

Addendum No. 1

Savade Pond Boat Launch, Windsor, Maine State of Maine Department of Inland Fisheries & Wildlife

April 15, 2015

The following changes and clarifications are made to the contract documents:

1. The bench (supplied by Owner) is 18"x18"x72" solid granite to be placed on 6"x36"x78" crushed stone bed.
2. The granite monument (supplied by Owner) is a 6' tall monolith, to be buried 3.5' in the ground.
3. Note: The granite bench and monument will be delivered to site by Owner. Contractor will be required to offload and install.
4. Change the 40' 15" HDPE culvert nearest to Greeley Road to 18" HDPE culvert with the same length and elevation.
5. Section 31 11 00, Item 3.1.E.2:

DELETE:


Burying. Brush and logs may be disposed of by burying in approved waste dumps.

ADD:

Burying. Brush, logs, and small stumps may be disposed of by burying in approved waste dump areas. Large stumps must be ground or removed from the site.

6. The attached drawing (Figure 1) provides clarification for the location of the turbidity curtain which was not included in the original drawings. Note: The gravel road is 14' wide to the parking area and 16' wide from the parking area to the launch area.
7. The Town of Windsor Road Entrance/Culvert Permit is attached.

**PINE TREE
ENGINEERING**

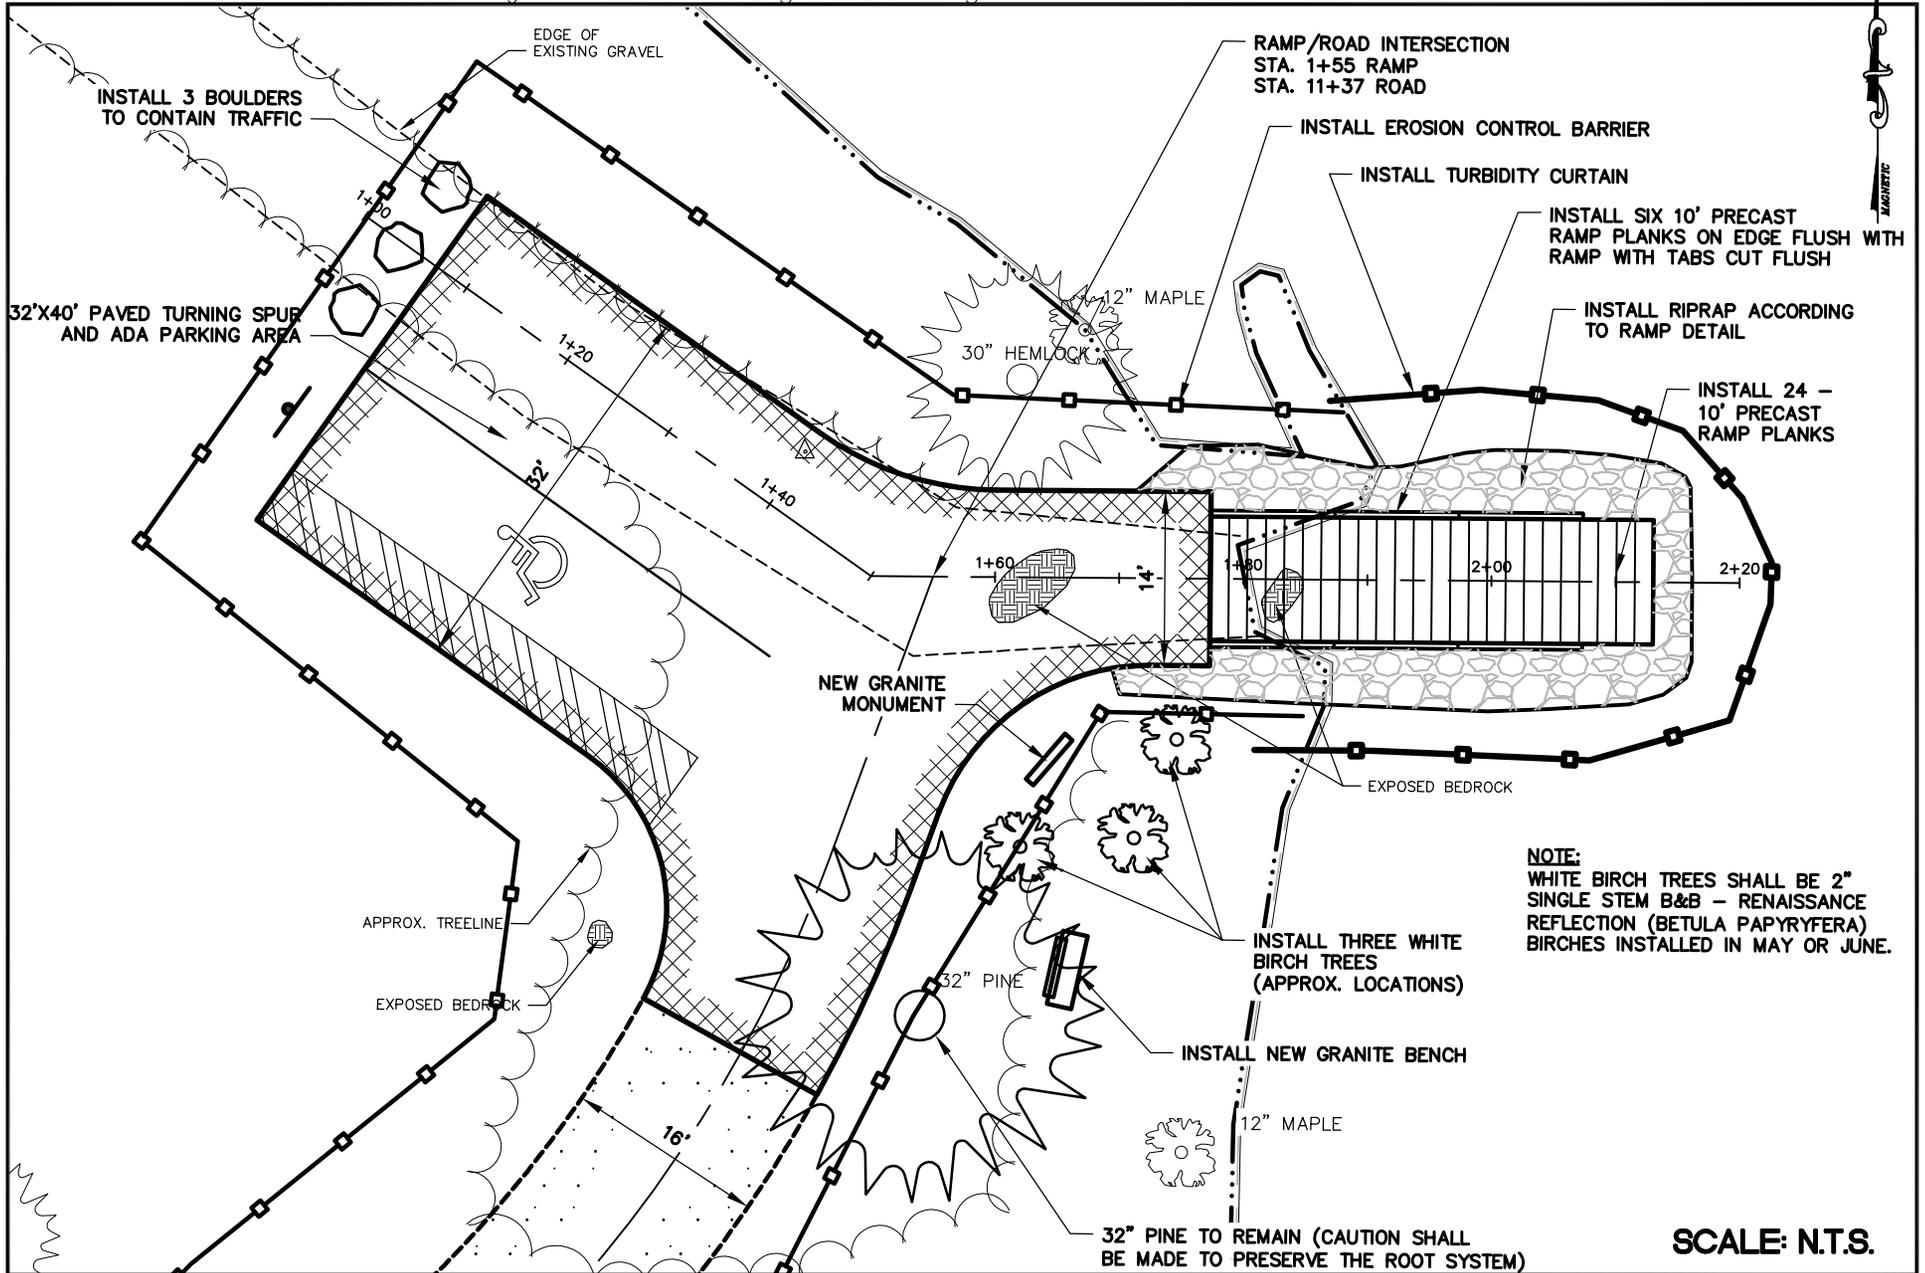

Pine Tree Engineering 53 Front Street Bath, Maine 04530 Tel: (207) 443-1508 Fax: (207) 442-7029 Civil/Environmental Engineering • Surveying	SAVADE POND ACCESS FACILITY LAUNCH PLAN VIEW		DATE APRIL 15, 2015
	PLACE: SAVADE POND TOWN: WINDSOR COUNTY: KENNEBEC STATE: MAINE	APPLICATION BY: MAINE DEPARTMENT OF INLAND FISHERIES AND WILDLIFE	ADDENDUM 1 FIGURE 1



Phone: 445-2998
Fax: 445-3762

PO Box 179
Windsor, ME 04363

TOWN OF WINDSOR
Office of Selectmen, Town Manager, Town Clerk,
Tax Collector and Treasurer

Application for Road Entrance/Culvert Permit

This application must be mailed to: Road Supervisor, Windsor Town Office, PO Box 179, Windsor, ME 04363, or dropped off at the Town Office. You will receive a reply by mail within ten (10) days of receipt of the application. You must have the area you wish to use for a driveway clearly marked with ribbons or stakes. This permit must accompany your building permit application.

Property Owner: Maine Department of Inland Fisheries and Wildlife Date: 3/4/15 Day Phone: 207-287-3128 Leon Bucher, Chief Planner

Mailing Address: 41 State House Station, Augusta, Maine 04333-0041

Site Location: Savade Pond, off Greeley Road Tax Map # R-7 Lot # 26

- Plastic culverts must be a minimum of 2' underground.
- No used culverts.
- Culvert should extend 1' beyond dirt on each side or be rocked to hold dirt.
- Minimum culvert dimensions: 15" diameter, 20' length.
- A Maine D.O.T. entrance permit is required for entrances onto State highways and must accompany your building permit application.

I have read the above information and agree the information from me is correct to the best of my knowledge.

Signature: [Handwritten Signature]

Date: 3-4-15

.....
Do not write below this line
.....

Proposed entrance site reviewed on _____ (date). Permit # _____

Culvert needed.
Length _____ Diameter 18 Invert elevation _____

No culvert needed.
 Private Road, check with Owners Association
 State Road, call Maine Dept. of Transportation

[Handwritten Signature]
Road Supervisor

3-10-15
Date