



JOHN ELIAS BALDACCI
GOVERNOR

STATE OF MAINE
DEPARTMENT OF TRANSPORTATION
16 STATE HOUSE STATION
AUGUSTA, MAINE
04333-0016

DAVID A. COLE
COMMISSIONER

February 2, 2010
Subject: **Brewer**
Federal Project No: HP-1487(110)X
State Pin No: 014871.10
Amendment No. 2

Dear Sir/Ms:

Make the following change to the Bid Document:

In the Plans, SHEET NUMBER 4 OF 42, **DELETE** in its entirety, note #23. Make this change in pen and ink.

The following questions have been received:

Question: Plan Sheet No. 4 of 42, Note 23 indicates that "The City of Brewer will be furnishing office space for the department's resident engineer." Is it the responsibility of the contractor to pay/provide utilities, etc... for the resident engineer's office? If not, is item 639.19 Field Office Type B necessary for bidding purposes?

Response: Disregard note #23 on Sheet 4. The City was originally supposed to supply office space but this fell through. When we learned of this, we added the standard field office item, but missed deleting this note.

Question: Can you provide the location (s) and details for item 608.08, Reinforced Concrete Sidewalk? Is this item intended for the concrete medians on North Main Street?

Response: The only place this concrete is used in the medians on North Main Street and on the pork chop island at Union Street. The thickness is 4" and should contain wire mesh similar to MDOT's detail for concrete sidewalk.

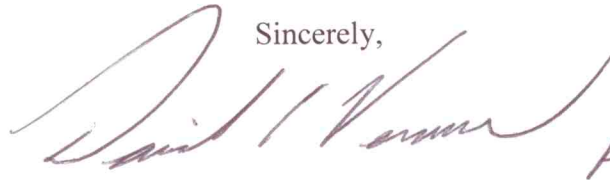
Question: Is it known whether North Main Street has concrete pavement under the roadway? If concrete pavement is encountered when cutting the islands on North Main Street how will the removal be paid for?



PRINTED ON RECYCLED PAPER

Response: The City has never mentioned to us that there was concrete under the existing pavement in North Main Street.

Consider this change and information prior to submitting your bid on February 3, 2010.

Sincerely,
 FOR

Scott Bickford
Contracts & Specifications Engineer