



STATE OF MAINE
DEPARTMENT OF TRANSPORTATION
16 STATE HOUSE STATION
AUGUSTA, MAINE
04333-0016

JOHN ELIAS BALDACCI
GOVERNOR

DAVID A. COLE
COMMISSIONER

March 19, 2010
Subject: **Madison & Skowhegan**
Federal Project No's: NH-1680(600)E,
NH-1680(800)E & STP-1730(800)X
State Pin No's: 016806.00, 016808.00 &
017308.00
Amendment No. 4

Dear Sir/Ms:

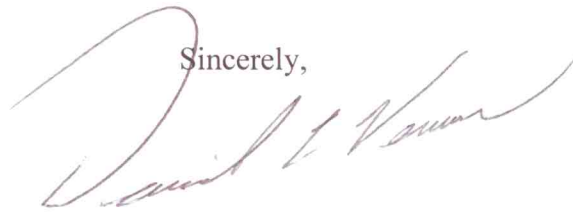
Make the following changes to the Bid Documents:

In the Bid Book (pages 86 & 87), **REMOVE** "Special Provision, Section 105, General Scope of Work, (Limitations of Operations)", 2 pages dated 2/08/10 and **REPLACE** with the new attached "Special Provision, Section 105, General Scope of Work, (Limitations of Operations)", 2 pages dated 3/17/10.

In the Bid Book (page 90), **REMOVE** "Special Provision, Section 107, Prosecution and Progress, (Contract Time)", 1 page dated 2/08/10 and **REPLACE** with the attached new "Special Provision, Section 107, Prosecution and Progress, (Contract Time)", 1 page dated 3/17/10.

Consider these changes and information prior to submitting your bid on **March 24**, 2010.

Sincerely,


FOR Scott Bickford
Contracts & Specifications Engineer



PRINTED ON RECYCLED PAPER

Special Provision
Section 105
General Scope of Work
(Limitations of Operations)

- 1) Unless otherwise authorized, this contract allows for only one milling and one paving operation per day/night (excluding hand work paving).
- 2) A 48 hour notice is required prior to paving or milling operations.
- 3) A 48 hour notice is required prior to working any Saturdays.
- 4) A 48 hour notice is required prior to any changes in the work schedule.
- 5) All milling and paving on pin 16806.00 shall be completed at night between the hours of 7:00 P.M. and 7:00 A.M. This shall be addressed in the Contractor's Traffic Control Plan. All other work on pin 16806.00 may be completed during the day. However, daytime work shall be limited to only one side of the road at any given time and one through lane of traffic shall be maintained at all times on the side being worked on.
- 6) On pin 16806.00, the Contractor shall mill the existing pavement full width (curb to curb) each night milling is performed. Failure to do so will result in the following:
 - a. Liquidated damages as per Standard Specification 107.7.2.
 - b. Traffic Control Plan violation as per Special Provision 652.
- 7) On pin 16806.00, the Contractor shall place the surface pavement within 3 calendar days of milling the existing pavement (excluding inclement weather days). Failure to do so will result in the following:
 - a. Liquidated damages as per Standard Specification 107.7.2.
 - b. Traffic Control Plan violation as per Special Provision 652.
- 8) On pin 17308.00, milling of the existing pavement full width (curb to curb) each day is not required. However, once milling operations commence, the Contractor shall continue milling every day until the pavement has been milled full width (curb to curb). The pavement shall be milled full width prior to leaving the project for the weekend. Failure to do so will result in the following:
 - a. Liquidated damages as per Standard Specification 107.7.2.
 - b. Traffic Control Plan violation as per Special Provision 652.

Special Provision
Section 105
General Scope of Work
(Limitations of Operations)

- 9) On pin 17308.00, the Contractor shall place the surface pavement within 7 calendar days of milling the existing pavement (excluding inclement weather days). Failure to do so will result in the following:
- a. Liquidated damages as per Standard Specification 107.7.2.
 - b. Traffic Control Plan violation as per Special Provision 652.
- 10) The Contractor shall place the surface pavement in the mill and fill areas prior to shutdown on the dates specified below in #11. Failure to do so will result in the following:
- a. Liquidated damages as per Standard Specification 107.7.2.
 - b. Traffic Control Plan violation as per Special Provision 652.
- 11) The Contractor shall cease all operations and have all lanes open to traffic and the roadway in safe operating condition as directed on the following dates:
- a. July 02, 2010 by the end of the normal workday. Work shall not commence again until July 06, 2010 (Independence Day).
 - b. August 11, 2010 by the end of the normal workday. Work shall not commence again until August 23, 2010 (Skowhegan State Fair). This applies only to pin 16806.00.
 - c. September 3, 2010 by the end of the normal workday. Work shall not commence again until September 7, 2010 (Labor Day).
- 12) The Contractor shall not schedule both day work and night work within the same 24 hour period.

Special Provision
Section 107
Prosecution and Progress
(Contract Time)

- 1) The Contractor will be allowed to commence work on June 21, 2010 as long as all applicable plans, as required under this contract, have been submitted and approved and the office trailer is 100% complete.
- 2) The completion date for this contract is September 11, 2010.
- 3) Work on pin 17308.00 shall not begin until the Anson-Madison Sanitary District has finished upgrading their sewer lines. This upgrade is scheduled to be completed by July 2, 2010.
- 4) For every weekday/night not worked once operations commence, the Contractor will be charged supplemental damages per standard specification 107.7.2 (excluding days or nights lost to inclement weather).