



B-35-1 North Edgecomb / Cushman Pt.

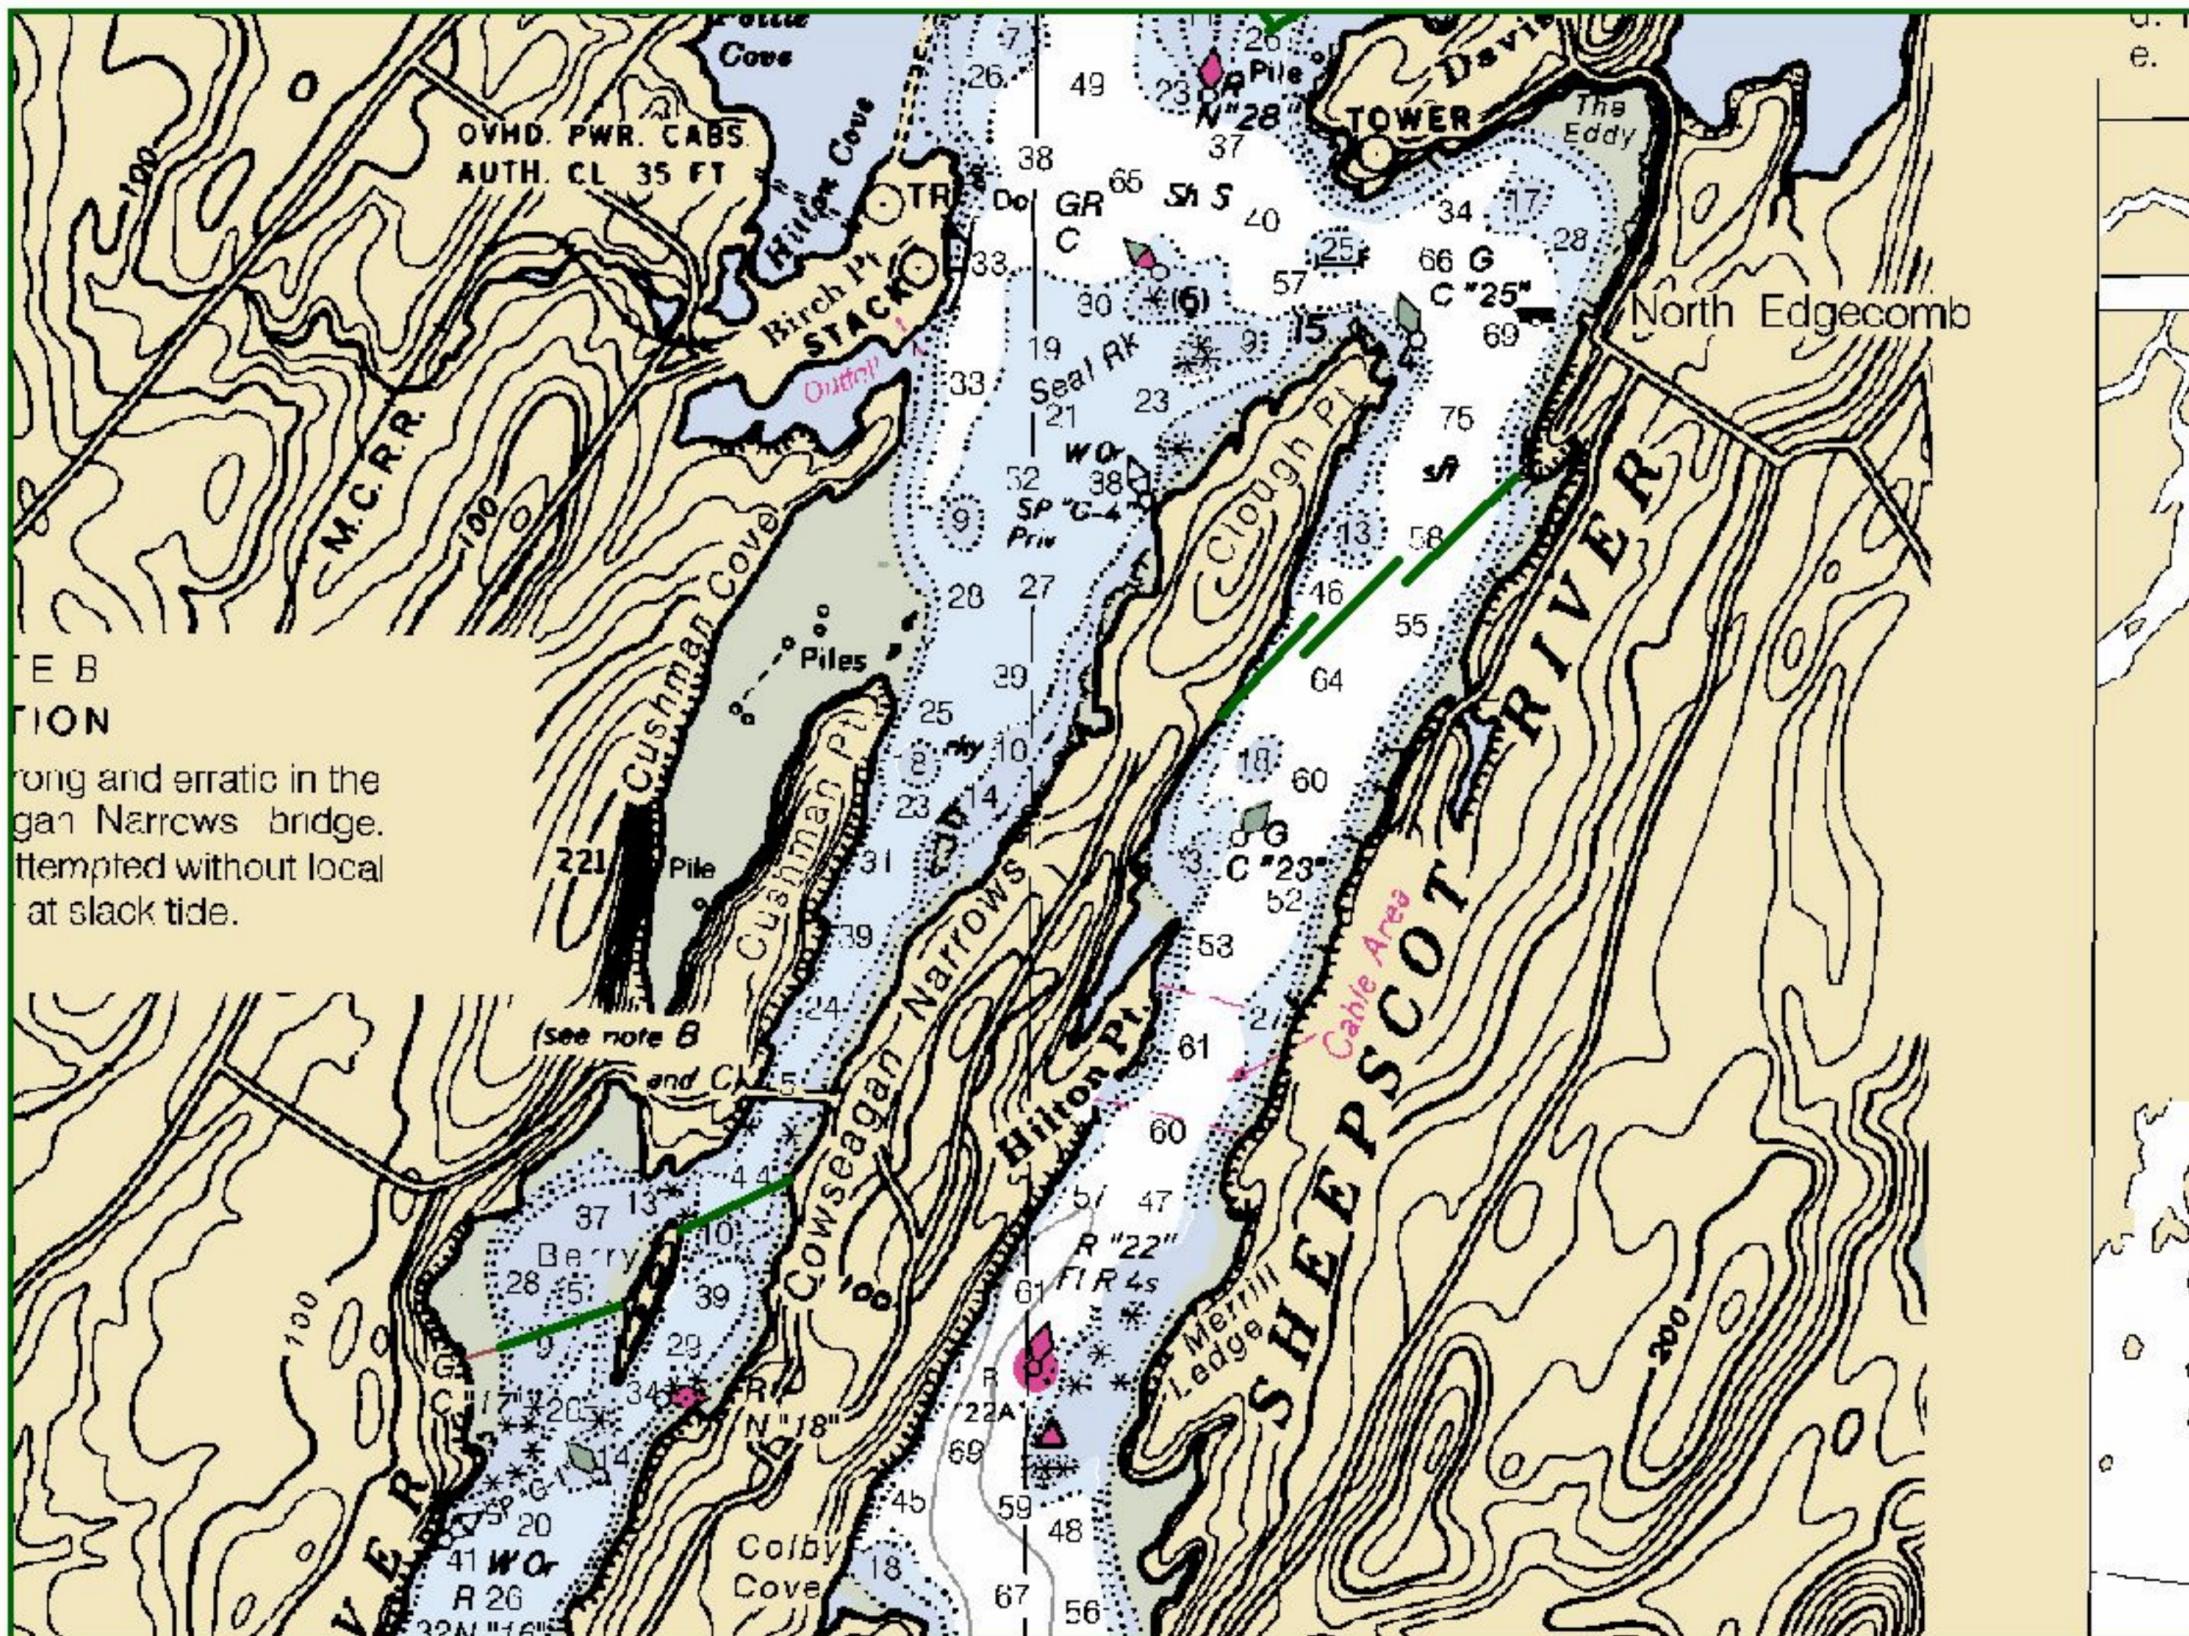

WARNING
 Strong and erratic in the narrow Narrows bridge. Attempted without local pilot at slack tide.



LEGEND

- Harbor Boom
- Intertidal Boom
- Ocean Boom
- Permanent Moorings
- Staging Area
- Command Post
- Collection Recovery Point
- Skimmer
- Response Vessel
- Vacuum Truck



Note: Not to be used for navigational purposes



North Edgecomb / Cushman Pt.

Site, Strategy & Chart #

Port Region

Latitude Longitude

Water Depth Range feet

Max Current (knots) *Flood* *Ebb* *Source*

Nearest Boat Ramp

Response Strategy Type

Type of Boom

Total Length of Boom feet Unless otherwise indicated, the boom length given is straight line distance as measured on the map. Actual length required will vary with conditions, and increase with current.

Strategy Implementation

Deploy three 1000' sections of harbor boom from Clough Pt. on Westport Island to the North Edgecomb shore. If threat is from upstream, deploy 300 feet of intertidal boom and 1,000 feet of harbor boom from Wiscasset side to Berry Island, and 850 feet of harbor boom from Berry Island to Westport Island to trap oil into cove and prevent it from moving downstream.

Site Access

Staging Areas

Collection Points

Environmental Concerns

EVI Map #

Shoreline Types

Other Comments