

## Installation



SELECT A STREAM CROSSING SITE

Avoid or minimize crossings and avoid steep approaches. Bridges should be placed 2-3 ft. above water level.



PLACE SILL LOGS

Sill logs provide a stable surface, prevent the bridge from sinking, and from freezing into the ground in the winter.



INSTALL BRIDGE PANELS

When using a skidder, wrap the panel with a chain and place a small log under the arms of the blade to help lift the panel. Place panels tight on the sill logs to prevent soil from falling into the stream.



INSTALL BUMPER LOGS

Install bumper logs to keep hitches of wood on the bridge and out of the stream.

## Erosion Controls



INSTALL WATERBARS

Install on both approaches to the crossing starting 25-50 ft. back, and spaced appropriately.



STABILIZE APPROACHES

Use slash to cover exposed soil and help keep sediment off of the bridge deck.



REMOVING THE BRIDGE

Lift the panels off of the sill logs, keeping them level to prevent dirt from entering the stream. Do not drag the panels over the stream banks.



AFTER LOGGING

Seed and mulch approaches on both sides of the stream, at least 25 ft. back.

Photos courtesy of VT Dept. of Forest, Parks and Recreation

Funding for bridges provided by:

- USDA Forest Service—Presumpscot River Watershed Redesign Grant
- USDA Forest Service—Enhancing Brook Trout Habitat Through Forest Management Redesign Grant.
- USFWS Gulf of Maine Coastal Program
- Maine Outdoor Heritage Fund



Maine Forest Service  
Water Quality Program  
22 State House Station  
Augusta, ME 04333  
207-287-2791

## Maine Forestry Bridge Program

*Productive Harvests—Protecting Water*

# Steel and Wood Skidder Bridges Available for Loan to Maine Loggers




Maine Dept. of Agriculture  
Conservation and Forestry  
Maine Forest Service  
Water Quality Program



# Program Details

The Maine forest Service has partnered with several organizations to provide loaner steel and wooden skidder bridges at low or no cost to Maine loggers .

## Bridge Specs

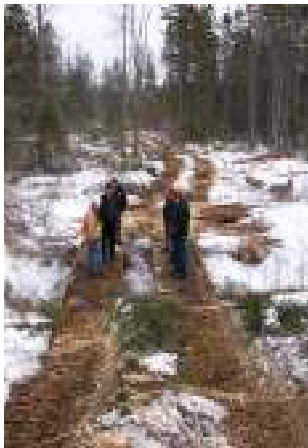

Steel bridges are made up of 3 panels and come in 20' and 24' lengths and are either 12 or 14' wide. Wooden bridges are generally 16' to 20' long and come in various widths.

## Getting A Loaner Bridge

Please reference the contact information in this pamphlet. Loan agreements vary depending on the organization loaning the bridge, but all require you to pick up and return the bridge. Some require a rental fee and/or deposit.

# Bridge Locations and Contacts

## WOODEN BRIDGES

**Gray** – Threshold to Maine RC&D:  
Dick Wood, Ph. 207-657-3922

**Dover-Foxcroft** – Piscataquis County  
Soil and Water Conservation District:  
Lynn Lubas, Ph. 207-564-2321

**Dyer Brook** – Region Two/SACS: Rob  
Greenier, Ph. 207-694-7492

**Oakfield** – Katahdin Cedar Log  
Homes: David Gordon, Ph. 207-757-  
9342 or 207-757-8278

**New Limerick** – LP Corp: Tim  
Richards, Ph. 207-694-8797

**Presque Isle** – Central Aroostook Soil  
and Water Conservation District:  
Dotty Dudley, Ph. 207-764-4153



## STEEL BRIDGES

**West Paris** – Oxford County Soil and  
Water Conservation District: Ph. 743-  
5789 ext. 101/111

**Gray** – Cumberland County Soil and  
Water Conservation District: Heather  
True, Ph. 207-892-4700 ext. 107 or  
207-657-3922

**Vassalboro** – Kennebec Soil and Wa-  
ter Conservation District: Dale  
Finseth, Ph. 207-622-7847 ext. 3

**North Fryeburg** – Oxford County Soil  
and Water Conservation District:  
Ph. 743-5789 ext. 101/111

**New Sharon** – Maine Forest Service:  
Patty Cormier, Ph. 207-592-2238

**Old Town** – Maine Forest Service:  
Terri Coolong, Ph. 207-215-0679

**Woodland** – Woodland Pulp: Steve  
Follette, Ph. 207-557-0482

