



66246. MIL-L-10095A, TYPE II 13079-PHILA-52-16-((51)) WT. 58 LBS. 1-5 GAL. CAN CU. 1.1 COMPOUND, FUNGUS PROOFING **FOR RETREATMENT OF LEATHER ITEMS** MIDLAND ADHESIVE & CHEMICAL CORP. FERNDALE, MICHIGAN FILLING DATED JUST BATCH NO. 14




DIRECT ish the leather items with source and water at a temand the local of the exceed 100°E. A sussing machine or device in which the shift of tumbled may be d Remove dirt remaining abing with a cloth or a bruck with clean water. weather to drain for five wind by immersing the least the tot tor 10 seconds. then only a small quantity term of application may emade with a soft bristled opy in a well ventilated toxic solvent. After approx why with cool water and show leather items ly thoroughly in the open ad skin contact.

INGRED Hydrocarbon oil Cyclohexanone Perchlorethylene Paranitrophenol

20% 10% 68% 2%

dauber or cloth. avoid inhaling the ash hands thorbefore mearing. 2001

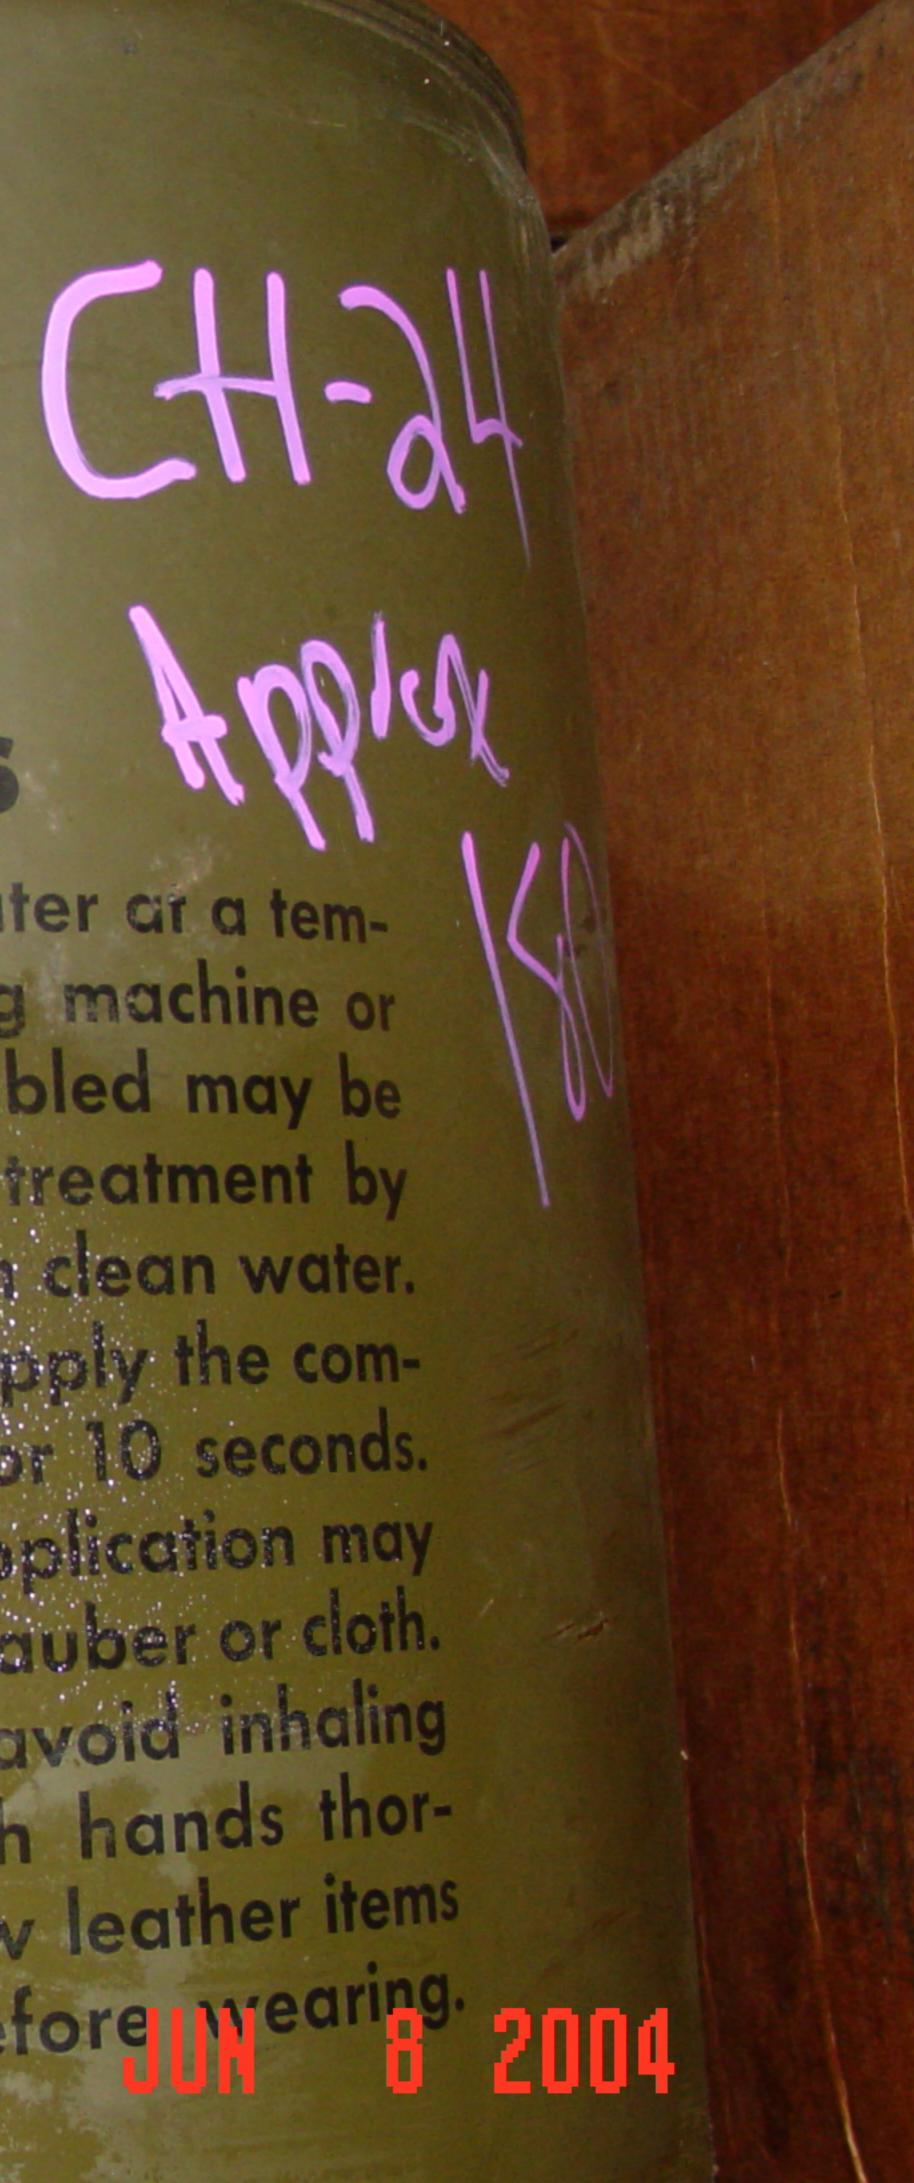





















D T Insulating oil Electrica by 1-530 and 960-611-2000 bt Ctagon process in Bias







Winning

DO NOT USE AS FOOD CONTAINER 2-OZ. CLEANER-RIFLE BORE

POISON .

P SPEC. RIXS-205 (REV. 1):

SHAKE WELL BEFORE USING

P. O. NO. (28-024) 44-40700.2 THE CURRAN CORPORATION MALDEN, MASS.

