



Paul R. LePage
GOVERNOR

STATE OF MAINE
DEPARTMENT OF TRANSPORTATION
16 STATE HOUSE STATION
AUGUSTA, MAINE 04333-0016

David Bernhardt
COMMISSIONER

August 18, 2014
Subject: **Durham & Lisbon**
State WIN: 018239.00 &
018382.00
Amendment No. 1

Dear Sir/Ms:

Make the following changes to the Bid documents:

In the Bid Book page 81, **REMOVE** "Special Provision Section 107 Time (Supplemental Liquidated Damages for Fabrication Time" one page, dated July 10, 2014 and **REPLACE** with the attached new "Special Provision Section 107 Time (Supplemental Liquidated Damages for Fabrication Time" one page, dated August 14, 2014.

In the Plans on plan sheet Number 75 of 87, WIN 018239.00 in the "Structural Steel Notes" number 9, **DELETE** the first sentence and **REPLACE** with the following sentence: "Bolted connections shall be made using 7/8" Φ (dia) A325 H.S. bolts; use Type 3 at bare unpainted locations and Type 1 Galvanized at coated locations." Make this change in pen and ink.

The following question has been received:

Question: In the Special Provision Section 107 you've allowed 42 calendar days for fabrication of the Precast Deck Panels.

How many calendar days are allowed for the fabrication of the structural steel? If you've included the fabrication of the structural steel in the 42 calendar days, we request that you increase the calendar days allowed to at least 85 calendar days for the steel fabrication alone.

Response: Please see the attached new Special Provision 107.

Question: The contract drawings for the subject project, file fp018239.00.pdf is severely restricted such that no markups, bookmarks, etc. can be added. Please provide a file with all restrictions removed so that it is usable in a paperless environment.

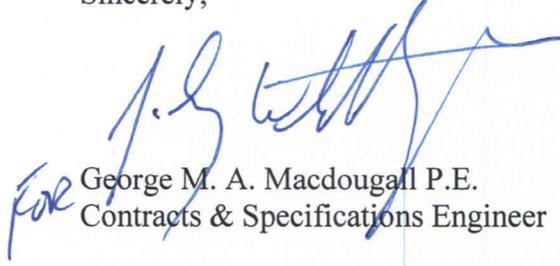
Response: The Contract Drawings for file fp018239.00 have been replaced with a new file and all restrictions have been removed.



PRINTED ON RECYCLED PAPER

Consider this information prior to submitting your bid on September 3, 2014.

Sincerely,

A handwritten signature in blue ink, appearing to read 'G. M. A. Macdougall', is written over the typed name. To the left of the signature, the word 'For' is written in a cursive script.

George M. A. Macdougall P.E.
Contracts & Specifications Engineer

SPECIAL PROVISION
SECTION 107
TIME

(Supplemental Liquidated Damages for Fabrication Time)

107.8.1 Fabrication Time.

The Department has budgeted for the following amounts of continuous full time fabrication/shop inspection for certain Work components:

<u>Element</u>	<u>Time</u>	<u>Supplemental LD</u>
1) Precast Deck Panels	42 calendar days	\$650 per calendar day
2) Structural Steel Fabrication	75 calendar days	\$650 per calendar day

The Contractor is responsible for requiring their fabricators and suppliers to produce these products for the Work continuously until finished, including any needed actions to correct unacceptable workmanship or materials. If the Department determines that shop inspection beyond these times is required, then the corresponding Supplemental Liquidated Damages will be deducted as they occur from the amounts otherwise due the Contractor. The Contractor will be notified by the Department when these times begin and when the allotted time will expire.

If a fabricator or supplier works more than one shift per day and the Department determines that inspection is required for each shift, each shift will count as a calendar day and the LD rate will be the noted amount per shift per calendar day in lieu of per calendar day.

Inspection is required for the following activities:

For metal fabrication work – welding, including tack welding, heat correcting, non- destructive examination, assembly verification, protective coating application.

For concrete work – tensioning of strands, batching and casting of concrete, breaking of test cylinders, de-tensioning.