



Paul R. LePage
GOVERNOR

STATE OF MAINE
DEPARTMENT OF TRANSPORTATION
16 STATE HOUSE STATION
AUGUSTA, MAINE 04333-0016

David Bernhardt
COMMISSIONER

May 8, 2015
Subject: milling / overlay
State WIN: 018573.00
Location: **Ashland**
Amendment No. 1

Dear Sir/Ms:

The following questions have been received:

Question: Does the MDOT plan on having the contractor mill to grade? If so what is the base material?

Response: Contractor is expected to mill to grades shown on typical sections. Base material is gravel.

Question: Does the contractor get paid for over excavating the 12' wide lanes to be able to pave adequately?

Response: Over excavation of 12' wide lanes will not be permitted.

Question: Does the contractor get paid to go back and chink the areas that were over excavated?

Response: Over excavation of 12' wide lanes will not be permitted.

Question: Is the MDOT going to transfer Centerline elevations and Slopes?

Response: Contractor is expected to perform work in accordance with grades and slopes shown on typical sections while matching existing adjacent pavement surfaces.




PRINTED ON RECYCLED PAPER

Question: Is the Contractor responsible for weepers to let water out of the box section?

Response: Contractor is responsible for maintaining drainage. Weepers may be required.

Consider this information prior to submitting your bid on **May 13, 2015**.

Sincerely,

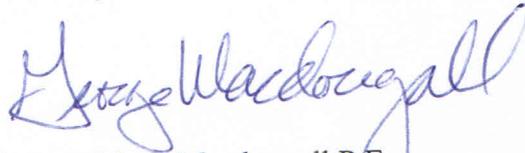

George M. A. Macdougall P.E.
Contracts & Specifications Engineer