



Paul R. LePage
GOVERNOR

STATE OF MAINE
DEPARTMENT OF TRANSPORTATION
16 STATE HOUSE STATION
AUGUSTA, MAINE 04333-0016

David Bernhardt
COMMISSIONER

September 23, 2015
Subject: New Sidewalk Construction
State WIN: 020527.00
Location: **Wiscasset**
Amendment No. 1

Dear Sir/Ms:

Make the following changes to the Bid Documents:

REMOVE, pages 17 thru 22 "Proposal Schedule of Items", dated 8/31/2015 and **REPLACE** with the attached revised "Proposal Schedule of Items" 6 pages dated 9/23/2015.

The following questions have been received:

Question: The details show areas to be milled but there is no item for butt joints. How will milling be paid for?

Response: See revised Schedule of Items attached. Pavement milling within the travel lanes from station 20+25+/- to station 20+70+/- shall be paid for under item 202.203 PAVEMENT BUTT JOINTS – SY. All other milling shall be incidental to related items.

Question: The detail for the sidewalk between stations 1+75 to 2+75 left of center line call out 4" of bark mulch to be installed between the back of the new sidewalk and the existing exposed ledge but there is no pay item for bark mulch in the schedule of values. How will this bark mulch be paid for?

Response: See revised Schedule of Items attached. Bark Mulch shall be paid for under item 619.13 BARK MULCH – CY.

Question: Sheet 14 of 26 on the plans indicates a 40' Dual Purpose Mast Arm Pole. There's no indication of what's to be placed on top or a specified height. If a luminaire is to be on the top then wattage will be needed. Please advise.

Response: There is no other equipment planned to go on this pole beyond what is described in the Equipment Schedule on sheet 14 of 26 on the plans, under this project.

Question: At station 11+20 RT +/- there is a catch basin grate called out to be changed to a cascade grate. How will this be paid for?

Response: See attached revised schedule of items. This work will be paid under item 604.167 CHANGE CATCH BASIN GRATE TO CASCADE - EA



PRINTED ON RECYCLED PAPER

Question: Where is the intended use for Item 403.1021, option 1? Sidewalks?

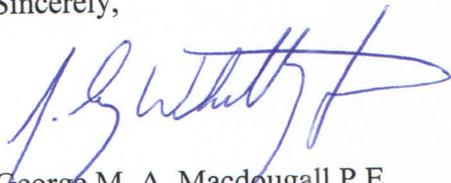
Response: This item is intended as an optional finish for the entire paved sidewalk area. Not including crosswalks.

Question: Where is the Street Print Textured Pavement to be used?

Response: This item is intended as an optional finish for the entire paved sidewalk area. Not including crosswalks.

Consider this change and information prior to submitting your bid on **September 30, 2015**.

Sincerely,


George M. A. Macdougall P.E.
Contracts & Specifications Engineer

9/23/2015

Maine Department of Transportation

Proposal Schedule of Items

Page 1 of 6

Proposal ID: 020527.00

Project(s): 020527.00

SECTION: 1 PROJECT ITEMS

Alt Set ID: Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0010	201.24 REMOVING STUMP	4.000 EA	_____	 _____	_____	 _____
0020	202.127 REMOVE EXISTING BITUMINOUS PAVEMENT	LUMP SUM	LUMP SUM		_____	
0025	202.203 PAVEMENT BUTT JOINTS	31.000 SY	_____	 _____	_____	 _____
0030	203.20 COMMON EXCAVATION	720.000 CY	_____	 _____	_____	 _____
0040	203.21 ROCK EXCAVATION	17.000 CY	_____	 _____	_____	 _____
0050	304.10 AGGREGATE SUBBASE COURSE - GRAVEL	545.000 CY	_____	 _____	_____	 _____
0060	403.209 HOT MIX ASPHALT 9.5 MM (SIDEWALKS, DRIVES, INCIDENTALS)	109.000 T	_____	 _____	_____	 _____
0070	403.210 HOT MIX ASPHALT 9.5 MM	45.000 T	_____	 _____	_____	 _____
0080	403.213 HOT MIX ASPHALT 12.5 MM BASE	59.000 T	_____	 _____	_____	 _____
0090	409.15 BITUMINOUS TACK COAT - APPLIED	61.000 G	_____	 _____	_____	 _____
0100	603.159 12 INCH CULVERT PIPE OPTION III	44.000 LF	_____	 _____	_____	 _____
0105	604.167 CHANGE CATCH BASIN GRATE TO CASCADE	1.000 EA	_____	 _____	_____	 _____

9/23/2015

Maine Department of Transportation

Proposal Schedule of Items

Page 2 of 6

Proposal ID: 020527.00

Project(s): 020527.00

SECTION: 1

PROJECT ITEMS

Alt Set ID:

Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0110	608.26 CURB RAMP DETECTABLE WARNING FIELD	105.000 SF	_____	 _____	_____	 _____
0120	609.12 VERTICAL CURB TYPE 1 - CIRCULAR	12.000 LF	_____	 _____	_____	 _____
0130	609.2381 TERMINAL CURB TYPE 1 - 8' CIRCULAR	4.000 EA	_____	 _____	_____	 _____
0140	609.31 CURB TYPE 3	1,100.000 LF	_____	 _____	_____	 _____
0150	609.34 CURB TYPE 5	18.000 LF	_____	 _____	_____	 _____
0160	609.35 CURB TYPE 5 - CIRCULAR	14.000 LF	_____	 _____	_____	 _____
0170	609.40 RESET CURB TYPE 5	43.000 LF	_____	 _____	_____	 _____
0180	610.08 PLAIN RIPRAP	7.000 CY	_____	 _____	_____	 _____
0190	613.319 EROSION CONTROL BLANKET	37.000 SY	_____	 _____	_____	 _____
0200	615.07 LOAM	120.000 CY	_____	 _____	_____	 _____
0210	618.13 SEEDING METHOD NUMBER 1	11.000 UN	_____	 _____	_____	 _____
0220	619.12 MULCH	10.000 UN	_____	 _____	_____	 _____
0225	619.13 BARK MULCH	3.000 CY	_____	 _____	_____	 _____

9/23/2015

Maine Department of Transportation

Proposal Schedule of Items

Page 3 of 6

Proposal ID: 020527.00

Project(s): 020527.00

SECTION: 1 PROJECT ITEMS

Alt Set ID: Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0230	620.58 EROSION CONTROL GEOTEXTILE	22.000 SY	_____	 _____	_____	 _____
0240	626.11 PRECAST CONCRETE JUNCTION BOX	4.000 EA	_____	 _____	_____	 _____
0250	626.22 NON-METALLIC CONDUIT	350.000 LF	_____	 _____	_____	 _____
0260	626.31 18 INCH FOUNDATION	3.000 EA	_____	 _____	_____	 _____
0270	626.332 30 INCH DIAMATER GREATER THAN 8 FEET LONG & 36 INCH DIAMETER, 42 INCH DIAMETER FOUNDATION	10.000 CY	_____	 _____	_____	 _____
0280	626.333 48 INCH DIAMETER, 54 INCH DIAMETER, & 60 INCH DIAMETER FOUNDATIONS	15.000 CY	_____	 _____	_____	 _____
0290	626.35 CONTROLLER CABINET FOUNDATION	1.000 EA	_____	 _____	_____	 _____
0300	627.733 4" WHITE OR YELLOW PAINTED PAVEMENT MARKING LINE	5,450.000 LF	_____	 _____	_____	 _____
0310	627.75 WHITE OR YELLOW PAVEMENT & CURB MARKING	1,850.000 SF	_____	 _____	_____	 _____
0320	627.76 TEMPORARY PAVEMENT MARKING LINE, WHITE OR YELLOW	LUMP SUM		LUMP SUM	_____	 _____
0330	627.77 REMOVING PAVEMENT MARKINGS	2,400.000 SF	_____	 _____	_____	 _____

9/23/2015

Maine Department of Transportation

Proposal Schedule of Items

Page 4 of 6

Proposal ID: 020527.00

Project(s): 020527.00

SECTION: 1 PROJECT ITEMS

Alt Set ID: Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0340	629.05 HAND LABOR, STRAIGHT TIME	25.000 HR	_____	 _____	_____	 _____
0350	631.12 ALL PURPOSE EXCAVATOR (INCLUDING OPERATOR)	15.000 HR	_____	 _____	_____	 _____
0360	631.172 TRUCK - LARGE (INCLUDING OPERATOR)	10.000 HR	_____	 _____	_____	 _____
0370	631.18 CHAIN SAW RENTAL (INCLUDING OPERATOR)	10.000 HR	_____	 _____	_____	 _____
0380	631.221 SMALL FRONT-END LOADER (INCLUDING OPERATOR)	10.000 HR	_____	 _____	_____	 _____
0390	631.28 BRUSH CHIPPER (INCLUDING OPERATOR)	10.000 HR	_____	 _____	_____	 _____
0400	631.32 CULVERT CLEANER (INCLUDING OPERATOR)	10.000 HR	_____	 _____	_____	 _____
0410	639.19 FIELD OFFICE TYPE B	1.000 EA	_____	 _____	_____	 _____
0420	643.80 TRAFFIC SIGNALS AT RTE.1& RTE.27	LUMP SUM		 LUMP SUM	_____	 _____
0430	643.83 VIDEO DETECTION SYSTEM	LUMP SUM		 LUMP SUM	_____	 _____
0440	643.91 MAST ARM POLE	2.000 EA	_____	 _____	_____	 _____
0450	643.92 PEDESTAL POLE	3.000 EA	_____	 _____	_____	 _____

Maine Department of Transportation

Proposal Schedule of Items

Proposal ID: 020527.00

Project(s): 020527.00

SECTION: 1 PROJECT ITEMS

Alt Set ID: Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0460	645.106 DEMOUNT REGULATORY, WARNING, CONFIRMATION AND ROUTE MARKER ASSEMBLY SIGN	2.000 EA	_____	 _____	_____	 _____
0470	645.1061 RELOCATE EXISTING SIGN ASSEMBLY AND POST	9.000 EA	_____	 _____	_____	 _____
0480	645.108 DEMOUNT POLE	3.000 EA	_____	 _____	_____	 _____
0490	645.292 REGULATORY, WARNING, CONFIRMATION AND ROUTE MARKER ASSEMBLY SIGNS TYPE II	30.000 SF	_____	 _____	_____	 _____
0500	652.31 TYPE I BARRICADE	5.000 EA	_____	 _____	_____	 _____
0510	652.33 DRUM	30.000 EA	_____	 _____	_____	 _____
0520	652.34 CONE	75.000 EA	_____	 _____	_____	 _____
0530	652.35 CONSTRUCTION SIGNS	800.000 SF	_____	 _____	_____	 _____
0540	652.36 MAINTENANCE OF TRAFFIC CONTROL DEVICES	75.000 CD	_____	 _____	_____	 _____
0550	652.38 FLAGGER	4,900.000 HR	_____	 _____	_____	 _____
0560	656.75 TEMPORARY SOIL EROSION AND WATER POLLUTION CONTROL	LUMP SUM		LUMP SUM	_____	 _____

Maine Department of Transportation

Proposal Schedule of Items

Proposal ID: 020527.00

Project(s): 020527.00

SECTION: 1 PROJECT ITEMS

Alt Set ID: Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0570	658.20 ACRYLIC LATEX COLOR FINISH, GREEN	7.000 SY	_____	 _____	_____	 _____
0580	659.10 MOBILIZATION	LUMP SUM	LUMP SUM		_____	 _____
Section: 1			Total:		_____	 _____

SECTION: 2 OPTION 1

Alt Set ID: Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0590	403.1021 TEXTURED ASPHALT PAVEMENT	940.000 SY	_____	 _____	_____	 _____
Section: 2			Total:		_____	 _____
			Total Bid:		_____	 _____