

Gartley & Dorsky
ENGINEERING & SURVEYING

January 26, 2015

Subject: Rockland Public Landing Gangway
WIN: 018534.22
Addendum No. 2

Dear Sir/Ms:

Please make the following changes to the Bid Documents:


The following questions have been received:

Question 1. The gangway is calling for open grating decking. Would slip resistant aluminum decking be acceptable?

Answer: The specification for 'load rated aluminum perforated/punched grating with serrated top surface rated non-skid' requires the product must comply with the Americans with Disabilities Act, be open by perforation or by punching for ready drainage, and be slip resistant. An expanded metal product is not acceptable. A panel or plank product, compatible with the span of intermediate supports at the specified loading, is acceptable. Product to be McNichols Diamondback deckplate plank, or approved equal.

Please acknowledge this Addendum on the bid form.

Very truly yours,
Gartley & Dorsky Engineering & Surveying, Inc.

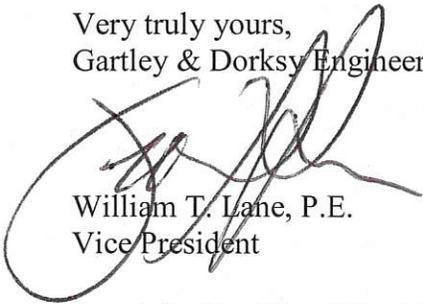

William T. Lane, P.E.
Vice President

Agent for the City of Rockland