

GENERAL NOTES

1. REMOVE CONCRETE FROM CURBS & WINGWALL UNTIL SOUND CONCRETE IS MET.
2. MOST REINFORCING STEELS TO BE CUT IN FIELD AS RELIABLE DIMENSIONS ARE UNAVAILABLE.
3. DOVELS TO BE EMBEDDED MINIMUM OF 1'-0"
4. MINIMUM COVER OF REINFORCING TO BE 2" UNLESS OTHERWISE NOTED.
5. MINIMUM SPlice TO BE 24 BAR DIAMETERS AS FOLLOWS:
 - * 4 BAR - 1'-0" MIN. LAP
 - * 6 BAR - 1'-6" MIN. LAP

G DOTTED LINES REPRESENT NEW WORK.

BILL OF MATERIALS

28 - 12x17x0'-10
28 - 16x15.5x1'-6
112 - 3/8" GALV. MACH. BOLTS W/ NUTS & WASHERS


BILL OF MATERIALS

28 - 121 x 7 x 0.10
23 - W6 x 15.5 x 1.6
112 - 3/4 x 10 GALV. MACH. BOLTS W/ NUTS & WASHERS

STATE OF MAINE
DEPARTMENT OF TRANSPORTATION

**GREAT BROOK BRIDGE
OVER
GREAT BROOK
IN THE TOWN OF
CAMDEN
IN
KNOX COUNTY**

SHEET / OF / **WIDENING**
AUGUSTA, MAINE 1/26/79

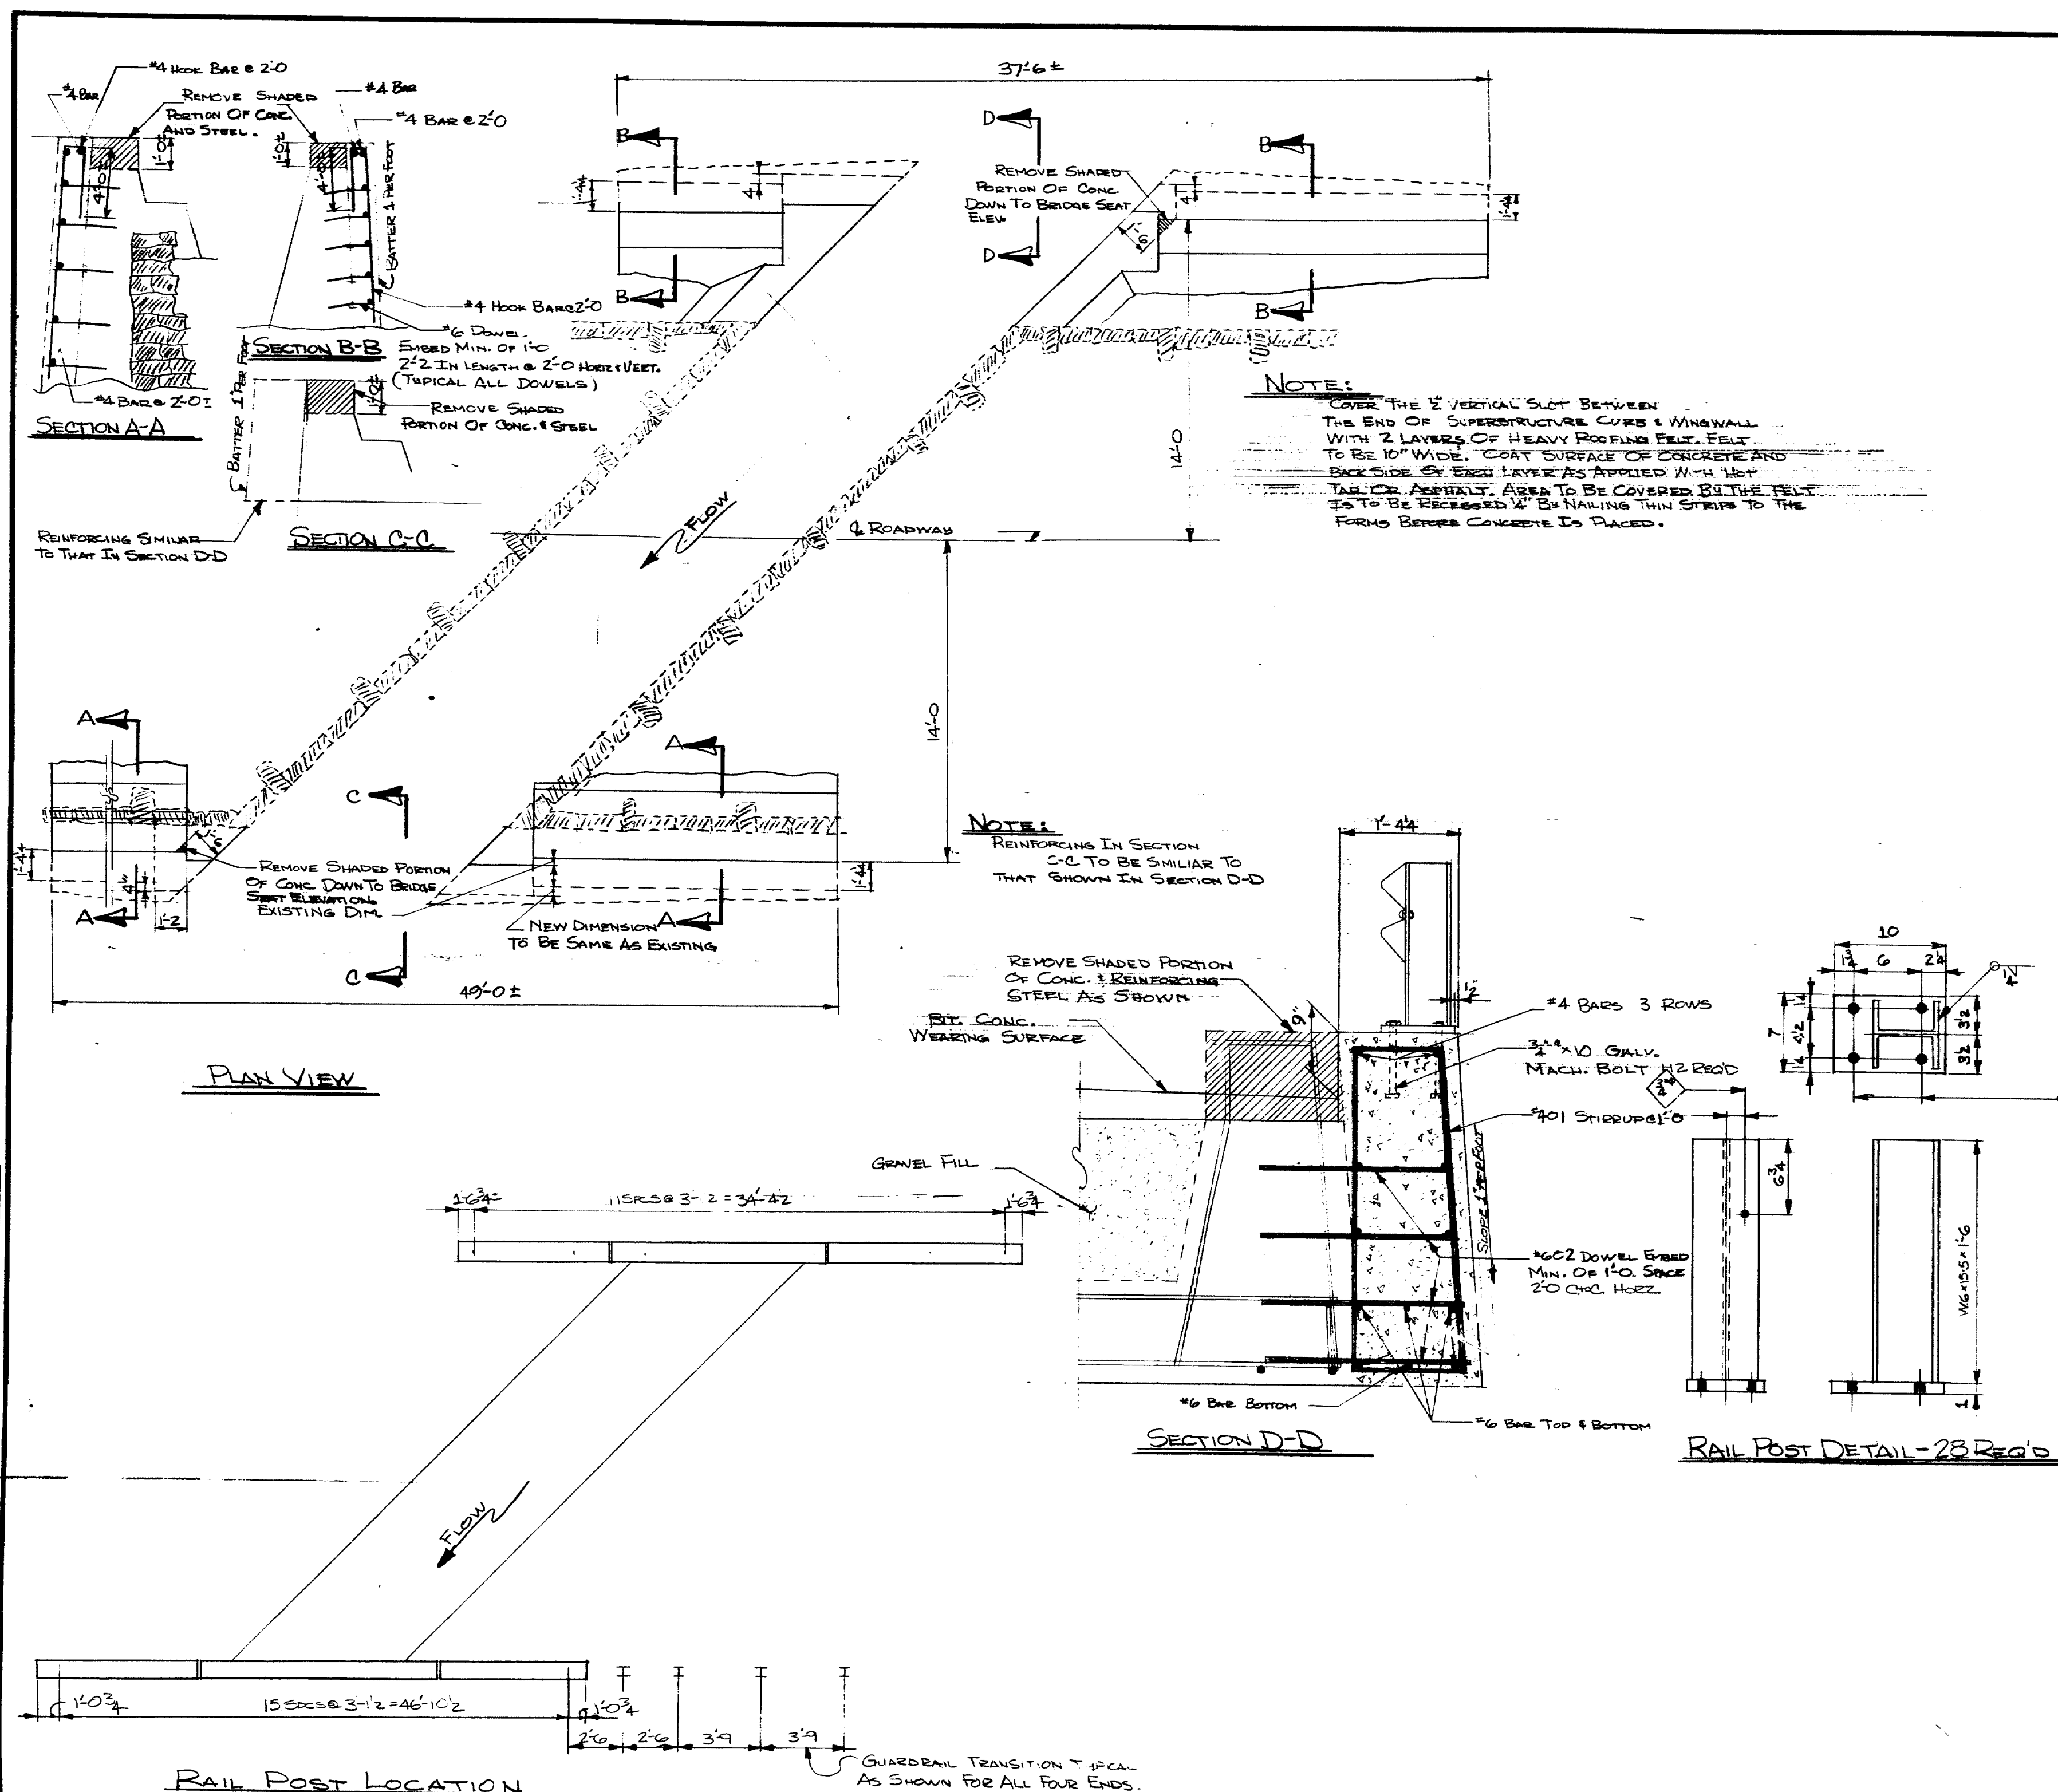

PROJECT DESIGN ENGINEER	BY	DATE
DESIGN - DETAILED		1-25-77
CHECKED	(R22)	
REVISIONS		
FIELD CHANGES		