


**MAINE DEPARTMENT OF TRANSPORTATION
HIGHWAY PROGRAM
GEOTECHNICAL SECTION
AUGUSTA, MAINE**

GEOTECHNICAL DESIGN REPORT

For the Construction of

**PEMBROKE BRIDGE
ROUTE 1
PEMBROKE, MAINE**

Prepared by:
Yueh-Ti Lee
Assistant Geotechnical Engineer

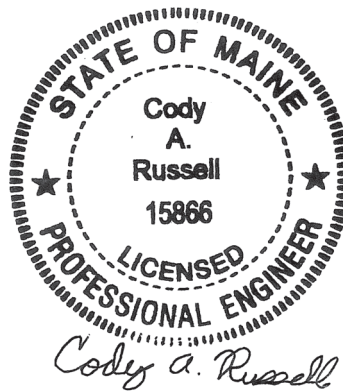

Reviewed by:
Cody Russell, P.E.
Senior Geotechnical Engineer

Washington County
WIN 26630.09

August 1, 2025

Soils Report 2025-30
Bridge No. 6773

Table of Contents

1.0 INTRODUCTION	2
2.0 GEOLOGIC SETTING	2
3.0 SUBSURFACE INVESTIGATION.....	2
4.0 LABORATORY TESTING.....	3
5.0 SUBSURFACE CONDITIONS.....	3
6.0 GEOTECHNICAL DESIGN AND CONSTRUCTION RECOMMENDATIONS	4
6.1 PRECAST CONCRETE BOX CULVERT DESIGN AND CONSTRUCTION	4
6.2 BEDROCK REMOVAL AND SUBGRADE PREPARATION	5
6.3 SETTLEMENT	5
6.4 BEARING RESISTANCE	6
6.5 MODULUS OF SUBGRADE REACTION	6
6.6 SCOUR AND RIPRAP	6
6.7 SEISMIC DESIGN CONSIDERATIONS	6
6.8 CONSTRUCTION CONSIDERATIONS	6
7.0 CLOSURE.....	7

Sheets

Sheet 1 - Location Map

Sheet 2 - Boring Location Plan & Interpretive Subsurface Profile

Appendices

Appendix A - Boring Logs

Appendix B - Laboratory Test Results

Appendix C - Calculations

1.0 INTRODUCTION

The purpose of this Geotechnical Design Report is to present subsurface information and make geotechnical recommendations for the replacement of an existing large culvert (#47373) on Route 1 in Pembroke. A subsurface investigation has been completed at the site to evaluate subsurface conditions and to develop geotechnical design and construction recommendations for the replacement structure. This report presents the subsurface information obtained during the subsurface investigation and soil laboratory testing programs and provides design and construction recommendations and geotechnical design parameters for the culvert replacement.

The existing structure consists of an approximately 72-inch diameter, 100-foot long corrugated metal pipe (CMP). The CMP is in poor condition and needs replacement both from an infrastructure and environmental standpoint. Route 1 is a Highway Corridor Priority 2 road.

The proposed replacement structure will be an approximately 12-foot span by 10-foot rise by 106-foot-long precast concrete box culvert. The invert of the proposed culvert is approximately 20.0 feet below the existing road grade at the roadway centerline. The roadway embankment slopes at the proposed culvert inlet and outlet shall be no steeper than 2H:1V to protect against erosion.

2.0 GEOLOGIC SETTING

The existing culvert carries an unnamed stream under Route 1 in Pembroke and is located approximately 0.06 of a mile south of Ayers Junction Road as shown on Sheet 1 – Location Map.

According to the Maine Geological Survey (MGS) map titled Surficial Geology of the Eastport Quadrangle, Maine, Open File 75-2 (1975) the surficial soils at the site consist of Presumpscot Formation. Presumpscot Formation consists of silt, clay, and sand.

According to the map titled Bedrock Geologic Map of Maine (1985) published by the MGS, the bedrock in the vicinity of the site consists of mafic to felsic volcanic rocks of the Leighton Formation Mafic to Felsic Volcanic Rock Member.

3.0 SUBSURFACE INVESTIGATION

One (1) boring (HB-PEM-101) and one (1) probe (HB-PEM-102) were drilled for this project on October 25, 2023 by the MaineDOT drill crew using a trailer-mounted drill rig. Exploration locations are shown on Sheet 2 – Boring Location Plan & Interpretive Subsurface Profile. Details and sampling methods used, field data obtained, and soil and groundwater conditions encountered are presented on the Boring Logs in Appendix A.

Boring HB-PEM-101 was drilled using solid stem auger, cased wash boring, and rock core drilling techniques. Soil samples were obtained at 5-foot intervals using Standard Penetration Test (SPT) methods. The MaineDOT drill rig is equipped with an automatic hammer to drive the split spoon. The MaineDOT calibrated automatic hammer delivers approximately 51 percent more energy during driving than the standard rope and cathead system. All N-values discussed in this report are

corrected values (N_{60}) computed by applying an average energy transfer factor of 0.906 to the raw field N-values. Probe HB-PEM-102 was drilled using solid stem auger techniques. No soil samples were obtained in the probe.

The MaineDOT Geotechnical Team member selected the boring and probe locations, drilling methods, designated type and depth of sampling, reviewed field logs for accuracy and identified field and laboratory testing requirements. A NorthEast Transportation Training and Certification (NETTCP) certified Subsurface Investigator logged the subsurface conditions encountered. The boring and probe were located in the field by taping to surveyed site features after completion of the drilling program.

4.0 LABORATORY TESTING

A laboratory testing program was conducted to assist in soil classification, evaluation of engineering properties of the soils and geologic assessment of the project site. Laboratory testing consisted of two (2) standard grain size analyses with natural water content. The results of the laboratory testing program are discussed in the following section and are included in Appendix B – Laboratory Test Results. Laboratory test information is also shown on the Boring Logs in Appendix A.

5.0 SUBSURFACE CONDITIONS

Subsurface conditions encountered in the test boring and probe generally consisted of sandy gravel fill underlain by native gravel underlain by bedrock. An interpretive subsurface profile depicting the generalized soil stratigraphy at the boring location is shown on Sheet 2 – Boring Location Plan & Interpretive Subsurface Profile.

Boring HB-PEM-101 was drilled to depth of approximately 20.9 feet below ground surface (bgs) where bedrock was encountered. The total boring depth was 25.9 feet bgs, including a bedrock core approximately 5.0 feet in length. Probe HB-PEM-102 was drilled to depth of approximately 30.0 feet bgs without encountering a refusal surface.

The table below summarizes the field and laboratory information obtained in boring HB-PEM-101:

Approx. Depth BGS ¹ (feet)	Soil Description	AASHTO ² Classification	USCS ³	WC% ⁴
0.0 – 0.7	HMA Pavement	--	--	--
0.7 – 9.5	Fill: Brown, dry, fine to coarse sandy gravel, trace silt.	A-1-a	GW-GM	2.1
9.5 – 18.5	Brown, wet, gravel, some fine to coarse sand, trace silt.	A-1-a	GW-GM	10.1
18.5 – 19.8	Cobbles	--	--	--
19.8 – 20.9	Weathered bedrock	--	--	--

20.9 – 25.9	Bedrock	--	--	--
-------------	---------	----	----	----

¹BGS = below ground surface

²AASHTO = American Association of State Highway and Transportation Officials

³USCS = Unified Soil Classification System

⁴WC% = Water content in percent

One (1) N₆₀-value obtained in the sandy gravel fill was 65 blows per foot (bpf) indicating that the fill is very dense in consistency. Two (2) N₆₀-values obtained in the native gravel were 18 bpf and 103 bpf, indicating that the gravel is medium dense to very dense in consistency.

Groundwater was recorded at depth 11.0 feet bgs in boring HB-PEM-101. Groundwater levels can be expected to fluctuate subject to seasonal variations, local soil conditions, topography, precipitation, and construction activity.

6.0 GEOTECHNICAL DESIGN AND CONSTRUCTION RECOMMENDATIONS

The following sections discuss geotechnical recommendations for the design and construction of the proposed culvert.

6.1 Precast Concrete Box Culvert Design and Construction

The proposed replacement structure will consist of a 12-foot span by 10-foot rise by 106-foot-long precast concrete box culvert. The proposed box culvert shall be designed and constructed in accordance with MaineDOT Standard Specification 534.

The approximate invert of the proposed culvert ranges from an elevation of 38.1 feet at the inlet to 37.6 feet at the outlet with a 0.5% slope. To facilitate fish passage, Habitat Connectivity Design elements will be used inside the precast concrete box culvert as shown on the Streambed Details Sheet in the Plans.

The full nature of the culvert bearing surface will not become evident until the culvert excavation is made. Any cobbles or boulders in excess of 6 inches encountered at the bedding elevation shall be removed and replaced with compacted Granular Borrow Material for Underwater Backfill or Crushed Stone ³/₄-Inch. Any disturbed soils at the bedding elevation resulting from excavation activities should be removed by hand prior to placement of the bedding material. The prepared subgrade shall be proof rolled using a static roller to visually confirm the prepared subgrade is firm and stable. The exposed subgrade shall be free of ponded water so that bedding material placement and compaction can be completed in the dry.

The proposed structure shall be bedded on a 1-foot-thick layer of Granular Borrow, Material for Underwater Backfill meeting the requirements of MaineDOT Standard Specification 703.19. The soil envelope and backfill shall consist of Standard Specification 703.19 - Granular Borrow with a maximum particle size of 4 inches. The Granular Borrow bedding and backfill material shall be placed in lifts of 6 to 8 inches loose measure and compacted to the manufacturer's specifications or, in the absence of manufacturer's specifications, the bedding and backfill soil shall be compacted to at least 92 percent of the AASHTO T-180 maximum dry density.

6.2 Bedrock Removal and Subgrade Preparation

The approximate invert of the proposed culvert ranges from an elevation of 38.1 feet at the inlet to 37.6 feet at the outlet. Constructing the culvert at this elevation may require removal of bedrock. The need for and depth of weathered bedrock removal will vary over the length of the precast concrete box culvert. The bottom elevation of the excavation shall take into account the wall thickness of the culvert bottom and the required 1-foot layer of bedding material. The boring indicates that the Rock Quality of the bedrock is Fair with an RQD of approximately 57 percent.

The bedrock surface shall be prepared in accordance with MaineDOT standard practices. The nature, slope, and degree of fracturing in the bedrock bearing surfaces will not be evident until the excavation from the precast concrete box culvert is made. Construction activities should not be permitted to create any open fissures in the bedrock to remain. Any irregularities in the existing bedrock surface or irregularities created during the excavation process should be backfilled with crushed stone to the bottom of the required bedding material.

The Contractor shall remove any overburden soil and bedrock that can be removed using ordinary excavation equipment to expose the proposed bearing surface at the required elevation. The cleanliness and condition of the bedrock surface should be confirmed and accepted by the Resident prior to placing the structural bedding material. If soil is encountered at bedding material subgrade it shall be proof-rolled using multiple passes of a static roller to achieve a firm and stable surface for construction. Any cobbles, boulders, or loose bedrock encountered in excess of 6 inches shall be removed and replaced with compacted Granular Borrow Material for Underwater Backfill or Crushed Stone $\frac{3}{4}$ -Inch.

Blasting shall be conducted in accordance with MaineDOT Standard Specifications Sections 105.2.7 and 203. The Contractor is required to conduct pre- and post-blast surveys, as well as blast vibrations monitoring at nearby structures in accordance with industry standards at the time of the blast.

It is anticipated that there will be seepage of water from fractures and joints exposed in the bedrock surface. Water should be controlled by pumping from sumps. The Contractor should maintain the excavation so that all work is completed in the dry.

6.3 Settlement

No settlement issues are anticipated at the site. The proposed precast concrete box culvert is larger than the existing culvert and will result in a net unloading of the site soils at the proposed structure location. Placement of fill soils at the location of the existing structure is not anticipated to exceed the past loading condition of the site soils. Any settlement due to elastic compression of the bedding material will be immediate and negligible.

6.4 Bearing Resistance

The factored bearing resistances for the precast concrete box culvert bearing on compacted granular bedding material placed on native soils and/or bedrock at the service and strength limit states are presented in the table below. Supporting calculations in accordance with AASHTO LRFD Bridge Design Specifications 10th Edition 2024 (LRFD) are provided in Appendix C – Calculations.

Limit State	Resistance Factor ϕ_b	AASHTO LRFD Reference	Factored Bearing Resistance (ksf)
Service	1.0	Article 10.5.5.1	10.0
Strength	0.45	Table 10.5.5.2.2-1	12.0

6.5 Modulus of Subgrade Reaction

A modulus of subgrade reaction (k_s) equal to 370 pounds per cubic inch shall be used for the structural design of the box culvert's base slab. Calculations are included in Appendix C – Calculations.

6.6 Scour and Riprap

Both the inlet and outlet of the precast concrete box culvert shall be protected against scour with riprap conforming to MaineDOT Standard Specification Section 703.26 Plain and Hand Laid Riprap. Slopes shall be no steeper than 2H:1V on the inlet and outlet end. No specific scour protection recommendations are needed other than armoring with riprap. The riprap on the slopes shall be underlain by a 1-foot layer of protective aggregate cushion consisting of Granular Borrow Material for Underwater Backfill (703.19) that is underlain by a non-woven, Class 1 Erosion Control Geotextile meeting the requirements of MaineDOT Standard Specification 722.03. The toe of the riprap sections shall be keyed into the existing soils 1 foot below the streambed elevation.

6.7 Seismic Design Considerations

In conformance with LRFD Article 3.10.1, seismic analysis is not required for buried structures, except where they cross active faults. There are no known active faults in Maine; therefore, seismic analysis is not required.

6.8 Construction Considerations

Construction activities may include construction of cofferdams and earth support systems to control stream flow during construction. Construction activities will also include common earth excavation. Construction of the proposed precast concrete box culvert will require deep soil excavation. Earth support systems shall be implemented if laying back slopes is not feasible. It is likely that the use of complex (four-sided) braced excavations with dewatering will be necessary due to the depth of the excavation. If this is the case, adequate embedment into sand or bedrock will be necessary to allow for the excavation and maintenance of a stable excavation bottom. All earth support systems shall

be designed by a Professional Engineer licensed in the State of Maine. Regardless of the method of excavation, all excavations and earth support systems shall meet all applicable OSHA regulations.

The Contractor shall control groundwater and surface water infiltration using temporary ditches, sumps, granular drainage blankets, stone ditch protection or hand-laid riprap with geotextile underlayment to divert groundwater and surface water as needed to maintain a stable excavation and allow work in the dry.

Using the excavated native soils as backfill around the culvert shall not be permitted. The native soils may only be used as common borrow in accordance with MaineDOT Standard Specifications 203 and 703.

The Contractor will have to excavate the existing subbase and subgrade fill soils in the vicinity of the culvert. These materials should not be used to re-base the roadway. Excavated subbase sand and gravel may be used as fill below roadway subgrade level in fill areas provided all other requirements of MaineDOT Standard Specifications 203 and 703 are met.

7.0 CLOSURE

This report has been prepared for the use of the MaineDOT Highway Program for specific application to the proposed replacement of an existing large culvert (#47373) under Route 1 in Pembroke, Maine in accordance with generally accepted geotechnical and foundation engineering practices. No other intended use or warranty is expressed or implied.


In the event that any changes in the nature, design, or location of the proposed project are planned, this report should be reviewed by a geotechnical engineer to assess the appropriateness of the conclusions and recommendations and to modify the recommendations as appropriate to reflect the changes in design. These analyses and recommendations are based in part upon a limited subsurface investigation at discrete exploratory location completed at the site. If variations from the conditions encountered during the investigation appear evident during construction, it may also become necessary to re-evaluate the recommendations made in this report.

It is recommended that a geotechnical engineer be provided the opportunity for a review of the design and specifications in order that the earthwork and foundation recommendations and construction considerations presented in this report are properly interpreted and implemented in the design and specifications.

Sheets



PEMBROKE, MAINE

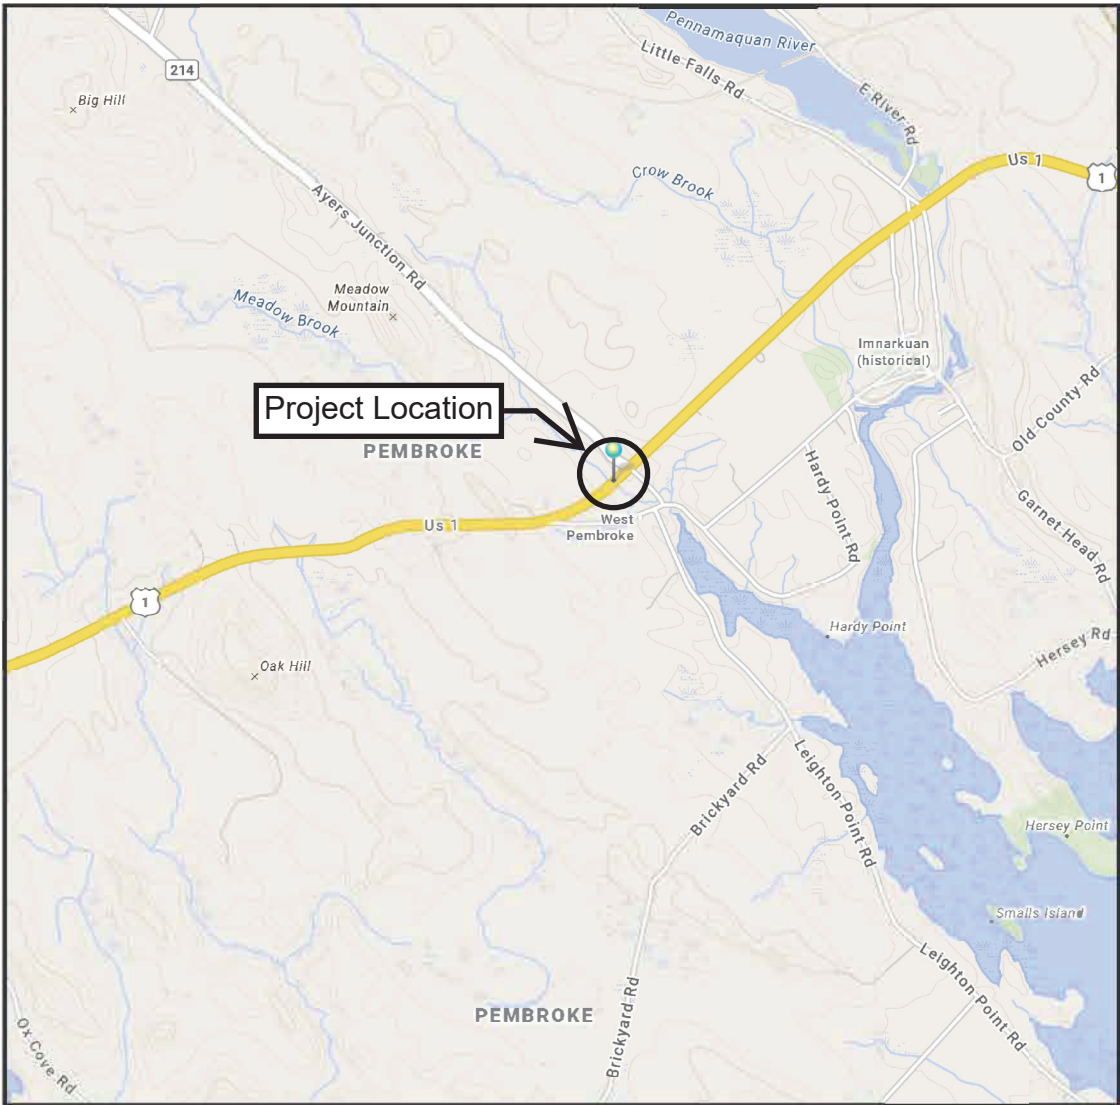

The Maine Department of Transportation provides this publication for information only. Reliance upon this information is at user risk. It is subject to revision and may be incomplete depending upon changing conditions. The Department assumes no liability if injuries or damages result from this information. This map is not intended to support emergency dispatch.

0.5 Miles
1 inch = 0.57 miles

Date: 7/22/2025
Time: 1:16:34 PM

SHEET NUMBER 1 OF 2	PEMBROKE U.S. ROUTE 1	STATE OF MAINE DEPARTMENT OF TRANSPORTATION	
		2663009	
	LOCATION MAP	WIN 26630.09	HIGHWAY PLANS

[illegible]

REFERENCES:

MISSIONERS' RECORDS


STATE OF MAINE
DEPARTMENT OF TRANSPORTATION

Scale of Feet

R.H. FOSTER ENGINEERING, LLC

FRESHIES

S RITE

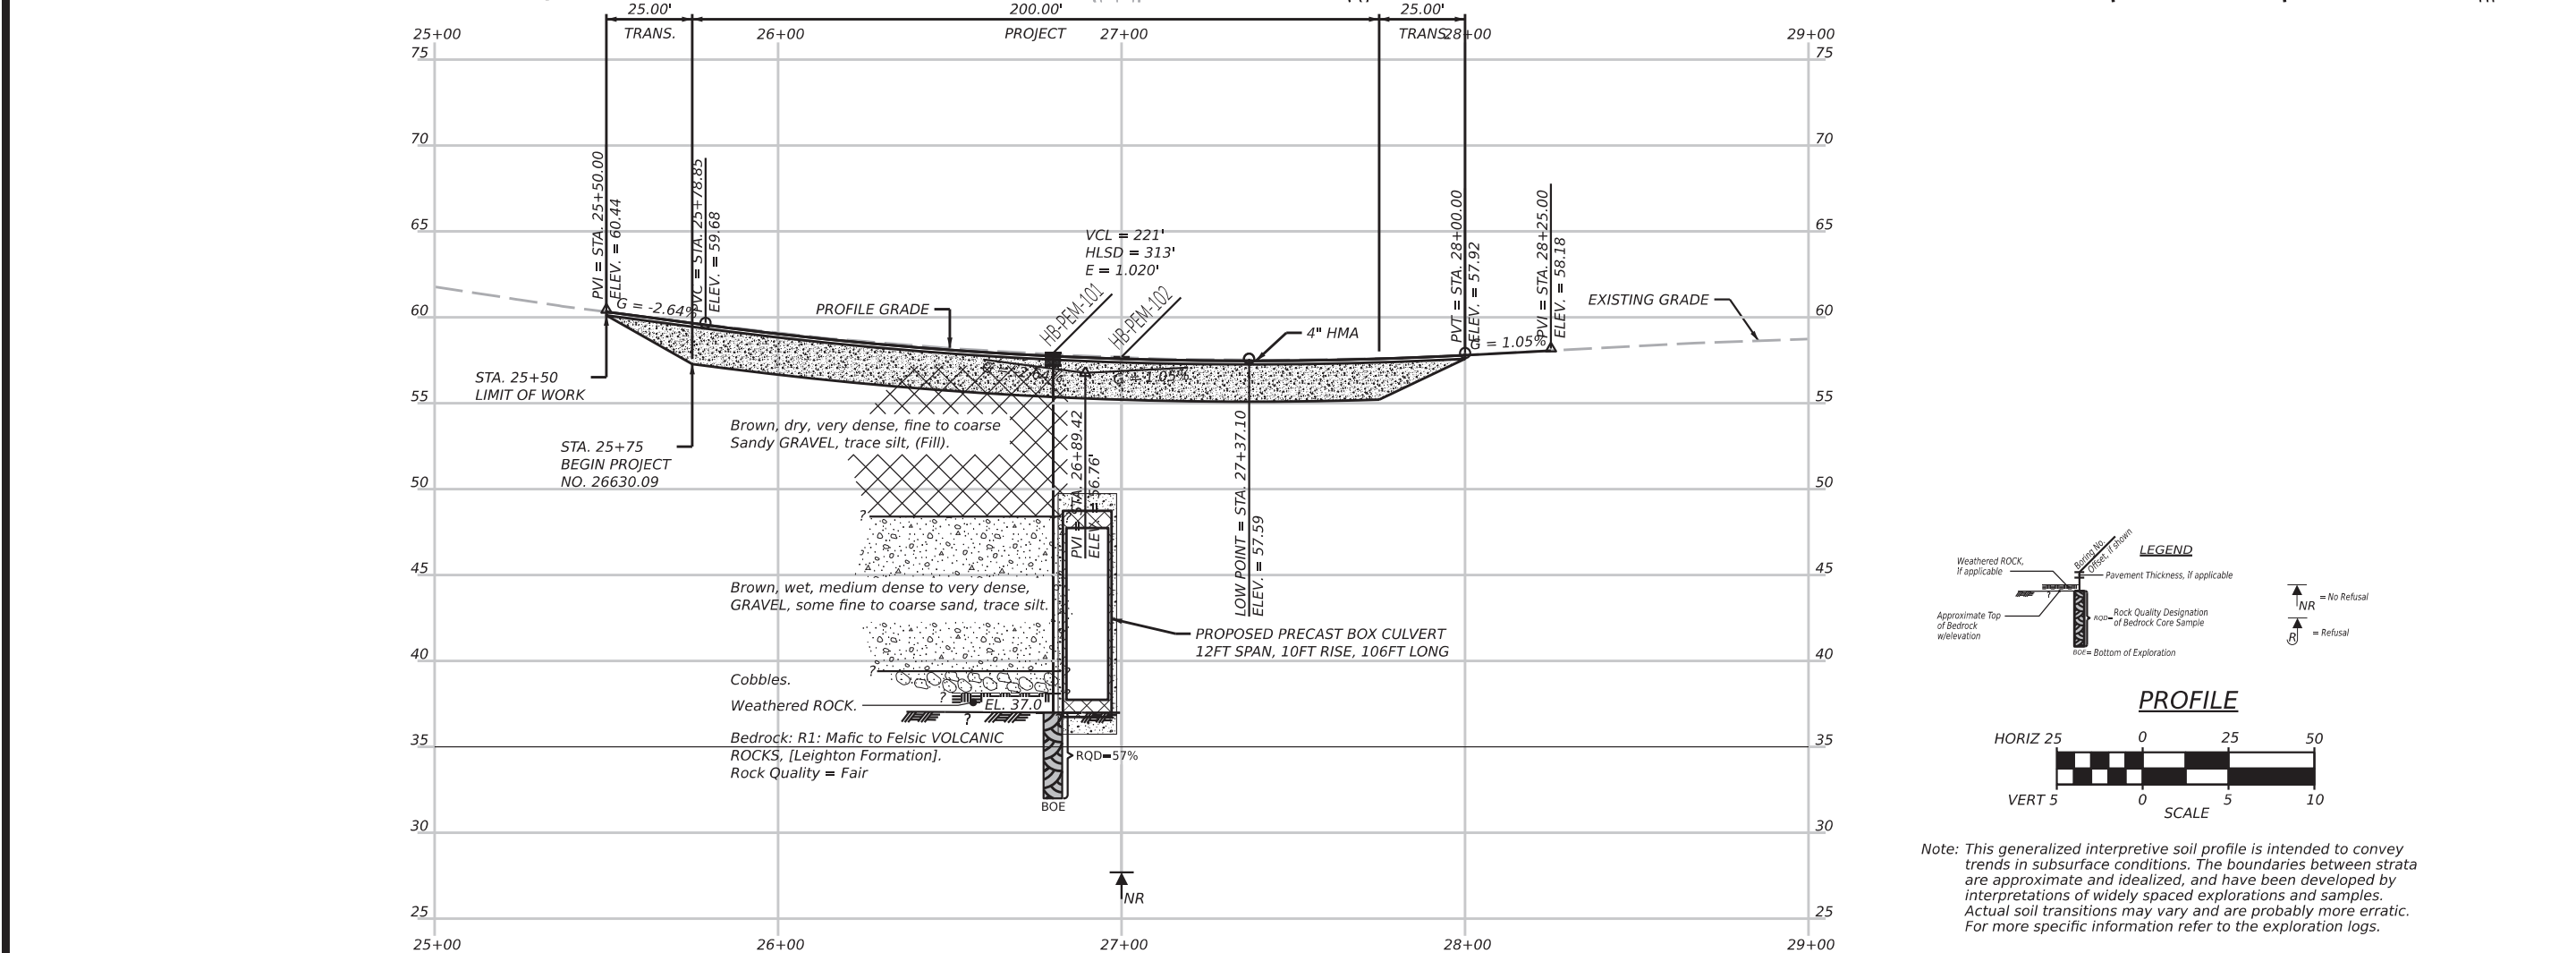

Note: This generalized interpretive soil profile is intended to convey trends in subsurface conditions. The boundaries between strata are approximate and idealized, and have been developed by interpretations of widely spaced explorations and samples. Actual soil transitions may vary and are probably more erratic. For more specific information refer to the exploration logs.

PEMBROKE U.S. ROUTE 1 BORING LOCATION PLAN & INTERPRETIVE SUBSURFACE PROFILE	SHEET NUMBER		2		OF 2	
	PROJ. MANAGER		####	BY	####	DATE
	CHECKED/DRAWN	####	####	####	SIGNATURE	
	CHECKED/REVISED	####	####	####	SIGNATURE	
	DESIGNED/SCALE/DWG	VT LEE	1/10/91	JUL 2025	P.E. NUMBER	
	DESIGNED/SCALE/DWG	####	####	####	DATE	
	REVISIONS 1	####	####	####	DATE	
	REVISIONS 2	####	####	####	DATE	
	REVISIONS 3	####	####	####	DATE	
	REVISIONS 4	####	####	####	DATE	
FIELD CHANGES		####	####	####	DATE	
STATE OF MAINE DEPARTMENT OF TRANSPORTATION						
2663009						
26630.09						
HIGHWAY PLANS						

Appendix A

Boring Logs

UNIFIED SOIL CLASSIFICATION SYSTEM				
MAJOR DIVISIONS			GROUP SYMBOLS	TYPICAL NAMES
COARSE-GRAINED SOILS (more than half of material is larger than No. 200 sieve size)	GRAVELS (more than half of coarse fraction is larger than No. 4 sieve size)	CLEAN GRAVELS	GW	Well-graded gravels, gravel-sand mixtures, little or no fines.
		(little or no fines)	GP	Poorly-graded gravels, gravel sand mixtures, little or no fines.
		GRAVEL WITH FINES (Appreciable amount of fines)	GM	Silty gravels, gravel-sand-silt mixtures.
		GC	Clayey gravels, gravel-sand-clay mixtures.	
		SANDS (more than half of coarse fraction is smaller than No. 4 sieve size)	CLEAN SANDS	SW
	(little or no fines)		SP	Poorly-graded sands, Gravelly sand, little or no fines.
	SANDS WITH FINES (Appreciable amount of fines)		SM	Silty sands, sand-silt mixtures
	SC		Clayey sands, sand-clay mixtures.	
	FINE-GRAINED SOILS (more than half of material is smaller than No. 200 sieve size)		SILTS AND CLAYS (liquid limit less than 50)	ML
		CL		Inorganic clays of low to medium plasticity, Gravelly clays, Sandy clays, Silty clays, lean clays.
OL		Organic silts and organic Silty clays of low plasticity.		
SILTS AND CLAYS (liquid limit greater than 50)		MH		Inorganic silts, micaceous or diatomaceous fine Sandy or Silty soils, elastic silts.
		CH		Inorganic clays of high plasticity, fat clays.
		OH	Organic clays of medium to high plasticity, organic silts.	
HIGHLY ORGANIC SOILS		Pt	Peat and other highly organic soils.	

MODIFIED BURMISTER SYSTEM			
<u>Descriptive Term</u>		<u>Portion of Total (%)</u>	
trace		0 - 10	
little		11 - 20	
some		21 - 35	
adjective (e.g. Sandy, Clayey)		36 - 50	
TERMS DESCRIBING DENSITY/CONSISTENCY			
<u>Coarse-grained soils</u> (more than half of material is larger than No. 200 sieve): Includes (1) clean gravels; (2) Silty or Clayey gravels; and (3) Silty, Clayey or Gravelly sands. Density is rated according to standard penetration resistance (N-value).			
<u>Density of Cohesionless Soils</u>		<u>Standard Penetration Resistance N-Value (blows per foot)</u>	
Very loose		0 - 4	
Loose		5 - 10	
Medium Dense		11 - 30	
Dense		31 - 50	
Very Dense		> 50	
<u>Fine-grained soils</u> (more than half of material is smaller than No. 200 sieve): Includes (1) inorganic and organic silts and clays; (2) Gravelly, Sandy or Silty clays; and (3) Clayey silts. Consistency is rated according to undrained shear strength as indicated.			
<u>Consistency of Cohesive soils</u>		<u>SPT N-Value (blows per foot)</u>	<u>Approximate Undrained Shear Strength (psf)</u>
Very Soft		WOH, WOR, WOP, <2	0 - 250
Soft		2 - 4	250 - 500
Medium Stiff		5 - 8	500 - 1000
Stiff		9 - 15	1000 - 2000
Very Stiff		16 - 30	2000 - 4000
Hard		>30	over 4000
<u>Field Guidelines</u>			
Fist easily penetrates			
Thumb easily penetrates			
Thumb penetrates with moderate effort			
Indented by thumb with great effort			
Indented by thumbnail			
Indented by thumbnail with difficulty			
<u>Rock Quality Designation (RQD):</u>			
RQD (%) = $\frac{\text{sum of the lengths of intact pieces of core}^* > 4 \text{ inches}}{\text{length of core advance}}$			
*Minimum NQ rock core (1.88 in. OD of core)			
<u>Rock Quality Based on RQD</u>			
<u>Rock Quality</u>	<u>RQD (%)</u>		
Very Poor	≤25		
Poor	26 - 50		
Fair	51 - 75		
Good	76 - 90		
Excellent	91 - 100		
<u>Desired Rock Observations (in this order, if applicable):</u>			
Color (Munsell color chart)			
Texture (aphanitic, fine-grained, etc.)			
Rock Type (granite, schist, sandstone, etc.)			
Hardness (very hard, hard, mod. hard, etc.)			
Weathering (fresh, very slight, slight, moderate, mod. severe, severe, etc.)			
Geologic discontinuities/jointing:			
-dip (horiz - 0-5 deg., low angle - 5-35 deg., mod. dipping - 35-55 deg., steep - 55-85 deg., vertical - 85-90 deg.)			
-spacing (very close - <2 inch, close - 2-12 inch, mod. close - 1-3 feet, wide - 3-10 feet, very wide >10 feet)			
-tightness (tight, open, or healed)			
-infilling (grain size, color, etc.)			
Formation (Waterville, Ellsworth, Cape Elizabeth, etc.)			
RQD and correlation to rock quality (very poor, poor, etc.)			
ref: ASTM D6032 and FHWA NHI-16-072 GEC 5 - Geotechnical Site Characterization, Table 4-12			
Recovery (inch/inch and percentage)			
Rock Core Rate (X.X ft - Y.Y ft (min:sec))			
<u>Sample Container Labeling Requirements:</u>			
WIN	Blow Counts		
Bridge Name / Town	Sample Recovery		
Boring Number	Date		
Sample Number	Personnel Initials		
Sample Depth			

<p>Maine Department of Transportation</p> <p>Geotechnical Section</p> <p>Key to Soil and Rock Descriptions and Terms</p> <p>Field Identification Information</p>

<div>Maine Department of Transportation</div> <div>Soil/Rock Exploration Log</div> <div>US CUSTOMARY UNITS</div>				<div>Project: Route 1 Large Culvert Replacement</div> <div>Location: Pembroke, Maine</div>				<div>Boring No.: HB-PEM-101</div> <div>WIN: 26630.09</div>							
Driller: MaineDOT				Elevation (ft.) 57.9				Auger ID/OD: 5" Solid Stem							
Operator: Daggett/Andrel				Datum: NAVD88				Sampler: Standard Split Spoon							
Logged By: B. Wilder				Rig Type: CME 45C				Hammer Wt./Fall: 140#/30"							
Date Start/Finish: 10/25/2023; 08:00-10:30				Drilling Method: Cased Wash Boring				Core Barrel: NQ-2"							
Boring Location: 26+80, 11.7 ft Lt.				Casing ID/OD: NW-3"				Water Level*: 11.0 ft bgs.							
Hammer Efficiency Factor: 0.906				Hammer Type: Automatic <input checked="" type="checkbox"/> Hydraulic <input type="checkbox"/> Rope & Cathead <input type="checkbox"/>											
<div>Definitions:</div> <div>D = Split Spoon Sample</div> <div>MD = Unsuccessful Split Spoon Sample Attempt</div> <div>U = Thin Wall Tube Sample</div> <div>MU = Unsuccessful Thin Wall Tube Sample Attempt</div> <div>V = Field Vane Shear Test, PP = Pocket Penetrometer</div> <div>MV = Unsuccessful Field Vane Shear Test Attempt</div>				<div>R = Rock Core Sample</div> <div>SSA = Solid Stem Auger</div> <div>HSA = Hollow Stem Auger</div> <div>RC = Roller Cone</div> <div>WOH = Weight of 140lb. Hammer</div> <div>WOR/C = Weight of Rods or Casing</div> <div>WO1P = Weight of One Person</div>				<div>S_u = Peak/Remolded Field Vane Undrained Shear Strength (psf)</div> <div>S_{u(lab)} = Lab Vane Undrained Shear Strength (psf)</div> <div>q_p = Unconfined Compressive Strength (ksf)</div> <div>N-uncorrected = Raw Field SPT N-value</div> <div>Hammer Efficiency Factor = Rig Specific Annual Calibration Value</div> <div>N₆₀ = SPT N-uncorrected Corrected for Hammer Efficiency</div> <div>N₆₀ = (Hammer Efficiency Factor/60%)*N-uncorrected</div>				<div>T_v = Pocket Torvane Shear Strength (psf)</div> <div>WC = Water Content, percent</div> <div>LL = Liquid Limit</div> <div>PL = Plastic Limit</div> <div>PI = Plasticity Index</div> <div>G = Grain Size Analysis</div> <div>C = Consolidation Test</div>			
<div><div><div>Depth (ft.)</div><div>Sample No.</div><div>Pen./Rec. (in.)</div><div>Sample Depth (ft.)</div><div>Blows (6 in.) Shear Strength (psf) or RQD (%)</div><div>N-uncorrected</div><div>N₆₀</div><div>Casing Blows</div><div>Elevation (ft.)</div><div>Graphic Log</div><div>Visual Description and Remarks</div><div>Laboratory Testing Results/ AASHTO and Unified Class.</div></div><div><div>0</div><div>1D</div><div>24/17</div><div>1.00 - 3.00</div><div>19/19/24/24</div><div>43</div><div>65</div><div></div><div>57.2</div><div></div><div>8 1/2" HMA, (in Shoulder).</div><div>Brown, dry, very dense, fine to coarse Sandy GRAVEL, trace silt, (Fill).</div><div>Brown, dry, very dense, fine to coarse Sandy GRAVEL, trace silt, (Fill).</div><div>Brown, wet, very dense, GRAVEL, some fine to coarse sand, trace silt.</div><div>Brown, wet, medium dense, GRAVEL, some fine to coarse sand, trace silt.</div><div>a101 blows for 0.5 ft.</div><div>Cobbles. Roller Coned ahead to 20.9 ft bgs.</div><div>Possible Weathered Rock.</div><div>Top of Bedrock at Elev. 37.0 ft. R1: Bedrock: Mafic to Felsic VOLCANIC ROCKS, [Leighton Formation]. Rock Quality = Fair R1: Core Times (min:sec) 20.9-21.9 ft (3:02) 21.9-22.9 ft (1:59) 22.9-23.9 ft (2:15)</div></div><div><div>G#379692 A-1-a, GW-GM WC=2.1%</div><div>G#379693 A-1-a, GW-GM WC=10.1%</div></div></div>															
Remarks:															
Stratification lines represent approximate boundaries between soil types; transitions may be gradual.								Page 1 of 2							
* Water level readings have been made at times and under conditions stated. Groundwater fluctuations may occur due to conditions other than those present at the time measurements were made.								Boring No.: HB-PEM-101							

<div>Maine Department of Transportation</div> <div>Soil/Rock Exploration Log</div> <div>US CUSTOMARY UNITS</div>						Project: Route 1 Large Culvert Replacement		Boring No.: HB-PEM-101																																																																																																																																																																																																																																				
						Location: Pembroke, Maine		WIN: 26630.09																																																																																																																																																																																																																																				
Driller: MaineDOT				Elevation (ft.) 57.9		Auger ID/OD: 5" Solid Stem																																																																																																																																																																																																																																						
Operator: Daggett/Andrel				Datum: NAVD88		Sampler: Standard Split Spoon																																																																																																																																																																																																																																						
Logged By: B. Wilder				Rig Type: CME 45C		Hammer Wt./Fall: 140#/30"																																																																																																																																																																																																																																						
Date Start/Finish: 10/25/2023; 08:00-10:30				Drilling Method: Cased Wash Boring		Core Barrel: NQ-2"																																																																																																																																																																																																																																						
Boring Location: 26+80, 11.7 ft Lt.				Casing ID/OD: NW-3"		Water Level*: 11.0 ft bgs.																																																																																																																																																																																																																																						
Hammer Efficiency Factor: 0.906				Hammer Type: Automatic <input checked="" type="checkbox"/> Hydraulic <input type="checkbox"/> Rope & Cathead <input type="checkbox"/>																																																																																																																																																																																																																																								
Definitions: D = Split Spoon Sample MD = Unsuccessful Split Spoon Sample Attempt U = Thin Wall Tube Sample MU = Unsuccessful Thin Wall Tube Sample Attempt V = Field Vane Shear Test, PP = Pocket Penetrometer MV = Unsuccessful Field Vane Shear Test Attempt				R = Rock Core Sample SSA = Solid Stem Auger HSA = Hollow Stem Auger RC = Roller Cone WOH = Weight of 140 lb. Hammer WOR/C = Weight of Rods or Casing WQ1P = Weight of One Person		S _u = Peak/Remolded Field Vane Undrained Shear Strength (psf) S _{u(lab)} = Lab Vane Undrained Shear Strength (psf) q _p = Unconfined Compressive Strength (ksf) N-uncorrected = Raw Field SPT N-value Hammer Efficiency Factor = Rig Specific Annual Calibration Value N ₆₀ = SPT N-uncorrected Corrected for Hammer Efficiency N ₆₀ = (Hammer Efficiency Factor/60%)*N-uncorrected		T _v = Pocket Torvane Shear Strength (psf) WC = Water Content, percent LL = Liquid Limit PL = Plastic Limit PI = Plasticity Index G = Grain Size Analysis C = Consolidation Test																																																																																																																																																																																																																																				
<table><thead><tr><th rowspan="2">Depth (ft.)</th><th colspan="8">Sample Information</th><th rowspan="2">Graphic Log</th><th rowspan="2">Visual Description and Remarks</th><th rowspan="2">Laboratory Testing Results/ AASHTO and Unified Class.</th></tr><tr><th>Sample No.</th><th>Pen./Rec. (in.)</th><th>Sample Depth (ft.)</th><th>Blows (/6 in.) Shear Strength (psf) or RQD (%)</th><th>N-uncorrected</th><th>N₆₀</th><th>Casing Blows</th><th>Elevation (ft.)</th></tr></thead><tbody><tr><td>25</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>32.0</td><td><div><div></div></div></td><td>23.9-24.9 ft (2:13) 24.9-25.9 ft (2:02) 100% Recovery</td><td rowspan="15">Bottom of Exploration at 25.9 feet below ground surface.</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>50</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>												Depth (ft.)	Sample Information								Graphic Log	Visual Description and Remarks	Laboratory Testing Results/ AASHTO and Unified Class.	Sample No.	Pen./Rec. (in.)	Sample Depth (ft.)	Blows (/6 in.) Shear Strength (psf) or RQD (%)	N-uncorrected	N ₆₀	Casing Blows	Elevation (ft.)	25									32.0	<div><div></div></div>	23.9-24.9 ft (2:13) 24.9-25.9 ft (2:02) 100% Recovery	Bottom of Exploration at 25.9 feet below ground surface.																																																																																																																																																																																					50											
Depth (ft.)	Sample Information								Graphic Log	Visual Description and Remarks	Laboratory Testing Results/ AASHTO and Unified Class.																																																																																																																																																																																																																																	
	Sample No.	Pen./Rec. (in.)	Sample Depth (ft.)	Blows (/6 in.) Shear Strength (psf) or RQD (%)	N-uncorrected	N ₆₀	Casing Blows	Elevation (ft.)																																																																																																																																																																																																																																				
25									32.0	<div><div></div></div>	23.9-24.9 ft (2:13) 24.9-25.9 ft (2:02) 100% Recovery	Bottom of Exploration at 25.9 feet below ground surface.																																																																																																																																																																																																																																
50																																																																																																																																																																																																																																												
Remarks:																																																																																																																																																																																																																																												
Stratification lines represent approximate boundaries between soil types; transitions may be gradual.											Page 2 of 2																																																																																																																																																																																																																																	
* Water level readings have been made at times and under conditions stated. Groundwater fluctuations may occur due to conditions other than those present at the time measurements were made.											Boring No.: HB-PEM-101																																																																																																																																																																																																																																	

<div>Maine Department of Transportation</div> <div>Soil/Rock Exploration Log</div> <div>US CUSTOMARY UNITS</div>				<div>Project: Route 1 Large Culvert Replacement</div> <div>Location: Pembroke, Maine</div>				<div>Boring No.: HB-PEM-102</div> <div>WIN: 26630.09</div>			
Drilling Contractor: MaineDOT				Elevation (ft.): 57.7				Auger ID/OD: 5" Dia.			
Operator: Daggett/Andrel				Datum: NAVD88				Sampler: N/A			
Logged By: B. Wilder				Rig Type: CME 45C				Hammer Wt./Fall: N/A			
Date Start/Finish: 10/25/2023-10/25/2023				Drilling Method: Solid Stem Auger				Core Barrel: N/A			
Boring Location: 27+00, 13.8 ft Rt.				Casing ID/OD: N/A				Water Level*: None Observed			
<div>Definitions: D = Spilt Spoon Sample S = Sample off Auger Flights B = Bucket Sample off Auger Flights MD = Unsuccessful Split Spoon Sample Attempt U = Thin Wall Tube Sample MV = Unsuccessful Field Vane Shear Test Attempt V = Field Vane Shear Test PP= Pocket Penetrometer</div> <div>MU = Unsuccessful Thin Wall Tube Sample Attempt R = Rock Core Sample SSA = Solid Stem Auger HSA = Hollow Stem Auger RC = Roller Cone WOH = Weight of 140lb. Hammer WOR/C = Weight of Rods or Casing</div> <div>WO1P = Weight of 1 Person S_u = Peak/Remolded Field Vane Undrained Shear Strength (psf) S_{u(lab)} = Lab Vane Undrained Shear Strength (psf) q_p = Unconfined Compressive Strength (ksf) N-value = Raw Field SPT N-value T_v = Pocket Torvane Shear Strength (psf) WC = Water Content, percent ≐ = Similar or Equal too</div> <div>LL = Liquid Limit PL = Plastic Limit PI = Plasticity Index G = Grain Size Analysis C = Consolidation Test</div>											
Depth (ft.)	Sample Information									Visual Description and Remarks	Laboratory Testing Results/ AASHTO and Unified Class.
	Sample No.	Pen./Rec. (in.)	Sample Depth (ft.)	Blows (/6 in.) Shear Strength (psf) or RQD (%)	N-value	Casing Blows	Elevation (ft.)	Graphic Log			
0						SSA			Probe, no material samples taken.		
5									Very, very dense Cobble and Boulder from 8.0-13.5 ft bgs.		
10											
15											
20											
25											
Remarks:											
Stratification lines represent approximate boundaries between soil types; transitions may be gradual.											
* Water level readings have been made at times and under conditions stated. Groundwater fluctuations may occur due to conditions other than those present at the time measurements were made.											
										Page 1 of 2	
										Boring No.: HB-PEM-102	


Appendix B

Laboratory Test Results

Work Number: 26630.09

PI = Plasticity Index as determined by AASHTO 90-96 and/or ASTM D4318-98

Maine Department of Transportation
Grain Size Distribution Curve

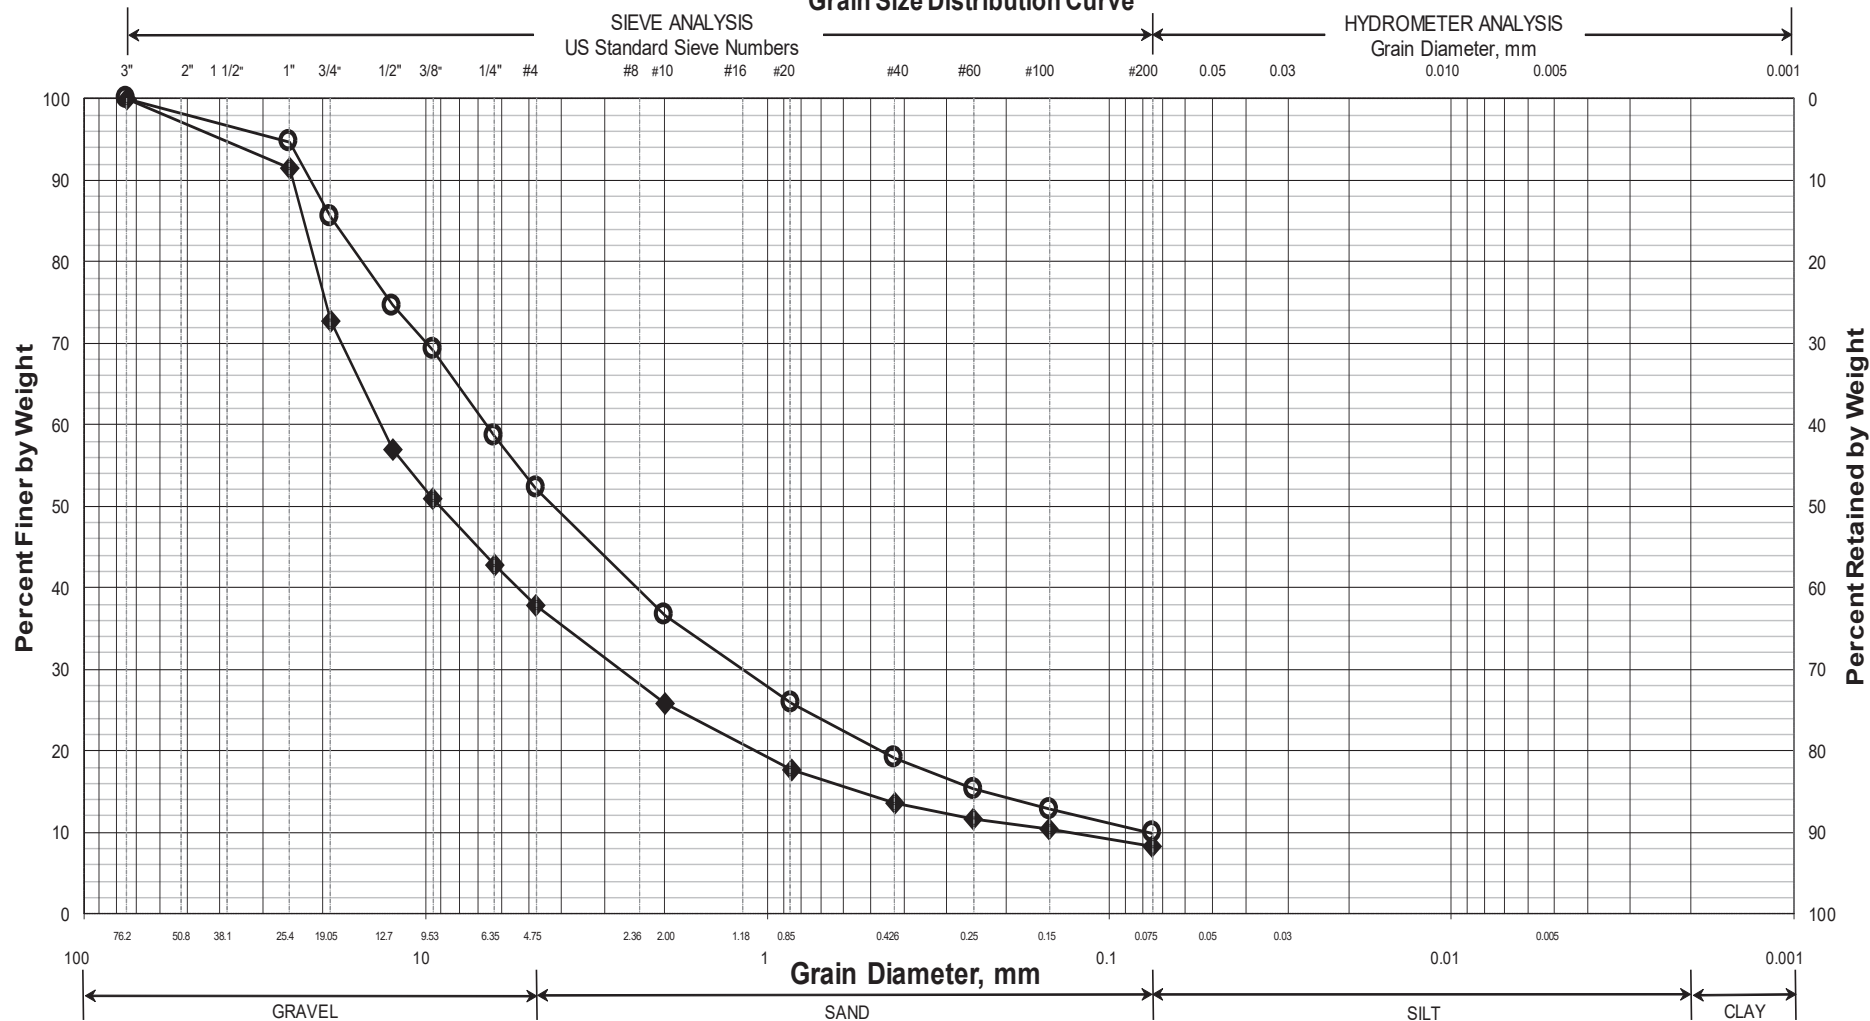

UNIFIED CLASSIFICATION

	Boring/Sample No.	Station	Offset, ft	Depth, ft	Description	WC, %	LL	PL	PI
○	HB-PEM-101/1D	26+80	11.7 LT	1.0-3.0	Sandy GRAVEL, trace silt.	2.1			
◆	HB-PEM-101/4D	26+80	11.7 LT	15.0-17.0	GRAVEL, some sand, trace silt.	10.1			
■									
●									
▲									
X									

WIN	
026630.09	
Town	
Pembroke	
Reported by/Date	
WHITE, TERRY A	5/7/2025

Appendix C

Calculations

Bearing Resistance - Existing Soils:

Part 1 - Service Limit State

Nominal and factored Bearing Resistance - Box Culvert on Gravel

Presumptive Bearing Resistance for Service Limit State ONLY

Reference: AASHTO LRFD Bridge Design Specifications 10th Edition 2024
Table C10.6.2.5.1-1 Presumptive Bearing Resistances for Spread Footings at the
Service Limit State Modified after US Department of Navy (1982)

Type of Bearing Material: Gravel (GW-GM)

Based on N-values, soils are medium dense near the bearing elevation

Density In Place: medium dense to dense

Bearing Resistance: Ordinary Range (ksf) 8 to 14

Recommended Value of Use:

$$q_{nom} := 10 \cdot \text{ksf}$$

Resistance factor at the **service limit state** = 1.0 (LRFD Article 10.5.5.1)

$$\phi_{\text{service_bc}} := 1.0$$

$$q_{\text{factored_service_bc}} := q_{nom} \cdot \phi_{\text{service_bc}}$$

$$q_{\text{factored_service_bc}} = 10 \cdot \text{ksf}$$

Note: This bearing resistance is settlement limited (1 inch) and applies only at the service limit state.

Part 2 - Strength Limit State

Nominal and factored Bearing Resistance - Box Culvert on Gravel

Reference: AASHTO LRFD Bridge Design Specifications 10th Edition 2024 - Article 10.6.3.1

Assumptions:

1. The box will be founded at ~ Elev 38.1 feet

Bottom of Construction will be 2 feet below box invert

$$D_{\text{footing}} := 2.0 \cdot \text{ft}$$

2. Assumed parameters for fill soils:

Saturated unit weight: $\gamma_s := 125 \cdot \text{pcf}$

Internal friction angle: $\phi_{ns} := 32 \cdot \text{deg}$

Undrained shear strength: $c_{ns} := 0 \cdot \text{psf}$

3. Box Culvert parameters

Width of box culvert, B $B_{\text{box}} := 12 \cdot \text{ft}$

Length of box culvert, L $L_{\text{box}} := 106 \cdot \text{ft}$

Nominal Bearing Resistance per LRFD Equation 10.6.3.1.2a-1

$$q_n = cN_{cm} + \gamma D_f N_{qm} C_{wq} + 0.5\gamma B N_{\gamma m} C_{w\gamma}$$

Bearing Capacity Factors - LRFD Table 10.6.3.1.2a-1

For $\phi=32$ deg $N_c := 35.5$ $N_q := 23.2$ $N_\gamma := 30.2$

Shape Correction Factors LRFD Table 10.6.3.1.2a-3

for $\phi=32$ degrees

$$s_c := 1 + \left(\frac{B_{box}}{L_{box}} \right) \left(\frac{N_q}{N_c} \right) \quad s_c = 1.07$$

$$s_\gamma := 1 - 0.4 \left(\frac{B_{box}}{L_{box}} \right) \quad s_\gamma = 0.9547$$

$$s_q := 1 + \left(\frac{B_{box}}{L_{box}} \cdot \tan(\phi_{ns}) \right) \quad s_q = 1.07$$

Load Inclination Factors:

Assume all are 1.0 (LRFD Article C10.6.3.1.2a)

$i_c := 1.0$ $i_q := 1.0$ $i_\gamma := 1.0$

Depth Correction
Factor

$$d_q := 1 + 2 \cdot \tan(\phi_{ns}) \cdot (1 - \sin(\phi_{ns}))^2 \cdot \tan\left(\frac{D_{footing}}{B_{box}}\right)^{-1} \quad d_q = 2.6416$$

LRFD Eq.
10.6.3.1.2a-10

$$N_{cm} := N_c \cdot s_c \cdot i_c \quad N_{cm} = 38.1264 \quad \text{LRFD Eq. 10.6.3.1.2a-2}$$

$$N_{qm} := N_q \cdot s_q \cdot d_q \cdot i_q \quad N_{qm} = 65.62 \quad \text{LRFD Eq. 10.6.3.1.2a-3}$$

$$N_{\gamma m} := N_\gamma \cdot s_\gamma \cdot i_\gamma \quad N_{\gamma m} = 28.83 \quad \text{LRFD Eq. 10.6.3.1.2a-4}$$

Coefficients for Groundwater Depths LRFD Table 10.6.3.1.2a-2

Depth the water table: $D_w := 11.0 \cdot \text{ft}$ $C_{wq} := 1.0$ $C_{w\gamma} := 0.5$

$$q_{nominal} := c_{ns} \cdot N_{cm} + \gamma_s \cdot D_{footing} \cdot N_{qm} \cdot C_{wq} + 0.5(\gamma_s) B_{box} \cdot N_{\gamma m} \cdot C_{w\gamma}$$

$$q_{nominal} = 27.2 \cdot \text{ksf}$$

Factored Bearing Resistance for Strength Limit State

Resistance Factor: $\phi_b := 0.45$ LRFD Table 10.5.5.2.2-1

$$q_{factored} := q_{nominal} \cdot \phi_b$$

$$q_{factored} = 12.2 \cdot \text{ksf}$$

Recommend a limiting factored bearing resistance of 12.0 ksf for the Strength Limit State.

Modulus of Subgrade Reaction:

Reference: Foundation Analysis and Design 5th Edition JE Bowles Section 9-6

Width of box culvert, B $B_{\text{box}} = 12 \text{ ft}$

Length of box culvert, L $L_{\text{box}} = 106 \text{ ft}$

Thickness of box culvert, t $t_{\text{box}} := 12 \cdot \text{in}$ assumed

Depth of box, D $D_{\text{box}} := 20.0 \cdot \text{ft}$

Bearing Resistance: $q_{\text{factored_service_bc}} = 10 \cdot \text{ksf}$ Calculated above

Modulus of Elasticity: Site soils at bearing elevation are Gravel. Use values for Gravel (medium dense)
From Bowles Table 2-8 Modulus E_s for Dense Sand and Gravel, ranges from 2089 - 4177 ksf

Use Modulus of Elasticity, E_s $E_s := 3100 \cdot \text{ksf}$

Poisson's Ratio: Site conditions at bearing elevation are Gravel. Use values for Gravel (medium dense)
From Bowles Table 2-7 Poisson's Ratio μ for Gravelly Sand ranges from 0.3 - 0.4

Use Poisson's Ratio, μ $\mu := 0.3$

$$E_{\text{prime_s}} := \frac{1 - \mu^2}{E_s} \quad E_{\text{prime_s}} = 0.000294 \cdot \frac{\text{ft}^2}{\text{kip}}$$

Analyze corner:

Take H as 5*B as recommended in Bowles Chapter 5

$$H_{\text{inf}} := \frac{5 \cdot B_{\text{box}}}{B_{\text{box}}} \quad H_{\text{inf}} = 5 \quad N \text{ in Table 5-2}$$

$$\frac{L_{\text{box}}}{B_{\text{box}}} = 8.8333 \quad M \text{ in Table 5-2}$$

From Table 5-2 for N=5 and M=8.83

$$I_1 := 0.537$$

$$I_2 := 0.136 \quad \text{by interpolation}$$

Determine Steinbrenner influence factor - Bowles Section 5-6:

$$I_s := I_1 + \left[\frac{1 - (2 \cdot \mu)}{1 - \mu} \right] \cdot I_2 \quad I_s = 0.6147$$

Determine Influence factor for footing depth - Bowles Figure 5-7

$$\text{Depth ratio: } \frac{D_{\text{box}}}{B_{\text{box}}} = 1.6667 \quad \frac{L_{\text{box}}}{B_{\text{box}}} = 8.8333 \quad \mu = 0.3 \quad I_F := 0.72$$

Calculate modulus of subgrade reaction - Bowles Eq. 9-7

$$k_s := \frac{1}{B_{\text{box}} \cdot E_{\text{prime_s}} \cdot I_s \cdot I_F} \quad \text{Bowles Eq. 9-7}$$

$$k_s = 371 \cdot \text{pci}$$

Recommend Modulus of Subgrade Reaction of 370 pci