

CONTRACT & SPECIFICATIONS


FOR

KENNEBEC RIVER
BOATING FACILITY IMPROVEMENTS
PHIPPSBURG, MAINE
BGS No. 3601

PINE TREE ENGINEERING, INC.
BATH, MAINE

CONTRACT & SPECIFICATIONS
FOR
KENNEBEC RIVER
BOATING FACILITY IMPROVEMENTS
PHIPPSBURG, MAINE

January 2026

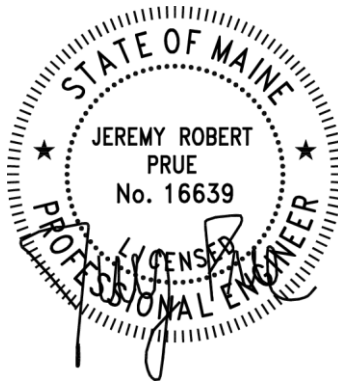

PINE TREE ENGINEERING, INC.
BATH, MAINE

Project No. 23001
BGS No. 3601

TABLE OF CONTENTS

DIVISION 00

00 11 13	Notice to Contractors
00 21 13	Instructions to Bidders
00 41 13	Contractor Bid Form
00 43 13	Contractor Bid Bond (Sample)
00 52 13	Construction Contract (Sample)
00 61 13.13	Contractor Performance Bond (Sample)
00 61 13.16	Contractor Payment Bond (Sample)
0 62 46	Construction Change Directive
00 62 76	Application for Payment
00 63 63	Change Order
00 71 00	Definitions
00 72 13	General Conditions
00 73 46	Wage Determination Schedule

DIVISION 01

01 11 00	Summary of Work
01 33 23	Contractor Furnished Shop Drawings/Submittals

DIVISION 31

31 23 00	Excavation, Filling, and Grading
31 25 00	Erosion and Sedimentation Controls
31 37 00	Riprap

DIVISION 32

32 16 13	Precast Concrete Curb
----------	-----------------------

DIVISION 35

35 43 38	Precast Concrete Launch Planks
----------	--------------------------------

APPENDIX A

Department of Environmental Protection Permit-by-Rule

PLANS

Sheet 1 of 3	Existing Conditions Plan
Sheet 2 of 3	Proposed Ramp Plan and Profile
Sheet 3 of 3	Details

DIVISION 00

00 11 13	Notice to Contractors
00 21 13	Instructions to Bidders
00 41 13	Contractor Bid Form
00 43 13	Contractor Bid Bond (Sample)
00 52 13	Construction Contract (Sample)
00 61 13.13	Contractor Performance Bond (Sample)
00 61 13.16	Contractor Payment Bond (Sample)
00 62 46	Construction Change Directive
00 62 76	Application for Payment
00 63 63	Change Order
00 71 00	Definitions
00 72 13	General Conditions
00 73 46	Wage Determination Schedule

00 11 13
Notice to Contractors

Kennebec River Boating Facility Improvements BGS Project No. 3601

Removal and replacement of the precast concrete ramp planks, precast concrete curb, and riprap installation at the Kennbec River Boating Facility in Phippsburg.

The contract shall designate the Substantial Completion Date on or before *22 May 2026*, and the Contract Final Completion Date on or before *31 May 2026*. *Work can begin on or after 1 April 2026.*

1. Submit bids on a completed Contractor Bid Form (section 00 41 13), provided in the Bid Documents, include bid security when required, and scan each item as an attachment to an email addressed to: BGS.Architect@Maine.gov, so as to be received no later than **1:30 p.m. on 3 February 2026**. The email subject line shall be marked "**Bid for Kennebec River Boating Facility Improvements**".

Bid submissions will be opened and read aloud at **2:00 p.m.** on the date noted above at the Bureau of General Services office, accessible as a video conference call. Those who wish to participate in the call must submit a request for access to BGS.Architect@Maine.gov.

Any bid received after the noted time will not be considered a valid bid and will remain unopened. Any bid submitted by any other means will not be considered a valid bid. In certain circumstances, the Bureau of General Services may require the Bidder to surrender a valid paper copy of the bid form or the bid security document. The Owner reserves the right to accept or reject any or all bids as may best serve the interest of the Owner.

2. Questions and comments on the *bid opening process* shall be addressed to: Division of Planning, Design & Construction, Bureau of General Services, 77 State House Station, Augusta, Maine 04333-0077, BGS.Architect@Maine.gov.
3. Questions and comments regarding the *project* design specifications or drawings shall be directed in writing to the Consultant during the bid period prior to the question and comment deadline of 5:00 p.m. on *28 January 2026*.

Pine Tree Engineering, Inc.
Jeremy R. Prue, P.E.
jrprue@pte-maine.com

4. ☒ Bid security is required on this project.
The Bidder shall include a satisfactory Bid Bond (section 00 43 13) or a certified or cashier's check for 5% of the bid amount with the completed bid form submitted to the Owner. The Bid Bond form is available on the BGS website.
or
☐ Bid security is not required on this project.

00 11 13
Notice to Contractors

5. ☒ Performance and Payment Bonds are required on this project.
If noted above as required, or if any combination of Base Bid and Alternate Bids amounts selected in the award of the contract exceeds \$125,000.00, the selected Contractor shall furnish a 100% contract Performance Bond (section 00 61 13.13) and a 100% contract Payment Bond (section 00 61 13.16) in the contract amount to cover the execution of the Work. Bond forms are available on the BGS website.
- or*
- ☐ Performance and Payment Bonds are not required on this project.
6. Filed Sub-bids *are not required* on this project.
7. ☐ Pre-qualified General Contractors are utilized on this project.
- or*
- ☒ Pre-qualified General Contractors are not utilized on this project.
8. ☒ An on-site pre-bid conference (☐ *mandatory* or ☒ *optional*) will be conducted for this project. The pre-bid conference is intended for General Contractors. Subcontractors and suppliers are welcome to attend. Contractors who arrive late or leave early for a mandatory meeting may be prohibited from participating in this meeting and bidding.
The optional pre-bid conference will be held 22 January 2026 at 11:00 a.m. at the project location site (295 Fiddlers Reach Road, Phippsburg, Maine).
- or*
- ☐ An on-site pre-bid conference will not be conducted for this project.
9. Bid Documents - full sets only - will be available on or about *13 January 2026* and may be obtained at a cost of ~~\$50 for electronic copies and \$100 for hard copies~~ from:
Pine Tree Engineering, Inc.
53 Front Street Bath, Maine 04530
(207) 443-1508 - pte@pte-maine.com
10. Bid Documents may be examined at:
- | | |
|---|--|
| <i>AGC Maine</i>
<i>188 Whitten Road, Augusta, ME 04330</i>
<i>207-622-4741</i> | <i>Construction Summary</i>
<i>734 Chestnut Street, Manchester, NH 03104</i>
<i>603-627-8856</i> |
|---|--|

00 21 13
Instructions to Bidders

1. Bidder Requirements

- 1.1 A bidder is a Contractor which is evidently qualified, or has been specifically pre-qualified by the Bureau of General Services, to bid on the proposed project described in the Bid Documents.
- 1.2 Contractors and Subcontractors bidding on projects that utilize Filed Sub-bids shall follow the requirements outlined in these Bid Documents for such projects. See Section 00 22 13 for additional information.
- 1.3 Contractors and Subcontractors are not eligible to bid on the project when their access to project design documents prior to the bid period distribution of documents creates an unfair bidding advantage. Prohibited access includes consultation with the Owner or with design professionals engaged by the Owner regarding cost estimating, constructability review, or project scheduling. This prohibition to bid applies to open, competitive bidding or pre-qualified contractor bidding or Filed Sub-bidding. The Bureau may require additional information to determine if the activities of a Contractor constitute an unfair bidding advantage.
- 1.4 Each bidder is responsible for becoming thoroughly familiar with the Bid Documents prior to submitting a bid. The failure of a bidder to review evident site conditions, to attend available pre-bid conferences, or to receive, examine, or act on addenda to the Bid Documents shall not relieve that bidder from any obligation with respect to their bid or the execution of the work as a Contractor.
- 1.5 Prior to the award of the contract, General Contractor bidders or Filed Sub-bidders may be required to provide documented evidence to the Owner or the Bureau showing compliance with the provisions of this section, their business experience, financial capability, or performance on previous projects.
- 1.6 The selected General Contractor bidder will be required to provide proof of insurance before a contract can be executed.
- 1.7 Contracts developed from this bid shall not be assigned, sublet or transferred without the written consent of the Owner.
- 1.8 By submitting a bid the Contractor attests that it has not been declared ineligible to bid on State of Maine projects. The Director of the Bureau of General Services may disallow award of this contract to any Contractor if there is evidence that the Contractor or any of its Subcontractors, through their own fault, have been terminated, suspended for cause, debarred from bidding, agreed to refrain from bidding as part of a settlement, have defaulted on a contract, or had a contract completed by another party.
- 1.9 The Contractor attests that it is not presently indicted for or otherwise criminally or civilly charged by a Federal, State or local government entity with commission of any of the following offenses and has not within a three-year period preceding this bid been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction, or contract under a public transaction, violation of Federal or State anti-trust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property.

00 21 13
Instructions to Bidders

- 1.10 The Contractor shall not make any award or permit any award (subgrant or contract) at any tier to any party which is debarred or suspended or is otherwise excluded from or ineligible for participation in Federal assistance programs or State of Maine projects.
2. Authority of Owner
- 2.1 The Owner reserves the right to accept or reject any or all bids as may best serve the interest of the Owner.
- 2.2 Subject to the Owner's stated right to accept or reject any or all bids, the Contractor shall be selected on the basis of the lowest dollar value of an acceptable Base Bid, or any combination of Base Bid plus Alternate Bids, as well as other limited cost modifications the Owner determines may best serve the interests of the Owner. An acceptable bid is a duly submitted bid from a responsive and responsible bidder.
- 2.3 The Owner reserves the right to require Bid Bonds or Performance and Payment Bonds for any project of any contract value.
3. Submitting Bids and Bid Requirements
- 3.1 Each bid shall be submitted on the forms provided in the Bid Documents.
- 3.2 Each bid shall be valid for a period of thirty calendar days following the Project bid closing date and time. The bid expiration date may be extended in unusual circumstances by mutual consent of the Bidder and the Owner. The bid amount shall not be modified due to the bid expiration date extension.
- 3.3 Any provision contained in a bid which shows cost escalation, or any modification of schedule or other requirements shall not be accepted. Such a provision causes the bid to be invalid, or, at the discretion of the Owner and BGS, that element of the bid submission may be disregarded for the purpose of awarding the contract without that provision.
- 3.4 Bidders shall include a Bid Bond or other approved bid security with the bid form submitted to the Owner when the bid form indicates such bid security is required. The bond value shall be 5% of the bid amount. The form of bond is shown in section 00 43 13.
- 3.5 Bidders recognize that inclusion of contract bonds and the cost of those bonds is dependent on the awarded contract dollar value. Therefore, a Base Bid, or any combination of Base Bid plus Alternate Bids, as well as other limited cost modifications, resulting in a contract award shall include the cost of Performance and Payment Bonds in the submitted bid amount when the construction contract value is over \$125,000.00. Similarly, the cost of Performance and Payment Bonds is excluded in the submitted bid amount when the construction contract value is \$125,000.00 or less unless bonds are specifically required by the Bid Documents. When required for the project, the selected Contractor shall provide these bonds before a contract can be executed, pursuant to 14 M.R.S.A., Section 871, Public Works Contractors' Surety Bond Law of 1971, subsection 3. The form of bonds is shown in section 00 61 13.13 and 00 61 13.16.

00 21 13
Instructions to Bidders

- 3.6 Bidders may modify bids in writing, by the same means as the original bid submission, prior to the bid closing time. Such written amendments shall not disclose the amount of the initial bid. If so disclosed, the entire bid is considered invalid.
- 3.7 Bidders implicitly acknowledge all Addenda issued when they submit the bid form. By usual practice the Consultant shall not issue Addenda less than 72 hours prior to the bid closing time, to allow ample time for bidders to incorporate the information. However, some information, such as extending the bid due date and time, may be issued with shorter notice. Addenda shall be issued to all companies who are registered holders of Bid Documents.
- 3.8 A bid may be withdrawn without penalty if a written request by the bidder is presented to the Owner prior to the bid closing time. Such written withdrawal requests are subject to verification as required by the Bureau.
- A bid may be withdrawn without penalty after the bid closing time if, in the determination of the Bureau, evidence provided by the Contractor shows an apparent unintended error such as a miscalculation, or an erroneous number on estimating documents, was the cause of an inaccurate bid. The Bureau may allow withdrawal in consideration of the bid bond or, without utilizing a bid bond, if the Bureau considers documented evidence provided by the Contractor shows factual errors had been made on the bid form.
- 3.9 In the event State of Maine Offices unexpectedly close on the published date of a public bid opening in the location of that bid opening, prior to the time of the scheduled deadline, the new deadline for the public bid opening will be the following business day at the originally scheduled hour of the day, at the original location. Official closings are posted on the State of Maine government website.
- 3.10 The Owner may require, in a Notice of Intent to Award letter to the apparent low bidder, a Schedule of Values, Project Schedule, and List of Subcontractors and Suppliers as both a demonstration of capability of the Bidder and as a condition of award.
- 3.11 Projects which require a State of Maine wage determination will include that schedule as part of the Bid Documents. See section 00 73 46, if such rates are required.
- 3.12 Projects which require compliance with the Davis-Bacon Act are subject to the regulations contained the Code for Federal Regulations and the federal wage determination which is made a part of the Bid Documents. See section 00 73 46, if such rates are required.
- 3.13 The Owner is exempt from the payment of Maine State sales and use taxes as provided in 36 M.R.S. §1760 (1). The Contractor and Subcontractors shall not include taxes on exempt items in the construction contract.

00 41 13
Contractor Bid Form

Kennebec River Boating Facility Improvements

BGS Project No. 3601

Bid Form submitted by: *email only to email address below*

Bid Administrator:

Paul Barber, Project Manager
Bureau of General Services
111 Sewall Street, Cross State Office Building, 4th floor
77 State House Station
Augusta, Maine 04333-0077

BGS.Architect@Maine.gov

Bidder:

Signature: _____

Printed name and
title: _____

Company name: _____

Mailing address: _____

City, state, zip code: _____

Phone number: _____

Email address: _____

State of
incorporation,
if a corporation: _____

List of all partners,
if a partnership: _____

The Bidder agrees, if the Owner offers to award the contract, to provide any and all bonds and certificates of insurance, as well as Schedule of Values, Project Schedule, and List of Subcontractors and Suppliers if required by the Owner, and to sign the designated Construction Contract within twelve calendar days after the date of notification of such acceptance, except if the twelfth day falls on a State of Maine government holiday or other closure day, or a Saturday, or a Sunday, in which case the aforementioned documents must be received before 12:00 noon on the first available business day following the holiday, other closure day, Saturday, or Sunday.

As a guarantee thereof, the Bidder submits, together with this bid, a bid bond or other acceptable instrument as and if required by the Bid Documents.

00 41 13
Contractor Bid Form

1. The Bidder, having carefully examined the Kennebec River Boating Facility Improvements Project Manual dated January 2026, prepared by Pine Tree Engineering, Inc., as well as Specifications, Drawings, and any Addenda, the form of contract, and the premises and conditions relating to the work, proposes to furnish all labor, equipment and materials necessary for and reasonably incidental to the construction and completion of this project for the **Base Bid** amount of:

\$ _____ .00

2. Allowances *are not included* on this project.
No Allowances

1 *Not Used* \$ 0.00

2 *Not Used* \$ 0.00

3 *Not Used* \$ 0.00

4 *Not Used* insert brief name of Allowance or "Not Used" \$ 0.00

3. Alternate Bids *are not included* on this project.
No Alternate Bids

Any dollar amount line below that is left blank by the Bidder shall be read as a bid of **\$0.00**.

1 *Not Used* \$ _____ .00

2 *Not Used* \$ _____ .00

3 *Not Used* \$ _____ .00

4 *Not Used* \$ _____ .00

4. Bid security *is required* on this project.

If noted above as required, or if the Base Bid amount exceeds \$125,000.00, the Bidder shall include with this bid form a satisfactory Bid Bond (section 00 43 13) or a certified or cashier's check for 5% of the bid amount with this completed bid form submitted to the Owner.

5. Filed Sub-bids *are not required* on this project.

If noted above as required, the Bidder shall include with this bid form a list of each Filed Sub-bidder selected by the Bidder on the form provided (section 00 41 13F).

00 43 13
Contractor Bid Bond

Bond No.: insert bond number

We, the undersigned, insert company name of Contractor, select type of entity of insert name of municipality in the State of insert name of state as principal, and insert name of surety as Surety, are hereby held and firmly bound unto select title of obligee in the penal sum of five percent of the bid amount, for the payment of which, well and truly to be made, we hereby jointly and severally bind ourselves, our heirs, executors, administrators, successors and assigns, signed this insert date, i.e.: 8th day of select month, select year, which is the same date as that of the first specified bid due date, or subsequent bid due date revised by addendum.

The condition of the above obligation is such that whereas the principal has submitted to the Owner, or State of Maine, to a certain bid, attached hereto and hereby made a part hereof, to enter into a contract in writing, for the construction of insert name of project as designated in the contract documents

Now therefore:

If said bid shall be rejected, or, in the alternate,

If said bid shall be accepted and the principal shall execute and deliver a contract in the form of contract attached hereto, properly completed in accordance with said bid, and shall furnish a bond for the faithful performance of said contract, and for the payment of all persons performing labor or furnishing material in connection therewith, and shall in all other respects perform the agreement created by the acceptance of said bid, then this obligation shall be void.

Otherwise, the same shall remain in force and effect- it being expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall, in no event, exceed the penal amount of this obligation as herein stated.

The Surety, for value received hereby stipulates and agrees that the obligation of said Surety and its bonds shall be in no way impaired or affected by any extension of the time within which the Obligee may accept such bid and said Surety does hereby waive notice of any such extension.

00 43 13
Contractor Bid Bond

In witness whereof, the principal and the Surety have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereto affixed and these presents to be signed by their proper officers, the day and year first set above.

Signed and sealed this **insert date, i.e.: 8th** day of **select month, select year**, which is the same date as that of the first specified bid due date, or subsequent bid due date revised by addendum.

Contractor

(Signature)

insert name and title

insert company name

insert address
insert city state zip code

Surety

(Signature)

insert name and title

insert company name

insert address
insert city state zip code

If Contractor is a partnership, all partners shall execute the bond. A power of attorney document indicating that it still is in full force and effect shall be provided by the person executing this bond.

State of Maine CONSTRUCTION CONTRACT

Large Construction Project

*This form is used when the Contract value is \$50,000 or greater.
The Project Manual, Specifications and Drawings, and any Addenda are considered part of this Contract.*

Agreement entered into by and between the contracting entity name hereinafter called the **Owner** and Contractor company name hereinafter called the **Contractor**.

BGS Project No.: number assigned by BGS

Other Project No.: _____

For the following Project: title of project as shown on bid documents at facility or campus name, municipality, Maine.

The Specifications and the Drawings have been prepared by Consultant firm name, acting as Professional-of-Record and named in the documents as the Consultant Architect or Engineer.

The *Owner* and *Contractor* agree as follows:

ARTICLE 1 COMPENSATION AND PAYMENTS

1.1 The Owner shall pay the Contractor to furnish all labor, equipment, materials and incidentals necessary for the construction of the Work described in the Specifications and shown on the Drawings the Contract Amount as shown below.

Base Bid	<u>\$0.00</u>
<u>Alternate Bid number and name or "no Alternates"</u>	<u>\$0.00</u>
<u>Alternate Bid number and name or "no Alternates"</u>	<u>\$0.00</u>
<u>Alternate Bid number and name or "no Alternates"</u>	<u>\$0.00</u>
<u>Alternate Bid number and name or "no Alternates"</u>	<u>\$0.00</u>
<u>Alternate Bid number and name or "no Alternates"</u>	<u>\$0.00</u>
Total Contract Amount	<u>\$0.00</u>

1.2 The Contractor's requisition shall contain sufficient detail and supporting information for the Owner to evaluate and support the payment requested.

1.2.1 Payments are due and payable twenty-five working days from the date of receipt of a Contractor requisition which is approved by the Owner.

1.2.2 Provisions for late payments are governed by 5 M.R.S. Chapter 144, *Payment of Invoices Received from Business Concerns*, and interest shall be calculated at 1% per month.

ARTICLE 2 COMMENCEMENT AND COMPLETION DATES

2.1 The Work of this Contract shall commence no sooner than the date this document is executed by the approval authority, or a subsequent date designated in the contract documents.

2.2 The Substantial Completion Date shall be _____.

2.3 The Work of this Contract shall be completed on or before the Contract Final Completion Date of _____.

2.4 The Contract Expiration Date shall be _____. (This date is the Owner's deadline for internal management of contract accounts. The Contract Expiration Date does not directly relate to any contract obligation of the Contractor.)

ARTICLE 3 INELIGIBLE BIDDER

3.1 By signing this contract the Contractor attests that it has not been declared ineligible to bid on State of Maine projects. The Bureau of General Services may disallow award of this contract to any Contractor if there is evidence that the Contractor or any of its Subcontractors, through their own fault, have been terminated, suspended for cause, debarred from bidding, agreed to refrain from bidding as part of a settlement, have defaulted on a contract, or had a contract completed by another party.

3.2 By signing this contract the Contractor attests that it is not presently indicted for or otherwise criminally or civilly charged by a Federal, State or local government entity with commission of any of the following offenses and has not within a three-year period preceding this bid been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction, or contract under a public transaction, violation of Federal or State anti-trust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property.

3.3 The Contractor shall not make any award or permit any award (subgrant or contract) at any tier to any party which is debarred or suspended or is otherwise excluded from or ineligible for participation in Federal assistance programs or State of Maine projects.

ARTICLE 4 CONTRACTOR'S RESPONSIBILITIES

4.1 On this project, the Contractor shall furnish the Owner the appropriate contract bonds in the amount of 100% of the Contract Sum. Contract bonds are mandated if the Contract Sum exceeds \$125,000, or if bonds are specifically required by the Contract Documents.

4.2 The Contractor shall comply with all laws, codes and regulations applicable to the Work.

4.3 The Contractor shall acquire all permits and third-party approvals applicable to the Work not specifically identified as provided by the Owner. Costs for Contractor-provided permits and third-party approvals shall be included in the Contract Sum identified in Section 1.1 above.

4.4 The Contractor shall remain an independent agent for the duration of this Contract, shall not become an employee of the State of Maine, and shall assure that no State employee will be compensated by, or otherwise benefit from, this Contract.

4.5 The Contractor shall be responsible for any design cost, construction cost, or other cost incurred on the Project to the extent caused by the negligent acts, errors or omissions of the Contractor or their Subcontractors in the performance of Work under this Contract.

ARTICLE 5 OWNER'S RESPONSIBILITIES

5.1 The Owner shall provide full information about the objectives, schedule, constraints and existing conditions of the project. The Owner has established a budget with reasonable contingencies that meets the project requirements.

5.2 By signing this contract, the Owner attests that all State of Maine procurement requirements for this contract have been met, including the solicitation of competitive bids.

ARTICLE 6 INSTRUMENTS OF SERVICE

6.1 The Contractor's use of the drawings, specifications and other documents known as the Consultant's Instruments of Service is limited to the execution of the Contractor's scope of work of this project unless the Contractor receives the written consent of the Owner and Consultant for use elsewhere.

ARTICLE 7 MISCELLANEOUS PROVISIONS

7.1 This Contract shall be governed by the laws of the State of Maine.

7.2 The Owner and Contractor, respectively, bind themselves, their partners, successors, assigns and legal representatives to this Contract. Neither party to this Contract shall assign the Contract as a whole without written consent of the other party, which consent the Owner may withhold without cause.

7.3 Notwithstanding any other provision of this Agreement, if the Owner does not receive sufficient funds to fund this Agreement or funds are de-appropriated, or if the Owner does not receive legal authority from the Maine State Legislature or Maine Courts to expend funds intended for this Agreement, then the Owner is not obligated to make payment under this Agreement; provided, however, the Owner shall be obligated to pay for services satisfactorily performed prior to any such non-appropriation in accordance with the termination provisions of this Agreement. The Owner shall timely notify the Contractor of any non-appropriation and the effective date of the non-appropriation.

ARTICLE 8 CONTRACT DOCUMENTS

8.1 The Project Manual, Specifications and Drawings, and any Addenda, together with this agreement, form the contract. Each element is as fully a part of the Contract as if hereto attached or herein repeated.

8.2 Specifications: **indicate date of issuance of project manual**

8.3 Drawings: **note here or attach each sheet number and title**

8.4 Addenda: **note each addenda number and date, or "none"**

BGS Project No.: _____

The Contract is effective as of the date executed by the approval authority.

OWNER**CONTRACTOR**

Signature *Date*
*name and title**name of contracting entity*
*address**telephone*
email address

Signature *Date*
*name and title**name of contractor company*
*address**telephone*
email address
*Vendor Number**Indicate the names of the review and approval individuals appropriate to the approval authority.*

select proper approval authority	
Reviewed by:	Approved by:
<i>Signature</i> <i>Date</i> <i>insert name</i>	<i>Signature</i> <i>Date</i> <i>John Kenney, P.E.</i>
<i>Project Manager/ Contract Administrator</i>	<i>Director, Planning Design and Construction Division (PDCD)</i>

00 61 13.13
Contractor Performance Bond

Bond No.: insert bond number

We, the undersigned, insert company name of Contractor, select type of entity of insert name of municipality in the State of insert name of state as principal, and insert name of surety as Surety, are hereby held and firmly bound unto select title of obligee in the penal sum of the Contract Price \$ insert the Contract Price in numbers for the payment of which, well and truly to be made, we hereby jointly and severally bind ourselves, our heirs, executors, administrators, successors and assigns.

The condition of the above obligation is such that if the principal shall promptly and faithfully perform the contract entered into this insert date, i.e.: 8th day of select month, select year, which is the same date as that of the notice of intent to award letter, or in the absence of such a letter, not later than the date the Owner signs the construction contract, for the construction of insert name of project as designated in the contract documents, then this obligation shall be null and void.

Otherwise, the same shall remain in force and effect- it being expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall, in no event, exceed the penal amount of this obligation as herein stated.

The Surety, for value received hereby stipulates and agrees that the obligation of said Surety and its bonds shall be in no way impaired or affected by any extension of the time which the Obligee may accept during the performance of the contract and said Surety does hereby waive notice of any such extension.

00 61 13.13
Contractor Performance Bond

In witness whereof, the principal and the Surety have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereto affixed and these presents to be signed by their proper officers, the day and year first set above.

Signed and sealed this **insert date, i.e.: 8th** day of **select month, select year**, which is the same date as that of the notice of intent to award letter, or in the absence of such a letter, not later than the date the Owner signs the construction contract.

Contractor

(Signature)

insert name and title

insert company name

insert address

insert city state zip code

Surety

(Signature)

insert name and title

insert company name

insert address

insert city state zip code

If Contractor is a partnership, all partners shall execute the bond. A power of attorney document indicating that it still is in full force and effect shall be provided by the person executing this bond.

00 61 13.16
Contractor Payment Bond

Bond No.: insert bond number

We, the undersigned, insert company name of Contractor, select type of entity of insert name of municipality in the State of insert name of state as principal, and insert name of surety as Surety, are hereby held and firmly bound unto select title of obligee in the penal sum of the Contract Price \$ insert the Contract Price in numbers for the use and benefit of claimants, defined as an entity having a contract with the principal or with a subcontractor of the principal for labor, materials, or both labor and materials, used or reasonably required for use in the performance of the contract, for the payment of which, well and truly to be made, we hereby jointly and severally bind ourselves, our heirs, executors, administrators, successors and assigns.

The condition of the above obligation is such that if the principal shall promptly satisfy all claims and demands incurred for all labor and materials, used or required by the principal in connection with the work described in the contract entered into this insert date, i.e.: 8th day of select month, select year, which is the same date as that of the notice of intent to award letter, or in the absence of such a letter, not later than the date the Owner signs the construction contract, for the construction of insert name of project as designated in the contract documents, and shall fully reimburse the obligee for all outlay and expense with said obligee may incur in making good any default of said principal, then this obligation shall be null and void.

Otherwise, the same shall remain in force and effect- it being expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall, in no event, exceed the penal amount of this obligation as herein stated.

The Surety, for value received hereby stipulates and agrees that the obligation of said Surety and its bonds shall be in no way impaired or affected by any extension of the time which the Obligee may accept during the performance of the contract and said Surety does hereby waive notice of any such extension.

00 61 13.16
Contractor Payment Bond

In witness whereof, the principal and the Surety have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereto affixed and these presents to be signed by their proper officers, the day and year first set above.

Signed and sealed this **insert date, i.e.: 8th** day of **select month, select year**, which is the same date as that of the notice of intent to award letter, or in the absence of such a letter, not later than the date the Owner signs the construction contract.

Contractor

(Signature)

insert name and title

insert company name

insert address

insert city state zip code

Surety

(Signature)

insert name and title

insert company name

insert address

insert city state zip code

If Contractor is a partnership, all partners shall execute the bond. A power of attorney document indicating that it still is in full force and effect shall be provided by the person executing this bond.

State of Maine
CONSTRUCTION CONTRACT
Construction Change Directive

Project name
 location / school / campus

C. C. D. Number: **1**
 CP (Change Proposal) Number **1**
 Issue Date of this Document: **31-Oct-2021**

Contractor Company name
 address
 city state zip code

BGS Project No.: **n**
 Other Project No.: **x**

CCD Item	Type name of CCD item here		
Description of Work	Type brief description here of work scope here.		
Reason or Necessity of Work	Type brief justification for change here.		
Method of Compensation	Select from drop down box...	Projected Total Cost	\$0
Supporting Documentation	is attached	Projected Calendar Days*	0

** Calendar Days refers to Contract Final Completion Date only.*

Fully describe the scope of work of the CCD item in the table above and on attached drawings and specifications as necessary.

Indicate the reason for the work, and the estimated schedule and cost impacts.

This CCD records the order to do the work. The documented actual final time and cost changes are subject to approval in a subsequent Change Order process.

Consultant
 (Architect or Engineer) Type firm name here
 Type person's name, title here

 signature date

Contractor
 Type company name here
 Type person's name, title here

 signature date

Owner
 Type contracting entity name here
 Type person's name, title here

 signature date

Owner's Rep
 Type entity name here
 Type person's name, title here

 signature date

Bureau of
General Services Division of Planning, Design & Construction
 Type person's name, title here

 signature date

State of Maine
CONSTRUCTION CONTRACT
Application for Payment

Enter Project name

Enter location / school / campus

Application Number: **1****Enter Contractor Company name**

address

city state zip code

Period Start Date: **19-May-2025**Period End Date: **30-Jun-2025**BGS Project No.: **BGS #**Other Project No.: **Other # or n/a**

1	Original Contract Amount		\$0
2	Net of Change Orders to Date (from table below)		\$0
3	Contract Sum to Date (line 1 plus or minus line 2)		\$0
4	Total Completed and Stored to Date (column G on Continuation Sheet)		\$0
5a	5% Retainage of Completed Work (columns D + E x 5%)	\$0	
5b	5% Retainage of Stored Materials (column F x 5%)	\$0	
5c	Total Retainage (column I)		\$0
6	Total Earned Less Retainage (line 4 minus line 5c)		\$0
7	Less Previous Approved Applications for Payment (line 6 from previous Application)		\$0
8	Current Payment Due (line 6 minus line 7)		\$0
9	Balance to Finish, Including Retainage (line 3 minus line 6)	\$0	

Change Order Summary	Additions	Deductions
Total Changes Approved in Previous Months	\$0	\$0
Total Changes Approved this Month	\$0	\$0
Subtotals	\$0	\$0
Net of Change Orders to Date		\$0

The undersigned Contractor certifies that to the best of the Contractor's knowledge, information, and belief the Work covered by this Application for Payment has been completed in accordance with the Contract Documents, that all amounts have been paid by the Contractor for Work for which the previous Certificates for Payment were issued and payments received from the Owner, and that current payment shown herein is now due.

Contractor

Type company name here

Type person's name, title here

signature

date

In accordance with the Contract Documents, based on on-site observations and the data comprising this Application, the Consultant certifies to the Owner that to the best of the Consultant's knowledge, information, and belief the Work has progressed as indicated, the quality of the Work is in accordance with the Contract Documents, and the Contractor is entitled to payment of the Amount Certified.

Amount Certified _____

Consultant (Architect or Engineer)

Type firm name here

Type person's name, title here

signature

date

Owner

Type contracting entity name here

Type person's name, title here

signature

date

Owner's Rep / other - clear this text if not used

Type entity name here

Type person's name, title here

signature

date

Bureau of General Services / Other - clear this text if not used

Type entity name here

Type person's name, title here

signature

date

Bureau of General Services

Type entity name here

Type person's name, title here

signature

date

State of Maine
CONSTRUCTION CONTRACT
Application for Payment - Base Contract Work

Application Number:	1
Period Start Date:	19-May-2025
Period End Date:	30-Jun-2025
BGS Project No.:	BGS #
Other Project No.:	Other # or n/a

Enter Project name

Enter Contractor Company name

[illegible]

Application Number: **1**

Period Start Date: 19-May-2025

Period Start Date: 19-May-2025

Period End Date: 30-Jun-2025

BGS Project No.: BGS #

Enter Contractor Company name

[illegible]

**State of Maine
CONSTRUCTION CONTRACT
Change Order**

Project name

location / school / campus

Change Order: **1**Issue Date of this Document: **21-Aug-2025****Contractor Company name**

address

city state zip code

BGS Project No.: **n**Other Project No.: **x****Cost Change**

Show Deduct as a negative number, e.g.: "\$850".

	Add	Deduct	Total
Net Amount of this Change Order	\$0	\$0	
Net Amount of Previous Change Orders	\$0	\$0	
Net of Change Orders to Date	\$0	\$0	\$0
Original Contract Amount			\$0
Revised Contract Amount			\$0

Time Change

Show Deduct as a negative number, e.g.: "-8".

	Add	Deduct	Total
Net Calendar Days Adjusted by this Change Order	0	0	
Net Calendar Days Adjusted by Previous Change Orders	0	0	
Net of Change Orders to Date	0	0	0
Original Contract Final Completion Date			30-Apr-2027
Revised Contract Final Completion Date*			30-Apr-2027

Consultant (Architect or Engineer)

Type firm name here

Type person's name, title here

signature

date

Contractor

Type company name here

Type person's name, title here

signature

date

Owner

Type contracting entity name here

Type person's name, title here

signature

date

Owner' Representative / Delete if not used

Type entity name here

Type person's name, title here

signature

date

Project Manager / Delete if not used

Type entity name here

Type person's name, title here

signature

date

Bureau of General Services

Division of Planning, Design & Construction

Type person's name, title here

signature

date

Attach the "List of Change Order Items" sheet, plus all supporting documentation for each Change Order Item.

Substantial Completion Date: the deadline for first beneficial use by Owner, as certified by Consultant.

* **Contract Final Completion Date**: the Contractor's final completion deadline for contract work.

Contract Expiration Date: the Owner's deadline for internal management of contract accounts;

Contract Expiration Date does not directly relate to any contract obligation of the Contractor.

4-May-2027

30-Apr-2027

31-Dec-2027

List of Change Order Items

Project name

C. O. Number:

1

Contractor Company name

Item No.	CP No.	Item Name	Reason Code	Calendar Days*	Cost
1	1	Enter Item Name		0	\$0
				0	\$0
				0	\$0
				0	\$0
				0	\$0
				0	\$0
				0	\$0
				0	\$0
				0	\$0
				0	\$0
				0	\$0
				0	\$0
				0	\$0
				0	\$0
				0	\$0
Totals				0	\$0

Reason Codes

EO Error or omission of Consultant
 UC Unforeseen job site condition
 OC Owner-generated change
 RC Regulatory authority-generated change
 CC Contractor-generated change

* Calendar Days shows Contract
 Final Completion Date impact only.

Attach this sheet to the BGS "Change Order" cover sheet (with cost and time summaries, and signatures).
 Attach a "Details" sheet, and other supporting documentation, for each Change Order Item listed above.

Details of Change Order Item

Project name

location / school / campus

Change Order

1

Item Number

1

CP (Change Proposal) Number

1

Contractor Company name

Issue Date of this Document:

21-Aug-2025

address

BGS Project No.:

n

city state zip code

Other Project No.:

x

Item Name	Add item name from List of Items sheet			
Description of Work	Briefly describe scope of work			
Reason or Necessity of Work	Briefly describe reason or necessity for work change			
Cost Breakdown	Work by Subcontractor only	Work by Sub and Contractor	Work by Contractor only	
Subcontractor base cost	\$0	\$0		
Subcontractor markup	\$0	\$0		
Contractor base cost		\$0	\$0	
Contractor markup	\$0	\$0	\$0	
Subtotal	\$0	\$0	\$0	
Compensation	lump sum		Total Cost	\$0
Initiated by	Contractor		Calendar Days*	0
	CC	Supporting Documentation		is not needed

EO
Error or omission
of Consultant

UC
Unforeseen job site
condition

OC
Owner-
generated change

RC
Regulatory authority-
generated change

CC
Contractor-
generated change

* Calendar Days shows Contract Final Completion Date impact only.

Consultant (Architect or Engineer)

Type firm name here

Type person's name, title here

signature

date

Contractor

Type company name here

Type person's name, title here

signature

date

Owner

Type contracting entity name here

Type person's name, title here

signature

date

Owner' Representative / Delete if not used

Type entity name here

Type person's name, title here

signature

date

Project Manager / Delete if not used

Type entity name here

Type person's name, title here

signature

date

Bureau of General Services

Division of Planning, Design & Construction

Type person's name, title here

signature

date

00 71 00
Definitions

1. Definitions

- 1.1 *Addendum*: A document issued by the Consultant that amends the Bid Documents. Addenda shall not be issued less than seventy-two hours prior to the specified bid opening time.
- 1.2 *Allowance*: A specified dollar amount for a particular scope of work or service included in the Work that is identified in the Bid Documents and included in each Bidder's Bid. The Contractor shall document expenditures for an Allowance during the Project. Any unused balance shall be credited to the Owner. The Contractor is responsible for notifying the Owner of anticipated expenses greater than the specified amount and the Owner is responsible for those additional expenses.
- 1.3 *Alternate Bid*: The Contractor's written offer of a specified dollar amount, submitted on the Bid Form, for the performance of a particular scope of work described in the Bid Documents. The Owner determines the low bidder based on the sum of the base Bid and any combination of Alternate Bids that the Owner selects.
- 1.4 *Architect*: A Consultant acting as, or supporting, the Professional-of-Record who is responsible for the design of the Project. Equivalent to "Consultant" in State of Maine contract forms.
- 1.5 *Architectural Supplemental Instruction (ASI)*: A written instruction from the Architect for the purpose of clarification of the Contract Documents. An ASI does not alter the Contract Price or Contract Time. ASIs may be responses to RFIs and shall be issued by the Architect in a timely manner to avoid any negative impact on the Schedule of the Work.
- 1.6 *Bid*: The Contractor's written offer of a specified dollar amount or amounts, submitted on a form included in the Bid Documents, for the performance of the Work. A Bid may include bonds or other requirements. A base Bid is separate and distinct from Alternate Bids, being the only cost component necessary for the award of the contract, and representing the minimum amount of Work that is essential for the functioning of the Project.
- 1.7 *Bid Bond*: The security designated in the Bid Documents, furnished by Bidders as a guaranty of good faith to enter into a contract with the Owner, should a contract be awarded to that Bidder.
- 1.8 *Bidder*: Any business entity, individual or corporation that submits a bid for the performance of the work described in the Bid Documents, acting directly or through a duly authorized representative. See also *Responsive and Responsible Bidder*.
- 1.9 *Bid Documents*: The drawings, procurement and contracting requirements, general requirements, and the written specifications -including all addenda, that a bidder is required to reference in the submission of a bid.
- 1.10 *Bureau*: The State of Maine Bureau of General Services, or BGS, in the Department of Administrative and Financial Services.
- 1.11 *Calendar days*: Consecutive days, as occurring on a calendar, taking into account each day of the week, month, year, and any religious, national or local holidays. Calendar days are used for changes in Contract Time.

00 71 00
Definitions

- 1.12 *Certificate of Substantial Completion*: A document developed by the Consultant that describes the final status of the Work and establishes the date that the Owner may use the facility for its intended purpose. The Certificate of Substantial Completion may also include a provisional list of items - a "punch list" - remaining to be completed by the Contractor. The Certificate of Substantial Completion identifies the date from which the project warranty period commences.
- 1.13 *Certificate of Occupancy*: A document developed by a local jurisdiction such as the Code Enforcement Officer that grants permission to the Owner to occupy a building.
- 1.14 *Change Order (CO)*: A document that modifies the contract and establishes the basis of a specific adjustment to the Contract Price or the Contract Time, or both. Change Orders may address correction of omissions, errors, and document discrepancies, or additional requirements. Change Orders should include all labor, materials and incidentals required to complete the work described. A Change Order is not valid until signed by the Contractor, Owner and Consultant and approved by the Bureau.
- 1.15 *Change Order Proposal (COP) (see also Proposal)*: Contract change proposed by the Contractor regarding the contract amount, requirements, or time. The Contractor implements the work of a COP after it is accepted by all parties. Accepted COPs are incorporated into the contract by Change Order.
- 1.16 *Clerk of the Works*: The authorized representative of the Consultant on the job site. Clerk of the Works is sometimes called the Architect's representative.
- 1.17 *Construction Change Directive (CCD)*: A written order prepared by the Consultant and signed by the Owner and Consultant, directing a change in the Work prior to final agreement with the Contractor on adjustment, if any, in the Contract Price or Contract Time, or both.
- 1.18 *Contract*: A written agreement between the Owner and the successful bidder which obligates the Contractor to perform the work specified in the Contract Documents and obligates the Owner to compensate the Contractor at the mutually accepted sum, rates or prices.
- 1.19 *Contract Bonds (also known as Payment and Performance Bonds)*: The approved forms of security, furnished by the Contractor and their surety, which guarantee the faithful performance of all the terms of the contract and the payment of all bills for labor, materials and equipment by the Contractor.
- 1.20 *Contract Documents*: The drawings and written specifications (including all addenda), Standard General Conditions, and the contract (including all Change Orders subsequently incorporated in the documents).
- 1.21 *Contract Expiration Date*: Date determined by the Owner as a deadline for internal management of contract accounts. This allows time after the Contract Final Completion Date for processing the final Requisition for Payment. The Contract Expiration Date does not directly relate to any contract obligation of the Contractor.
- 1.22 *Contract Final Completion Date*: Point of time when the Work is fully completed in compliance with the Contract Documents, as certified by the Consultant. Final payment to the Contractor is due upon Final Completion of the Project.
- 1.23 *Contract Price*: The dollar amount of the construction contract, also called *Contract Sum*.

00 71 00
Definitions

- 1.24 *Contract Time*: The designated duration of time to execute the Work of the contract, with a specific date for completion.
- 1.25 *Contractor*: Also called the "General Contractor" or "GC" the individual or entity undertaking the execution of the general contract work under the terms of the contract with the Owner, acting directly or through a duly authorized representative. The Contractor is responsible for the means, methods and materials utilized in the execution and completion of the Work.
- 1.26 *Consultant*: The Architect or Engineer acting as Professional-of-Record for the Project. The Consultant is responsible for the design of the Project.
- 1.27 *Drawings*: The graphic and pictorial portion of the Contract Documents showing the design, location and dimensions of the Work, generally including plans, elevations, sections, details, schedules, and diagrams.
- 1.28 *Engineer*: A Consultant acting as, or supporting, the Professional-of-Record who is responsible for the design of the Project. Equivalent to "Consultant" in State of Maine contract forms.
- 1.29 *Filed Sub-bid*: The designated major Subcontractor's (or, in some cases, Contractor's) written offer of a specified dollar amount or amounts, submitted on a form included in the Bid Documents, for the performance of a particular portion of the Work. A Filed Sub-bid may include bonds or other requirements.
- 1.30 *General Requirements*: The on-site overhead expense items the Contractor provides for the Project, typically including, but not limited to, building permits, construction supervision, Contract Bonds, insurance, field office, temporary utilities, rubbish removal, and site fencing. Overhead expenses of the Contractor's general operation are not included. Sometimes referred to as the Contractor's General Conditions.
- 1.31 *Owner*: The State agency which is represented by duly authorized individuals. The Owner is responsible for defining the scope of the Project and compensation to the Consultant and Contractor.
- 1.32 *Owner's Representative*: The individual or entity contracted by the Owner to be an advisor and information conduit regarding the Project.
- 1.33 *Overhead*: General and administrative expenses of the Contractor's principal and branch offices, including payroll costs and other compensation of Contractor employees, deductibles paid on any insurance policy, charges against the Contractor for delinquent payments, and costs related to the correction of defective work, and the Contractor's capital expenses, including interest on capital used for the work.
- 1.34 *Performance and Payment Bonds (also known as Contract Bonds)*: The approved forms of security, furnished by the Contractor and their surety, which guarantee the faithful performance of all the terms of the contract and the payment of all bills for labor, materials and equipment by the Contractor.
- 1.35 *Post-Bid Addendum*: Document issued by the Consultant that defines a potential Change Order prior to signing of the construction contract. The Post-Bid Addendum allows the Owner to negotiate

00 71 00
Definitions

contract changes with the Bidder submitting the lowest valid bid, only if the negotiated changes to the Bid Documents result in no change or no increase in the bid price.

A Post-Bid Addendum may also be issued after a competitive construction Bid opening to those Bidders who submitted a Bid initially, for the purpose of rebidding the Project work without re-advertising.

- 1.36 *Project*: The construction project proposed by the Owner to be constructed according to the Contract Documents. The Project, a public improvement, may be tied logistically to other public improvements and other activities conducted by the Owner or other contractors.
- 1.37 *Proposal (see also Change Order Proposal)*: The Contractor's written offer submitted to the Owner for consideration containing a specified dollar amount or rate, for a specific scope of work, and including a schedule impact, if any. A proposal shall include all costs for overhead and profit. The Contractor implements the work of a Proposal after it is accepted by all parties. Accepted Proposals are incorporated into the contract by Change Order.
- 1.38 *Proposal Request (PR)*: An Owner's written request to the Contractor for a Change Order Proposal.
- 1.39 *Punch List*: A document that identifies the items of work remaining to be done by the Contractor at the Close Out of a Project. The Punch List is created as a result of a final inspection of the work only after the Contractor attests that all of the Work is in its complete and permanent status.
- 1.40 *Request For Information (RFI)*: A Contractor's written request to the Consultant for clarification, definition or description of the Work. RFIs shall be presented by the Contractor in a timely manner to avoid any negative impact on the Schedule of the Work.
- 1.41 *Request For Proposal (RFP)*: An Owner's written request to the Contractor for a Change Order Proposal.
- 1.42 *Requisition for Payment*: The document in which the Contractor certifies that the Work described is, to the best of the Contractor's knowledge, information and belief, complete and that all previous payments have been paid by the Contractor to Subcontractors and suppliers, and that the current requested payment is now due. See *Schedule of Values*.
- 1.43 *Responsive and Responsible Bidder*: A bidder who complies, when submitting a bid on a given project, with the following *responsive* standards, as required by the Bid Documents:
- submits specific qualifications to bid the project, if required;
 - attends mandatory pre-bid conferences, if required;
 - submits a bid prior to the close of the bid period;
 - submits a complete bid form;
 - submits a bid without indications of intent contrary to the stated requirements;
 - submits other materials and information, such as bid security, as required;
- and, meets the following minimums regarding these *responsible* standards:
- sustains a satisfactory record of project performance;
 - maintains a permanent place of business in a known physical location;
 - possesses the financial means for short- and long-term operations;
 - possesses the appropriate technical experience and capabilities;
 - employs adequate personnel and subcontractor resources;

00 71 00
Definitions

maintains the equipment needed to perform the work;
complies with the proposed implementation schedule;
complies with the insurance and bonding requirements;
provides post-construction warranty coverage;
and other criteria which can be considered relevant to the contract.

- 1.44 *Retainage*: The amount, calculated at five percent (5%) of the contract value or a scheduled value, that the Owner shall withhold from the Contractor until the work or portion of work is declared substantially complete or otherwise accepted by the Owner. The Owner may, if requested, reduce the amount withheld if the Owner deems it desirable and prudent to do so. (See Title 5 M.R.S.A., Section 1746.)
- 1.45 *Sample*: A physical example provided by the Contractor which illustrates materials, equipment or workmanship and establishes standards by which the Work will be judged.
- 1.46 *Schedule of the Work*: The document prepared by the Contractor and approved by the Owner that specifies the dates on which the Contractor plans to begin and complete various parts of the Work, including dates on which information and approvals are required from the Owner.
- 1.47 *Schedule of Values*: The document prepared by the Contractor and approved by the Owner before the commencement of the Work that specifies the dollar values of discrete portions of the Work equal in sum to the contract amount. The Schedule of Values is used to document progress payments of the Work in regular (usually monthly) requisitions for payment. See *Requisition for Payment*.
- 1.48 *Shop Drawings*: The drawings, diagrams, schedules and other data specially prepared for the Work by the Contractor or a Subcontractor, manufacturer, supplier or distributor to illustrate some portion of the Work.
- 1.49 *Specifications*: The portion of the Contract Documents consisting of the written requirements of the Work for materials, equipment, systems, standards, workmanship, and performance of related services.
- 1.50 *Subcontractor*: An individual or entity undertaking the execution of any part of the Work by virtue of a written agreement with the Contractor or any other Subcontractor. Also, an individual or entity retained by the Contractor or any other Subcontractor as an independent contractor to provide the labor, materials, equipment or services necessary to complete a specific portion of the Work.
- 1.51 *Substantial Completion Date*: Point of time when the Work or a designated portion of the Work is sufficiently complete in compliance with the Contract Documents so that the Owner can occupy or utilize the Work for its intended purpose without unscheduled disruption. Substantial Completion is documented by the date of the Certificate of Substantial Completion signed by the Owner and the Contractor.
- 1.52 *Superintendent*: The representative of the Contractor on the job site, authorized by the Contractor to receive and fulfill instructions from the Consultant.
- 1.53 *Surety*: The individual or entity that is legally bound with the Contractor and Subcontractor to insure the faithful performance of the contract and for the payment of the bills for labor, materials and equipment by the Contractor and Subcontractors.

00 71 00
Definitions

- 1.54 *Work*: The construction and services, whether completed or partially completed, including all labor, materials, equipment and services provided or to be provided by the Contractor and Subcontractors to fulfill the requirements of the Project as described in the Contract Documents.

00 72 13
General Conditions

Table of Contents of this General Conditions Section

1. Preconstruction Conference	2
2. Intent and Correlation of Contract Documents.....	2
3. Additional Drawings and Specifications	3
4. Ownership of Contract Documents	3
5. Permits, Laws, and Regulations	3
6. Taxes	4
7. Labor and Wages.....	4
8. Indemnification	5
9. Insurance Requirements	5
10. Contract Bonds.....	6
11. Patents and Royalties	7
12. Surveys, Layout of Work	7
13. Record of Documents.....	7
14. Allowances	8
15. Shop Drawings	8
16. Samples	8
17. Substitutions	8
18. Assignment of Contract.....	9
19. Separate Contracts.....	9
20. Subcontracts	10
21. Contractor-Subcontractor Relationship	10
22. Supervision of the Work.....	11
23. Observation of the Work	11
24. Consultant's Status.....	12
25. Management of the Premises	12
26. Safety and Security of the Premises	13
27. Changes in the Work	14
28. Correction of the Work.....	15
29. Owner's Right to do Work.....	16
30. Termination of Contract and Stop Work Action	16
31. Delays and Extension of Time	17
32. Payments to the Contractor	18
33. Payments Withheld	19
34. Liens	19
35. Workmanship	19
36. Close-out of the Work	20
37. Date of Completion and Liquidated Damages	21
38. Dispute Resolution	21

00 72 13
General Conditions

1. Preconstruction Conference

- 1.1 The Contractor shall, upon acceptance of a contract and prior to commencing work, schedule a preconstruction conference with the Owner and Consultant. The purpose of this conference is as follows.
 - 1.1.1 Introduce all parties who have a significant role in the Project, including:
 - Owner (State agency or other contracting entity)
 - Owner's Representative
 - Consultant (Architect or Engineer)
 - Subconsultants
 - Clerk-of-the-works
 - Contractor (GC)
 - Superintendent
 - Subcontractors
 - Other State agencies
 - Construction testing company
 - Commissioning agent
 - Special Inspections agent
 - Bureau of General Services (BGS);
 - 1.1.2 Review the responsibilities of each party;
 - 1.1.3 Review any previously-identified special provisions of the Project;
 - 1.1.4 Review the Schedule of the Work calendar submitted by the Contractor to be approved by the Owner and Consultant;
 - 1.1.5 Review the Schedule of Values form submitted by the Contractor to be approved by the Owner and Consultant;
 - 1.1.6 Establish routines for Shop Drawing approval, contract changes, requisitions, et cetera;
 - 1.1.7 discuss jobsite issues;
 - 1.1.8 Discuss Project close-out procedures;
 - 1.1.9 Provide an opportunity for clarification of Contract Documents before work begins; and
 - 1.1.10 Schedule regular meetings at appropriate intervals for the review of the progress of the Work.

2. Intent and Correlation of Contract Documents

- 2.1 The intent of the Contract Documents is to describe the complete Project. The Contract Documents consist of various components; each component complements the others. What is shown as a requirement by any one component shall be inferred as a requirement on all corresponding components.
- 2.2 The Contractor shall furnish all labor, equipment and materials, tools, transportation, insurance, services, supplies, operations and methods necessary for, and reasonably incidental to, the construction and completion of the Project. Any work that deviates from the Contract Documents which appears to be required by the exigencies of construction or by inconsistencies in the Contract Documents, will be determined by the Consultant and authorized in writing by the Consultant, Owner and the Bureau prior to execution. The Contractor shall be responsible for requesting clarifying information where the intent of the Contract Documents is uncertain.
- 2.3 The Contractor shall not utilize any apparent error or omission in the Contract Documents to the disadvantage of the Owner. The Contractor shall promptly notify the Consultant in writing of such errors or omissions. The Consultant shall make any corrections or clarifications necessary in such a situation to document the true intent of the Contract Documents.

00 72 13
General Conditions

3. Additional Drawings and Specifications

- 3.1 Upon the written request of the Contractor, the Owner shall provide, at no expense to the Contractor, up to five sets of printed Drawings and Specifications for the execution of the Work.
- 3.2 The Consultant shall promptly furnish to the Contractor revised Drawings and Specifications, for the area of the documents where those revisions apply, when corrections or clarifications are made by the Consultant. All such information shall be consistent with, and reasonably inferred from, the Contract Documents. The Contractor shall do no work without the proper Drawings and Specifications.

4. Ownership of Contract Documents

- 4.1 The designs represented on the Contract Documents are the property of the Consultant. The Drawings and Specifications shall not be used on other work without consent of the Consultant.

5. Permits, Laws, and Regulations

- 5.1 The Owner is responsible for obtaining any zoning approvals or other similar local project approvals necessary to complete the Work, unless otherwise specified in the Contract Documents.
- 5.2 The Owner is responsible for obtaining Maine Department of Environmental Protection, Maine Department of Transportation, or other similar state government project approvals necessary to complete the Work, unless otherwise indicated in the Contract Documents.
- 5.3 The Owner is responsible for obtaining any federal agency project approvals necessary to complete the Work, unless otherwise indicated in the Contract Documents.
- 5.4 The Owner is responsible for obtaining all easements for permanent structures or permanent changes in existing facilities.
- 5.5 The Contractor is responsible for obtaining and paying for all permits and licenses necessary for the implementation of the Work. The Contractor shall notify the Owner of any delays, variance or restrictions that may result from the issuing of permits and licenses.
- 5.6 The Contractor shall comply with all ordinances, laws, rules and regulations and make all required notices bearing on the implementation of the Work. In the event the Contractor observes disagreement between the Drawings and Specifications and any ordinances, laws, rules and regulations, the Contractor shall promptly notify the Consultant in writing. Any necessary changes shall be made as provided in the contract for changes in the work. The Contractor shall not perform any work knowing it to be contrary to such ordinances, laws, rules and regulations.
- 5.7 The Contractor shall comply with local, state and federal regulations regarding construction safety and all other aspects of the Work.
- 5.8 The Contractor shall comply with the Maine Code of Fair Practices and Affirmative Action, 5 M.R.S. §784 (2).

00 72 13
General Conditions

6. Taxes

- 6.1 The Owner is exempt from the payment of Maine State sales and use taxes as provided in 36 M.R.S. §1760 (1). The Contractor and Subcontractors shall not include taxes on exempt items in the construction contract.
- 6.2 Section 1760 further provides in subsection 61 that sales to a construction contractor or its subcontractor of tangible personal property that is to be physically incorporated in, and become a permanent part of, real property for sale to or owned by the Owner, are exempt from Maine State sales and use taxes. Tangible personal property is defined in 36 M.R.S. §1752 (17).
- 6.3 The Contractor may contact Maine Revenue Services, 24 State House Station, Augusta, Maine 04333 for guidance on tax exempt regulations authorized by 36 M.R.S. §1760 and detailed in Rule 302 (18-125 CMR 302).

7. Labor and Wages

- 7.1 The Contractor shall conform to the labor laws of the State of Maine, and all other laws, ordinances, and legal requirements affecting the work in Maine.
- 7.2 The Consultant shall include a wage determination document prepared by the Maine Department of Labor in the Contract Documents for state-funded contracts in excess of \$50,000. The document shows the minimum wages required to be paid to each category of labor employed on the project.
- 7.3 On projects requiring a Maine wage determination, the Contractor shall submit monthly payroll records to the Owner ("the contracting agency") showing the name and occupation of all workers and all independent contractors employed on the project. The monthly submission must also include the Contractor's company name, the title of the project, hours worked, hourly rate or other method of remuneration, and the actual wages or other compensation paid to each person.
- 7.4 The Contractor shall not reveal, in the payroll records submitted to the Owner, personal information regarding workers and independent contractors, other than the information described above. Such information shall not include Social Security number, employee identification number, or employee address or phone number, for example.
- 7.5 The Contractor shall conform to Maine statute (39-A M.R.S. §105-A (6)) by providing to the Workers' Compensation Board a list of all subcontractors and independent contractors on the job site and a record of the entity to whom that subcontractor or independent contractor is directly contracted and by whom that subcontractor or independent contractor is insured for workers' compensation purposes.
- 7.6 The Contractor shall enforce strict discipline and good order among their employees at all times, and shall not employ any person unfit or unskilled to do the work assigned to them.
- 7.7 The Contractor shall promptly pay all employees when their compensation is due, shall promptly pay all others who have billed and are due for materials, supplies and services used in the Work, and shall promptly pay all others who have billed and are due for insurance, workers compensation coverage, federal and state unemployment compensation, and Social Security

00 72 13
General Conditions

charges pertaining to this Project. Before final payments are made, the Contractor shall furnish to the Owner affidavits that all such payments described above have been made.

- 7.8 The Contractor may contact the Maine Department of Labor, 54 State House Station, Augusta, Maine 04333 for guidance on labor issues.
- 7.9 The Contractor may contact the Maine Workers' Compensation Board, 27 State House Station, Augusta, Maine 04333 for guidance on workers' compensation issues.

8. Indemnification

- 8.1 The Contractor shall indemnify and hold harmless the Owner and its officers and employees from and against any and all damages, liabilities, and costs, including reasonable attorney's fees, and defense costs, for any and all injuries to persons or property, including claims for violation of intellectual property rights, to the extent caused by the negligent acts or omissions of the Contractor, its employees, agents, officers or subcontractors in the performance of work under this Agreement. The Contractor shall not be liable for claims to the extent caused by the negligent acts or omissions of the Owner or for actions taken in reasonable reliance on written instructions of the Owner.
- 8.2 The Contractor shall notify the Owner promptly of all claims arising out of the performance of work under this Agreement by the Contractor, its employees or agents, officers or subcontractors.
- 8.3 This indemnity provision shall survive the termination of the Agreement, completion of the project or the expiration of the term of the Agreement.

9. Insurance Requirements

- 9.1 The Contractor shall provide, with each original of the signed Contract, an insurance certificate or certificates acceptable to the Owner and BGS. The Contractor shall submit insurance certificates to the Owner and BGS at the commencement of this Contract and at policy renewal or revision dates. The certificates shall identify the project name and BGS project number, and shall name the Owner as certificate holder and as additional insured for general liability and automobile liability coverages. The submitted forms shall contain a provision that coverage afforded under the insurance policies will not be canceled or materially changed unless at least ten days prior written notice by registered letter has been given to the Owner and BGS.
- 9.2 The Owner does not warrant or represent that the insurance required herein constitutes an insurance portfolio which adequately addresses all risks faced by the Contractor or its Subcontractors. The Contractor is responsible for the existence, extent and adequacy of insurance prior to commencement of work. The Contractor shall not allow any Subcontractor to commence work until all similar insurance required of the Subcontractor has been confirmed by the Contractor.
- 9.3 The Contractor shall procure and maintain primary insurance for the duration of the Project and, if written on a Claims-Made basis, shall also procure and maintain Extended Reporting Period (ERP) insurance for the period of time that any claims could be brought. The Contractor shall ensure that all Subcontractors they engage or employ will procure and maintain similar insurance

00 72 13
General Conditions

in form and amount acceptable to the Owner and BGS. At a minimum, the insurance shall be of the types and limits set forth herein protecting the Contractor from claims which may result from the Contractor's execution of the Work, whether such execution be by the Contractor or by those employed by the Contractor or by those for whose acts they may be liable. All required insurance coverages shall be placed with carriers authorized to conduct business in the State of Maine by the Maine Bureau of Insurance.

- 9.3.1 The Contractor shall have Workers' Compensation insurance for all employees on the Project site in accordance with the requirements of the Workers' Compensation law of the State of Maine.

Minimum acceptable limits for Employer's Liability are:

Bodily Injury by Accident.....	\$500,000
Bodily Injury by Disease.....	\$500,000 Each Employee
Bodily Injury by Disease.....	\$500,000 Policy Limit

- 9.3.2 The Contractor shall have Commercial General Liability insurance providing coverage for bodily injury and property damage liability for all hazards of the Project including premise and operations, products and completed operations, contractual, and personal injury liabilities. The policy shall include collapse and underground coverage as well as explosion coverage if explosion hazards exist. Aggregate limits shall apply on a location or project basis. Minimum acceptable limits are:

General aggregate limit.....	\$2,000,000
Products and completed operations aggregate	\$1,000,000
Each occurrence limit.....	\$1,000,000
Personal injury aggregate	\$1,000,000

- 9.3.3 The Contractor shall have Automobile Liability insurance against claims for bodily injury, death or property damage resulting from the maintenance, ownership or use of all owned, non-owned and hired automobiles, trucks and trailers. Minimum acceptable limit is:

Any one accident or loss	\$500,000
--------------------------------	-----------

- 9.3.4 For the portion of a project which is new construction, the Contractor shall procure and maintain Builder's Risk insurance naming the Owner, Contractor, and any Subcontractor as insureds as their interest may appear. Covered causes of loss form shall be all Risks of Direct Physical Loss, endorsed to include flood, earthquake, transit and sprinkler leakage where sprinkler coverage is applicable. Unless specifically authorized in writing by the Owner, the limit of insurance shall not be less than the initial contract amount, for the portion of the project which is new construction, and coverage shall apply during the entire contract period and until the work is accepted by the Owner.

- 9.3.5 The Contractor shall have Owner's Protective Liability insurance for contract values \$50,000 and above, naming the Owner as the Named Insured. Minimum acceptable limits are:

General aggregate limit.....	\$2,000,000
Each occurrence limit.....	\$1,000,000

10. Contract Bonds

- 10.1 When noted as required in the Bid Documents, the Contractor shall provide to the Owner a Performance Bond and a Payment Bond, or "contract bonds", upon execution of the contract. Each bond value shall be for the full amount of the contract and issued by a surety company authorized to do business in the State of Maine as approved by the Owner. The bonds shall be

00 72 13
General Conditions

executed on the forms furnished in the Bid Documents. The bonds shall allow for any subsequent additions or deductions of the contract.

- 10.2 The contract bonds shall continue in effect for one year after final acceptance of the contract to protect the Owner's interest in connection with the one year guarantee of workmanship and materials and to assure settlement of claims for the payment of all bills for labor, materials and equipment by the Contractor.

11. Patents and Royalties

- 11.1 The Contractor shall, for all time, secure for the Owner the free and undisputed right to the use of any patented articles or methods used in the Work. The expense of defending any suits for infringement or alleged infringement of such patents shall be borne by the Contractor. Awards made regarding patent suits shall be paid by the Contractor. The Contractor shall hold the Owner harmless regarding patent suits that may arise due to installations made by the Contractor, and to any awards made as a result of such suits.
- 11.2 Any royalty payments related to the work done by the Contractor for the Project shall be borne by the Contractor. The Contractor shall hold the Owner harmless regarding any royalty payments that may arise due to installations made by the Contractor.

12. Surveys, Layout of Work

- 12.1 The Owner shall furnish all property surveys unless otherwise specified.
- 12.2 The Contractor is responsible for correctly staking out the Work on the site. The Contractor shall employ a competent surveyor to position all construction on the site. The surveyor shall run the axis lines, establish correct datum points and check each line and point on the site to insure their accuracy. All such lines and points shall be carefully preserved throughout the construction.
- 12.3 The Contractor shall lay out all work from dimensions given on the Drawings. The Contractor shall take measurements and verify dimensions of any existing work that affects the Work or to which the Work is to be fitted. The Contractor is solely responsible for the accuracy of all measurements. The Contractor shall verify all grades, lines, levels, elevations and dimensions shown on the Drawings and report any errors or inconsistencies to the Consultant prior to commencing work.

13. Record of Documents

- 13.1 The Contractor shall maintain one complete set of Contract Documents on the jobsite, in good order and current status, for access by the Owner and Consultant.
- 13.2 The Contractor shall maintain, continuously updated, complete records of Requests for Information, Architectural Supplemental Instructions (or equivalent), Information Bulletins, supplemental sketches, Change Order Proposals, Change Orders, Shop Drawings, testing reports, et cetera, for access by the Owner and Consultant.

00 72 13
General Conditions

14. Allowances

- 14.1 The Contract Price shall include all allowances described in the Contract Documents. The Contractor shall include all overhead and profit necessary to implement each allowance in their Contract Price.
- 14.2 The Contractor shall not be required to employ parties for allowance work against whom the Contractor has a reasonable objection. In such a case, the Contractor shall notify the Owner in writing of their position and shall propose an alternative party to complete the work of the allowance.

15. Shop Drawings

- 15.1 The Contractor shall administer Shop Drawings prepared by the Contractor, Subcontractors, suppliers or others to conform to the approved Schedule of the Work. The Contractor shall verify all field measurements, check and authorize all Shop Drawings and schedules required by the Work. The Contractor is the responsible party and contact for the Contractor's work as well as that of Subcontractors, suppliers or others who provide Shop Drawings.
- 15.2 The Consultant shall review and acknowledge Shop Drawings, with reasonable promptness, for general conformity with the design concept of the project and compliance with the information provided in the Contract Documents.
- 15.3 The Contractor shall provide monthly updated logs containing: requests for information, information bulletins, supplemental instructions, supplemental sketches, change order proposals, change orders, submittals, testing and deficiencies.
- 15.4 The Contractor shall make any corrections required by the Consultant, and shall submit a quantity of corrected copies as may be needed. The acceptance of Shop Drawings or schedules by the Consultant shall not relieve the Contractor from responsibility for deviations from Drawings and Specifications, unless the Contractor has called such deviations to the attention of the Consultant at the time of submission and secured the Consultant's written approval. The acceptance of Shop Drawings or schedules by the Consultant does not relieve the Contractor from responsibility for errors in Shop Drawings or schedules.

16. Samples

- 16.1 The Contractor shall furnish for approval, with reasonable promptness, all samples as directed by the Consultant. The Consultant shall review and approve such samples, with reasonable promptness, for general conformity with the design concept of the project and compliance with the information provided in the Contract Documents. The subsequent work shall be in accord with the approved samples.

17. Substitutions

- 17.1 The Contractor shall furnish items and materials described in the Contract Documents. If the item or material specified describes a proprietary product, or uses the name of a manufacturer, the term "or approved equal" shall be implied, if it is not included in the text. The specific item or material specified establishes a minimum standard for the general design, level of quality, type, function, durability, efficiency, reliability, compatibility, warranty coverage, installation factors

00 72 13
General Conditions

and required maintenance. The Drawing or written Specification shall not be construed to exclude other manufacturers products of comparable design, quality, and efficiency.

- 17.2 The Contractor may submit detailed information about a proposed substitution to the Consultant for consideration. Particular models of items and particular materials which the Contractor asserts to be equal to the items and materials identified in the Contract Documents shall be allowed only with written approval by the Consultant. The request for substitution shall include a cost comparison and a reason or reasons for the substitution.
- 17.3 The Consultant may request additional information about the proposed substitution. The approval or rejection of a proposed substitution may be based on timeliness of the request, source of the information, the considerations of minimum standards described above, or other considerations. The Consultant should briefly state the rationale for the decision. The decision shall be considered final.
- 17.4 The duration of a substitution review process can not be the basis for a claim for delay in the Schedule of the Work.

18. Assignment of Contract

- 18.1 The Contractor shall not assign or sublet the contract as a whole without the written consent of the Owner. The Contractor shall not assign any money due to the Contractor without the written consent of the Owner.

19. Separate Contracts

- 19.1 The Owner reserves the right to create other contracts in connection with this Project using similar General Conditions. The Contractor shall allow the Owner's other contractors reasonable opportunity for the delivery and storage of materials and the execution of their work. The Contractor shall coordinate and properly connect the Work of all contractors.
- 19.2 The Contractor shall promptly report to the Consultant and Owner any apparent deficiencies in work of the Owner's other contractors that impacts the proper execution or results of the Contractor. The Contractor's failure to observe or report any deficiencies constitutes an acceptance of the Owner's other contractors work as suitable for the interface of the Contractor's work, except for latent deficiencies in the Owner's other contractors work.
- 19.3 Similarly, the Contractor shall promptly report to the Consultant and Owner any apparent deficiencies in their own work that would impact the proper execution or results of the Owner's other contractors.
- 19.4 The Contractor shall report to the Consultant and Owner any conflicts or claims for damages with the Owner's other contractors and settle such conflicts or claims for damages by mutual agreement or arbitration, if necessary, at no expense to the Owner.
- 19.5 In the event the Owner's other contractors sue the Owner regarding any damage alleged to have been caused by the Contractor, the Owner shall notify the Contractor, who shall defend such proceedings at the Contractor's expense. The Contractor shall pay or satisfy any judgment that may arise against the Owner, and pay all other costs incurred.

00 72 13
General Conditions

20. Subcontracts

- 20.1 The Contractor shall not subcontract any part of this contract without the written permission of the Owner.
- 20.2 The Contractor shall submit a complete list of named Subcontractors and material suppliers to the Consultant and Owner for approval by the Owner prior to commencing work. The Subcontractors named shall be reputable companies of recognized standing with a record of satisfactory work.
- 20.3 The Contractor shall not employ any Subcontractor or use any material until they have been approved, or where there is reason to believe the resulting work will not comply with the Contract Documents.
- 20.4 The Contractor, not the Owner, is as fully responsible for the acts and omissions of Subcontractors and of persons employed by them, as the Contractor is for the acts and omissions of persons directly or indirectly employed by the Contractor.
- 20.5 Neither the Contract Documents nor any Contractor-Subcontractor contract shall indicate, infer or create any direct contractual relationship between any Subcontractor and the Owner.

21. Contractor-Subcontractor Relationship

- 21.1 The Contractor shall be bound to the Subcontractor by all the obligations in the Contract Documents that bind the Contractor to the Owner.
- 21.2 The Contractor shall pay the Subcontractor, in proportion to the dollar value of the work completed and requisitioned by the Subcontractor, the approved dollar amount allowed to the Contractor no more than seven days after receipt of payment from the Owner.
- 21.3 The Contractor shall pay the Subcontractor accordingly if the Contract Documents or the subcontract provide for earlier or larger payments than described in the provision above.
- 21.4 The Contractor shall pay the Subcontractor for completed and requisitioned subcontract work, less retainage, no more than seven days after receipt of payment from the Owner for the Contractor's approved Requisition for Payment, even if the Consultant fails to certify a portion of the Requisition for Payment for a cause not the fault of the Subcontractor.
- 21.5 The Contractor shall not make a claim for liquidated damages or penalty for delay in any amount in excess of amounts that are specified by the subcontract.
- 21.6 The Contractor shall not make a claim for services rendered or materials furnished by the Subcontractor unless written notice is given by the Contractor to the Subcontractor within ten calendar days of the day in which the claim originated.
- 21.7 The Contractor shall give the Subcontractor an opportunity to present and to submit evidence in any progress conference or disputes involving subcontract work.

00 72 13
General Conditions

- 21.8 The Contractor shall pay the Subcontractor a just share of any fire insurance payment received by the Contractor.
- 21.9 The Subcontractor shall be bound to the Contractor by the terms of the Contract Documents and assumes toward the Contractor all the obligations and responsibilities that the Contractor, by those documents, assumes toward the Owner.
- 21.10 The Subcontractor shall submit applications for payment to the Contractor in such reasonable time as to enable the Contractor to apply for payment as specified.
- 21.11 The Subcontractor shall make any claims for extra cost, extensions of time or damages, to the Contractor in the manner provided in these General Conditions for like claims by the Contractor to the Owner, except that the time for the Subcontractor to make claims for extra cost is seven calendar days after the receipt of Consultant's instructions.

22. Supervision of the Work

- 22.1 During all stages of the Work the Contractor shall have a competent superintendent, with any necessary assistant superintendents, overseeing the project. The superintendent shall not be reassigned without the consent of the Owner unless a superintendent ceases to be employed by the Contractor due to unsatisfactory performance.
- 22.2 The superintendent represents the Contractor on the jobsite. Directives given by the Consultant or Owner to the superintendent shall be as binding as if given directly to the Contractor's main office. All important directives shall be confirmed in writing to the Contractor. The Consultant and Owner are not responsible for the acts or omissions of the superintendent or assistant superintendents.
- 22.3 The Contractor shall provide supervision of the Work equal to the industry's highest standard of care. The superintendent shall carefully study and compare all Contract Documents and promptly report any error, inconsistency or omission discovered to the Consultant. The Contractor may not necessarily be held liable for damages resulting directly from any error, inconsistency or omission in the Contract Documents or other instructions by the Consultant that was not revealed by the superintendent in a timely way.

23. Observation of the Work

- 23.1 The Contractor shall allow the Owner, the Consultant and the Bureau continuous access to the site for the purpose of observation of the progress of the work. All necessary safeguards and accommodations for such observations shall be provided by the Contractor.
- 23.2 The Contractor shall coordinate all required testing, approval or demonstration of the Work. The Contractor shall give sufficient notice to the appropriate parties of readiness for testing, inspection or examination.
- 23.3 The Contractor shall schedule inspections and obtain all required certificates of inspection for inspections by a party other than the Consultant.

00 72 13
General Conditions

- 23.4 The Consultant shall make all scheduled observations promptly, prior to the work being concealed or buried by the Contractor. If approval of the Work is required of the Consultant, the Contractor shall notify the Consultant of the construction schedule in this regard. Work concealed or buried prior to the Consultant's approval may need to be uncovered at the Contractor's expense.
- 23.5 The Consultant may order reexamination of questioned work, and, if so ordered, the work must be uncovered by the Contractor. If the work is found to conform to the Contract Documents, the Owner shall pay the expense of the reexamination and remedial work. If the work is found to not conform to the Contract Documents, the Contractor shall pay the expense, unless the defect in the work was caused by the Owner's Contractor, whose responsibility the reexamination expense becomes.
- 23.6 The Bureau shall periodically observe the Work during the course of construction and make recommendations to the Contractor or Consultant as necessary. Such recommendations shall be considered and implemented through the usual means for changes to the Work.
24. Consultant's Status
- 24.1 The Consultant represents the Owner during the construction period, and observes the work in progress on behalf of the Owner. The Consultant has authority to act on behalf of the Owner only to the extent expressly provided by the Contract Documents or otherwise demonstrated to the Contractor. The Consultant has authority to stop the work whenever such an action is necessary, in the Consultant's reasonable opinion, to ensure the proper execution of the contract.
- 24.2 The Consultant is the interpreter of the conditions of the contract and the judge of its performance. The Consultant shall favor neither the Owner nor the Contractor, but shall use the Consultant's powers under the contract to enforce faithful performance by both parties.
- 24.3 In the event of the termination of the Consultant's employment on the project prior to completion of the work, the Owner shall appoint a capable and reputable replacement. The status of the new Consultant relative to this contract shall be that of the former Consultant.
25. Management of the Premises
- 25.1 The Contractor shall place equipment and materials, and conduct activities on the premises in a manner that does not unreasonably hinder site circulation, environmental stability, or any long term effect. Likewise, the Consultant's directions shall not cause the use of premises to be impeded for the Contractor or Owner.
- 25.2 The Contractor shall not use the premises for any purpose other than that which is directly related to the scope of work. The Owner shall not use the premises for any purpose incompatible with the proposed work simultaneous to the work of the Contractor.
- 25.3 The Contractor shall enforce the Consultant's instructions regarding information posted on the premises such as signage and advertisements, as well as activities conducted on the premises such as fires, and smoking.

00 72 13
General Conditions

25.4 The Owner may occupy any part of the Project that is completed with the written consent of the Contractor, and without prejudice to any of the rights of the Owner or Contractor. Such use or occupancy shall not, in and of itself, be construed as a final acceptance of any work or materials.

26. Safety and Security of the Premises

26.1 The Contractor shall designate, and make known to the Consultant and the Owner, a safety officer whose duty is the prevention of accidents on the site.

26.2 The Contractor shall continuously maintain security on the premises and protect from unreasonable occasion of injury all people authorized to be on the job site. The Contractor shall also effectively protect the property and adjacent properties from damage or loss.

26.3 The Contractor shall take all necessary precautions to ensure the safety of workers and others on and adjacent to the site, abiding by applicable local, state and federal safety regulations. The Contractor shall erect and continuously maintain safeguards for the protection of workers and others, and shall post signs and other warnings regarding hazards associated with the construction process, such as protruding fasteners, moving equipment, trenches and holes, scaffolding, window, door or stair openings, and falling materials.

26.4 The Contractor shall restore the premises to conditions that existed prior to the start of the project at areas not intended to be altered according to the Contract Documents.

26.5 The Contractor shall protect existing utilities and exercise care working in the vicinity of utilities shown in the Drawings and Specifications or otherwise located by the Contractor.

26.6 The Contractor shall protect from damage existing trees and other significant plantings and landscape features of the site which will remain a permanent part of the site. If necessary or indicated in the Contract Documents, tree trunks shall be boxed and barriers erected to prevent damage to tree branches or roots.

26.7 The Contractor shall repair or replace damage to the Work caused by the Contractor's or Subcontractor's forces, including that which is reasonably protected, at the expense of the responsible party.

26.8 The Contractor shall not load, or allow to be loaded, any part of the Project with a force which imperils personal or structural safety. The Consultant may consult with the Contractor on such means and methods of construction, however, the ultimate responsibility lies with the Contractor.

26.9 The Contractor shall not jeopardize any work in place with subsequent construction activities such as blasting, drilling, excavating, cutting, patching or altering work. The Consultant must approve altering any structural components of the project. The Contractor shall supervise all construction activities carried out by others on site to ensure that the work is neatly done and in a manner that will not endanger the structure or the component parts.

26.10 The Contractor may act with their sole discretion in emergency situations that potentially effect health, life or serious damage to the premises or adjacent properties, to prevent such potential loss or injury. The Contractor may negotiate with the Owner for compensation for expenses due to such emergency work.

00 72 13
General Conditions

- 26.11 The Contractor and Subcontractors shall have no responsibility for the identification, discovery, presence, handling, removal or disposal of, or exposure of persons to, hazardous materials in any form at the project site. The Contractor shall avoid disruption of any hazardous materials or toxic substances at the project site and promptly notify the Owner in writing on the occasion of such a discovery.
- 26.12 The Contractor shall keep the premises free of any unsafe accumulation of waste materials caused by the work. The Contractor shall regularly keep the spaces “broom clean”. See the Close-out of the Work provisions of this section regarding cleaning at the completion of the project.

27. Changes in the Work

- 27.1 The Contractor shall not proceed with extra work without an approved Change Order or Construction Change Directive. A Change Order which has been properly signed by all parties shall become a part of the contract.
- 27.2 A Change Order is the usual document for directing changes in the Work. In certain circumstances, however, the Owner may utilize a Construction Change Directive to direct the Contractor to perform changes in the Work that are generally consistent with the scope of the project. The Owner shall use a Construction Change Directive only when the normal process for approving changes to the Work has failed to the detriment of the Project, or when agreement on the terms of a Change Order cannot be met, or when an urgent situation requires, in the Owner's judgment, prompt action by the Contractor.
- 27.3 The Consultant shall prepare the Construction Change Directive representing a complete scope of work, with proposed Contract Price and Contract Time revisions, if any, clearly stated.
- 27.4 The Contractor shall promptly carry out a Construction Change Directive which has been signed by the Owner and the Consultant. Work thus completed by the Contractor constitutes the basis for a Change Order. Changes in the Contract Price and Contract Time shall be as defined in the Construction Change Directive unless subsequently negotiated with some other terms.
- 27.5 The method of determining the dollar value of extra work shall be by:
- .1 an estimate of the Contractor accepted by Owner as a lump sum, or
 - .2 unit prices named in the contract or subsequently agreed upon, or
 - .3 cost plus a designated percentage, or
 - .4 cost plus a fixed fee.
- 27.6 The Contractor shall determine the dollar value of the extra work for both the lump sum and cost plus designated percentage methods so as not to exceed the following rates. The rates include all overhead and profit expenses.
- .1 Contractor - for any work performed by the Contractor's own forces, up to 20% of the cost;
 - .2 Subcontractor - for work performed by Subcontractor's own forces, up to 20% of the cost;
 - .3 Contractor - for work performed by Contractor's Subcontractor, up to 10% of the amount due the Subcontractor.
- 27.7 The Contractor shall keep and provide records as needed or directed for the cost plus designated percentage method. The Consultant shall review and certify the appropriate amount which

00 72 13
General Conditions

includes the Contractor's overhead and profit. The Owner shall make payments based on the Consultant's certificate.

- 27.8 Cost reflected in Change Orders shall be limited to the following: cost of materials, cost of delivery, cost of labor (including Social Security, pension, Workers' Compensation insurance, and unemployment insurance), and cost of rental of power tools and equipment. Labor cost may include a pro-ratio share of a foreman's time only in the case of an extension of contract time granted due to the Change Order.
- 27.9 Overhead reflected in Change Orders shall be limited to the following: bond premium, supervision, wages of clerks, time keepers, and watchmen, small tools, incidental expenses, general office expenses, and all other overhead expenses directly related to the Change Order.
- 27.10 The Contractor shall provide credit to the Owner for labor, materials, equipment and other costs but not overhead and profit expenses for those Change Order items that result in a net value of credit to the contract.
- 27.11 The Owner may change the scope of work of the Project without invalidating the contract. The Owner shall notify the Contractor of a change of the scope of work for the Owner's Contractors, which may affect the work of this Contractor, without invalidating the contract. Change Orders for extension of the time caused by such changes shall be developed at the time of directing the change in scope of work.
- 27.12 The Consultant may order minor changes in the Work, not involving extra cost, which is consistent with the intent of the design or project.
- 27.13 The Contractor shall immediately give written notification to the Consultant of latent conditions discovered at the site which materially differ from those represented in the Drawings or Specifications, and which may eventually result in a change in the scope of work. The Contractor shall suspend work until receiving direction from the Consultant. The Consultant shall promptly investigate the conditions and respond to the Contractor's notice with direction that avoids any unnecessary delay of the Work. The Consultant shall determine if the discovered conditions warrant a Change Order.
- 27.14 The Contractor shall, within ten calendar days of receipt of the information, give written notification to the Consultant if the Contractor claims that instructions by the Consultant will constitute extra cost not accounted for by Change Order or otherwise under the contract. The Consultant shall promptly respond to the Contractor's notice with direction that avoids any unnecessary delay of the Work. The Consultant shall determine if the Contractor's claim warrants a Change Order.
28. Correction of the Work
- 28.1 The Contractor shall promptly remove from the premises all work the Consultant declares is non-conforming to the contract. The Contractor shall replace the work properly at no expense to the Owner. The Contractor is also responsible for the expenses of others whose work was damaged or destroyed by such remedial work.

00 72 13
General Conditions

- 28.2 The Owner may elect to remove non-conforming work if it is not removed by the Contractor within a reasonable time, that time defined in a written notice from the Consultant. The Owner may elect to store removed non-conforming work not removed by the Contractor at the Contractor's expense. The Owner may, with ten days written notice, dispose of materials which the Contractor does not remove. The Owner may sell the materials and apply the net proceeds, after deducting all expenses, to the costs that should have been borne by the Contractor.
- 28.3 The Contractor shall remedy any defects due to faulty materials or workmanship and pay for any related damage to other work which appears within a period of one year from the date of substantial completion, and in accord with the terms of any guarantees provided in the contract. The Owner shall promptly give notice of observed defects to the Contractor and Consultant. The Consultant shall determine the status of all claimed defects. The Contractor shall perform all remedial work without unjustifiable delay in either the initial response or the corrective action.
- 28.4 The Consultant may authorize, after a reasonable notification to the Contractor, an equitable deduction from the contract amount in lieu of the Contractor correcting non-conforming or defective work.
29. Owner's Right to do Work
- 29.1 The Owner may, using other contractors, correct deficiencies attributable to the Contractor, or complete unfinished work. Such action shall take place only after giving the Contractor three days written notice, and provided the Consultant approves of the proposed course of action as an appropriate remedy. The Owner may then deduct the cost of the remedial work from the amount due the Contractor.
- 29.2 The Owner may act with their sole discretion when the Contractor is unable to take action in emergency situations that potentially effect health, life or serious damage to the premises or adjacent properties, to prevent such potential loss or injury. The Owner shall inform the Contractor of the emergency work performed, particularly where it may affect the work of the Contractor.
30. Termination of Contract and Stop Work Action
- 30.1 The Owner may, owing to a certificate of the Consultant indicating that sufficient cause exists to justify such action, without prejudice to any other right or remedy and after giving the Contractor and the Contractor's surety seven days written notice, terminate the employment of the Contractor. At that time the Owner may take possession of the premises and of all materials,

00 72 13
General Conditions

tools and appliances on the premises and finish the work by whatever method the Owner may deem expedient. Cause for such action by the Owner includes:

- .1 the contractor is adjudged bankrupt, or makes a general assignment for the benefit of its creditors, or
- .2 a receiver is appointed due to the Contractor's insolvency, or
- .3 the Contractor persistently or repeatedly refuses or fails to provide enough properly skilled workers or proper materials, or
- .4 the Contractor fails to make prompt payment to Subcontractors or suppliers of materials or labor, or
- .5 the Contractor persistently disregards laws, ordinances or the instructions of the Consultant, or is otherwise found guilty of a substantial violation of a provision of the Contract Documents.

- 30.2 The Contractor is not entitled, as a consequence of the termination of the employment of the Contractor as described above, to receive any further payment until the Work is finished. If the unpaid balance of the contract amount exceeds the expense of finishing the Work, including compensation for additional architectural, managerial and administrative services, such balance shall be paid to the Contractor. If the expense of finishing the Work exceeds the unpaid balance, the Contractor shall pay the difference to the Owner. The Consultant shall certify the expense incurred by the Contractor's default. This obligation for payment shall continue to exist after termination of the contract.
- 30.3 The Contractor may, if the Work is stopped by order of any court or other public authority for a period of thirty consecutive days, and through no act or fault of the Contractor or of anyone employed by the Contractor, with seven days written notice to the Owner and the Consultant, terminate this contract. The Contractor may then recover from the Owner payment for all work executed, any proven loss and reasonable profit and damage.
- 30.4 The Contractor may, if the Consultant fails to issue a certificate for payment within seven days after the Contractor's formal request for payment, through no fault of the Contractor, or if the Owner fails to pay to the Contractor within 30 days after submission of any sum certified by the Consultant, with seven days written notice to the Owner and the Consultant, stop the Work or terminate this Contract.

31. Delays and Extension of Time

- 31.1 The completion date of the contract shall be extended if the work is delayed by changes ordered in the work which have approved time extensions, or by an act or neglect of the Owner, the Consultant, or the Owner's Contractor, or by strikes, lockouts, fire, flooding, unusual delay in transportation, unavoidable casualties, or by other causes beyond the Contractor's control. The Consultant shall determine the status of all claimed causes.
- 31.2 The contract shall not be extended for delay occurring more than seven calendar days before the Contractor's claim made in writing to the Consultant. In case of a continuing cause of delay, only one claim is necessary.
- 31.3 The contract shall not be extended due to failure of the Consultant to furnish drawings if no schedule or agreement is made between the Contractor and the Consultant indicating the dates

00 72 13
General Conditions

which drawings shall be furnished and fourteen calendar days has passed after said date for such drawings.

- 31.4 This article does not exclude the recovery of damages for delay by either party under other provisions in the Contract Document.

32. Payments to the Contractor

- 32.1 As noted under *Preconstruction Conference* in this section, the Contractor shall submit a Schedule of Values form, before the first application for payment, for approval by the Owner and Consultant. The Consultant may direct the Contractor to provide evidence that supports the correctness of the form. The approved Schedule of Values shall be used as a basis for payments.
- 32.2 The Contractor shall submit an application for each payment ("Requisition for Payment") on a form approved by the Owner and Consultant. The Consultant may require receipts or other documents showing the Contractor's payments for materials and labor, including payments to Subcontractors.
- 32.3 The Contractor shall submit Requisitions for Payment as the work progresses not more frequently than once each month, unless the Owner approves a more frequent interval due to unusual circumstances. The Requisition for Payment is based on the proportionate quantities of the various classes of work completed or incorporated in the Work, in agreement with the actual progress of the Work and the dollar value indicated in the Schedule of Values.
- 32.4 The Consultant shall verify and certify each Requisition for Payment which appears to be complete and correct prior to payment being made by the Owner. The Consultant may certify an appropriate amount for materials not incorporated in the Work which have been delivered and suitably stored at the site. The Contractor shall submit bills of sale, insurance certificates, or other such documents that will adequately protect the Owner's interests prior to payments being certified.
- 32.5 In the event any materials delivered but not yet incorporated in the Work have been included in a certified Requisition for Payment with payment made, and said materials thereafter are damaged, deteriorated or destroyed, or for any reason whatsoever become unsuitable or unavailable for use in the Work, the full amount previously allowed shall be deducted from subsequent payments unless the Contractor satisfactorily replaces said material.
- 32.6 The Contractor may request certification of an appropriate dollar amount for materials not incorporated in the Work which have been delivered and suitably stored away from the site. The Contractor shall submit bills of sale, insurance certificates, right-of-entry documents or other such documents that will adequately protect the Owner's interests. The Consultant shall determine if the Contractor's documentation for the materials is complete and specifically designated for the Project. The Owner may allow certification of such payments.
- 32.7 Subcontractors may request, and shall receive from the Consultant, copies of approved Requisitions for Payment showing the amounts certified in the Schedule of Values.
- 32.8 Certified Requisitions for Payment, payments made to the Contractor, or partial or entire occupancy of the project by the Owner shall not constitute an acceptance of any work that does

00 72 13
General Conditions

not conform to the Contract Documents. The making and acceptance of the final payment constitutes a waiver of all claims by the Owner, other than those arising from unsettled liens, from faulty work or materials appearing within one year from final payment or from requirements of the Drawings and Specifications, and of all claims by the Contractor, except those previously made and still unsettled.

33. Payments Withheld

- 33.1 The Owner shall retain five percent of each payment due the Contractor as part security for the fulfillment of the contract by the Contractor. The Owner may make payment of a portion of this “retainage” to the Contractor temporarily or permanently during the progress of the Work. The Owner may thereafter withhold further payments until the full amount of the five percent is reestablished. The Contractor may deposit with the Maine State Treasurer certain securities in place of retainage amounts due according to Maine Statute (5 M.R.S. §1746).
- 33.2 The Consultant may withhold or nullify the whole or a portion of any Requisitions for Payment submitted by the Contractor in the amount that may be necessary, in his reasonable opinion, to protect the Owner from loss due to any of the following:
- .1 defective work not remedied;
 - .2 claims filed or reasonable evidence indicating probable filing of claims;
 - .3 failure to make payments properly to Subcontractors or suppliers;
 - .4 a reasonable doubt that the contract can be completed for the balance then unpaid;
 - .5 liability for damage to another contractor.

The Owner shall make payment to the Contractor, in the amount withheld, when the above circumstances are removed.

34. Liens

- 34.1 The Contractor shall deliver to the Owner a complete release of all liens arising out of this contract before the final payment or any part of the retainage payment is released. The Contractor shall provide with the release of liens an affidavit asserting each release includes all labor and materials for which a lien could be filed. Alternately, the Contractor, in the event any Subcontractor or supplier refuses to furnish a release of lien in full, may furnish a bond satisfactory to the Owner, to indemnify the Owner against any lien.
- 34.2 In the event any lien remains unsatisfied after all payments to the Contractor are made by the Owner, the Contractor shall refund to the Owner all money that the latter may be compelled to pay in discharging such lien, including all cost and reasonable attorney’s fees.

35. Workmanship

- 35.1 The Contractor shall provide materials, equipment, and installed work equal to or better than the quality specified in the Contract Documents and approved in submittal and sample. The installation methods shall be of the highest standards, and the best obtainable from the respective trades. The Consultant’s decision on the quality of work shall be final.

00 72 13
General Conditions

- 35.2 The Contractor shall know local labor conditions for skilled and unskilled labor in order to apply the labor appropriately to the Work. All labor shall be performed by individuals well skilled in their respective trades.
- 35.3 The Contractor shall perform all cutting, fitting, patching and placing of work in such a manner to allow subsequent work to fit properly, whether that be by the Contractor, the Owner's Contractors or others. The Owner and Consultant may advise the Contractor regarding such subsequent work. Notwithstanding the notification or knowledge of such subsequent work, the Contractor may be directed to comply with this standard of compatible construction by the Consultant at the Contractor's expense.
- 35.4 The Contractor shall request clarification or revision of any design work by the Consultant, prior to commencing that work, in a circumstance where the Contractor believes the work cannot feasibly be completed at the highest quality, or as indicated in the Contract Documents. The Consultant shall respond to such requests in a timely way, providing clarifying information, a feasible revision, or instruction allowing a reduced quality of work. The Contractor shall follow the direction of the Consultant regarding the required request for information.
- 35.5 The Contractor shall guarantee the Work against any defects in workmanship and materials for a period of one year commencing with the date of the Certificate of Substantial Completion, unless specified otherwise for specific elements of the project. The Work may also be subdivided in mutually agreed upon components, each defined by a separate Certificate of Substantial Completion.
36. Close-out of the Work
- 36.1 The Contractor shall remove from the premises all waste materials caused by the work. The Contractor shall make the spaces "broom clean" unless a more thorough cleaning is specified. The Contractor shall clean all windows and glass immediately prior to the final inspection, unless otherwise directed.
- 36.2 The Owner may conduct the cleaning of the premises where the Contractor, duly notified by the Consultant, fails to adequately complete the task. The expense of this cleaning may be deducted from the sum due to the Contractor.
- 36.3 The Contractor shall participate in all final inspections and acknowledge the documentation of unsatisfactory work, customarily called the "punch list", to be corrected by the Contractor. The Consultant shall document the successful completion of the Work in a dated Certificate of Substantial Completion, to be signed by Owner, Consultant, and Contractor.
- 36.4 The Contractor shall not call for final inspection of any portion of the Work that is not completely and permanently installed. The Contractor may be found liable for the expenses of individuals called to final inspection meetings prematurely.
- 36.5 The Contractor and all major Subcontractors shall participate in the end-of-warranty-period conference, typically scheduled close to one year after the Substantial Completion date.

00 72 13
General Conditions

37. Date of Completion and Liquidated Damages

- 37.1 The Contractor may make a written request to the Owner for an extension or reduction of time, if necessary. The request shall include the reasons the Contractor believes justifies the proposed completion date. The Owner may grant the revision of the contract completion date if the Work was delayed due to conditions beyond the control and the responsibility of the Contractor. The Contractor shall not conduct unauthorized accelerated work or file delay claims to recover alleged damages for unauthorized early completion.
- 37.2 The Contractor shall vigorously pursue the completion of the Work and notify the Owner of any factors that have, may, or will affect the approved Schedule of the Work. The Contractor may be found responsible for expenses of the Owner or Consultant if the Contractor fails to make notification of project delays.
- 37.3 The Project is planned to be done in an orderly fashion which allows for an iterative submittal review process, construction administration including minor changes in the Work and some bad weather. The Contractor shall not file delay claims to recover alleged damages on work the Consultant determines has followed the expected rate of progress.
- 37.4 The Consultant shall prepare the Certificate of Substantial Completion which, when signed by the Owner and the Contractor, documents the date of Substantial Completion of the Work or a designated portion of the Work. The Owner shall not consider the issuance of a Certificate of Occupancy by an outside authority a prerequisite for Substantial Completion if the Certificate of Occupancy cannot be obtained due to factors beyond the Contractor's control.
- 37.5 Liquidated Damages may be deducted from the sum due to the Contractor for each calendar day that the Work remains uncompleted after the completion date specified in the Contract or an approved amended completion date. The dollar amount per day shall be calculated using the Schedule of Liquidated Damages table shown below.

If the original contract amount is:	The per day Liquidated Damages shall be:
Less than \$100,000	\$250
\$100,000 to less than \$2,000,000	\$750
\$2,000,000 to less than \$10,000,000	\$1,500
\$10,000,000 and greater	\$1,500 plus \$250 for each \$2,000,000 over \$10,000,000

38. Dispute Resolution

38.1 Mediation

- 38.1.1 A dispute between the parties which arises under this Contract which cannot be resolved through informal negotiation, shall be submitted to a neutral mediator jointly selected by the parties.
- 38.1.2 Either party may file suit before or during mediation if the party, in good faith, deems it to be necessary to avoid losing the right to sue due to a statute of limitations. If suit is filed before good faith mediation efforts are completed, the party filing suit shall agree to stay all proceedings in the lawsuit pending completion of the mediation process, provided such stay is without prejudice.

00 72 13
General Conditions

38.1.3 In any mediation between the Owner and the Consultant, the Owner has the right to consolidate related claims between Owner and Contractor.

38.2 Arbitration

38.2.1 If the dispute is not resolved through mediation, the dispute shall be settled by arbitration. The arbitration shall be conducted before a panel of three arbitrators. Each party shall select one arbitrator; the third arbitrator shall be appointed by the arbitrators selected by the parties. The arbitration shall be conducted in accordance with the Maine Uniform Arbitration Act (MUAA), except as otherwise provided in this section.

38.2.2 The decision of the arbitrators shall be final and binding upon all parties. The decision may be entered in court as provided in the MUAA.

38.2.3 The costs of the arbitration, including the arbitrators' fees shall be borne equally by the parties to the arbitration, unless the arbitrator orders otherwise.

38.2.4 In any arbitration between the Owner and the Consultant, the Owner has the right to consolidate related claims between Owner and Contractor.

00 73 46
Wage Determination Schedule

PART 1- GENERAL

1.1 Related Documents

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specifications Sections, apply to this Section.

1.2 Summary

- A. This Section includes the wage determination requirements for Contractors as issued by the State of Maine Department of Labor Bureau of Labor Standards or the United States Department of Labor.

1.3 Requirements

- A. Conform to the wage determination schedule for this project which is shown on the following page.

PART 2 - PRODUCTS (not used)

PART 3 - EXECUTION (not used)

State of Maine
Department of Labor
Bureau of Labor Standards
Augusta, Maine 04333-0045
Telephone (207) 623-7906

Wage Determination - In accordance with 26 MRS §1301 et. seq., this is a determination by the Bureau of Labor Standards, of the fair minimum wage rate to be paid to laborers and workers employed on the below titled project.

2026 Fair Minimum Wage Rates – Highway & Earth Sagadahoc County

Occupational Title	Minimum Wage	Minimum Benefit	Total
Brickmasons and Blockmasons	\$43.02	\$7.64	\$50.66
Bulldozer Operator	\$30.62	\$5.38	\$36.00
Carpenter	\$33.75	\$3.55	\$37.30
Cement Masons and Concrete Finisher	\$24.42	\$2.52	\$26.94
Construction and Maintenance Painters	\$32.96	\$0.45	\$33.41
Construction Laborer	\$23.20	\$2.34	\$25.54
Conveyor Operators and Tenders	\$30.17	\$13.77	\$43.94
Crane and Tower Operators	\$40.43	\$8.63	\$49.06
Crushing Grinding and Polishing Machine Operators	\$26.00	\$3.11	\$29.11
Earth Drillers - Except Oil and Gas	\$25.04	\$3.77	\$28.81
Electrical Power - Line Installer and Repairers	\$48.12	\$15.63	\$63.75
Electricians	\$37.80	\$18.82	\$56.62
Elevator Installers and Repairers	\$67.34	\$39.76	\$107.10
Excavator Operator	\$28.97	\$3.94	\$32.91
Fence Erectors	\$30.90	\$2.18	\$33.08
Flaggers	\$21.00	\$0.53	\$21.53
Floor Layers - Except Carpet/Wood/Hard Tiles	\$29.00	\$8.65	\$37.65
Glaziers	\$37.00	\$6.60	\$43.60
Hazardous Materials Removal Workers	\$24.12	\$1.60	\$25.72
Heating and Air Conditioning and Refrigeration Mechanics and Installers	\$35.68	\$5.93	\$41.61
Heavy and Tractor - Trailer Truck Drivers	\$25.22	\$2.75	\$27.97
Highway Maintenance Workers	\$23.30	\$1.14	\$24.44
Industrial Machinery Mechanics	\$29.97	\$6.74	\$36.71
Industrial Truck and Tractor Operators	\$24.61	\$4.21	\$28.82
Insulation Worker - Mechanical	\$27.35	\$6.05	\$33.40
Light Truck or Delivery Services Drivers	\$26.79	\$5.14	\$31.93
Loading Machine and Dragline Operators	\$26.67	\$3.79	\$30.46
Millwrights	\$35.99	\$10.52	\$46.51
Mobile Heavy Equipment Mechanics - Except Engines	\$30.35	\$4.55	\$34.90
Operating Engineers and Other Equipment Operators	\$29.41	\$5.61	\$35.02
Paving Surfacing and Tamping Equipment Operators	\$28.52	\$6.53	\$35.05
Pile-Driver Operators	\$37.15	\$3.12	\$40.27
Pipe/Steam/Sprinkler Fitter	\$32.33	\$7.56	\$39.89
Pipelayers	\$28.75	\$3.64	\$32.39
Plumbers	\$34.11	\$7.80	\$41.91
Radio Cellular and Tower Equipment Installers	\$34.72	\$5.63	\$40.35
Reinforcing Iron and Rebar Workers	\$32.94	\$20.82	\$53.76
Riggers	\$31.25	\$7.68	\$38.93
Roofers	\$25.50	\$3.49	\$28.99
Sheet Metal Workers	\$28.77	\$7.00	\$35.77
Structural Iron and Steel Workers	\$30.98	\$7.12	\$38.10
Tapers	\$29.16	\$5.64	\$34.80
Telecommunications Equipment Installers and Repairers - Except Line Installers	\$37.09	\$10.21	\$47.30
Telecommunications Line Installers and Repairers	\$28.49	\$5.29	\$33.78
Tile and Marble Setters	\$28.91	\$5.46	\$34.37

Welders are classified as the trade to which welding is incidental (e.g. welding structural steel is Structural Iron and Steel Worker)

Apprentices – The minimum wage rates for registered apprentices are the rates recognized in the sponsorship agreement for registered apprentices working in the pertinent classification.

For any other specific trade on this project not listed above, contact the Bureau of Labor Standards for further clarification.

Title 26 §1310 requires that a clearly legible statement of all fair minimum wage and benefits rates to be paid the several classes of laborers, workers and mechanics employed on the construction on the public work must be kept posted in a prominent and easily accessible place at the site by each contractor and subcontractor subject to sections 1304 to 1313.

Appeal – Any person affected by the determination of these rates may appeal to the Commissioner of Labor by filing a written notice with the Commissioner stating the specific grounds of the objection within ten (10) days from the filing of these rates.

A true copy

Attest: 
Scott R. Cotnoir
Wage & Hour Director
Bureau of Labor Standards

Supersedes 01-01-2025
Effective 01-10-2026

DIVISION 01

01 11 00	Summary of Work
01 33 23	Contractor Furnished Shop Drawings/Submittals

SECTION 01 11 00
SUMMARY OF WORK

Description:

The work items cover the extent and character of the work. The Contractor shall complete any partially described work items, if any, to perform the functions intended.

Minor adjustments to the lines and grades may be made by the Owner to provide a better completed installation and such changes shall not be considered subject to extra charges.

Construction traffic shall obey speed limits and be considerate of area property owners.

Specific Items of Work:

The Kennebec River Boating Facility Improvements project shall include, but not be limited to the following:

1. Remove existing concrete planks, concrete curbing, and pavement from the existing boat ramp.
2. Installation of new 28-foot-wide trailered launch ramp built of precast 8-ft and 10-ft concrete planks over crushed stone base materials and geotextile, held in-place by concrete curb and riprap. The precast concrete planks and hardware will be supplied by the Owner. The planks are stored on-site in the upper parking lot.
3. Curbing on the ramp shall be standard precast concrete street curb. Curb to be supplied by Contractor.

General Notes:

1. All granular materials/aggregates and hot mix asphalt pavement shall conform to MaineDOT Standard Specifications, (latest revision) unless otherwise noted on the construction drawings. The placement and compaction shall be in accordance with these specifications.
2. Woven geotextile shall be installed over subgrade wherever unsuitable material is encountered or where shown on plans. Geotextile shall be Mirafi FW700 or approved equal.
3. It is the Contractor's responsibility to control dust within the project area.
4. Removal of boulders smaller than 10 cu. yd. will be an incidental item. Boulders shall be moved out of the work area or removed from the site. Any boulders within the water shall be relocated from the work area, but not removed from the water.

5. The Contractor is responsible for erosion and sediment control, and shall install measures such as silt fence, hay bales, temporary mulching in accordance with the “Maine Erosion and Sediment Control BMPs”, latest edition.
6. Providing all items necessary to result in a complete and functioning project, even if not specified. Materials not specified, but necessary, shall be of the Contractor’s choice for no additional cost to the Owner.

END OF SECTION

SECTION 01 33 23**CONTRACTOR FURNISHED SHOP DRAWINGS/SUBMITTALS****PART 1 - GENERAL****1.1 Description:****A. Work Included:**

1. Submit to the Engineer, Shop Drawings, Operation and Maintenance Manuals, Manufacturer's Certificates, Project Data, and Samples required by the Specification Sections.

1.2 Shop Drawings/Submittals:

- A. Promptly after the signing of the Agreement and in no case later than 15 days thereafter, the Contractor shall submit to the Engineer a complete list of the drawings which will be submitted for review in accordance with this specification. The drawing number, title, proposed submission date and actual submission date shall be given for each drawing.
- B. The Contractor shall submit to the Engineer a minimum of six (6) copies of shop drawings and approved data.
- C. The Contractor shall be responsible for the prompt and timely submittal of all shop and working drawings so that there shall be no delay to the work due to the absence of such drawings.
- D. No material or equipment shall be purchased or fabricated especially for the Contract until the required shop and working drawings have been submitted as hereinabove provided and reviewed for conformance to the Contract requirements. All such materials and equipment and the work involved in their installation or incorporation into the Work shall then be as shown in and represented by said drawings.
- E. If a shop drawing shows any deviation from the Contract requirements, the Contractor shall make specific mention of the deviations in his letter of transmittal.
- F. Should the Contractor submit equipment that requires modifications to the structures, piping, electrical conduit, wires and appurtenances, layout, etc., detailed on the Drawings, he shall also submit details of the proposed modifications. If such equipment and modifications are accepted, the Contractor, at no additional cost to the Owner, shall do all work necessary to make such modifications.

- G. A maximum of two submissions of each Shop Drawing will be reviewed, checked, and commented upon without charge to the Contractor. Any additional submissions which are ordered by the Engineer to fulfill the stipulations of the Drawings and Specifications, and which are required by virtue of the Contractor's neglect or failure to comply with the requirements of the Drawings and Specifications, or to make those modifications and/or corrections ordered by the Engineer in the review of the first two submissions of each Shop Drawing, will be reviewed and checked as deemed necessary by the Engineer, and the cost of such review and checking, as determined by the Owner, and based upon Engineer's documentation of time and rates established for additional services in the Owner-Engineer Agreement for this Project, may be deducted from the Contractor to make all modifications and/or corrections as may be required by the Engineer in an accurate, complete, and timely fashion.
- H. The Contractor shall check all shop drawings prior to submittal to the Engineer for compliance with the Contract Drawings and Specifications. All shop drawings shall bear the Contractor's stamp indicating that they have been so checked. All shop drawings of equipment shall bear the seal of certification of the vendor and/or manufacturer.
- I. The Engineer will review the shop drawings and return three (3) copies of each marked, NO EXCEPTIONS TAKEN, MAKE CORRECTIONS INDICATED, or CONDITIONAL TO TRANSMITTAL LETTER, with further directions to REVISE AND RESUBMIT, or REJECTED - SEE REMARKS.
- J. If the shop drawing is returned to the Contractor stamped NO EXCEPTIONS TAKEN, he may immediately proceed with the work. If the shop drawing is returned to the Contractor stamped MAKE CORRECTIONS INDICATED, he may proceed with the work taking into account the corrections noted on the shop drawing. However, corrected drawings shall be submitted to the Engineer for information within fourteen (14) days after receipt of drawings stamped MAKE CORRECTIONS INDICATED.
- K. If the shop drawing is returned to the Contractor stamped MAKE CORRECTIONS INDICATED and REVISE AND RESUBMIT, he shall not proceed with the work but shall make the corrections and resubmit the revised shop drawing to the Engineer for review.

1.3 **Submission Requirements:**

- A. Accompany submittals with transmittal letter, containing:
 - 1. Date
 - 2. Project title and number
 - 3. Contractor's name and address
 - 4. The number of each Shop Drawing, Project Data, and Sample submitted.
 - 5. Notification of deviations from Contract Documents.
 - 6. Other pertinent data.
- B. Submittals shall include:
 - 1. Date and revision dates.
 - 2. Project title and number.
 - 3. The names of:
 - a. Engineer
 - b. Contractor
 - c. Subcontractor
 - d. Supplier
 - e. Manufacturer
 - f. Separate detailer when pertinent.
 - 4. Identification of product or material.
 - 5. Relation to adjacent structure or materials.
 - 6. Field dimensions, clearly identified as such.
 - 7. Specification section number.
 - 8. Applicable standards, such as ASTM number or Federal Specification.
 - 9. A blank space, 4"x4", for the Engineer's stamp.
 - 10. Form entitled "Submittal Certification Form" (included at the end of this Section), shall be completed in its entirety. Contractor's failure to denote any deviations from Contract Documents shall be taken as an indication that all information contained within the submittal is in full and complete conformance with the Contract.

1.4 **Resubmission Requirements**

- A. Revise initial drawings as required and resubmit as specified for initial submittal.
- B. Clearly indicate on drawings any changes which have been made other than those required by Engineer.
- C. When the shop drawings are resubmitted, the drawings shall incorporate all of the marked revisions. When differing from the marked revisions, the Contractor shall state his reasons for omitting and/or modifying the marked revisions on the Submittal Certification Form. Resubmittals shall be made in the same manner as the original submittal.

1.5 **Engineer's Review:**

The review of the shop drawings shall be general only and shall not relieve the Contractor in any way from his responsibility for proper detailing of the design, satisfactory construction, compliance with the Specifications and applicable codes, or for errors or omissions of any kind in the final installed work.

Description: _____

_____A Complete List of Deviations as Follows:

Page ____ of ____

END OF SECTION

DIVISION 31

31 23 00	Excavation, Filling, and Grading
31 25 00	Erosion and Sedimentation Controls
31 37 00	Riprap

SECTION 31 23 00**EXCAVATION, FILLING & GRADING****PART 1 - GENERAL****1.1 Description**

- A. Provide all labor, materials, equipment and supervision necessary to complete the work specified in this Section as shown on the Contract Drawings or both but not limited to the following.
 - 1. Excavation, filling, backfilling, grading and subgrade preparation for concrete work.
 - 2. Excavation, trenching and backfilling for utilities to the limits shown on the drawings.

1.2 Quality Assurance

- A. Soil testing and inspection service:
 - 1. The Owner may complete soil testing and field observation of earthwork procedures for quality control during earthwork operations.

1.3 Submittals

- A. Contractor shall submit test results from a certified soils testing lab of each type of material to be brought in from off site.

1.4 Job Conditions

- A. Site information: Data on indicated subsurface conditions are not intended as representations or warrants of continuity of such conditions between soil borings. It is expressly understood that the Owner will not be responsible for interpretations of conclusions drawn therefore by Contractor.
 - 1. Additional test borings and other exploratory operations may be made by Contractor at no cost to owner.
- B. Existing utilities: Contact Dig Safe to locate existing underground utilities in the areas of work. If utilities are to remain in place, provide adequate means of protection during earthwork operations.
 - 1. Should uncharted or incorrectly charted piping or other utilities be encountered during excavation, consult the Engineer immediately for directions as to procedure. Cooperate with Owner and utility companies in keeping respective services and facilities in operation. Repair damaged utilities to satisfaction of utility owner.

2. Do not interrupt existing utilities serving facilities occupied and used by Owner or others, except when permitted in writing by Engineer and then only after acceptable temporary utility services have been provided.
- C. Use of explosives:
 1. Do not bring explosives onto site or use in work without prior written permission from authorities having jurisdiction. Contractor is solely responsible for handling, storage and use of explosive materials when their use is permitted.
- D. Protection of persons and property: Barricade open excavations occurring as part of this work and post with warning lights. Operate warning lights during hours from dusk to dawn to each day and as otherwise required.
 1. Protect structures, utilities, sidewalks, pavements and other facilities from damage caused by settlement, lateral movement, undermining, washout and other hazards created by earthwork operations.

1.5 Disturbance of Excavated and Filled Areas During Construction

- A. The Contractor shall take the necessary steps to avoid disturbance of subgrade during excavation and filling operations. Methods of excavation and filling operations shall be revised as necessary to avoid disturbance of the subgrade, including restricting the use of rubber tired Vehicles or other equipment in areas where subgrade is above optimum moisture level and will become disturbed due to movement of vehicles.
- B. All excavated or filled areas disturbed during construction that will not meet compaction requirements as specified herein shall be removed and replaced with gravel fill or crushed stone. Costs of removal of disturbed material and recompaction with gravel fill or crushed stone shall be borne by the Contractor.

1.6 Related Work

Related work specified elsewhere: Aggregate Surface, Base and Subbase Course Gravel (32 11 00).

PART 2 - PRODUCTS

2.1 Definitions

- A. All sieve analysis for conformance of on-site and off-site fill materials to be used in the work shall conform to ASTM D-422. In addition to the requirements of this ASTM designation all materials beyond the #60 sieve shall be done by means of a mechanical wet sieve analysis.

2.2 **Solid Materials**

- A. 1-1/2" crushed stone: Material for crushed stone shall be clean, angular fragments of sound rock, free of organic materials, trash, snow, ice, frozen soil and other objectionable material and shall be well graded within the following limits:

SIEVE SIZE	PERCENT FINER BY WEIGHT
1-1/2"	100
1"	0-20
#200	0-5

- B. 3/4" Crushed Stone: Material for crushed stone be shall be clean, angular fragments of sound rock, free of organic materials, trash, snow, ice, frozen soil and other objectionable material and shall be well graded within the following limits:

SIEVE SIZE	PERCENT FINER BY WEIGHT
1"	100
3/4"	90-100
1/2"	10-35
#200	0-5

- C. Common Borrow: Common borrow, conforming to MDOT 703.18, shall consist of earth, suitable for embankment construction. It shall be free from frozen material, perishable rubbish, peat, and other unsuitable material.

The moisture content shall be sufficient to provide the required compaction and stable embankment. In no case shall the moisture content exceed 4% above optimum, which shall be determined in accordance with AASHTO T180, Method C or D.

- D. Granular Borrow: Granular borrow, conforming to MDOT 703.19, shall consist of sand or gravel of hard durable particles free from vegetable matter, lumps or balls of clay and other deleterious substances. The gradation of that portion passing a 75mm (3 in.) sieve shall meet the gradation requirements of the following table:

SIEVE SIZE	PERCENT FINER BY WEIGHT
#40	0-70
#200	0-20

Granular borrow shall contain no particles or fragments with a maximum dimension in excess of the compacted thickness of the layer being placed.

- E. Ditch Turnout Stone: Material used for the berms constructed to disperse runoff from the ditch turnouts to the vegetated buffers. It shall be free of organic material, loam, trash, snow, ice, frozen soil and other objectionable material and shall be well-graded within the following limits:

SIEVE SIZE	PERCENT FINER BY WEIGHT
6"	100
3"	40-50
1"	0-3

- F. Stone Ditch Protection: Rock used for ditch protection shall consist of sound, durable rock that will not disintegrate by exposure to water or weather. Fieldstone, rough quarry stone, blasted ledge rock or tailings may be used. The size of any stone shall not exceed 450 mm[18 in] when measured along its longest axis. The rock shall be free from vegetable matter, lumps, or balls of clay and other deleterious substances and graded within the following limits or as otherwise:

SIEVE SIZE	PERCENT FINER BY WEIGHT
12"	90-100
4"	0-15

- G. Fill materials: Provide adequate quantities of fill materials where existing on site materials are insufficient or unsuitable for use as specified. On site material may be used for other fill classifications provided the material conforms to the requirements of the specifications for the type of fill.
- H. Borrow: Shall consist of approved material required for the construction of fills or other portions of the work and shall be obtained from approved sources.
- I. For this project, the supplied gravel, EXCEPT FOR SURFACE GRAVEL, WILL NOT be required to meet a minimum degradation value. All other requirements of Subsection 703.06 2020 MDOT Standard Specifications still apply.

PART 3 - EXECUTION

3.1 Inspection

- A. Examine the areas and conditions under which excavating, filling and grading are to be performed and notify the Engineer in writing of conditions detrimental to the proper and timely completion of the work. Do not proceed with the work until unsatisfactory conditions have been corrected in an acceptable manner.

3.2 **Excavation**

- A. Excavation consists of removal and disposal of materials encountered when establishing required grade elevations.

Dig Safe shall be properly notified 72 business hours prior to any excavation.
- B. Perform all excavation of every description and of whatever substances encountered to the depths and extent indicated for the proper installation of the work.
- C. Excavate to the exact depth required for all utility systems. Utility trenches shall be over excavated to accommodate pipe bedding as specified hereinafter.
- D. Earth excavation: The following classification of excavation will be made only when rock excavation is encountered.
 - 1. Earth excavation - consists of removal and disposal of pavements and other obstruction visible on ground surface, underground structures and utilities indicated to be demolished and removed, material of any classification indicated in data on subsurface conditions and other materials encountered that are not classified as rock excavation.
- E. Unauthorized excavation consists of removal of materials beyond indicated subgrade elevations or dimensions without specific direction of Engineer.
 - 1. Backfill and compact unauthorized excavations with materials as specified for authorized excavation of same classification, unless otherwise directed by Engineer. This work shall be completed at no additional cost to the Owner.
- F. Stability of excavation: Slope sides of excavation to comply with local codes and ordinances having jurisdiction. Shore and brace where sloping is not possible either because of space restrictions or stability of material excavated.
 - 1. Maintain side and slopes of excavation in a safe condition until completion of backfilling.
- G. Shoring and bracing: Provide adequate shoring and bracing, such as sheet piling, uprights, stringers and cross-braces, in good serviceable condition.
 - 1. Trench shoring and bracing shall comply with Federal, State, and local codes and authorities having jurisdiction.
 - 2. Maintain shoring and bracing in excavations regardless of time period excavations will be open. Carry down shoring and bracing as excavation progresses.

- H. Dewatering: Prevent surface water and subsurface or ground water from flowing into excavations or onto any work and from flooding project site and surrounding area.
 - 1. Do not allow water to accumulate in excavations. Remove water to prevent softening of subgrades and soil changes detrimental to stability of subgrades. Provide and maintain pumps, sumps, suction and discharge lines and other dewatering system components necessary to convey water away from excavations.
- I. Material storage: Stockpile satisfactory excavated materials where directed, until required for backfill or fill. Place grade and shape stockpiles for proper drainage.
- J. Excavation for structures: Conform to elevations and dimensions 0.1' and extending a sufficient distance from footings and foundations to permit placing and removal of concrete formwork, installation of services, other construction required and for inspection.
 - 1. In excavating for footings and foundations, take care not to disturb bottom of excavation. Excavate by hand to final grade just before concrete is placed. Trim bottoms to required lines and grades to leave solid base to receive concrete.
 - 2. If requested by the Engineer, the Contractor shall over-excavate approximately 6" for footings and place a working mat of crushed stone to prevent subgrade disturbance of material in place or in fill material.
- K. Excavation for pavements: Cut surface under pavements to comply with cross-sections, elevations and grades as shown.
- L. Excavation for ditches: Cut ditches to cross-sections and grades as shown. Deposit excavated materials to prevent cave-ins or material falling or sliding into ditch. Keep ditches free of debris until final acceptance of the work.
- M. Excavation for utilities: The trench for the pipe shall be excavated to the required line and grade and of sufficient width to permit thorough compacting and tamping of the fill material under the haunches and around the pipe. In general, utility trenches shall be excavated to a point 6 inches below the bottom of the utility line to accommodate bedding material as specified hereinafter. Soft or unsuitable material encountered below the normal bedding line of the pipe shall be removed as directed, replaced with selected material, gravel or crushed stone and thoroughly compacted. The bottom of the trench shall be shaped to conform to the curvature of the pipe. This bed shall also be excavated to accommodate the bells of pipes.

- N. Removal of unsatisfactory soil materials: Excavate unsatisfactory soil materials encountered that extend below required elevations, to additional depth directed by the Engineer.
 - 1. Such additional excavation, provided it is not due to fault or neglect of Contractor, will be measured as directed by Engineer and paid for as a change in the work.
 - 2. Material that is above or below optimum moisture for compaction of the particular material in place and is disturbed by the Contractor during construction operations so that proper compaction cannot be reached shall be construed as unsuitable bearing materials or unsatisfactory soil materials. This material shall be removed and replaced with lean concrete or compacted gravel fill at no additional charge.
- O. Cold weather protection: Protect excavation bottoms against freezing when atmospheric temperature is less than 35° F.
- P. Blasting: Perform blasting operations using skilled personnel in compliance with governing regulations. Comply with ANSI A10.1 "Safety Code for Building Construction" for the minimum requirements for blasting.
 - 1. Conduct blasting operations using explosives of such quantity and power and fired in such sequence and locations, as not to injure personnel or damage property, or damage adjacent work. Assume full responsibility for damages resulting from or attributable to blasting operations.
 - 2. A pre-blast survey is required prior to the undertaking of the blasting operations.

3.3 **Compaction**

- A. General: Control soil compaction during construction providing minimum percentage of density specified for each area classification.
- B. Percentage of maximum density requirements: Provide not less than following percentages of maximum density of soil material as determined by ASTM Test D1557, latest revision (Modified Proctor).
 - 1. Utility Structures: Compact top 12" of subgrade and each layer of backfill or fill material to 95% maximum density.
 - 2. Building Slabs and Pavements: Compact top 12" of subgrade and each layer of backfill or fill material to 95% maximum density.
 - 3. Lawn or other Grassed Areas: Compact top 6" of subgrade and each layer of backfill or fill material to a density approximating that of the adjacent undisturbed material but to a minimum of 90%.
 - 4. Walkways: Compact top 6" of subgrade to 95% and each layer of backfill material to 95% maximum density.
 - 5. Utility Trenches: Compact top 12" of subgrade to 95% and each layer of backfill or fill material 12" over the pipe to 95%. Above this point compact filled trench to specifications listed for the use above the pipe.
- C. Moisture Control: Where subgrade or layer of soil material must be moisture

conditioned before compaction, uniformly apply water to surface of subgrade, or layer of soil material, to obtain optimum moisture content.

1. Remove and replace or scarify and air dry, soil material that is too wet to permit compaction to specified density.
 - a. Soil material that has been removed because it is too wet to permit compaction may be stockpiled or spread and allowed to dry. Assist drying by discing, harrowing or pulverizing, until moisture content is reduced by a satisfactory value, as determined by moisture-density relation tests.

3.4 **Backfill**

- A. General: Place acceptable soil material in layers to required subgrade elevations for each area classification listed below.
 1. Adjacent to building and under roadways.
 2. Under building slabs and footings material shall be structural fill.
 3. Under landscaped areas fill material shall be common fill.
- B. Backfill excavations as promptly as work permits, but not until completion of the following.
 1. Acceptance by Engineer of construction below finish grade.
 2. Inspection, testing, approval and recording locations of underground utilities.
 3. Removal of concrete framework.
 4. Removal of shoring and bracing and backfilling of voids with satisfactory materials. Cut off temporary sheet piling driven below bottom of structures and remove in manner to prevent settlement of the structure or utilities or leave in place of required.
 5. Removal of trash and debris.
- C. Ground surface preparation: Remove vegetation, debris, unsatisfactory soil materials, obstructions and deleterious materials from ground surface prior to placement of fills.
- D. Placement and compaction: All compacted fill shall be placed in layers having a maximum loose layer thickness of 12 inches. Each layer shall be systematically compacted to the density specified hereinbefore.
 1. Compaction equipment in confined areas shall be accomplished by hand operated vibratory equipment or mechanical tampers as approved by the Soils Inspector.
 2. Fill layers shall not be left in an uncompacted state at the close of a day's operations. Prior to terminating operations for the day, the final layer of fill, after compaction, shall be rolled with a smooth-wheeled roller to eliminate ridges of soil left by tractors, trucks and compaction equipment. Slope all fill to drain at termination or work day.
 3. The Contractor shall not place a layer of compacted fill on snow, ice or soil that was permitted to freeze prior to compaction. Removal of these unsatisfactory materials will be required as directed by the Engineer.

4. Each lift of placed and compacted material shall be tested an independent soils testing firm engaged and paid directly by the Contractor. Do not proceed with additional lifts until authorized by the Engineer. See paragraph 3.7 for requirements.
- E. Backfilling of utilities: Place bedding 6" below pipe up to the vertical center of the pipe as shown on plans. Then place select backfill, which can be sand or bedding material, to a depth of 6" above the pipe as shown on the plans. All other backfill shall be as specified elsewhere according to above conditions.

3.5 **Grading**

- A. General: Uniformly grade areas within limits of grading under this section, including adjacent transition areas. Smooth finished surface within specified tolerances, compact with uniform levels or slopes between points where elevations are shown, or between such points and existing grades.
- B. Grading outside building lines: Grade areas adjacent to building lines to drain away from structures and to prevent ponding. Finish surfaces shall be free from irregular surface changes.
- C. Grading surface to fill under future building slabs: Grade smooth and even, free of voids, compacted as specified and to required elevation. Provide final grades within a tolerance of 1/4" when tested with a 10' straightedge.
- D. Compaction: After grading, compact subgrade surfaces to the depth and percentage of maximum density for each area classification.

3.6 **Base Course**

- A. General: Base course consists of placing base material, in layers of specified thickness, over ground surface to support a bituminous or concrete pavement.
- B. Grade control: During construction, maintain lines and grades including crown and cross-slope of base course.
- C. Shoulders: Place shoulders along edges of base course to prevent lateral movement. Construct shoulders of acceptable soil materials, placed in such quantity to compact to thickness of each base course layer. Compact and roll at least a 2 foot width of shoulder simultaneously with compacting and rolling of each layer of base course.
- D. Placing: Place base course material on prepared subgrade in layers of uniform thickness, conforming to indicated cross-section and thickness. Maintain optimum moisture content for compacting base material during placement operations.
 1. When a compacted base course is shown to be 12" thick or less, place

material in a single layer. When shown to be more than 12" thick, place material in layers.

3.7 Field Quality Control

- A. All operations under this Section of the Specification will be subject to the observation of the Engineer. When required, an independent/qualified soils testing firm shall be engaged and paid directly by the Contractor and shall report to Owner/Engineer. The Engineer will determine conformance of materials and workmanship, particularly compaction, to the requirements of this Specification.
 - 1. The soils testing firm shall make such tests of materials and compaction as the Engineer directs. Costs of such tests shall be borne by the Contractor.
 - 2. The soils testing firm will make a reasonable number of tests or visual examinations of materials proposed for fill.
 - 3. Areas for which tests indicate insufficient compaction shall be re-compacted and retested until the areas conform to the requirement of the appropriate Specification.
 - 4. In-place density testing shall be done in accordance with ASTM D2922 Nuclear Densometer.

3.8 Maintenance

- A. Protection of graded areas: Protect newly graded areas from traffic and erosion and keep free of trash and debris.
 - 1. Repair and re-establish grades in settled, eroded, and rutted areas to specified tolerance.
- B. Reconditioning compacted areas: Where completed compacted areas are disturbed by subsequent construction operations or adverse weather, scarify surface, re-shape, and compact to required density prior to further construction.

3.9 Disposal of Excess and Waste Materials

- A. The Contractor shall properly dispose of all excess material.

END OF SECTION

SECTION 31 25 00

EROSION AND SEDIMENTATION CONTROLS**PART 1 – GENERAL****1.1 Description****A. Certification:**

As required under M.R.S.A. § 439-B, an excavation contractor conducting excavation activity in a shoreland area shall ensure that a person certified in erosion control practices by the Department of Environmental Protection (DEP) is responsible for management of erosion and sediment control practices at the site, and is present at the site each day earth-moving activity occurs for a duration that is sufficient to ensure that proper erosion and sedimentation control practices are followed.

These requirements apply until the permanent erosion control measures have been installed and appropriate vegetation has been established.

B. Work Included:

1. The work under this Section shall include provision of all labor, equipment, materials and maintenance of erosion control devices, as specified herein, as shown on the Drawings and as required to prevent erosion.
2. Erosion control measures shall be provided as necessary to correct conditions that develop prior to the completion of permanent erosion control devices, or as required to control erosion that occurs during normal construction operations.
3. Construction operations shall comply with all federal, state, and local regulations pertaining to erosion control.
4. Employ such erosion control devices as may be necessary until such time that adequate soil stabilization has been achieved.
5. All erosion control measures shall be in accordance with standards outlined in the Maine Erosion and Sediment Control Best Management Practices, Bureau of Land and Water Quality, Maine Department of Environmental Protection, October 2016.
6. Erosion control measures shall be provided in accordance with applicable permit requirements contained in Section 3 and the Erosion and Sedimentation Control plan shown on the drawings.

C. Related Work Specified Elsewhere:

1. Site work is specified in appropriate sections of this division.

1.2 **Submittals**

The Contractor shall submit to the Engineer evidence of DEP certification for erosion control practices and work within the shoreland zone, along with a detailed erosion control work plan for the Engineer's approval outlining the methods and materials that the Contractor intends to use to control erosion at the site until adequately stabilized. The plan shall include exact locations of erosion and sedimentation control measures and methods to be used to clean up eroded areas. The plans shall be approved by the Engineer prior to the disturbance of any soils.

PART 2 – PRODUCTS

2.1 **Materials**

- A. Baled Hay:
 - 1. At least 14" by 18" by 30" securely tied to form a firm bale, staked as necessary to hold the bale in place.
- B. Sand Bags:
 - 1. Heavy cloth bags of approximately one cubic foot capacity filled with sand or gravel.
- C. Mats & Nettings:
 - 1. Twisted craft paper, yarn, jute, excelsior and wood fiber mats.
 - 2. Type and use shall be as specified by the Maine Erosion and Sediment Control Best Management Practices, herein after referred to as the Best Management Practices (BMP's).
- D. Seed:
 - 1. Conservation mix appropriate to the predominant soil conditions, as specified in the BMP's and subject to approval by the Engineer.
- E. Sod:
 - 1. Grown from certified seed of adapted varieties to produce high quality sod free of any serious thatch, weeds, insects, diseases, and other pest problems.
 - 2. At least one year old and not older than three years. Cut with a 1/2 to 1 inch layer of soil.

- F. Filter Fabrics:
 - 1. Filter fabric shall be of one of the commercially available brands such as Mirafi, Typar or equivalent. Fabric types for particular applications shall be approved by the Engineer prior to installation.
- G. Floating Silt Boom (turbidity curtain):
 - 1. Provide geotextile fabric and components made from polypropylene, polyester, polyamide or other chemically stable material and be resistant to ultraviolet radiation degradation for at least 12 months of installation. Provide silt retention capacity of not less than 75 percent, Mullen Burst Test range of not less than 200 pounds per square inch and a roll width of not less than 8 feet.

2.2 **Construction Requirements**

- A. Erosion Checks:
 - 1. Stone check dams shall be constructed in ditches and other locations as necessary.
 - 2. Riprap, baled hay, sand bags, erosion control mix, or siltation fence may be used in an arrangement to fit local conditions.
- B. Berms:
 - 1. Barriers shall be constructed along the toe of embankments when necessary to prevent erosion, sedimentation.
- C. Siltation Fences:
 - 1. Siltation fences shall consist of porous filter fabric with a wire mesh backing and shall be supported by posts as per manufacturer's recommendations. Fabric type shall be approved by the Engineer for its filtration properties.
 - 2. Erosion control mix may be used as a siltation berm as a substitute for silt fence. Grubbed wood from the site may be used to make the erosion control mix.

PART 3 – EXECUTION

3.1 Installation

- A. Erosion Checks:
 - 1. Erosion checks shall be constructed in ditches and at other locations designated on the Drawings and as required. The Engineer may instruct the Contractor to modify the arrangement of bales and bags to fit local conditions.
 - 2. Baled hay or sandbags, or both, may be used in other areas as necessary to inhibit soil erosion.
 - 3. Siltation fence located where needed.
 - 4. Install the silt boom prior to start up of work and maintain during the progress of the work;
- B. Removing & Disposing:
 - 1. When no longer needed, material and devices for erosion control shall be removed or may be left in place and dispersed over the adjacent area, as approved by the Engineer.
 - 2. When removed, such devices may be reused in other locations provided they are in good condition and suitable to perform the erosion control for which they are intended.
 - 3. When dispersed over adjacent areas, the material shall be scattered to the extent that it causes no unsightly conditions nor creates future maintenance problems.

3.2 Maintenance

- A. General:

All erosion control measures shall be cleaned and maintained as directed by the Engineer through project completion. Sediments trapped by the erosion control measures shall be removed and disposed of at an area designated by the Engineer after each significant rainfall.

Should areas during construction show signs of erosion, Engineer shall direct Contractor to take corrective measures to stabilize the area by means of the materials listed in paragraph 2.1 or approved equals.

END OF SECTION

SECTION 31 37 00**RIPRAP****PART 1 - GENERAL****1.1 Description**

- A. This work consists of furnishing all labor, equipment, and materials and performing all work necessary to place a protective covering of erosion-resistant material on the slopes of embankments, slopes of channels, or as directed by the ENGINEER. The work shall be done in accordance with these Specifications and in conformity with the lines and grades shown on the Drawings or established by the ENGINEER.
- B. Types of riprap/material included in this specification:
 - 1. Dumped Riprap: Dumped riprap consists of stone dumped in place on a prepared slope of geotextile backing to form a well-graded mass with a minimum of voids.
 - 2. Placed Riprap: Riprap placed next to the ramp sides and end shall be placed with care to result in a uniform surface suitable for boat trailers with small rubber tires. It consists of stone placed on a prepared slope of geotextile backing to form a well-graded mass with a minimum of voids.
 - 3. Geotextile Backing: A geotextile backing consists of a geotextile overlain by a layer of crushed stone placed on the bank before placing the riprap to prevent the bank material from passing through the riprap protection. Geotextile backing shall be used in lieu of a filter blanket where specifically called for on the plans or where approved by the ENGINEER.

PART 2 - PRODUCTS**2.1 Materials**

- A. Definition of the materials:
 - 1. Dumped Riprap: Stone used for dumped riprap shall be hard, durable, angular in shape; resistant to weathering and to water action; free from overburden soil, shale and organic material; and shall meet the gradation requirements for the class specified. Neither breadth nor thickness of a single stone should be less than one-third its length. Rounded stone or boulders shall not be accepted. Shale and stone with shale seams are not acceptable.

2. Machine or Hand Placed Riprap: Machine or hand placed riprap shall be placed next to both sides of the launch ramp and at its end and where called for on the plans. It will result in a 24" wide lane to accommodate rigs which may stray beyond the ramp. Stone used for placed riprap shall be hard, durable, and angular in shape (blasted rock); resistant to weathering and to water action; free from overburden soil, shale and organic material; and shall meet the gradation requirements for the class specified. Neither breadth nor thickness of a single stone should be less than one-third its length. Rounded stone or boulders shall not be accepted.
3. Geotextile:
 - a) Geotextile shall be Mirafi FW700 or approved equivalent.
 - b) During all periods of shipment and storage, the fabric shall be maintained, wrapped in a heavy-duty protective covering to protect the fabric from direct sunlight, ultraviolet rays, temperatures greater than 140°F, mud, dirt, dust, and debris.
 - c) The vendor shall furnish certified test reports of material attesting that the fabric meets the requirements of this Specification when requested by the Owner or Engineer.

B. Gradation of Crushed Stone for Geotextile Backing:

<u>Sieve Size</u>	<u>% Passing by Weight</u>
1"	100
3/4"	90-100
3/8"	20-55
No. 4	0-10
No. 8	0-5
No. 200	0-1.5

C. Gradation of Riprap Stone:

<u>Size of Stone</u>	<u>% of Total Weight Smaller Than the Given Size</u>
	Class I
18" (or 200 lbs.)	100
12" (or 50 lbs.)	40-50
6" (or 10 lbs.)	0-5

PART 3 - EXECUTION

3.1 Construction Details

- A. Slopes to be protected by riprap shall be free of brush, trees, stumps, and other objectionable material and be dressed to a smooth surface. All soft or spongy material shall be removed to the depth shown on the Drawings or as directed by the ENGINEER and replaced with approved material. Filled areas will be compacted thoroughly. A toe trench as shown on the Drawings shall be dug and maintained until the riprap is placed.
 - 1. Riprap
 - a. Stone for riprap shall be placed on the prepared slope or area in a manner which will produce a reasonably well-graded mass of stone with the minimum practicable percentage of voids. The entire mass of stone shall be placed in conformance with the lines, grades, and thicknesses shown on the Drawings. Riprap shall be placed to its full course thickness in one operation and in such a manner as to avoid displacing the underlying material. Placing of riprap in layers, or by dumping into chutes, or by similar methods likely to cause segregation will not be permitted.
 - b. The larger stones shall be well distributed and the entire mass of stone shall conform to the gradation specified.
 - c. It is the intent of these Specifications to produce a compact riprap protection in which all sizes of material are placed in their proper proportions. Hand placing or rearranging of individual stones by mechanical equipment may be required to the extent necessary to secure the results specified.
 - d. Unless otherwise authorized by the ENGINEER, the riprap protection shall be placed in conjunction with the construction of the embankment with only sufficient lag in construction of the riprap protection as may be necessary to allow for proper construction of the portion of the embankment protected and to prevent mixture of embankment and riprap. The riprap protection shall be maintained until accepted, and any material displaced by any cause shall be replaced at no additional cost to the OWNER.
 - e. Riprap stone shall not be dropped from a height greater than one foot onto the filter blanket.

2. Geotextile Backing:

- a. A geotextile shall be placed in the manner and at the locations shown in the Drawings or as directed by the ENGINEER. At the time of installation, fabric shall be rejected if it has defects, rips, holes, flaws, deterioration or damage incurred during manufacture, transportation or storage. The fabric shall be placed with the long dimension parallel to the centerline of the channel or pipe trench unless otherwise directed by the ENGINEER, and shall be laid smooth and free of tension, stress, folds, wrinkles, or creases. The strips shall be placed to provide a minimum width of 24 inches of overlap for each joint. Overlap joints and seams shall be measured as a single layer of cloth. Securing pins with washers shall be inserted through both strips of overlapped cloth.
- b. Securing pins for anchoring geotextile shall be 3/16-inch steel bars, pointed at one end and fabricated with a head to retain a steel washer having an outside diameter of not less than 1.5 inches. The length of the pin shall not be less than 12 inches.
- c. A layer of crushed stone shall be placed on the geotextile to the full specified thickness using methods which will not cause segregation of particle sizes. The surface of the finished layer shall be reasonably even and free from mounds or windrows.

END OF SECTION

DIVISION 32

32 16 13

Precast Concrete Curb

SECTION 32 16 13**PRECAST CONCRETE CURB****PART 1 - GENERAL****1.1 Description of Work**

Work included: Furnish all material, labor and equipment to install concrete curbs as indicated here and on the drawings.

1.2 Quality Assurance

- A. Acceptable manufacturers:
 - 1. Gagne and Son Concrete Products
 - 2. Precast Concrete Products of Maine
 - 3. Approved Equal
- B. Contractor shall inspect and ensure that each curb is in good condition with all surfaces clean and neat with no honeycombing, spalling or cracks
- C. If the Owner/Engineer rejects any planks at the construction site because they do not meet this standard of quality, it shall be the Contractors responsibility to remove and properly dispose of the rejected materials and to purchase and deliver acceptable curb to the job site at no additional cost to the Owner.
- D. Any damage caused to existing or new curb as a result of Contractor activity shall be repaired, to the satisfaction of the Owner, by the Contractor, at no additional cost to the Owner.

1.3 Submittals

- A. Submit shop drawings and manufacturer's literature in conformance to the General Conditions section of the Construction Contract.

PART 2 - PRODUCTS**2.1 Precast Concrete Curb**

- B. Six-foot precast concrete curb weighs approximately 730 lbs., and measures 7" by 1'- 6" in cross section.
- C. Concrete: Concrete shall have a minimum compression strength of 4,000 psi at 28 days.
- D. Reinforcement: #4, Grade 60 (ASTM A615)

PART 3 - EXECUTION**3.1 Subgrade Preparation**

Where the subgrade material is found to be of poor supporting value or of rock, the foundation shall be conditioned by removing the existing subgrade material by undercutting to the depth as directed by the Engineer and backfilling with either a suitable local material secured from unclassified excavation or borrow excavation at the nearest accessible location, or foundation conditioning material consisting of gravel base or subbase material, as approved by the Engineer. The selection of the type of backfill material to be used for subgrade conditioning will be made by the Engineer. Mechanical compaction below water is not required.

3.2 Installation

- A. Six inches of 3/4" crushed stone base shall be placed to ensure the entire length of curb is fully supported.
- B. Crushed stone base shall conform to Section 31 23 00 of this specification.
- C. The profile of new planks shall follow the profile of the grade shown on the drawings.
- D. The curb shall be set so that the front top arris line is in close conformity to the line and grade required as shown on the plans or directed by the Engineer.
- E. The required spacing between curb shall be a maximum of 1/2 inch.

END OF SECTION

DIVISION 35

35 43 38

Precast Concrete Launch Planks

SECTION 35 43 38**PRECAST CONCRETE LAUNCH PLANKS****PART 1 - GENERAL****1.1 Related Documents**

Drawings and general provisions of the Contract, including General and Supplemental Conditions and Section 01 11 00 of these Specifications apply to work of this section.

1.2 Description of Work

Work under this section includes:

- A. Loading and transporting precast planks and associated hardware from the the upper parking lot on-site Installation of precast concrete planks as indicated here and on the drawings.
- C. Furnishing and installing precast concrete curbs as indicated here and on the drawings.

1.3 Quality Assurance

- A. Contractor shall inspect each precast concrete plank at the point of pickup, and shall ensure that each plank is in good condition with all hardware intact and all surfaces and grooves clean and neat with no honeycombing, spalling or cracks.
- B. If the Owner/Engineer rejects any planks at the construction site because they do not meet this standard of quality, it shall be the Contractors responsibility to remove and properly dispose of the rejected materials and to purchase and deliver acceptable planks to the job site at no additional cost to the Owner.
- C. Any damage caused to existing or new planks as a result of Contractor activity shall be repaired, to the satisfaction of the Owner, by the Contractor, at no additional cost to the Owner.

1.4 **Job Conditions**

- A. Contractor shall furnish suitable equipment with operator to accept delivery of precast concrete planks and hardware. The Maintenance Shop may assist in loading, using a forklift, if staff are available. Contractor shall be responsible for moving planks into his vehicle and for offloading the materials at the job site.
- B. Contractor shall give at least two working days advance notice to the Richmond Complex to schedule pickup of materials. Call William Cunningham at 582-7845 (office) or 215-5587 (cell) to arrange pickup time for planks and bolts.

PART 2 - PRODUCTS

2.1 **Precast Concrete Planks**

Twelve-foot precast concrete planks weigh approximately 1,200 lb. each and measure 12' x 1'- 6" x 0'- 6" (see Sheet 3 of 4).

2.2 **Concrete Plank Connecting Hardware**

Each pair of connecting planks shall include two ½" x 2" hexagonal head galvanized A325 Type 1 (Grade 5 or stronger) machine bolts with hexagonal head nuts.

PART 3 - EXECUTION

3.1 **Subgrade Preparation**

Where the subgrade material is found to be of poor supporting value or of rock, the foundation shall be conditioned by removing the existing subgrade material by undercutting to the depth as directed by the Engineer and backfilling with either a suitable local material secured from unclassified excavation or borrow excavation at the nearest accessible location, or foundation conditioning material consisting of gravel base or subbase material, as approved by the Engineer. The selection of the type of backfill material to be used for subgrade conditioning will be made by the Engineer. Mechanical compaction below water is not required.

3.2 **Subbase And Base Installation**

Subbase and base will comply with the plans and Section 31 23 00 of this specification.

3.3 **Installation Of Precast Concrete Planks**

- A. The profile of new planks shall follow the profile of the grade shown on the drawings.
- B. Connect each pair of longitudinally abutting planks with two ½" x 2" hexagonal head galvanized machine bolts with hexagonal head nuts. Stagger the alignment of the plank connection bars so that a relatively straight alignment of the ramp is achieved. Make the laterally abutting planks butt to each other such that there is not more than 1 inch of clearance between ends. Vertical alignment shall be within 1 inch of established grade. There shall be no more than 1 inch difference in top elevation of abutting planks.

END OF SECTION

Appendix A

Department of Environmental Protection Permit-by-Rule

06-096

DEPARTMENT OF ENVIRONMENTAL PROTECTION

Chapter 305:

NATURAL RESOURCES PROTECTION ACT -
PERMIT BY RULE**15. Public boat ramps****A. Applicability**

- (1) This section applies to the construction of a new, or the replacement of an existing, public boat ramp or carry-in launch area, including associated parking and accessways, in or adjacent to a protected natural resource by a public natural resource agency, MaineDOT, municipality, or owners of a federally licensed hydropower project within the resource affected by the hydropower project. This section does not apply if a portion of the ramp or related facilities is located in, on or over emergent marsh vegetation or intertidal mudflat.
- (2) This section applies to the construction of up to 2 launch lanes at a facility provided no more than 2 lanes exist or will exist at the completion of the activity.
- (3) This section does not apply to a new boat ramp on a lake infested with aquatic invasive plants, as defined in 38 M.R.S. Section 410-N. The DEP identifies and maintains a list of these infested lakes.

NOTE: A permit will be required from the US Army Corps of Engineers for the following types of projects:

- (a) Any activity involving open trench excavation in a waterbody;
- (b) Any activity in coastal waterways;
- (c) Any activity within a river, stream or brook between October 2 and July 14; or
- (d) Any activity involving work in waterways designated as Essential Fish Habitat for Atlantic salmon including all aquatic habitats in the watersheds of the following rivers and streams, including all tributaries to the extent that they are currently or were historically accessible for salmon migration: St. Croix, Boyden, Dennys, Hobart Stream, Aroostook, East Machias, Machias, Pleasant, Narraguagus, Tunk Stream, Patten Stream, Orland, Penobscot, Passagassawaukeag, Union, Ducktrap, Sheepscot, Kennebec, Androscoggin, Presumpscot, and Saco River.

A copy of the permit by rule notification form and original photographs, not photocopies, should be submitted to the Corps of Engineers for these activities (U.S. Army Corps of Engineers, 442 Civic Center Drive, Suite 350, Augusta, ME 04330. Tel. (207) 623-8367).

B. Submissions

- (1) The applicant is required to submit photographs of the area in which this activity is proposed.

- (2) Photographs showing the finished activity must be submitted within 20 days of the activity's completion. The photographs must be sent with a copy of the notification form or labeled with the applicant's name and the municipality in which the activity took place.
- (3) If the project results in a new or expanded access drive or parking area, the project design plan, erosion control plan and a request for review for an activity on great ponds classified as GPA under 38 M.R.S. Section 465-A must be submitted to the DEP's Division of Watershed Management (DWM) prior to submitting the notification form to the DEP. A certification from DWM must be obtained and must be included with the notification form, along with final project plans and the erosion control plan, when it is submitted to the DEP.
- (4) If the proposed activity involves work below the mean low water line of a waterbody, the applicant shall submit a copy of the project design plan along with a copy of the notification form to the Department of Agriculture, Conservation and Forestry, Bureau of Parks and Lands, Submerged Lands Program (State House Station #22 Augusta, Maine 04333) at the time the notification form is submitted to the DEP. Work on the activity may not begin until a lease or easement is obtained or the Bureau of Parks and Lands has provided notification that one is not necessary.

NOTE: Processing of a request for a lease or easement may require several weeks of review by the Bureau of Public Lands.

- (5) If the proposed activity is located within a coastal wetland area, the applicant must submit, along with the notification form, a letter from both the Department of Inland Fisheries and Wildlife and the Department of Marine Resources that describes times of the year in which the construction of the boat ramp may occur.
- (6) If the proposed activity is located within a freshwater wetland, great pond, river, stream or brook, the applicant must submit, along with the notification form, a letter from the Department of Inland Fisheries and Wildlife that describes times of the year in which the construction of the boat ramp may occur.

C. Standards

- (1) The erosion control plan must be followed. The following measures must be taken to prevent erosion of soil or fill material from disturbed areas into the resource:
 - (a) For any soil disturbance that is limited to the upland and does not extend into the protected natural resource, sediment controls such as trenched and anchored silt fence, an erosion control mix berm at least 1 foot tall, staked straw bales, anchored erosion control socks at least 12 inches in diameter, or a combination of these methods must be properly installed between the area of soil disturbance and the resource before the activity begins and maintained until the disturbed area is permanently stabilized;
 - (b) Any soil disturbance within a freshwater wetland, great pond, river, stream, or brook must be done during periods of low water to minimize impacts (in-stream work window, lake draw-down, etc.) and must be temporarily or permanently stabilized daily. The placement of sediment barriers within the water would be ineffective and could cause unnecessary damage to the resource;
 - (c) Any soil disturbance within a coastal wetland must be done at or near low tide and must be temporarily or permanently stabilized before being submerged. The placement of sediment

barriers within the tidal zone would be ineffective and could cause unnecessary damage to the resource;

- (d) Surface flows from above the disturbed area must be diverted around the disturbed area until final stabilization and any diverted runoff must be managed to prevent erosion; examples of diversions include but are not limited to erosion control mix berms or socks, sand bags, and shallow excavated trenches;
- (e) Within 1 calendar day following the completion of any soil disturbance, and prior to any storm event, temporary or permanent stabilization must be implemented or spread on any exposed soils;
- (f) All disturbed soils must be permanently stabilized; and
- (g) Within 30 days of final stabilization of the site, any silt fence, straw bales, or temporary erosion or sediment controls containing plastic or other non-biodegradable materials must be removed and erosion control mulch berms must be raked to a depth of no more than 6 inches.

NOTE: For guidance on erosion and sedimentation controls, consult the Maine Erosion and Sediment Control BMPs, dated October 2016. This handbook and other references are available online at <https://www.maine.gov/dep/land/erosion/escbmps/> or by contacting the DEP.

- (2) A hard-surfaced launch must be used where boats will be launched from trailers, and must meet the following specifications:
 - (a) The underwater portions of the ramp, at the time of construction, must be constructed of reinforced precast concrete planks, panels or slabs;
 - (b) The portion of the ramp used by the towing vehicle may not have a slope that exceeds 15%; the portion of the ramp used by the trailer only may not have a slope that exceeds 20%;
 - (c) The width of the hard surfaced launch lane(s) may not exceed 20 feet as measured parallel to shore;
 - (d) The upper most 6 inches of the base must consist of crushed rock or crushed or screened gravel having 5% or less passing a 200 mesh sieve; and
 - (e) Fill slopes at or below the normal high water line must be protected with riprap. Riprap installation must meet the standards for riprap in PBR Section 8, "Shoreline stabilization".
- (3) An additional area of up to 8 feet wide as measured parallel to shore may be constructed using bituminous pavement, precast concrete planks, panels or slabs to support docking systems.
- (4) A carry-in launch area for small boats must:
 - (a) Consist of gravel, rock, sand, vegetation, or other erosion resistant materials;
 - (b) Have a grade not exceeding 18%; and

- (c) Be limited, below the low water line, to constructing a path up to 6 feet wide, measured parallel to shore, consisting of cobble, rock or concrete planks, to access deeper water to float watercraft.
 - (5) A vegetated buffer zone at least 25 feet in width must be maintained between any new or expanded parking area and the waterbody.
 - (6) A parking area or access road may not be located in a protected natural resource, except that an access roadway may cross a stream if the requirements of PBR Section 10 "Stream crossings" are met.
 - (7) Any new or expanded parking area or roadway must divert stormwater runoff away from the ramp to an area where it may infiltrate into the ground before reaching the waterbody.
 - (8) Machinery may operate below the water line only when necessary to excavate or place material below the existing water level and must travel and operate on temporary mats or portions of the ramp that have been constructed.
 - (9) Timing of the activity must conform to the recommendations of the Department of Inland Fisheries and Wildlife or the Department of Marine Resources, as appropriate, as described in letters submitted along with the notification form.
 - (10) Any debris generated during the work must be prevented from washing downstream and must be removed from the wetland or water body. Disposal of debris must be in conformance with Maine Hazardous Waste, Septage and Solid Waste Management Act, 38 M.R.S.A Section 1301 *et seq.*
 - (11) Uncured concrete may not be placed directly into the water. Concrete must be pre-cast and cured at least three weeks before placing in the water or, where necessary, must be placed in forms and cured at least one week before the forms are removed. No washing of tools, forms, etc. may occur in the waterbody or wetland.
 - (1) (12) The use of untreated lumber is preferred. Lumber pressure-treated with chromated copper arsenate (CCA) may be used only if necessary and only if use is allowed under federal law and not prohibited from sale under 38 M.R.S. §1682, and provided it is cured on dry land in such a manner as to expose all surfaces to the air for a period of at least 21 days prior to construction. Wood treated with creosote or pentachlorophenol shall not be used where it will contact water. Sawdust or other lumber waste materials may not be stored or placed in such a manner that pollutants may be discharged into the resource.
- D. Definitions.** The following terms, as used in this chapter, have the following meanings, unless the context indicates otherwise:
- (1) **Emergent marsh vegetation.** Plants that are erect, rooted and herbaceous, and that may be temporarily to permanently flooded at the base, but do not tolerate prolonged inundation of the entire plant; (e.g. cattails, saltmarsh cordgrass).
 - (2) **Public natural resource agency.** The Maine Department of Inland Fisheries and Wildlife, the Maine Department of Marine Resources, the DEP, the Maine Department of Agriculture, Conservation and Forestry, the United States Fish and Wildlife Service, the United States Forest Service, the United States Natural Resources Conservation Service and County Soil and Water Conservation Districts.

- (3) **Project design plan.** A detailed plan of the proposed activity indicating all dimensions (width, height, length) relative to the mean low water mark, and including any appurtenant structures that may be seasonal in nature.

STATUTORY AUTHORITY:

38 M.R.S., Sections 341-D(1), 344(7), 480-H

EFFECTIVE DATE:

February 15, 1989

AMENDED:

March 23, 1991

April 11, 1992

May 19, 1992

May 1, 1995

EFFECTIVE DATE (ELECTRONIC CONVERSION):

May 4, 1996

NON-SUBSTANTIVE CORRECTIONS:

May 12, 1997 - punctuation, formatting, comparison with May 14, 1995 amendment

October 29, 1998 - APA Office Note added to first Section 5

AMENDED:

June 1, 1999

July 16, 1999 (EMERGENCY, expires October 14, 1999) - Section 10(A)

October 15, 1999 - language reverted to June 1, 1999 version

February 14, 2000 - Section 10

NON-SUBSTANTIVE CORRECTIONS:

November 23, 2000 - removed erroneous April 21, 1995 amendment date

AMENDED:

September 1, 2002

NON-SUBSTANTIVE CORRECTIONS:

September 5, 2002 - title of Section 2 only

AMENDED:

May 25, 2005 – filing 2005-174

December 5, 2006 – filing 2006-496

February 25, 2008 – Section 20 only, filing 2008-88

July 15, 2009 – filing 2009-339


July 30, 2011 – Section 16 only, filing 2011-211 (*Final adoption, major substantive*)

June 8, 2012 – filing 2012-146 (*Final adoption, major substantive*)


December 27, 2022 – Section 16-A only, filing 2022-256

December 9, 2023 - Section 16 only, filing 2023-231 (*Final adoption, major substantive*)


June 17, 2025 – filing 2025-129

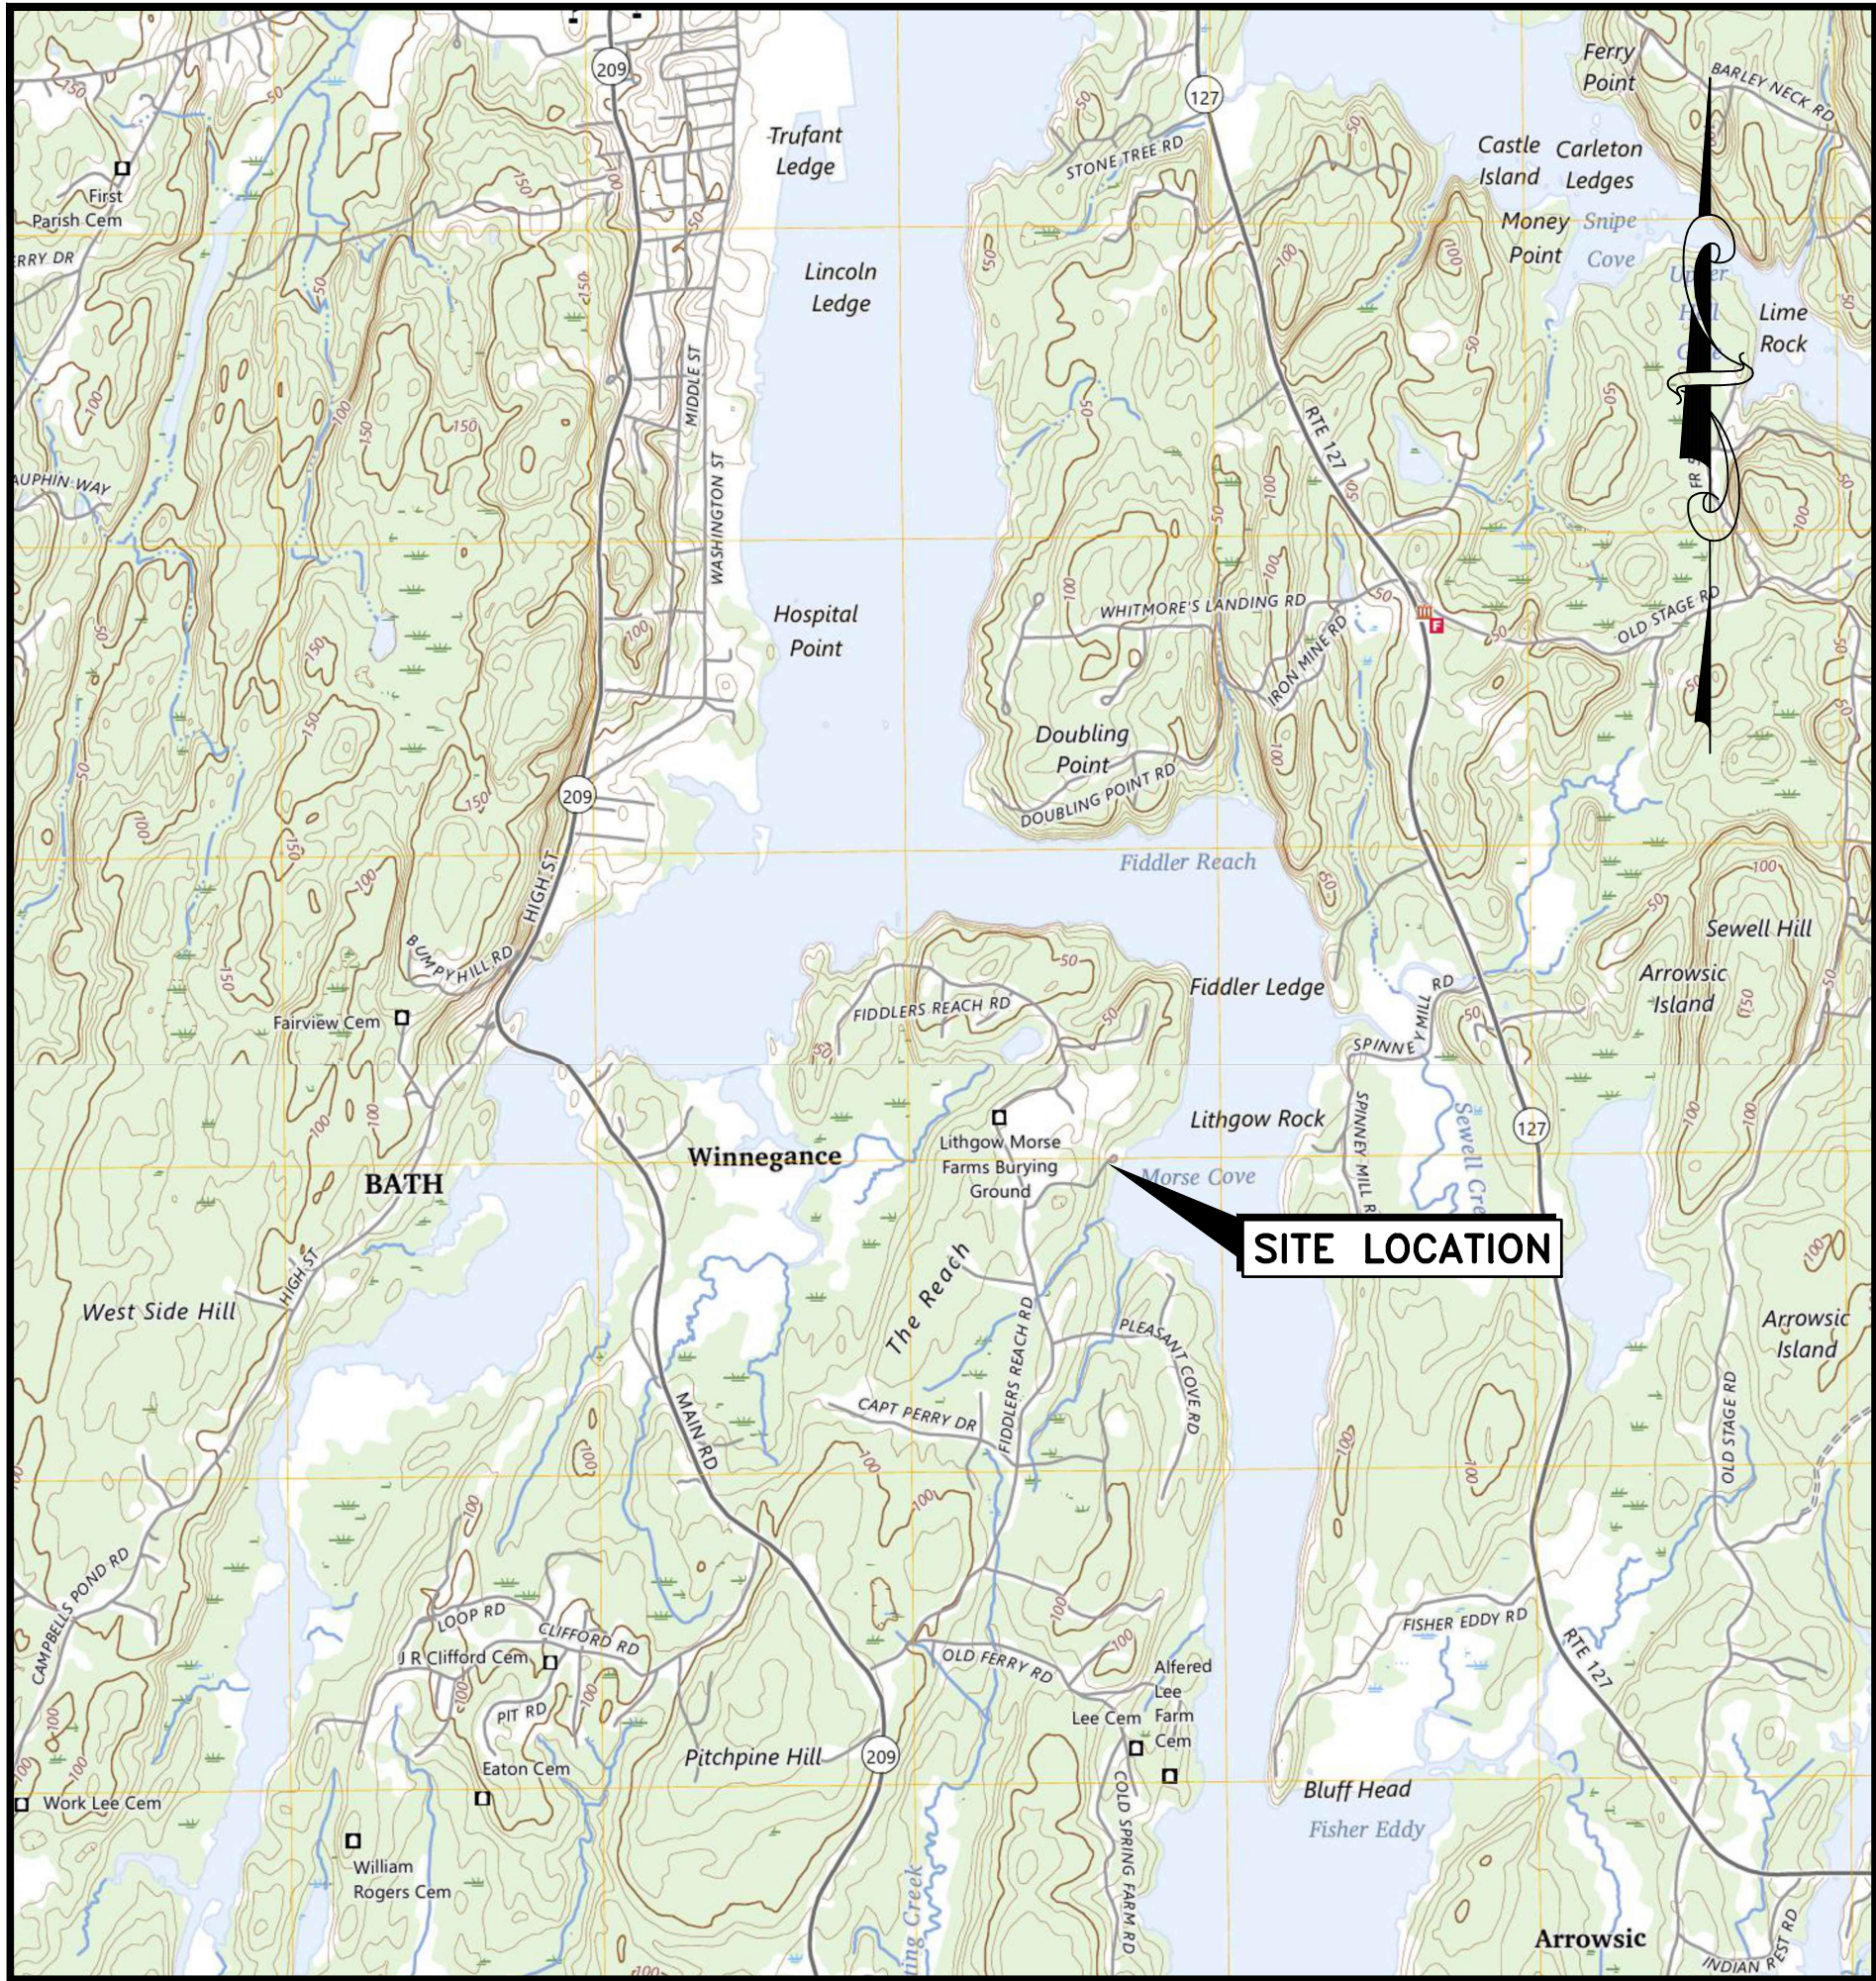

LOCATION MAP
SCALE: 1" = 2,000'

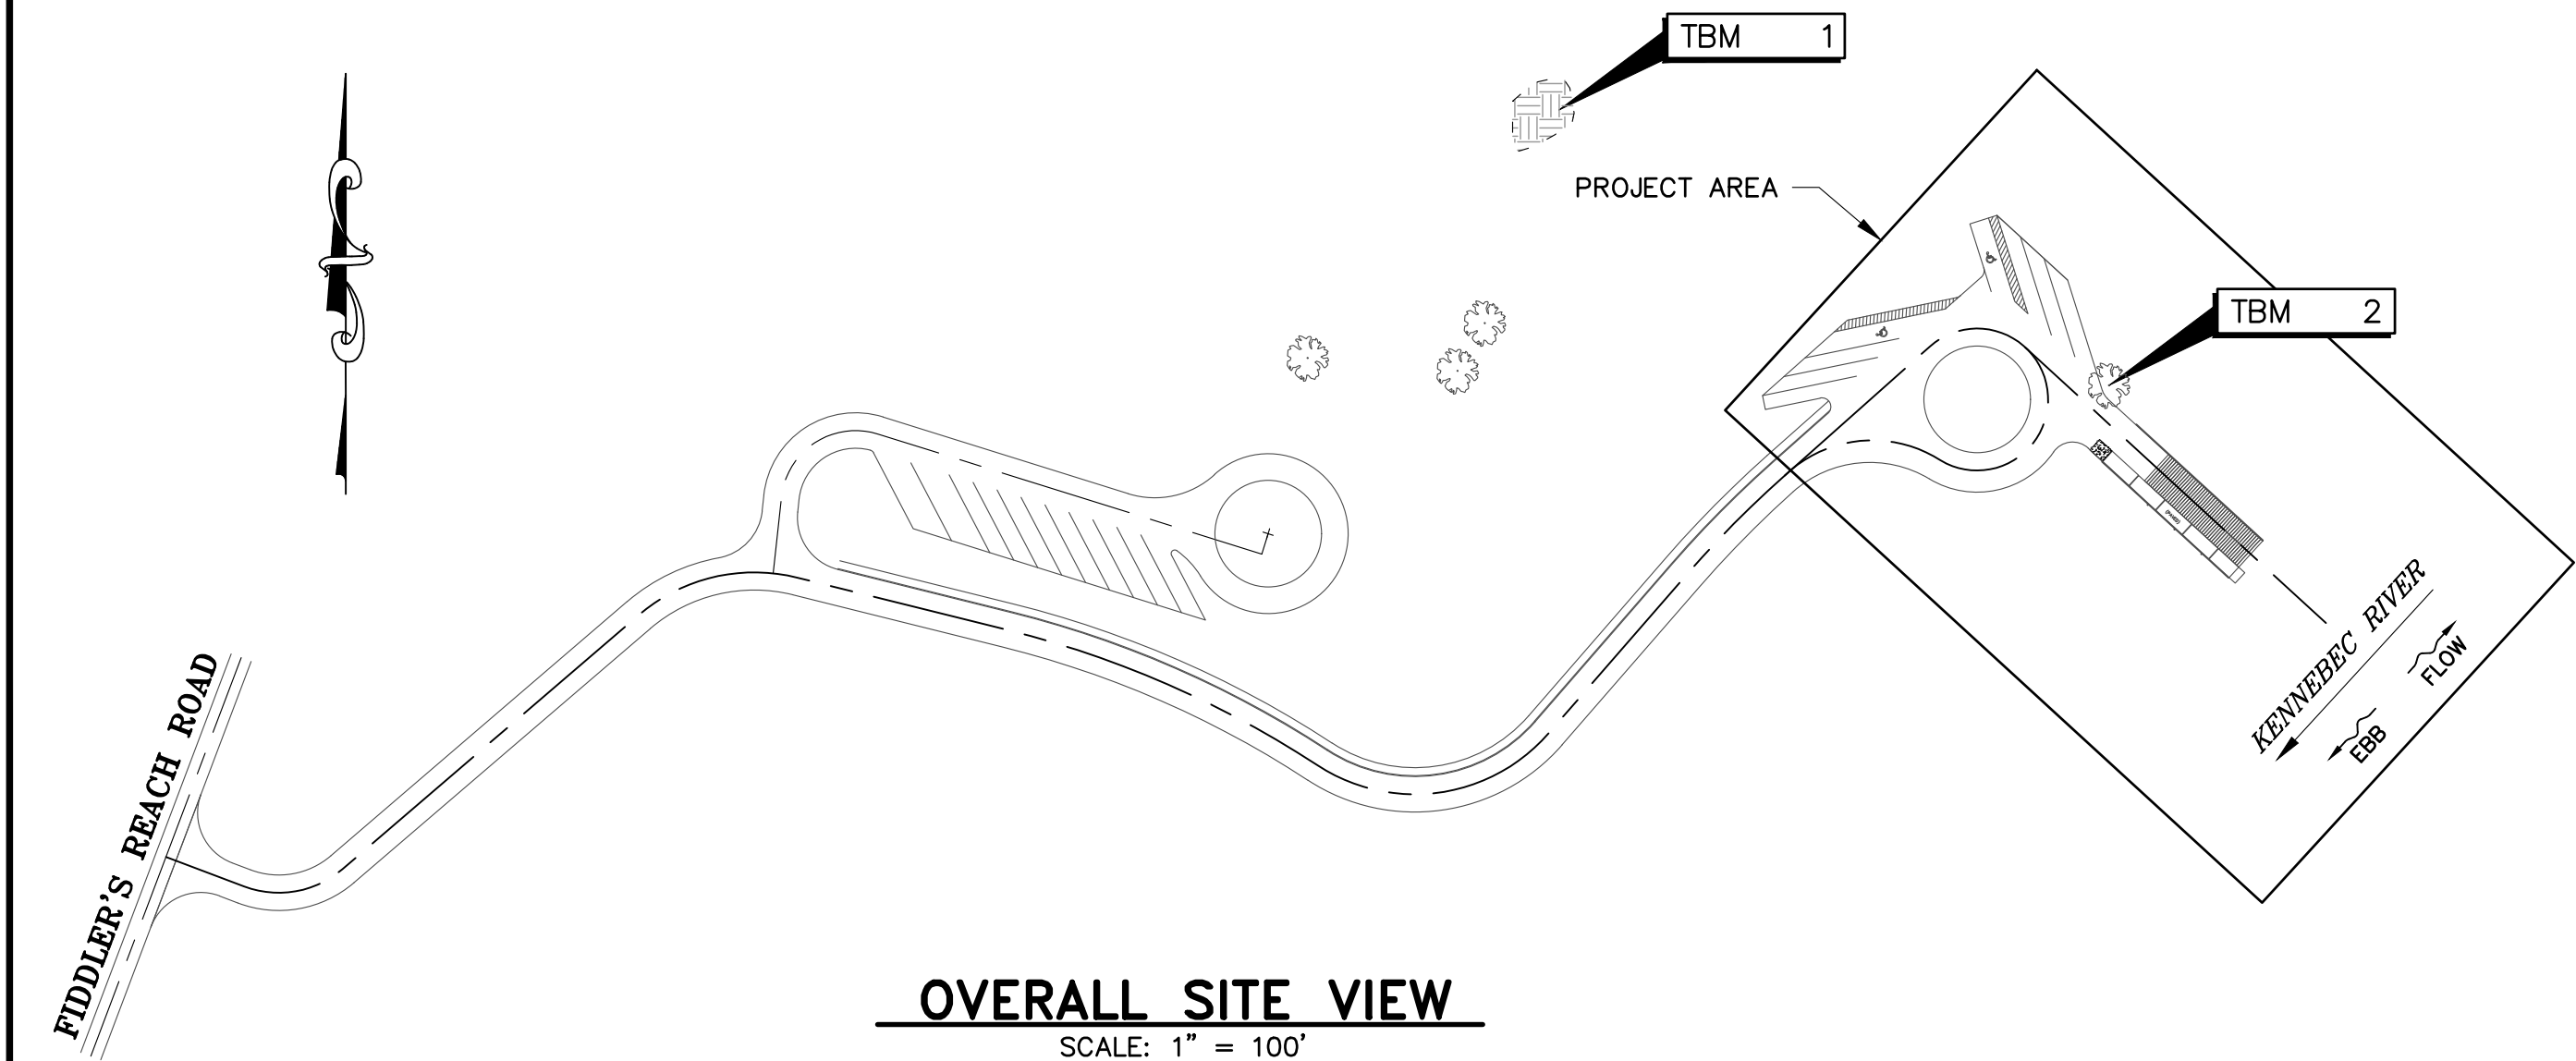

OVERALL SITE VIEW
SCALE: 1" = 100'

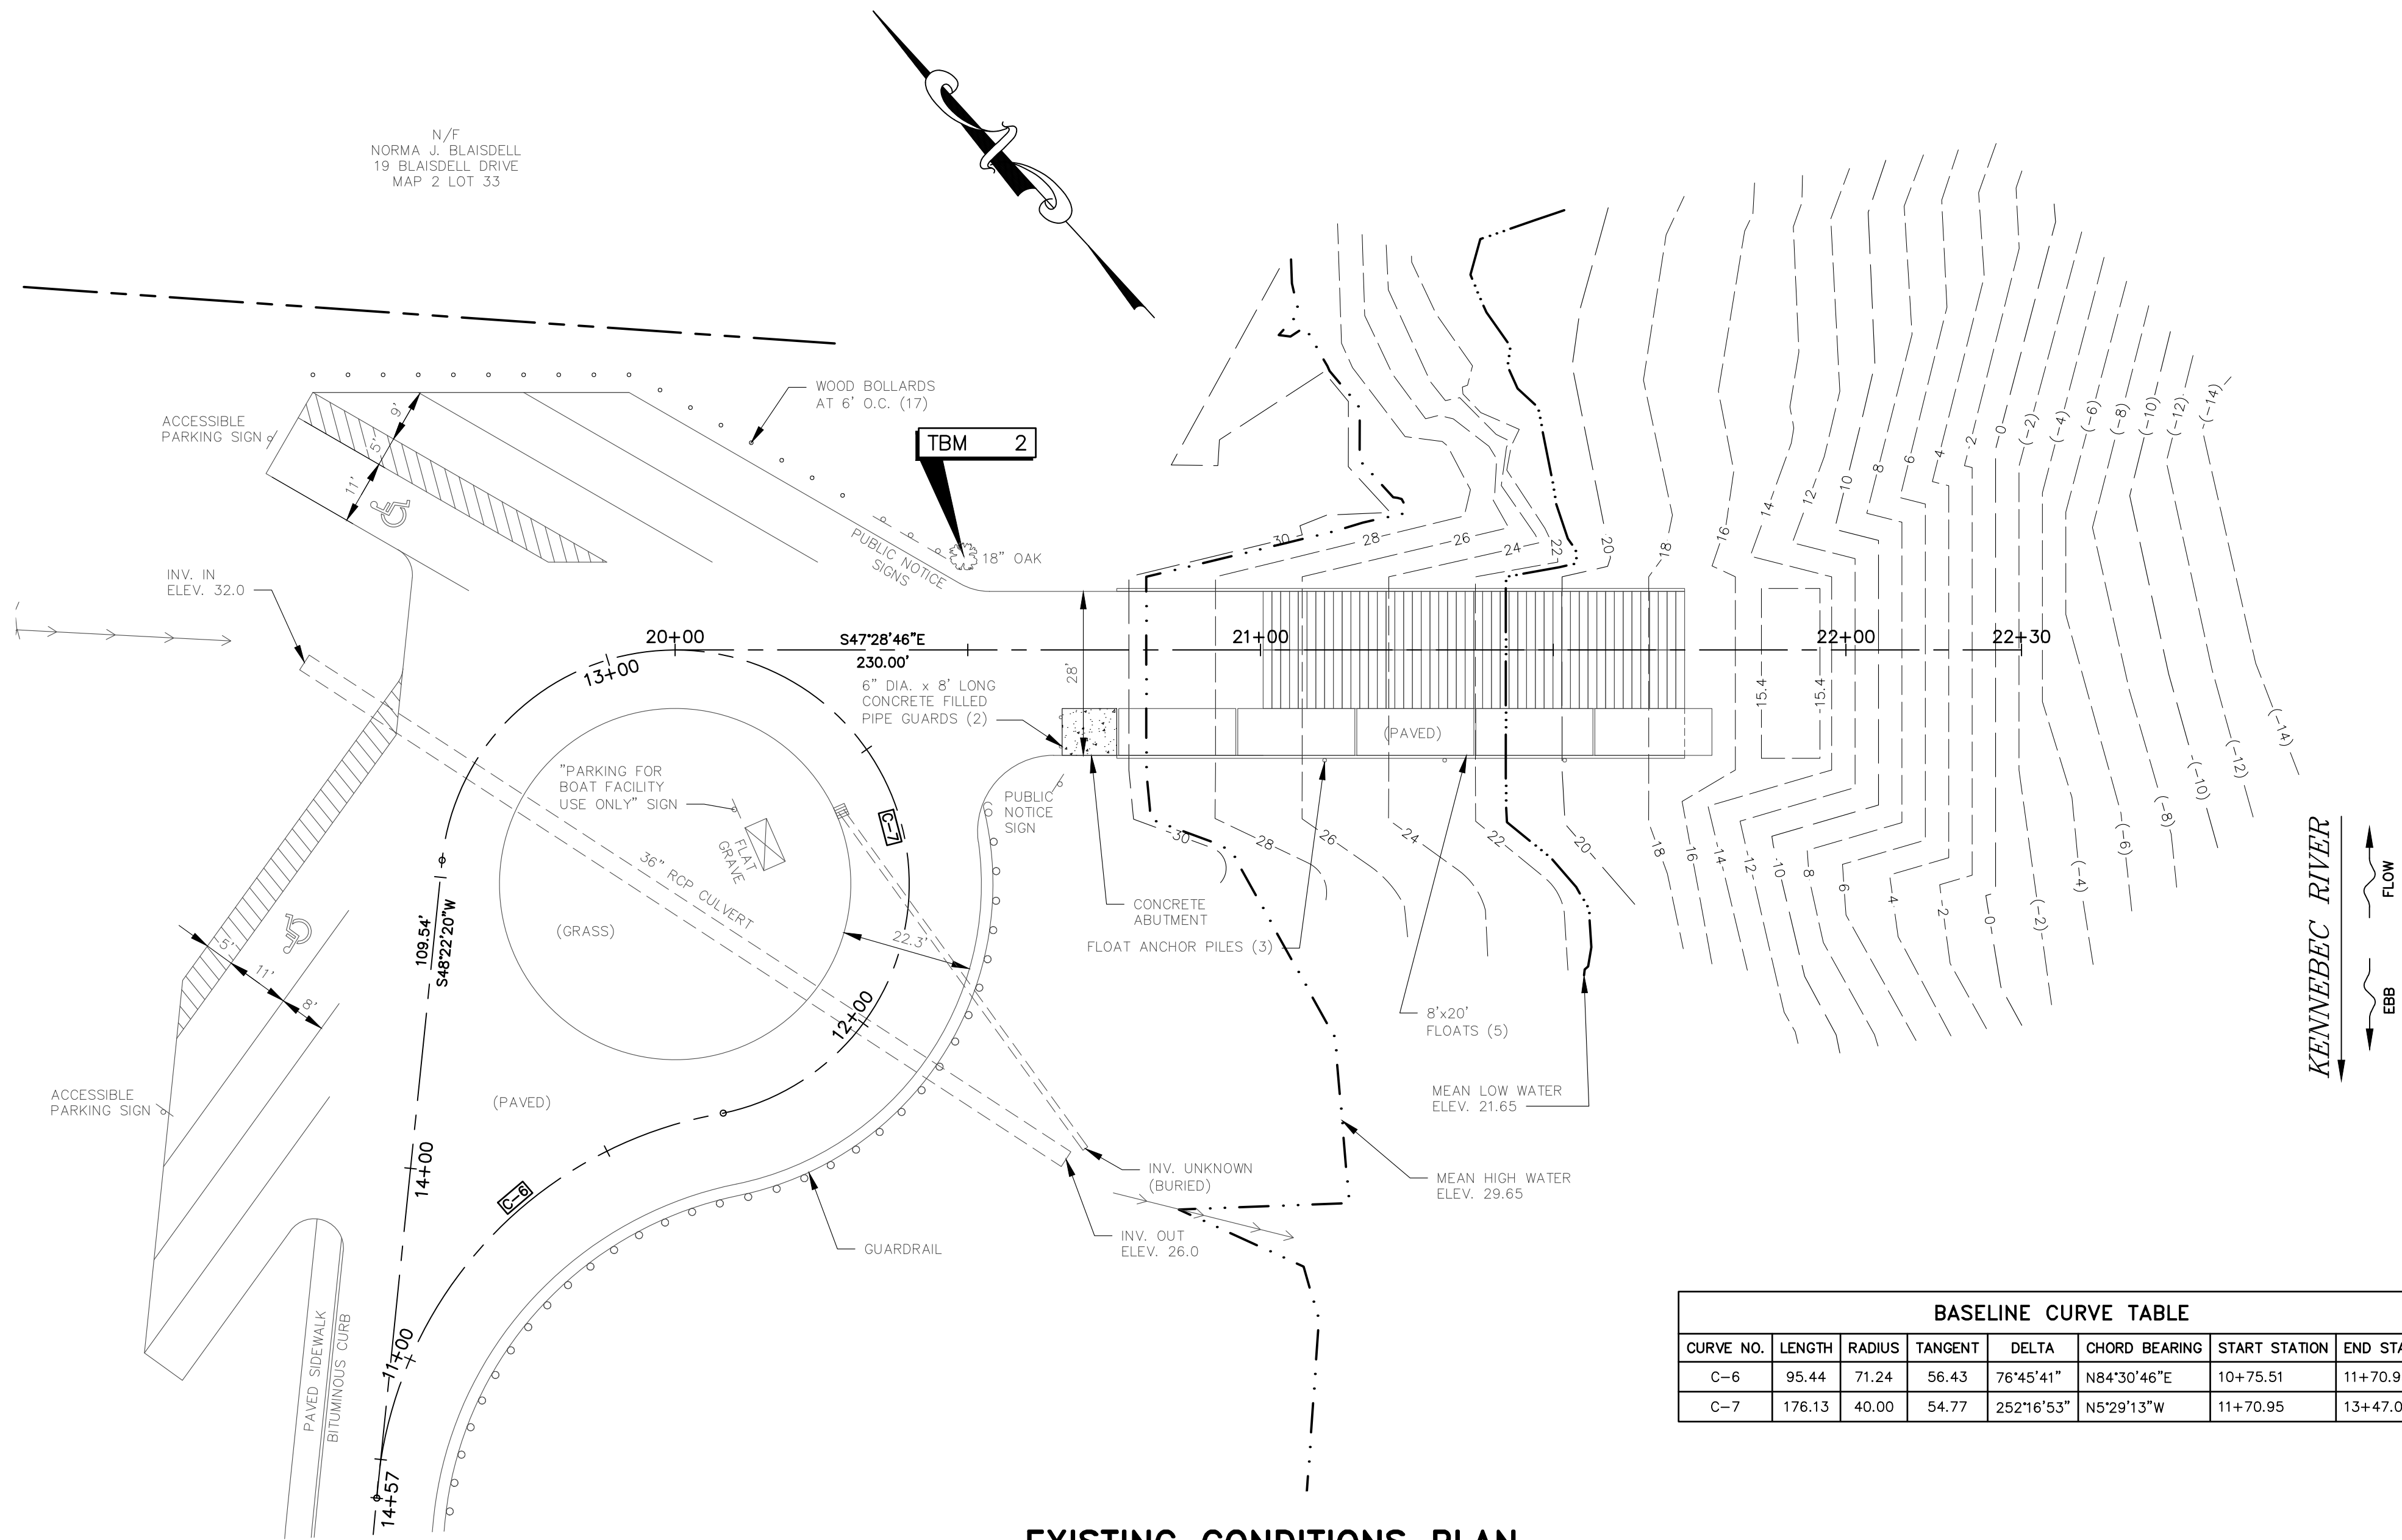

EXISTING CONDITIONS PLAN
SCALE: 1" = 20'

BASELINE CURVE TABLE							
CURVE NO.	LENGTH	RADIUS	TANGENT	DELTA	CHORD BEARING	START STATION	END STATION
C-6	95.44	71.24	56.43	76°45'41"	N84°30'46"E	10+75.51	11+70.95
C-7	176.13	40.00	54.77	252°16'53"	N5°29'13"W	11+70.95	13+47.08

PLAN REFERENCE

- EXISTING DATA OBTAINED FROM A PLAN ENTITLED "BOAT FACILITY AT MORSE COVE ON THE KENNEBEC RIVER" DATED JULY 30, 1991, BY CARROLL E. TAYLOR & ASSOCIATES, AUBURN, MAINE. ALL EXISTING CONDITIONS TO BE FIELD VERIFIED.

TEMPORARY BENCHMARKS

- TBM-1
POINT ON LEDGE
ELEV. 100.00
- TBM-2
VERTICAL SPIKE IN ROOT OF 18" OAK
ELEV. 35.33


LEGEND

EXISTING	DESCRIPTION	PROPOSED
---	APPROX. PROPERTY LINE	
---	EDGE OF PAVEMENT	
---	SAWCUT	---
---	CURBING	---
---	CONTOUR (2' INT.)	
---	CONTOUR (10' INT.)	
---	MEAN LOW WATER	
---	MEAN HIGH WATER	
---	DRAINAGE/STREAM	
---	CULVERT	
---	CATCH BASIN	
---	SIGN	
---	MONUMENT FOUND	
---	RIPRAP	

DRAWING INDEX

- EXISTING CONDITIONS PLAN
- PROPOSED RAMP PLAN AND PROFILE
- DETAILS

G:\Projects\2023\23001\dwg\23001 Exbase.dwg 01/07/26 9:56am

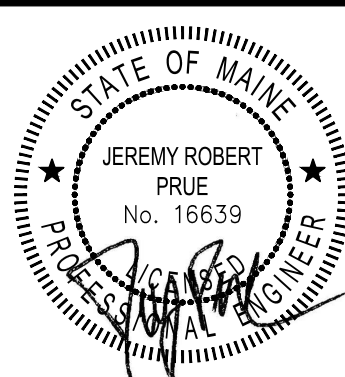

DESIGNED BY: JRP
DRAWN BY: JET
CHECKED BY: STR/RLP
APPROVED BY: JRP
DATE: 1/6/2026

**PINE TREE
ENGINEERING**



53 Front Street
Bath, Maine 04530
Tel: (207) 443-1508
Fax: (207) 442-7029

Civil/Environmental Engineering • Surveying

CLIENT

MAINE DEPARTMENT OF AGRICULTURE,
CONSERVATION AND FORESTRY
18 ELKINS LANE
AUGUSTA, MAINE 04333

PROJECT

KENNEBEC RIVER
BOATING FACILITY IMPROVEMENTS
PHIPPSBURG, MAINE

TITLE

EXISTING CONDITIONS PLAN

SCALE

AS SHOWN

PROJECT NO.

23001

DRAWING NO.


23001 Exbase

SHT.

1 of 3

REV.

0

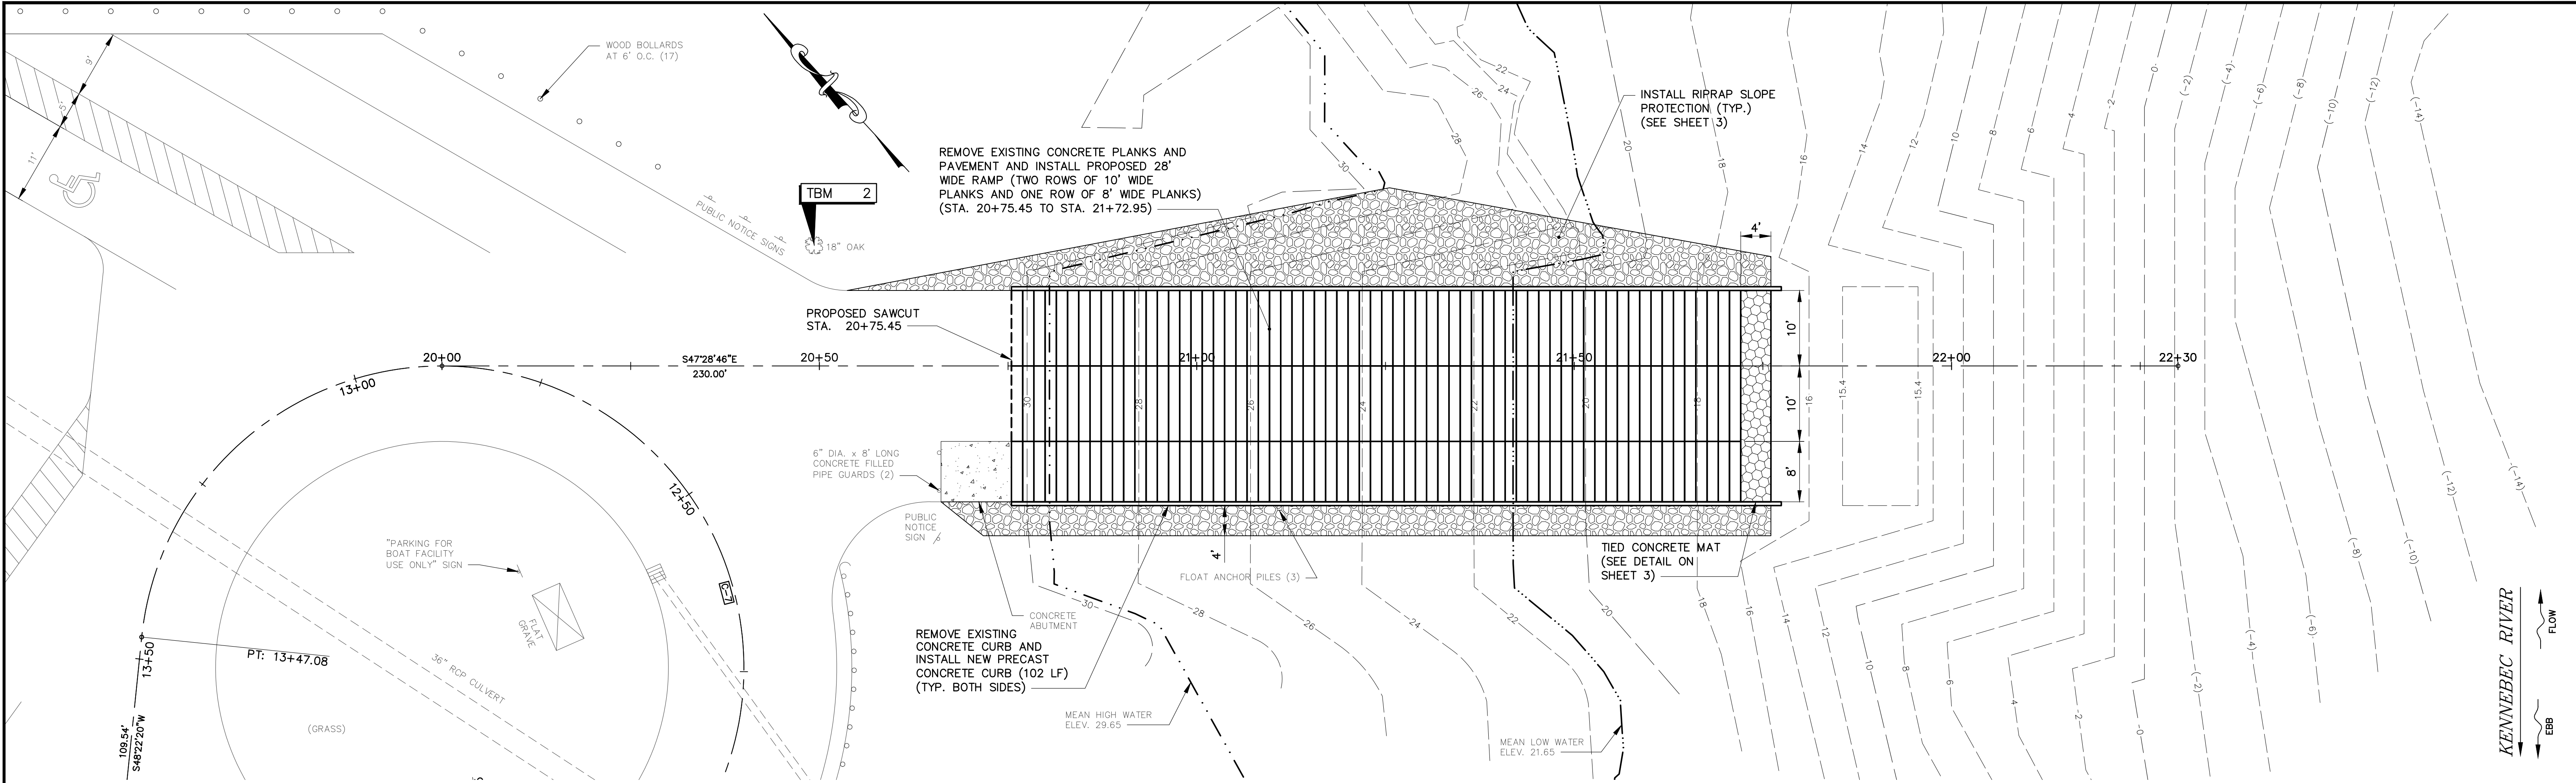


TEMPORARY BENCHMARKS

TBM-2
VERTICAL SPIKE IN ROOT OF 18" OAK
ELEV. 35.33

PROPOSED RAMP PLAN VIEW

SCALE: 1" = 10'

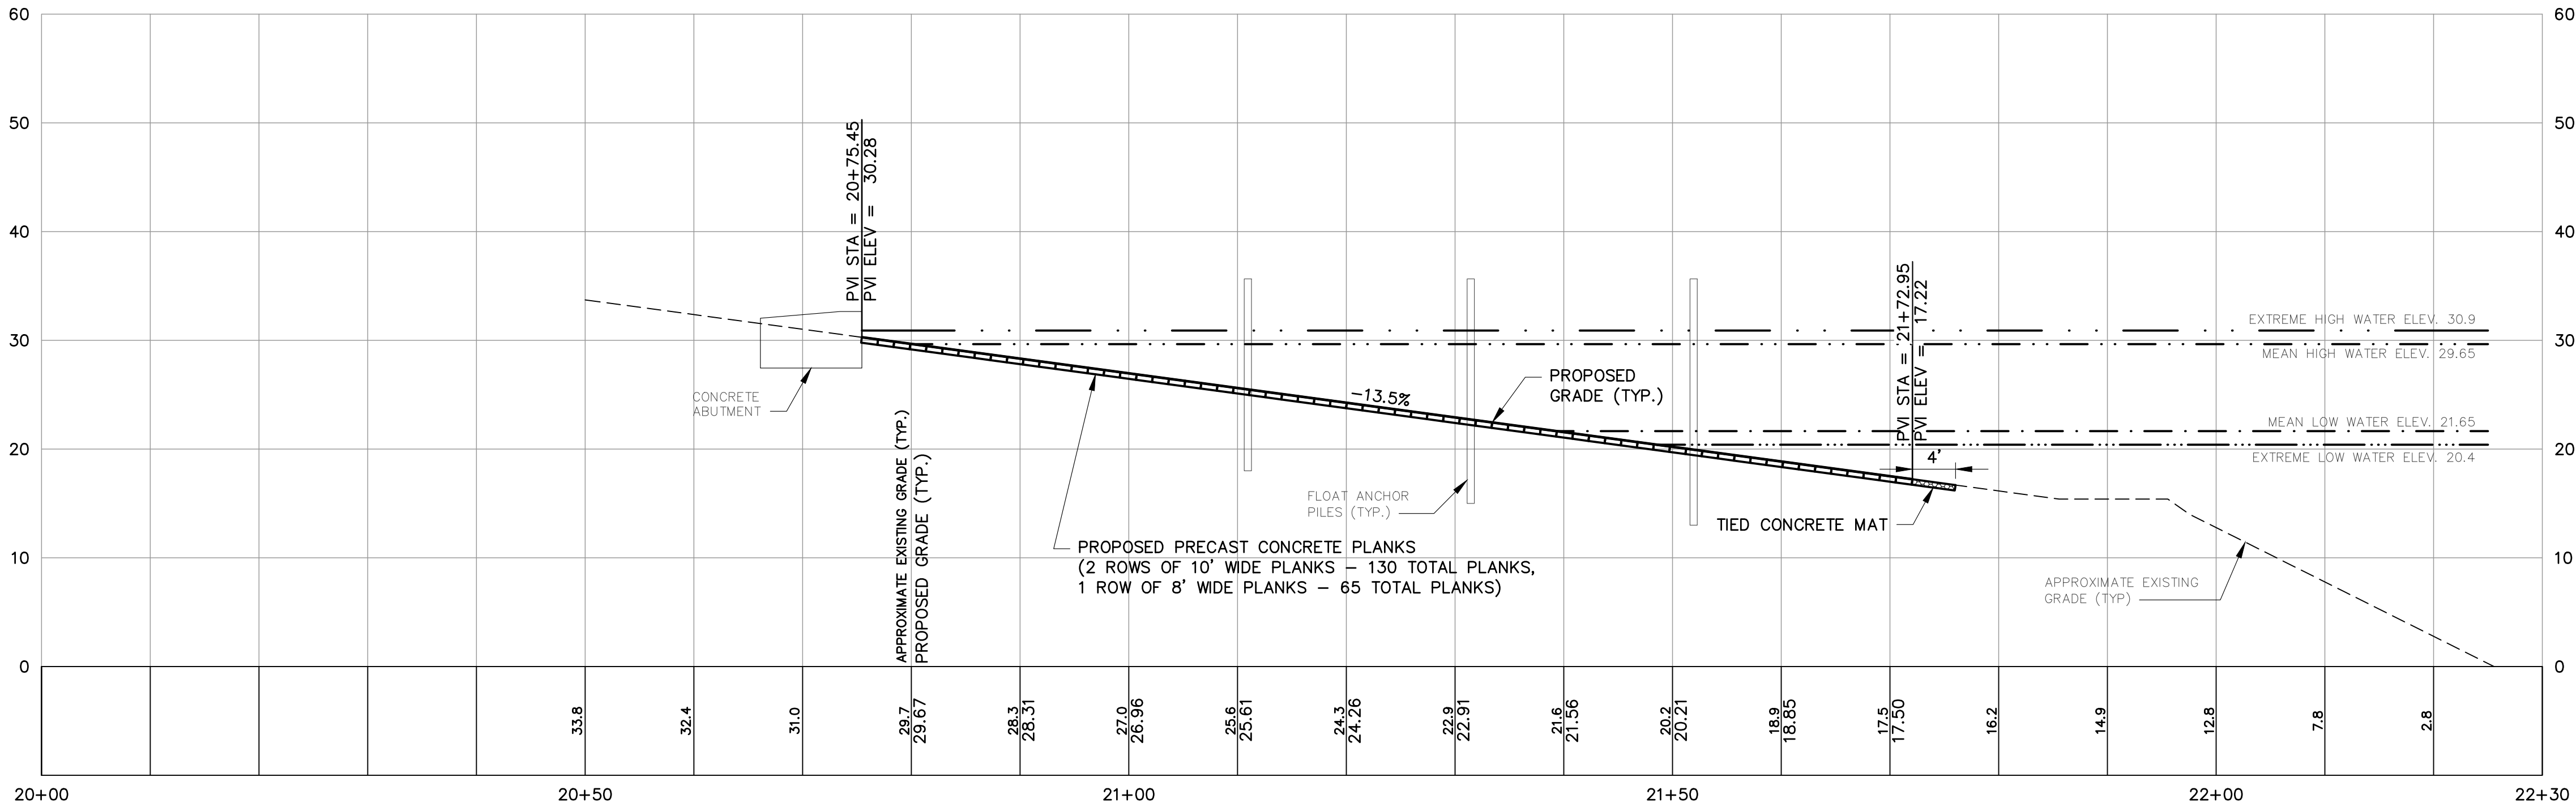


PROPOSED RAMP PROFILE


SCALE: 1" = 10' HORIZ, 1" = 10' VERT.

G:\Projects\2023\23001\dwg\23001 Site-P&P.dwg

01/07/26 9:56am

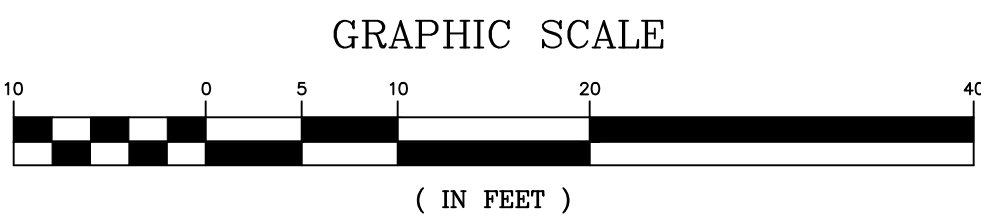

REV	DATE	STATUS	BY	CHKD	APPD
0	1/6/2026	ISSUED FOR BIDDING	JET	STR	JRP

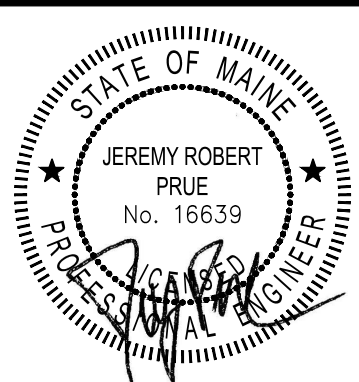

DESIGNED BY:	JRP
DRAWN BY:	JET
CHECKED BY:	STR/RJP
APPROVED BY:	JRP
DATE:	1/6/2026

**PINE TREE
ENGINEERING**



53 Front Street
Bath, Maine 04530
Tel: (207) 443-1508
Fax: (207) 442-7029

Civil/Environmental Engineering • Surveying

CLIENT

MAINE DEPARTMENT OF AGRICULTURE,
CONSERVATION AND FORESTRY
18 ELKINS LANE
AUGUSTA, MAINE 04333

PROJECT

KENNEBEC RIVER
BOATING FACILITY IMPROVEMENTS
PHIPPSBURG, MAINE

TITLE

PROPOSED RAMP
PLAN AND PROFILE

SCALE

1" = 10'

PROJECT NO.

23001

DRAWING NO.

23001 Site-P&P

SHT.

2 of 3

REV.

0

EROSION AND SEDIMENTATION CONTROL NOTES

CONSTRUCTION ACTIVITIES SHALL CONFORM TO THE MAINE EROSION AND SEDIMENTATION CONTROL (MESC) BMPS, MARCH 2016. ALL EROSION AND SEDIMENTATION CONTROLS MUST BE INSPECTED BEFORE AND AFTER ANY PREDICTED STORM EVENTS, AND, AT A MINIMUM, ONCE PER WEEK. VEGETATED AREAS WILL NOT BE CONSIDERED PERMANENTLY STABILIZED UNTIL A 90% COVER OF HEALTHY VEGETATION HAS BEEN ACHIEVED.

CONSTRUCTION SEQUENCE

1. INSTALL TEMPORARY EROSION CONTROL DEVICES (SUCH AS SILT FENCE, TURBIDITY CURTAIN OR APPROVED EQUAL DEVICE) BEYOND THE CLEARING LIMITS, BUT NOT ACROSS CHANNELS AND STREAMS. IN ALL AREAS THE EROSION CONTROL DEVICE SHALL BE INSTALLED ALONG THE CONTOUR OF THE LAND WITH ENDS DIRECTED UPHILL.
2. INSTALL EROSION CONTROL MAT OR STONE DITCH PROTECTION IN ANY AREAS OF CONCENTRATED RUNOFF (DITCH LINES).
3. PERMANENT STABILIZATION IS REQUIRED ON ALL AREAS THAT WILL NOT BE WORKED FOR ONE YEAR. THESE AREAS TO BE PERMANENTLY STABILIZED WITHIN 7 DAYS BY SEEDING AND MULCHING.
4. UPON COMPLETION OF SIDESLOPE SHAPING, INSTALL TOPSOIL, SEED, FERTILIZER, AND MULCH AS FOLLOWS:

TOPSOIL: INSTALL 3" OF TOPSOIL ON ALL AREA TO BE REVEGETATED

PERMANENT SEEDING: MAY 15 – JUNE 20,
AUGUST 15 – SEPTEMBER 30

SEEDING: 42 LBS./ACRE
CREEPING RED FESCUE 20 LBS./ACRE
RED TOP 2 LBS./ACRE
TALL FESCUE 20 LBS./ACRE

FERTILIZER & LIME: APPLY FERTILIZER AND LIME ACCORDING TO SOIL TESTS PER MAINE SOIL TESTING LAB. SOIL TESTING KITS ARE AVAILABLE AT UNIVERSITY OF MAINE COOPERATIVE EXTENSION OFFICE.

MULCH: 1.5 TONS./ACRE (2 BALES PER 1,000 SF)

DORMANT SEEDING (AFTER FIRST KILLING FROST): TRIPLE SEEDING RATE

5. TEMPORARY STABILIZATION BETWEEN APRIL 15 AND NOVEMBER 1 SHALL BE INSTALLED IN ACCORDANCE WITH THE FOLLOWING TIME FRAMES:

- A. AREAS WITHIN 75' OF SENSITIVE AREAS AND WETLANDS – WITHIN 48 HOURS OF THE INITIAL DISTURBANCE, PRIOR TO ANY STORM EVENT, WHICHEVER COMES FIRST
- B. ALL OTHER AREAS – WITHIN 7 DAYS OF DISTURBANCE SEE SECTION A–1 TEMPORARY MULCHING AND SECTION A–2 TEMPORARY MULCHING OF THE MESC BMPS.

6. IF THE CONSTRUCTION SITE IS NOT STABILIZED WITH PAVEMENT, THE GRAVEL ROAD BASE, 75% MATURE VEGETATION COVER, OR RIPRAP BY NOVEMBER 15, THE SITE NEEDS TO BE PROTECTED WITH OVER–WINTER STABILIZATION. THE WINTER CONSTRUCTION PERIOD IS FROM NOVEMBER 1 THROUGH APRIL 15.

A. WINTER EXCAVATION AND EARTHWORK SHALL BE COMPLETED SUCH THAT NO MORE THAN ONE ACRE OF THE SITE IS WITHOUT STABILIZATION AT ANY ONE TIME. LIMIT THE EXPOSED AREA TO THOSE AREAS IN WHICH WORK IS TO OCCUR DURING THE FOLLOWING 15 DAYS AND THAT CAN BE MULCHED IN ONE DAY PRIOR TO ANY SNOW EVENT.

B. DURING WINTER CONSTRUCTION A DOUBLE ROW OF SEDIMENT BARRIERS WILL BE PLACED BETWEEN A NATURAL RESOURCE AND THE DISTURBED AREA.

C. DURING FROZEN CONDITIONS SEDIMENT BARRIERS MAY CONSIST OF EROSION CONTROL MIXED BERMS OR ANY OTHER RECOGNIZED SEDIMENT BARRIERS, AS FROZEN SOIL PREVENTS THE PROPER INSTALLATION OF HAY BALES OR SILT FENCES.

D. ALL AREAS SHALL BE CONSIDERED TO BE DENUDED UNTIL SEEDED AND MULCHED. HAY AND STRAW MULCH SHALL BE APPLIED AT A RATE OF 150 POUNDS PER 1,000 SQUARE FEET, OR 3 TONS PER ACRE (TWICE THE NORMAL ACCEPTED RATE). THIS SHALL BE PROPERLY ANCHORED. EROSION CONTROL MIX MUST BE APPLIED WITH A MINIMUM 4–INCH THICKNESS. MULCH SHALL NOT BE SPREAD ON TOP OF SNOW. SNOW SHALL BE REMOVED DOWN TO A 1–INCH DEPTH OR LESS PRIOR TO APPLICATION. AFTER EACH DAY OF FINAL GRADING, THE AREA WILL BE PROPERLY STABILIZED WITH ANCHORED HAY OR STRAW OR EROSION CONTROL MATTING. AN AREA SHALL BE CONSIDERED TO HAVE BEEN STABILIZED WHEN EXPOSED SURFACES HAVE BEEN EITHER MULCHED OR ADEQUATELY ANCHORED SO THAT GROUND SURFACE IS NOT VISIBLE THROUGH THE MULCH. ALL MULCH SHALL BE ANCHORED BY EITHER MULCH NETTING, ASPHALT EMULSION CHEMICAL, TRACKING, OR WOOD CELLULOSE FIBER. MULCH AND ANCHORING OF ALL EXPOSED SOIL SHALL OCCUR AT THE END OF EACH FINAL GRADING WORK DAY.

E. STOCKPILES OF SOIL WILL BE MULCHED FOR OVER–WINTER PROTECTION WITH HAY OR STRAW AT TWICE THE NORMAL RATE, OR WITH A 4–INCH LAYER OF EROSION CONTROL MIX. THIS WILL BE DONE WITHIN 24 HOURS OF STOCKING AND REESTABLISHED PRIOR TO ANY RAINFALL OR SNOWFALL. STOCKPILES ARE NOT ALLOWED WITHIN 100 FEET OF ANY NATURAL RESOURCE.

F. BETWEEN THE DATES OF OCTOBER 15 AND APRIL 1 LOAM OR SEED WILL NOT BE REQUIRED. DURING PERIODS OF ABOVE–FREEZING TEMPERATURES FINISHED AREAS SHALL BE FINE GRADED AND EITHER PROTECTED WITH MULCH OR TEMPORARILY SEEDED AND MULCHED UNTIL SUCH TIME AS THE FINAL TREATMENT CAN BE APPLIED. IF THE DATE IS AFTER NOVEMBER 1 AND IF THE EXPOSED AREA HAS BEEN LOAMED AND FINAL GRADED WITH A UNIFORM SURFACE, THEN THE AREA MAY BE DORMANT–SEEDED AT A RATE OF THREE TIMES HIGHER THAN SPECIFIED FOR PERMANENT SEED, AND THEN MULCHED. ALL AREAS SEEDED DURING THE WINTER WILL BE INSPECTED IN THE SPRING FOR ADEQUATE CATCH. ALL AREAS INSUFFICIENTLY VEGETATED (LESS THAN 75%) SHALL BE RE–VEGETATED BY REPLACING LOAM, SEED, AND MULCH.

7. ALL STONE LINED DITCHES AND CHANNELS MUST BE CONSTRUCTED AND STABILIZED BY NOVEMBER 15. ALL GRASS LINED DITCHES AND CHANNELS MUST BE CONSTRUCTED AND STABILIZED BY SEPTEMBER 1. IF A DITCH OR CHANNEL IS NOT GRASS LINED BY SEPTEMBER 1, THEN ONE OF THE FOLLOWING ACTIONS MUST BE TAKEN TO STABILIZE THE DITCH FOR LATE FALL AND WINTER: INSTALL A SOD LINING IN THE DITCH OR INSTALL STONE LINING IN THE DITCH.

8. ALL STONE COVERED SLOPES MUST BE CONSTRUCTED AND STABILIZED BY NOVEMBER 15 AND ALL SLOPES TO BE VEGETATED MUST BE SEEDED AND MULCHED BY SEPTEMBER 1. AREAS EXCEEDING 15% IN GRADE ARE CONSIDERED TO BE SLOPES. IF A SLOPE TO BE VEGETATED IS NOT STABILIZED BY SEPTEMBER 1, THEN THE SOIL SHALL BE STABILIZED WITH TEMPORARY VEGETATION AND EROSION CONTROL MATS, STABILIZED WITH SOD, STABILIZED WITH EROSION CONTROL MIX, OR STABILIZED WITH STONE RIPRAP.

9. BY SEPTEMBER 15 ALL DISTURBED SOILS ON AREAS HAVING A SLOPE LESS THAN 15% MUST BE SEEDED AND MULCHED. IF THE DISTURBED AREAS ARE NOT STABILIZED BY THIS DATE, THEN ONE OF THE FOLLOWING ACTIONS MUST BE TAKEN TO STABILIZE THE SOIL FOR THE LATE FALL AND WINTER: THE SOIL SHALL BE STABILIZED WITH TEMPORARY VEGETATION, SOD, OR MULCH AS FOLLOWS:

STABILIZE THE SOIL WITH TEMPORARY VEGETATION – BY OCTOBER 1, SEED THE DISTURBED SOIL WITH WINTER RYE AT A SEEDING RATE OF 3 POUNDS PER 1000 SQUARE FEET, LIGHTLY MULCH THE SEEDED SOIL WITH HAY OR STRAW AT 75 POUNDS PER 1000 SQUARE FEET, AND ANCHOR THE MULCH WITH PLASTIC NETTING. MONITOR GROWTH OF THE RYE OVER THE NEXT 30 DAYS. IF THE RYE FAILS TO GROW ATLEAST 3 INCHES OR FAILS TO COVER AT LEAST 75% OF THE DISTURBED SOIL BEFORE NOVEMBER 1, THEN MULCH THE AREA FOR OVER–WINTER PROTECTION AS DESCRIBED BELOW.


STABILIZE THE SOIL WITH SOD – STABILIZE THE DISTURBED SOIL WITH PROPERLY INSTALLED SOD BY OCTOBER 1. PROPER INSTALLATION INCLUDES THE PINNING THE SOD ONTO THE SOIL WITH WIRE PINS, ROLLING THE SOD TO GUARANTEE CONTACT BETWEEN THE SOD AND UNDERLYING SOIL, AND WATERING THE SOD TO PROMOTE ROOT GROWTH INTO THE DISTURBED SOIL.

STABILIZE THE SOIL WITH MULCH – BY NOVEMBER 15, MULCH THE DISTURBED SOIL BY SPREADING HAY OR STRAW AT A RATE OF AT LEAST 150 POUNDS PER 1000 SQUARE FEET ON THE AREA SO THAT NO SOIL IS VISIBLE THROUGH THE MULCH. IMMEDIATELY AFTER APPLYING THE MULCH, ANCHOR THE MULCH WITH PLASTIC NETTING TO PREVENT WIND FROM MOVING THE MULCH OFF THE DISTURBED SOIL.

10. MAINTENANCE MEASURES SHALL BE APPLIED AS NEEDED DURING THE ENTIRE CONSTRUCTION SEASON. AFTER EACH RAINFALL, SNOWSTORM, OR PERIOD OF THAWING AND RUNOFF, THE SITE CONTRACTOR SHALL PERFORM A VISUAL INSPECTION OF ALL INSTALLED EROSION CONTROL MEASURES AND PERFORM REPAIRS AS NEEDED TO ENSURE THEIR CONTINUOUS FUNCTION. REPAIR ANY DAMAGES AND/OR BARE SPOTS.


11. MAINTAIN EROSION CONTROL DEVICES, PARTICULARLY MULCH, UNTIL PERMANENT VEGETATION IS ESTABLISHED.

12. REMOVE TEMPORARY SEDIMENT CONTROL MEASURES, SUCH AS SILT FENCE, WITHIN 30 DAYS AFTER PERMANENT STABILIZATION IS ATTAINED. REMOVE ANY ACCUMULATED SEDIMENTS AND STABILIZE.

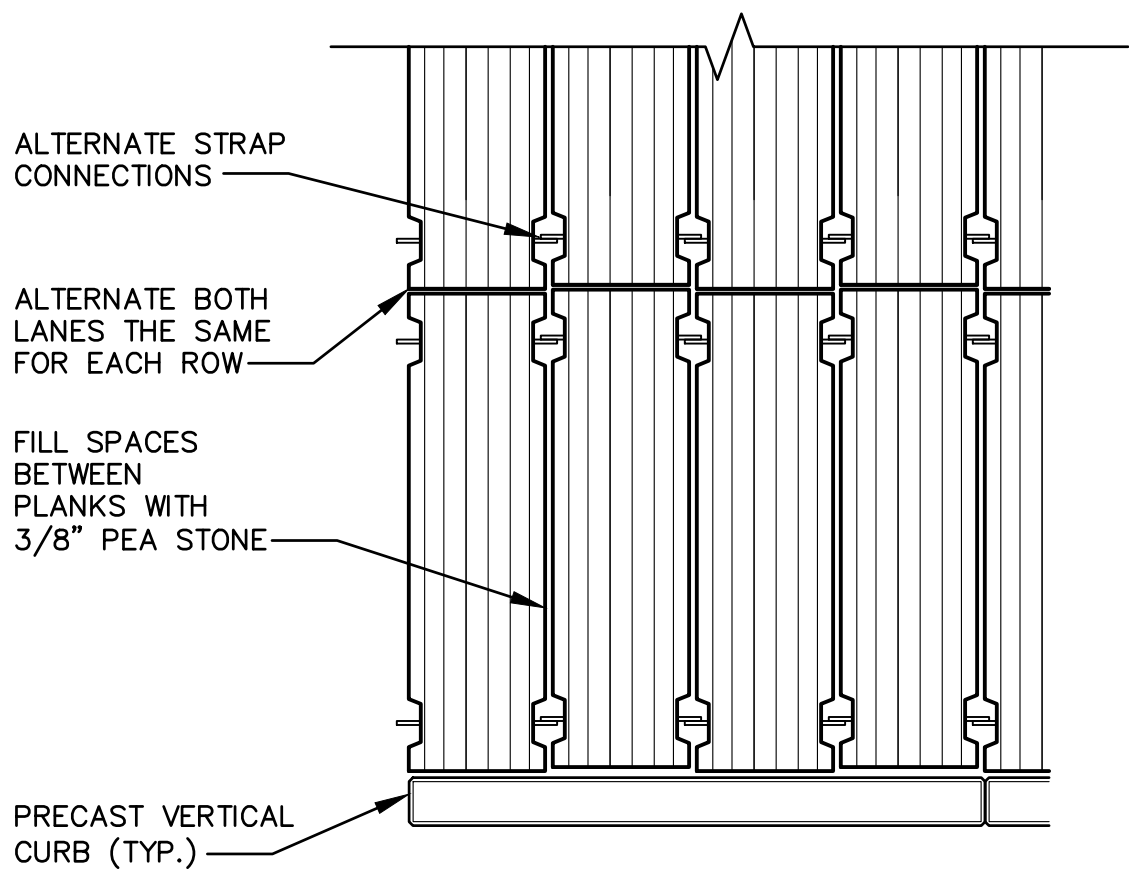

LAUNCH PLANK INSTALLATION DETAIL


SCALE: 1/2" = 1'–0"

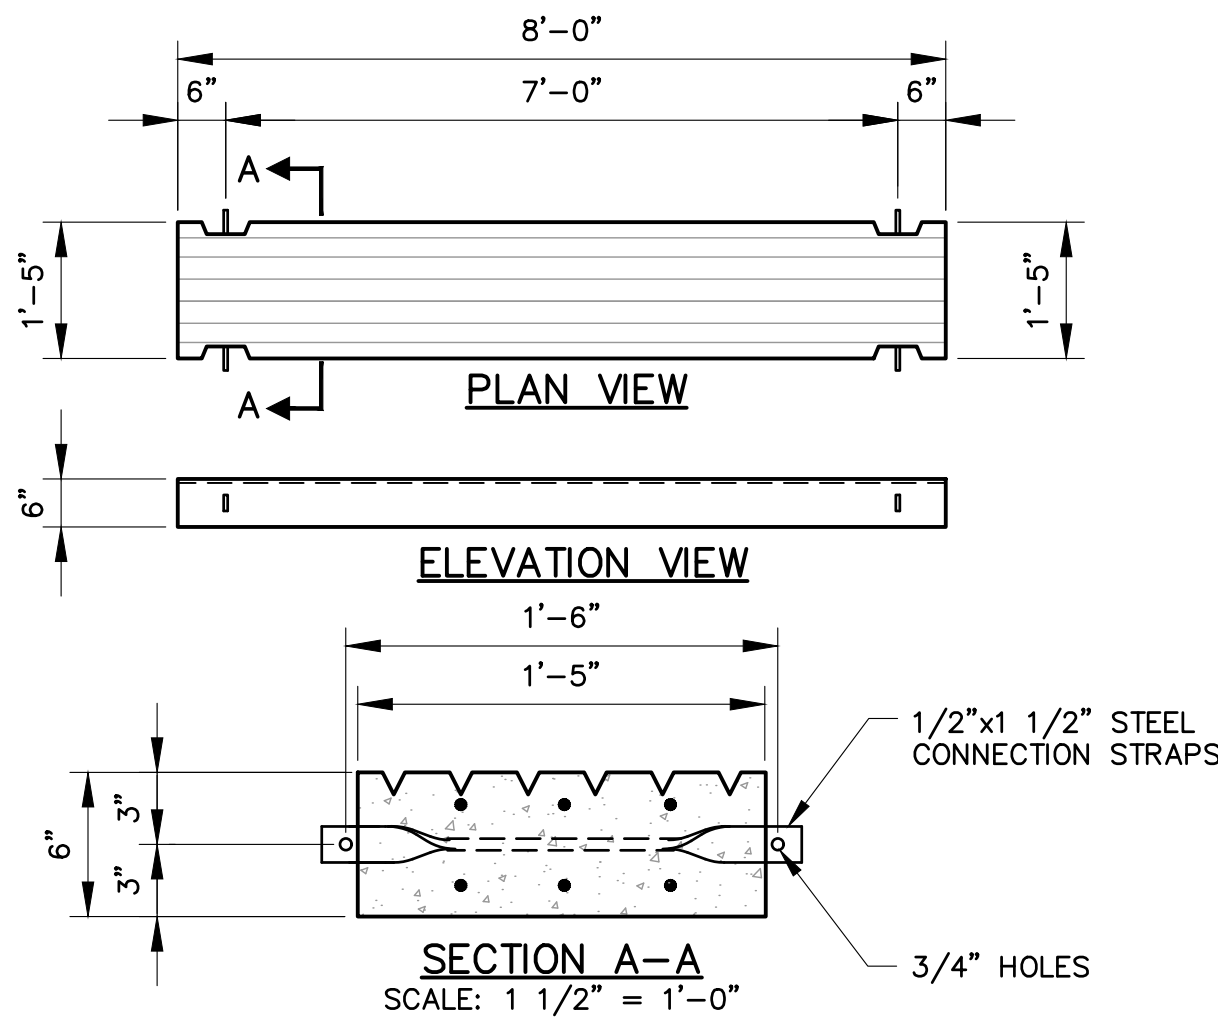

NOTE:
RAMPS TO BE CONNECTED USING A325 TYPE 1, 1/2" DACF BD (5/8" IF&W). BOLTS AND NUTS PROVIDED BY OWNER (DACF BD.) (NOT PROVIDED BY IF&W).

CONCRETE BOAT LAUNCH PLANKS 8'


SCALE: 1/2" = 1'–0"

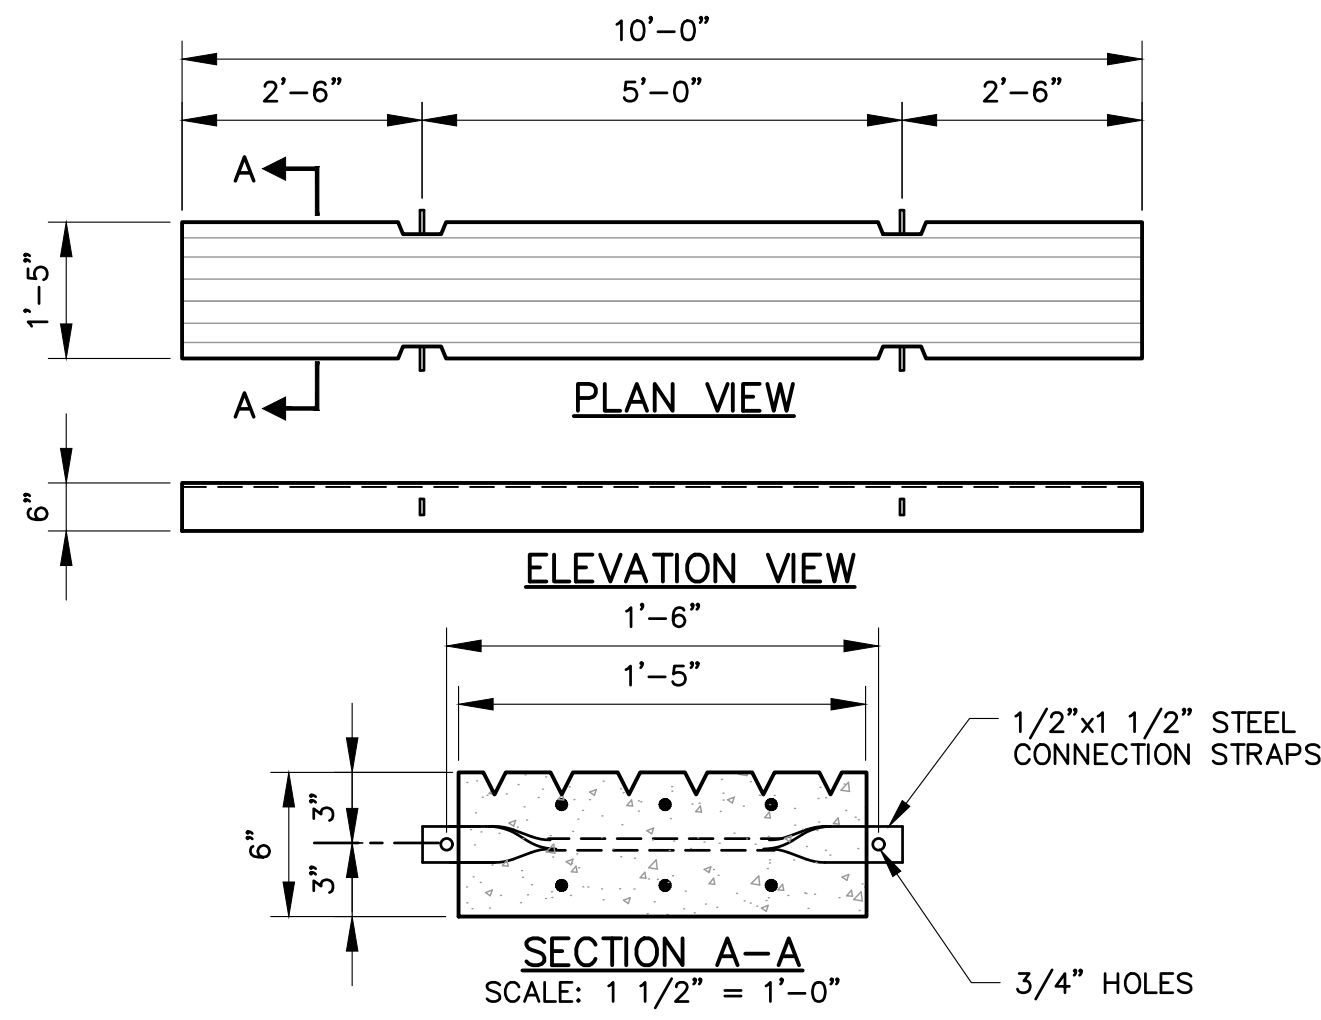

NOTE:
RAMPS TO BE CONNECTED USING A325 TYPE 1, 1/2" DACF BD (5/8" IF&W). BOLTS AND NUTS PROVIDED BY OWNER (DACF BD.) (NOT PROVIDED BY IF&W).


CONCRETE BOAT LAUNCH PLANKS 10'

SCALE: 1/2" = 1'–0"

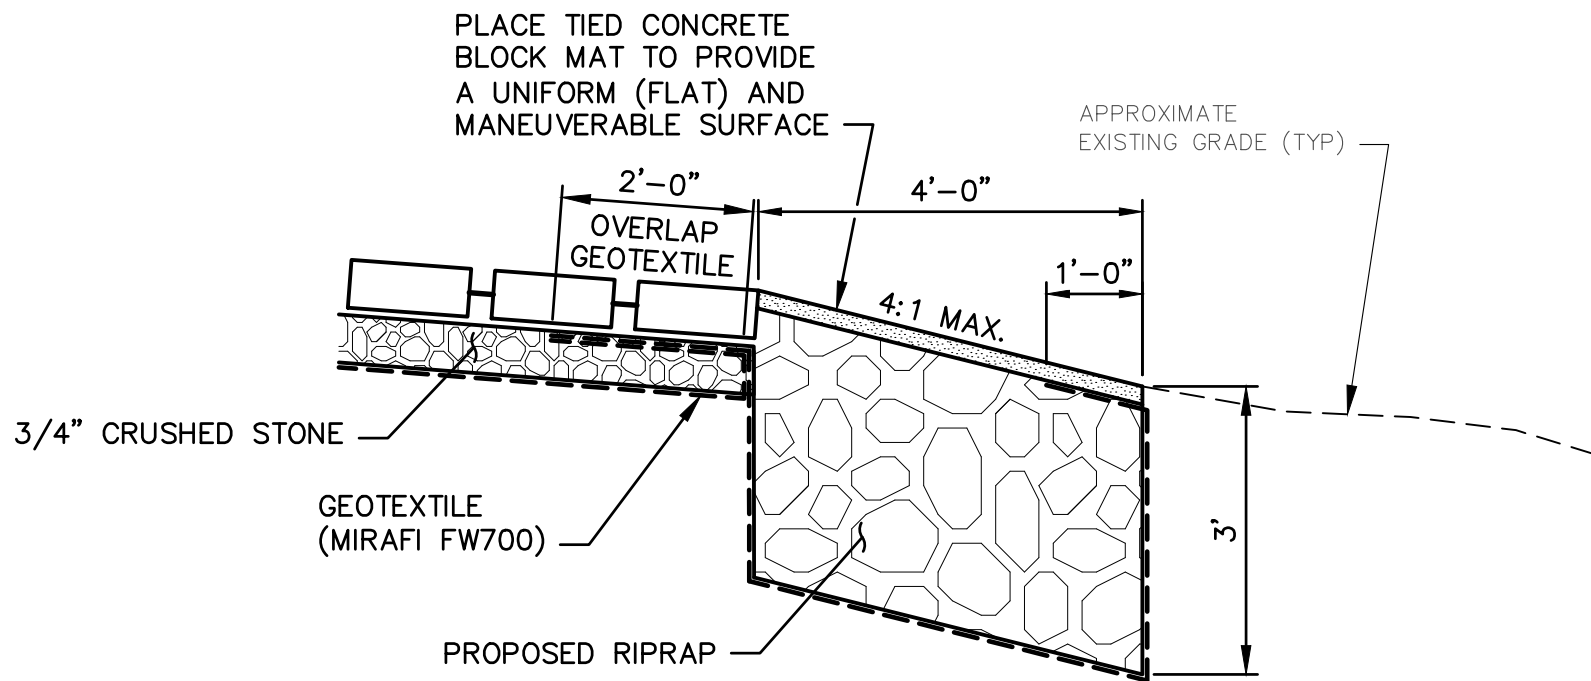


TYPICAL RAMP END SECTION

SCALE: 1/2" = 1'–0"

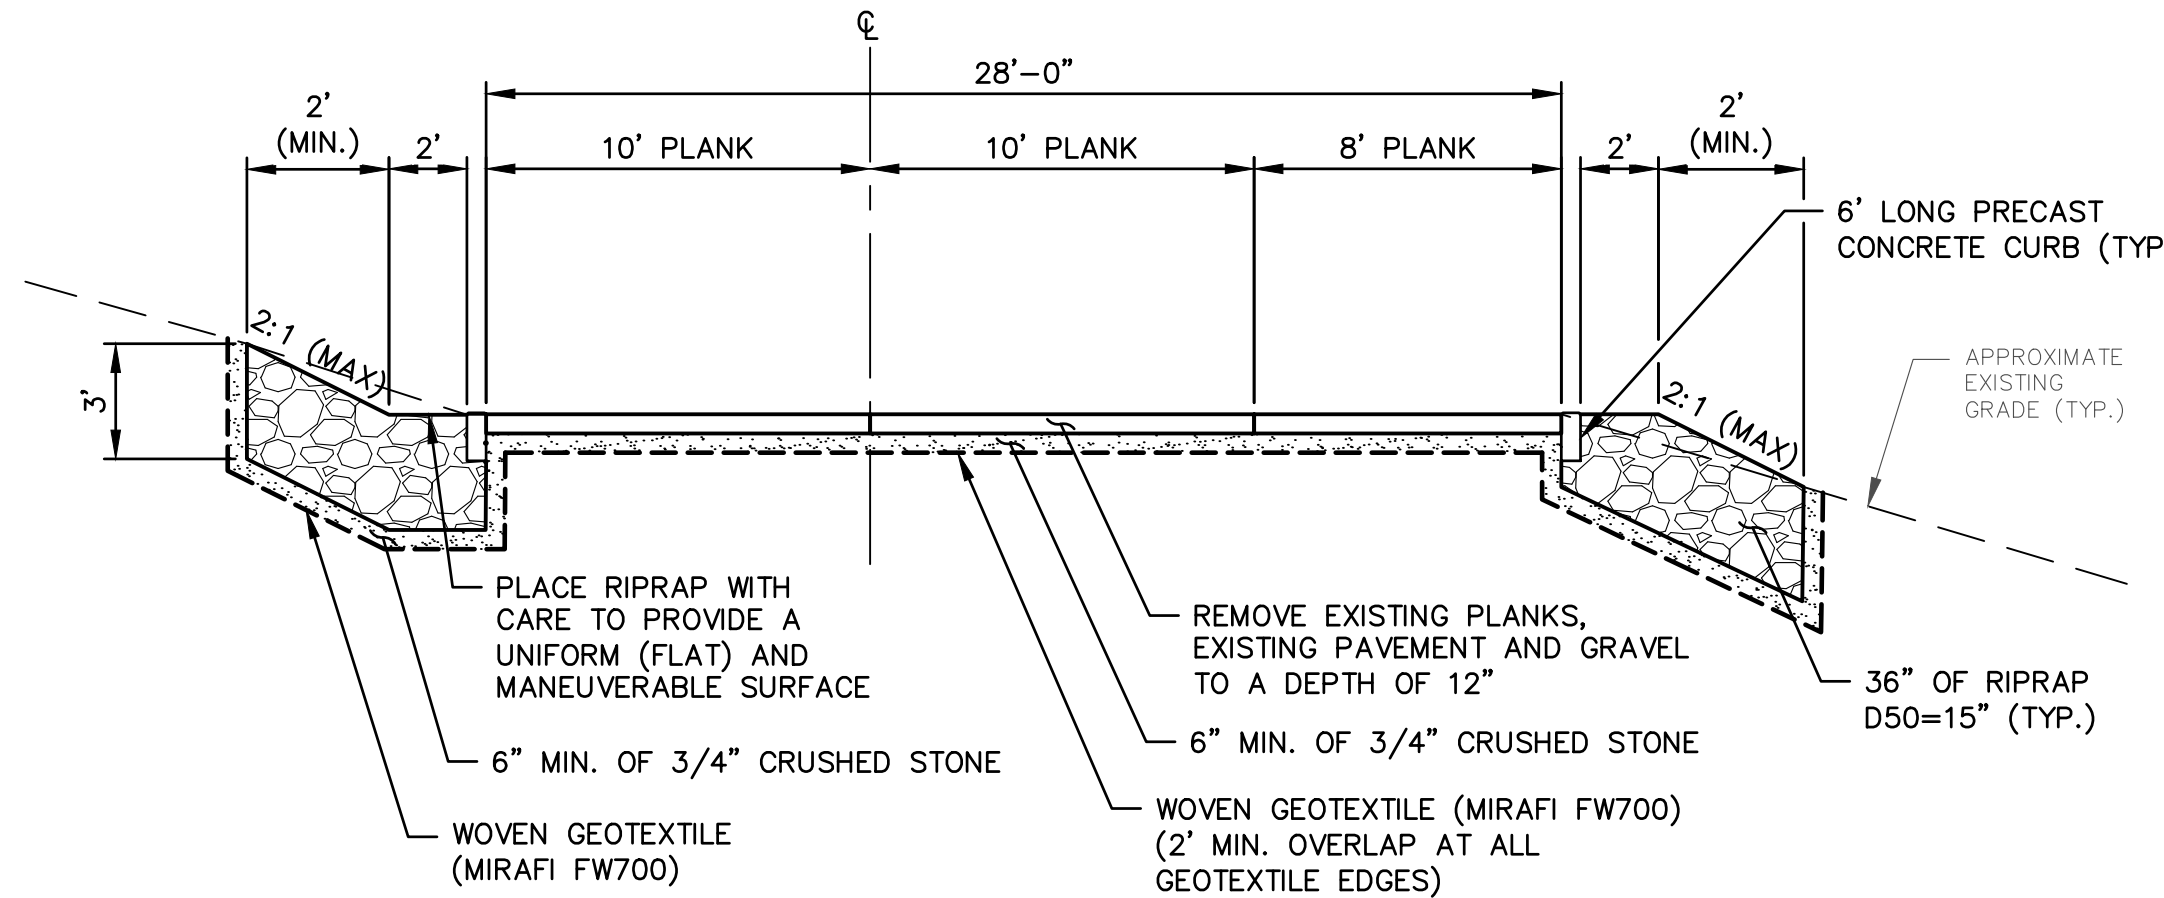


TYP. CONCRETE RAMP SECTION WITH GROUNDOUT PLANKS

SCALE: 1" = 5'–0"

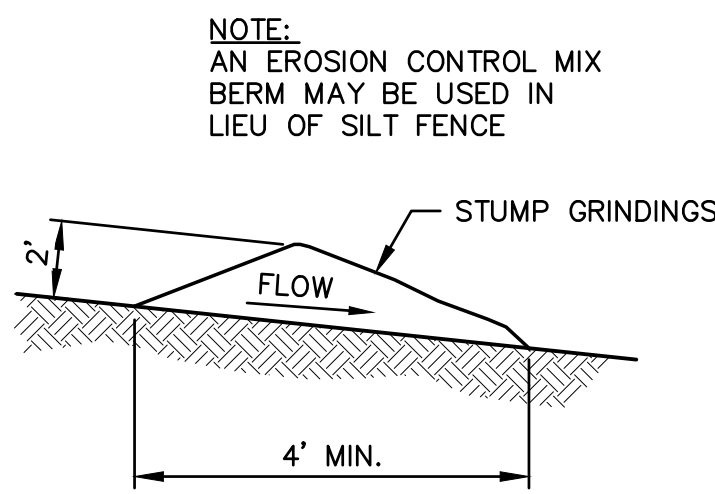


EROSION CONTROL MIX BERM DETAIL

SCALE: N.T.S.

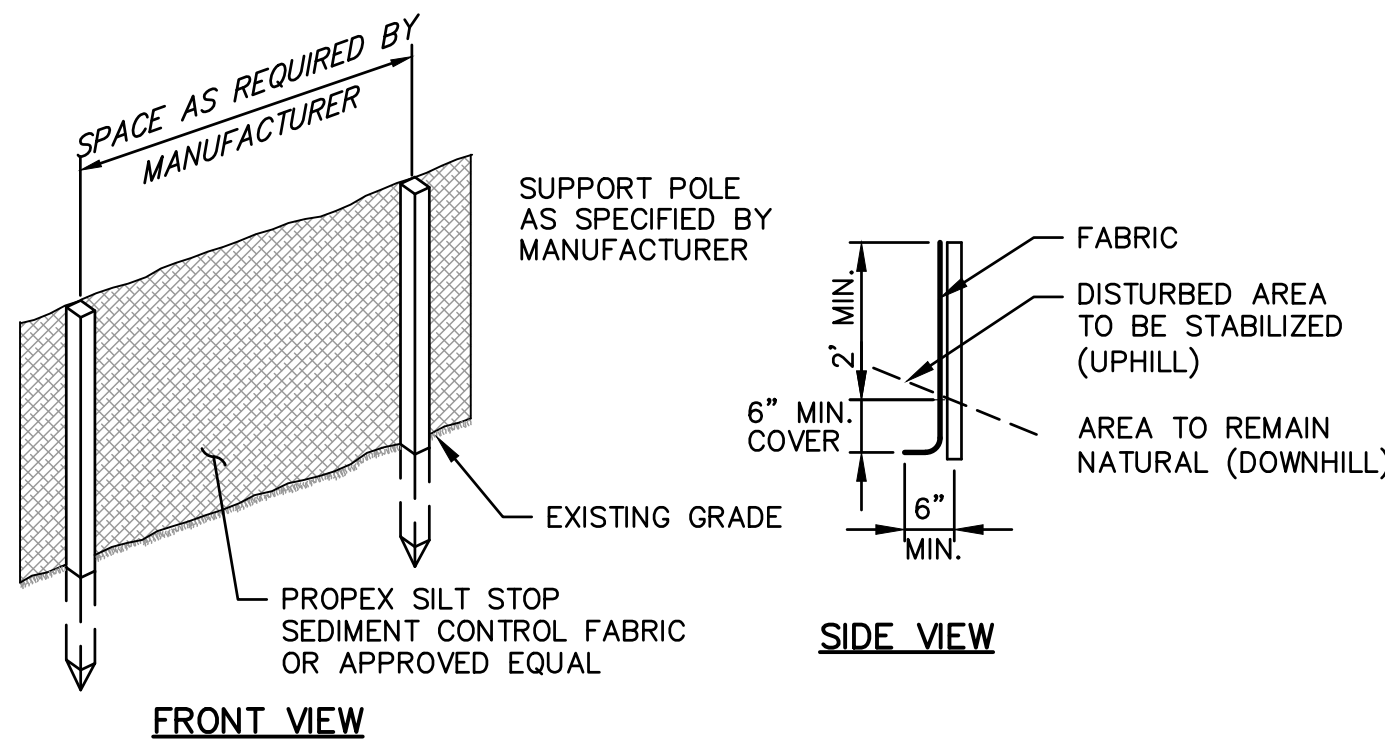

SILT FENCE DETAIL

SCALE: N.T.S.

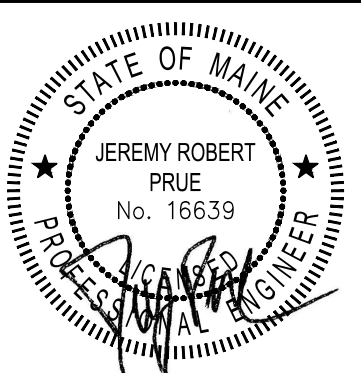

DESIGNED BY: JRP
DRAWN BY: JET
CHECKED BY: STR/RLP
APPROVED BY: JRP
DATE: 1/6/2026

PINE TREE ENGINEERING



53 Front Street
Bath, Maine 04530
Tel: (207) 443–1508
Fax: (207) 442–7029

Civil/Environmental Engineering • Surveying

CLIENT

MAINE DEPARTMENT OF AGRICULTURE,
CONSERVATION AND FORESTRY
18 ELKINS LANE
AUGUSTA, MAINE 04333

PROJECT

KENNEBEC RIVER
BOATING FACILITY IMPROVEMENTS
PHIPPSBURG, MAINE

TITLE

DETAILS

SCALE

AS SHOWN

PROJECT NO.

23001

DRAWING NO.

23001 Details

SHT.

3 of 3

REV.

0