

Updated 04/28/17

FEDERAL PROJECT

BIDDING INSTRUCTIONS

FOR ALL PROJECTS:

1. Use pen and ink to complete all paper Bids.
2. As a minimum, the following must be received prior to the time of Bid opening:

For a Paper Bid:

- a) a copy of the Notice to Contractors, b) the completed Acknowledgement of Bid Amendments form, c) the completed Schedule of Items, d) two copies of the completed and signed Contract Offer, Agreement & Award form, e) a Bid Guaranty, (if required), and f) any other certifications or Bid requirements listed in the Bid Documents as due by Bid opening.

For an Electronic Bid:

- a) a completed Bid using Expedite® software and submitted via the Bid Express™ web-based service, b) an electronic Bid Guaranty (if required) or a faxed copy of a Bid Bond (with original to be delivered within 72 hours), and c) any other Certifications or Bid requirements listed in the Bid Documents as due by Bid opening.
3. Include prices for all items in the Schedule of Items (excluding non-selected alternates).
 4. Bid Guaranty acceptable forms are:
 - a) a properly completed and signed Bid Bond on the Department's prescribed form (or on a form that does not contain any significant variations from the Department's form as determined by the Department) for 5% of the Bid Amount or
 - b) an Official Bank Check, Cashier's Check, Certified Check, U.S. Postal Money Order or Negotiable Certificate of Deposit in the amount stated in the Notice to Contractors or
 - c) an electronic bid bond submitted with an electronic bid.
 5. If a paper Bid is to be sent, "FedEx First Overnight" delivery is suggested as the package is delivered directly to the DOT Headquarters Building located at 16 Child Street in Augusta. Other means, such as U.S. Postal Service's Express Mail has proven not to be reliable.

IN ADDITION, FOR FEDERAL AID PROJECTS:

6. Complete the DBE Proposed Utilization form, and submit with your bid. If you are submitting your bid electronically, you must FAX the form to (207) 624-3431. This is a curable defect.

*If you need further information regarding Bid preparation, call the DOT
Contracts Section at (207) 624-3410.*

*For complete bidding requirements, refer to Section 102 of the Maine Department
of Transportation, Standard Specifications, November 2014 Edition.*

NOTICE

The Maine Department of Transportation is attempting to improve the way Bid Amendments/Addendums are handled, and allow for an electronic downloading of bid packages from our website, while continuing to maintain an optional plan holders list.

Prospective bidders, subcontractors or suppliers who wish to download a copy of the bid package and receive a courtesy notification of project specific bid amendments must fill out the on-line plan holder registration form and provide an email address to the MDOT Contracts mailbox at: MDOT.contracts@maine.gov. Each bid package will require a separate request.

Additionally, interested parties will be responsible for reviewing and retrieving the Bid Amendments from our web site, and acknowledging receipt and incorporating those Bid Amendments in their bids using the Acknowledgement of Bid Amendment Form.

The downloading of bid packages from the MDOT website is not the same as providing an electronic bid to the Department. Electronic bids must be submitted via <http://www.BIDX.com>. For information on electronic bidding contact Rebecca Snowden at rebecca.snowden@maine.gov or Diane Barnes at diane.barnes@maine.gov.

NOTICE

For security and other reasons, all Bid Packages which are mailed, shall be provided in double (one envelope inside the other) envelopes. The *Inner Envelope* shall have the following information provided on it:

Bid Enclosed - Do Not Open

PIN:

Town:

Date of Bid Opening:

Name of Contractor with mailing address and telephone number:

In Addition to the usual address information, the *Outer Envelope* should have written or typed on it:

Double Envelope: Bid Enclosed

PIN:

Town:

Date of Bid Opening:

Name of Contractor:

This should not be much of a change for those of you who use Federal Express or similar services.

Hand-carried Bids may be in one envelope as before, and should be marked with the following information:

Bid Enclosed: Do Not Open

PIN:

Town:

Name of Contractor:

October 16, 2001

STATE OF MAINE DEPARTMENT OF TRANSPORTATION
Bid Guaranty-Bid Bond Form

KNOW ALL MEN BY THESE PRESENTS THAT _____

_____, of the City/Town of _____ and State of _____

as Principal, and _____ as Surety, a

Corporation duly organized under the laws of the State of _____ and having a usual place of

Business in _____ and hereby held and firmly bound unto the Treasurer of

the State of Maine in the sum of _____ for payment which Principal and Surety bind

themselves, their heirs, executors, administrators, successors and assigns, jointly and severally.

The condition of this obligation is that the Principal has submitted to the Maine Department of

Transportation, hereafter Department, a certain bid, attached hereto and incorporated as a

part herein, to enter into a written contract for the construction of _____

_____ and if the Department shall accept said bid

and the Principal shall execute and deliver a contract in the form attached hereto (properly

completed in accordance with said bid) and shall furnish bonds for this faithful performance of

said contract, and for the payment of all persons performing labor or furnishing material in

connection therewith, and shall in all other respects perform the agreement created by the

acceptance of said bid, then this obligation shall be null and void; otherwise it shall remain in full

force, and effect.

Signed and sealed this _____ day of _____ 20____

WITNESS:

WITNESS

PRINCIPAL:

By _____

By: _____

By: _____

SURETY:

By _____

By: _____

Name of Local Agency: _____

NOTICE

Bidders:

Please use the attached “Request for Information” form when submitting questions concerning specific Contracts that have been advertised for Bid, include additional numbered pages as required. RFI’s may be faxed to 207-624-3431, submitted electronically through the Departments web page of advertised projects by selecting the RFI tab on the project details page or via e-mail to RFI-Contracts.MDOT@maine.gov.

These are the only allowable mechanisms for answering Project specific questions. Maine DOT will not be bound to any answers to Project specific questions received during the Bidding phase through other processes.

When submitting RFIs by Email please follow the same guidelines as stated on the “Request for Information” form and include the word “RFI” along with the Project name and Identification number in the subject line.

RFI No: _____

Date _____ **Time** _____

WIN(S): _____ **Town(s):** _____ **Bid Date:** _____

Question(s):_____

Request by: _____
Company Name:_____ **Phone:(_____)**_____

Email: _____ **Fax:** (____) _____

7

NOTICE

Disadvantaged Business Enterprise Proposed Utilization

The Apparent Low Bidder shall submit the Disadvantaged Business Enterprise Proposed Utilization form with their bid. This is a curable bid defect.

The Contractor's Disadvantaged Business Enterprise Proposed Utilization Plan form contains additional information that is required by USDOT.

The Contractor's Disadvantaged Business Enterprise Proposed Utilization Plan form should be used.

A copy of the new Contractor's Disadvantaged Business Enterprise Proposed Utilization Plan and instructions for completing it are attached.

Note: Questions about DBE firms, or to obtain a printed copy of the DBE Directory, contact The Office of Civil Rights at (207) 624-3066.

MDOTs DBE Directory of Certified firms can also be obtained at <http://www.maine.gov/mdot/civilrights/dbe.htm>

INSTRUCTIONS FOR PREPARING THE MaineDOT CONTRACTOR'S DBE/SUBCONTRACTOR UTILIZATION FORM

The Contractor Shall Extend equal opportunity to MaineDOT certified DBE firms (as listed in MaineDOT's DBE Directory of Certified Businesses) in the selection and utilization of Subcontractors and Suppliers.

SPECIFIC INSTRUCTIONS FOR COMPLETING THE FORM:

Insert Contractor name, the name of the person(s) preparing the form, and that person(s) telephone, fax number and e-mail address.

Calculate and provide percentage of your bid that will be allocated to DBE firms, Federal Project Identification Number, and location of the Project work.

In the columns, name each subcontractor, DBE and non-DBE firm to be used, provide the Unit/Item cost of the work/product to be provided by the subcontractor, give a brief description and the dollar value of the work.

Revised 1/12

FHWA DBE GOAL NOTICE FFY 2016-18
Maine Department of Transportation
Disadvantaged Business Enterprise Program

Notice is hereby given that in accordance with US DOT regulation 49 CFR Part 26, the Maine Department of Transportation has established a DBE Program for disadvantaged business participation in the federal-aid highway and bridge construction program; MaineDOT contracts covered by the program include consulting, construction, supplies, manufacturing, and service contracts.

For FFY 2016-18 (October 1, 2015 through September 30, 2018) MaineDOT has established an annual DBE participation goal of **2.0%** to be achieved through race/gender neutral means. This goal has been approved by the Federal Highway Administration and remains in effect through September 30, 2018. Maine DOT must meet this goal each federal fiscal year. If the goal is not met, MaineDOT must provide a justification for not meeting the goal and provide a plan to ensure the goal is met, which may include contract goals on certain projects that contractors will be required to meet.

MaineDOT asks all contractors, consultants and subcontractors to seek certified DBE firms for projects and to work to meet the determined 2.0% goal without the need to impose contract goals. DBE firms are listed on the MaineDOT website at:

<http://www.maine.gov/mdot/civilrights/dbe/>

Interested parties may view MaineDOT's DBE goal setting methodology also posted on this website. If you have questions regarding this goal or the DBE program you may contact Sherry Tompkins at the Maine Department of Transportation, Civil Rights Office by telephone at (207) 624-3066 or by e-mail at: sherry.tompkins@maine.gov

.

**MaineDOT CONTRACTOR'S DBE/SUBCONTRACTOR
PROPOSED UTILIZATION FORM**

All Bidders must furnish this form with their bid on Bid Opening day

Contractor: _____ **Telephone:** _____ **Ext** _____

Contact Person: _____ **Fax:** _____

E-mail: _____

BID DATE: _____

FEDERAL PROJECT PIN # _____ **PROJECT LOCATION:** _____

TOTAL ANTICIPATED DBE ____ % PARTICIPATION FOR THIS CONTRACT

W B E	D B E	Non DBE	Firm Name	Item Number & Description of Work	Quantity	Cost Per Unit/Item	Anticipated \$ Value
Subcontractor Total>							
DBE Total >							

**NOTE: THIS INFORMATION IS USED TO TRACK AND REPORT ANTICIPATED DBE PARTICIPATION IN ALL
FEDERALLY FUNDED MAINE DOT CONTRACTS. THE ANTICIPATED DBE AMOUNT IS VOLUNTARY AND WILL
NOT BECOME A PART OF THE CONTRACTUAL TERMS.**

Equal Opportunity Use:

Form received: ____/____/____ Verified by: _____

FHWA ☐

FTA ☐

FAA ☐

**For a complete list of certified firms and company designation (WBE/DBE) go to
<http://www.maine.gov/mdot>**

Rev. 05/13

Maine Department of Transportation Civil Rights Office

Directory of Certified Disadvantaged Business Enterprises

Listing can be found at:

<http://www.maine.gov/mdot/civilrights/dbe.htm>

For additional information and guidance contact:

Civil Rights Office at (207) 624-3066

It is the responsibility of the Contractor to access the DBE Directory at this site in order to have the most current listing.

Vendor Registration

Prospective Bidders must register as a vendor with the Department of Administrative & Financial Services if the vendor is awarded a contract. Vendors will not be able to receive payment without first being registered. Vendors/Contractors will find information and register through the following link –

<http://www.maine.gov/purchases/venbid/index.shtml>

STATE OF MAINE DEPARTMENT OF TRANSPORTATION NOTICE TO CONTRACTORS

Sealed Bids addressed to the Maine Department of Transportation, Augusta, Maine 04333 and endorsed on the wrapper "Bids for Billings Bridge Superstructure Replacement in the town of **PARIS**" will be received from contractors at the Reception Desk, Maine DOT Building, Capitol Street, Augusta, Maine, until 11:00 o'clock A.M. (prevailing time) on January 10, 2018 and at that time and place publicly opened and read. Bids will be accepted from all bidders. The lowest responsive bidder must have completed, or successfully complete, a bridge, or project specific prequalification to be considered for the award of this contract **We now accept electronic bids for those bid packages posted on the bidx.com website. Electronic bids do not have to be accompanied by paper bids. Please note: the Department will accept a facsimile of the bid bond; however, the original bid bond must then be received at the MDOT Contract Section within 72 hours of the bid opening.** Until further notice, dual bids (one paper, one electronic) will be accepted, with the paper copy taking precedence.

Description: Maine Federal Aid Project No. STP-2261(800), WIN 022618.00

Location: In Oxford County, E Main Street/ Route 117/ 119 over Little Androscoggin River approximately 0.2 mile easterly of Route 26 junction.

Scope of Work: Billings Bridge superstructure replacement plus other incidental work.

For general information regarding Bidding and Contracting procedures, contact George Macdougall at (207) 624-3410. Our webpage at <http://www.maine.gov/mdot/contractors/> contains a copy of the Schedule of Items, Plan Holders List, written portions of bid amendments, drawings, bid results and an electronic form for RFI submittal. For Project-specific information fax all questions to **Project Manager Joel Kittredge** at (207) 624-3431, use electronic RFI form or email questions to RFI-Contracts.MDOT@maine.gov, project name and identification number should be in the subject line. Questions received after 12:00 noon of Monday (or if that Monday is a state holiday, Friday) prior to bid date will not be answered. Bidders shall not contact any other Departmental staff for clarification of Contract provisions, and the Department will not be responsible for any interpretations so obtained. TTY users call Maine Relay 711.

Plans, specifications and bid forms may be seen at the Maine DOT Building in Augusta, Maine and at the Department of Transportation's Regional Office in Dixfield. They may be purchased from the Department between the hours of 8:00 a.m. to 4:30 p.m. by cash, credit card (Visa/Mastercard) or check payable to Treasurer, State of Maine sent to Maine Department of Transportation, Attn.: Mailroom, 16 State House Station, Augusta, Maine 04333-0016. They also may be purchased by telephone at (207) 624-3536 between the hours of 8:00 a.m. to 4:30 p.m. Full size plans \$57.00 (\$62.50 by mail). Half size plans \$28.50 (\$31.75 by mail), Bid Book \$10 (\$13 by mail), Single Sheets \$2, payment in advance, all non-refundable.


Each Bid must be made upon blank forms provided by the Department and must be accompanied by a bid bond at 5% of the bid amount or an official bank check, cashier's check, certified check, certificate of deposit, or United States postal money order in the amount of 80,000.00 payable to Treasurer, State of Maine as a Bid guarantee. A Contract Performance Surety Bond and a Contract Payment Surety Bond, each in the amount of 100 percent of the Contract price, will be required of the successful Bidder.

This Contract is subject to all applicable Federal Laws. This contract is subject to compliance with the Disadvantaged Business Enterprise program requirements as set forth by the Maine Department of Transportation.

All work shall be governed by "State of Maine, Department of Transportation, Standard Specifications, November 2014 Edition", price \$10 [\$15 by mail], and Standard Details, November 2014 Edition, price \$10 [\$15 by mail]. They also may be purchased by telephone at (207) 624-3536 between the hours of 8:00 a.m. to 4:30 p.m. Standard Detail updates can be found at <http://www.maine.gov/mdot/contractors/publications/>.

The right is hereby reserved to the Maine DOT to reject any or all bids.

Augusta, Maine
December 20, 2017



A handwritten signature in blue ink that reads "Joyce Noel Taylor".

JOYCE NOEL TAYLOR P.E.
CHIEF ENGINEER

SPECIAL PROVISION 102.7.3
ACKNOWLEDGMENT OF BID AMENDMENTS

With this form, the Bidder acknowledges its responsibility to check for all Amendments to the Bid Package. For each Project under Advertisement, Amendments are located at <http://www.maine.gov/mdot/contractors/> . It is the responsibility of the Bidder to determine if there are Amendments to the Project, to download them, to incorporate them into their Bid Package, and to reference the Amendment number and the date on the form below. The Maine DOT will not post Bid Amendments any later than noon the day before Bid opening without individually notifying all the planholders.

Amendment Number	Date

The Contractor, for itself, its successors and assigns, hereby acknowledges that it has received all of the above referenced Amendments to the Bid Package.

CONTRACTOR

Date

Signature of authorized representative

(Name and Title Printed)

12/18/2017

Maine Department of Transportation

Proposal Schedule of Items

Page 1 of 12

Proposal ID: 022618.00

Project(s): 022618.00

SECTION: 1

PROJECT ITEMS

Alt Set ID:

Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0010	202.10 REMOVING EXISTING SUPERSTRUCTURE (PROPERTY OF CONTRACTOR)	LUMP SUM				
0020	202.12 REMOVING EXISTING STRUCTURAL CONCRETE	85.000 CY				
0030	202.1235 DIAMOND GRINDING CONCRETE PAVEMENT	480.000 SY				
0040	202.1912 REMOVE OR ABANDON SEWER SERVICE	190.000 LF				
0050	203.20 COMMON EXCAVATION	1,740.000 CY				
0060	203.22 UNCLASSIFIED EXCAVATION	355.000 CY				
0070	203.24 COMMON BORROW	20.000 CY				
0080	203.25 GRANULAR BORROW	170.000 CY				
0090	206.082 STRUCTURAL EARTH EXCAVATION - MAJOR STRUCTURES	180.000 CY				
0100	206.092 STRUCTURAL ROCK EXCAVATION - MAJOR STRUCTURES	30.000 CY				
0110	304.10 AGGREGATE SUBBASE COURSE - GRAVEL	1,255.000 CY				

Maine Department of Transportation

Proposal Schedule of Items

Page 2 of 12

Proposal ID: 022618.00

Project(s): 022618.00

SECTION: 1

PROJECT ITEMS

Alt Set ID:

Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0120	403.208 HOT MIX ASPHALT 12.5 MM HMA SURFACE	30.000 T	_____	_____	_____	_____
0130	403.2081 12.5 MM POLYMER MODIFIED HOT MIX ASPHALT	150.000 T	_____	_____	_____	_____
0140	403.209 HOT MIX ASPHALT 9.5 MM (SIDEWALKS, DRIVES, INCIDENTALS)	80.000 T	_____	_____	_____	_____
0150	403.211 HOT MIX ASPHALT (SHIMMING)	5.000 T	_____	_____	_____	_____
0160	403.213 HOT MIX ASPHALT 12.5 MM BASE	30.000 T	_____	_____	_____	_____
0170	403.2131 12.5 MM POLYMER MODIFIED HMA BASE	175.000 T	_____	_____	_____	_____
0180	409.15 BITUMINOUS TACK COAT - APPLIED	105.000 G	_____	_____	_____	_____
0190	424.304 HIGH MOLECULAR WEIGHT METHACRYLATE CRACK SEALER	5.000 G	_____	_____	_____	_____
0200	424.3331 ASPHALT LOW MODULUS CRACK SEALER, APPLIED	10.000 LB	_____	_____	_____	_____
0210	502.219 STRUCTURAL CONCRETE, ABUTMENTS AND RETAINING WALLS	LUMP SUM	LUMP	SUM	_____	_____
0220	502.239 STRUCTURAL CONCRETE PIERS	LUMP SUM	LUMP	SUM	_____	_____

12/18/2017

Maine Department of Transportation

Proposal Schedule of Items

Page 3 of 12

Proposal ID: 022618.00

Project(s): 022618.00

SECTION: 1 PROJECT ITEMS

Alt Set ID:

Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0230	502.26 STRUCTURAL CONCRETE ROADWAY AND SIDEWALK SLABS ON STEEL BRIDGES	LUMP SUM	LUMP	SUM	_____	_____
0240	502.49 STRUCTURAL CONCRETE CURBS AND SIDEWALKS	LUMP SUM	LUMP	SUM	_____	_____
0250	502.565 CONCRETE FILL	5.000 CY	_____	_____	_____	_____
0260	503.12 REINFORCING STEEL, FABRICATED AND DELIVERED	18,300.000 LB	_____	_____	_____	_____
0270	503.13 REINFORCING STEEL, PLACING	18,300.000 LB	_____	_____	_____	_____
0280	503.17 MECHANICAL WELDED SPLICE	892.000 EA	_____	_____	_____	_____
0290	503.26 STAINLESS STEEL REINFORCEMENT - FABRICATED & DELIVERED	18,500.000 LB	_____	_____	_____	_____
0300	503.27 STAINLESS STEEL REINFORCEMENT - PLACING	18,500.000 LB	_____	_____	_____	_____
0310	504.701 STRUCTURAL STEEL FABRICATED AND DELIVERED, ROLLED	LUMP SUM	LUMP	SUM	_____	_____
0320	504.71 STRUCTURAL STEEL ERECTION	LUMP SUM	LUMP	SUM	_____	_____
0330	505.08 SHEAR CONNECTORS	LUMP SUM	LUMP	SUM	_____	_____

12/18/2017

Maine Department of Transportation

Proposal Schedule of Items

Page 4 of 12

Proposal ID: 022618.00

Project(s): 022618.00

SECTION: 1 PROJECT ITEMS

Alt Set ID:

Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0340	506.9104 THERMAL SPRAY COATING - SHOP APPLIED	LUMP SUM	LUMP	SUM	_____	_____
0350	507.0821 STEEL BRIDGE RAILING, 3 BAR	LUMP SUM	LUMP	SUM	_____	_____
0360	507.0831 STEEL BRIDGE RAILING, 4 BAR	LUMP SUM	LUMP	SUM	_____	_____
0370	508.14 HIGH PERFORMANCE WATERPROOFING MEMBRANE	LUMP SUM	LUMP	SUM	_____	_____
0380	510.11 SPECIAL DETOUR, PEDESTRIAN TRAFFIC ONLY	LUMP SUM	LUMP	SUM	_____	_____
0390	511.07 COFFERDAM: ABUTNO.1	LUMP SUM	LUMP	SUM	_____	_____
0400	511.07 COFFERDAM: ABUT NO.2	LUMP SUM	LUMP	SUM	_____	_____
0410	511.07 COFFERDAM: PIER	LUMP SUM	LUMP	SUM	_____	_____
0420	514.06 CURING BOX FOR CONCRETE CYLINDERS	1.000 EA	_____	_____	_____	_____
0430	515.20 PROTECTIVE COATING FOR CONCRETE SURFACES	1,405.000 SY	_____	_____	_____	_____
0440	518.50 REPAIR OF UPWARD FACING SURFACES - TO REINFORCING STEEL < 8 IN.	200.000 SF	_____	_____	_____	_____

12/18/2017

Maine Department of Transportation

Proposal Schedule of Items

Page 5 of 12

Proposal ID: 022618.00

Project(s): 022618.00

SECTION: 1

PROJECT ITEMS

Alt Set ID:

Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0450	518.511 FULL DEPTH CONCRETE REPAIR	8.000 SF	_____	_____	_____	_____
0460	518.60 REPAIR OF VERTICAL SURFACES < 8 IN.	90.000 SF	_____	_____	_____	_____
0470	518.70 REPAIR OF OVERHEAD SURFACES < 8 IN.	51.000 SF	_____	_____	_____	_____
0480	523.52 BEARING INSTALLATION	18.000 EA	_____	_____	_____	_____
0490	523.5401 LAMINATED ELASTOMERIC BEARINGS, FIXED	6.000 EA	_____	_____	_____	_____
0500	523.5402 LAMINATED ELASTOMERIC BEARINGS, EXPANSION	12.000 EA	_____	_____	_____	_____
0510	524.301 TEMPORARY STRUCTURAL SUPPORT	LUMP SUM	LUMP SUM		_____	_____
0520	526.301 TEMPORARY CONCRETE BARRIER TYPE I	LUMP SUM	LUMP SUM		_____	_____
0530	526.302 PORTABLE CONCRETE BARRIER	140.000 LF	_____	_____	_____	_____
0540	526.34 PERMANENT CONCRETE TRANSITION BARRIER	4.000 EA	_____	_____	_____	_____
0550	527.34 WORK ZONE CRASH CUSHIONS	2.000 UN	_____	_____	_____	_____

12/18/2017

Maine Department of Transportation

Proposal Schedule of Items

Page 6 of 12

Proposal ID: 022618.00

Project(s): 022618.00

SECTION: 1

PROJECT ITEMS

Alt Set ID:

Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0560	530.30 GFRP, REINFORCEMENT BARS, FABRICATED & DELIVERED	49,300.000 LF	_____	 _____	_____	 _____
0570	530.31 GFRP, REINFORCEMENT BARS, PLACING	49,300.000 LF	_____	 _____	_____	 _____
0580	603.159 12 INCH CULVERT PIPE OPTION III	28.000 LF	_____	 _____	_____	 _____
0590	603.169 15 INCH CULVERT PIPE OPTION III	105.000 LF	_____	 _____	_____	 _____
0600	604.072 CATCH BASIN TYPE A1-C	6.375 EA	_____	 _____	_____	 _____
0610	604.18 ADJUSTING MANHOLE OR CATCH BASIN TO GRADE	7.000 EA	_____	 _____	_____	 _____
0620	604.182 CLEAN EXISTING CATCH BASIN AND MANHOLE	7.000 EA	_____	 _____	_____	 _____
0630	604.249 CATCH BASIN TYPE F6-C	1.000 EA	_____	 _____	_____	 _____
0640	605.12 15 INCH UNDERDRAIN TYPE C	250.000 LF	_____	 _____	_____	 _____
0650	606.1722 BRIDGE TRANSITION - TYPE 2	3.000 EA	_____	 _____	_____	 _____
0660	606.178 GUARDRAIL BEAM	6.000 LF	_____	 _____	_____	 _____
0670	606.23 GUARDRAIL TYPE 3C - SINGLE RAIL	19.000 LF	_____	 _____	_____	 _____

12/18/2017

Maine Department of Transportation

Proposal Schedule of Items

Page 7 of 12

Proposal ID: 022618.00

Project(s): 022618.00

SECTION: 1

PROJECT ITEMS

Alt Set ID:

Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0680	606.231 GUARDRAIL TYPE 3C - 15 FOOT RADIUS AND LESS	37.625 LF	_____	 _____	_____	 _____
0690	606.25 TERMINAL CONNECTOR	1.000 EA	_____	 _____	_____	 _____
0700	606.265 TERMINAL END - SINGLE RAIL - GALVANIZED STEEL	2.000 EA	_____	 _____	_____	 _____
0710	606.353 REFLECTORIZED FLEXIBLE GUARDRAIL MARKER	8.000 EA	_____	 _____	_____	 _____
0720	606.79 GUARDRAIL 350 FLARED TERMINAL	2.000 EA	_____	 _____	_____	 _____
0730	607.163 CHAIN LINK FENCE - 4 FOOT P.V.C. COATED	60.000 LF	_____	 _____	_____	 _____
0740	608.26 CURB RAMP DETECTABLE WARNING FIELD	70.000 SF	_____	 _____	_____	 _____
0750	609.11 VERTICAL CURB TYPE 1	469.000 LF	_____	 _____	_____	 _____
0760	609.12 VERTICAL CURB TYPE 1 - CIRCULAR	43.000 LF	_____	 _____	_____	 _____
0770	609.23 TERMINAL CURB TYPE 1	3.000 EA	_____	 _____	_____	 _____
0780	609.2371 TERMINAL CURB TYPE 1- 7 FT - CIRCULAR	5.000 EA	_____	 _____	_____	 _____
0790	609.238 TERMINAL CURB TYPE 1 - 8 FOOT	2.000 EA	_____	 _____	_____	 _____

12/18/2017

Maine Department of Transportation

Proposal Schedule of Items

Page 8 of 12

Proposal ID: 022618.00

Project(s): 022618.00

SECTION: 1

PROJECT ITEMS

Alt Set ID:

Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0800	609.247 TERMINAL CURB TYPE 2 - 7 FOOT	1.000 EA	_____	_____	_____	_____
0810	610.08 PLAIN RIPRAP	250.000 CY	_____	_____	_____	_____
0820	615.07 LOAM	20.000 CY	_____	_____	_____	_____
0830	618.13 SEEDING METHOD NUMBER 1	1.000 UN	_____	_____	_____	_____
0840	618.14 SEEDING METHOD NUMBER 2	2.000 UN	_____	_____	_____	_____
0850	618.141 SEEDING METHOD NUMBER 3	3.000 UN	_____	_____	_____	_____
0860	619.12 MULCH	3.000 UN	_____	_____	_____	_____
0870	619.14 EROSION CONTROL MIX	40.000 CY	_____	_____	_____	_____
0880	627.733 4" WHITE OR YELLOW PAINTED PAVEMENT MARKING LINE	1,750.000 LF	_____	_____	_____	_____
0890	627.75 WHITE OR YELLOW PAVEMENT & CURB MARKING	130.000 SF	_____	_____	_____	_____
0900	627.78 TEMPORARY 4 INCH PAINTED PAVEMENT MARKING LINE, WHITE OR YELLOW	95.000 LF	_____	_____	_____	_____
0910	629.05 HAND LABOR, STRAIGHT TIME	40.000 HR	_____	_____	_____	_____

Maine Department of Transportation

Proposal Schedule of Items

Page 9 of 12

Proposal ID: 022618.00

Project(s): 022618.00

SECTION: 1 PROJECT ITEMS

Alt Set ID:

Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0920	631.12 ALL PURPOSE EXCAVATOR (INCLUDING OPERATOR)	40.000 HR	_____	 _____	_____	 _____
0930	631.172 TRUCK - LARGE (INCLUDING OPERATOR)	80.000 HR	_____	 _____	_____	 _____
0940	631.32 CULVERT CLEANER (INCLUDING OPERATOR)	16.000 HR	_____	 _____	_____	 _____
0950	639.18 FIELD OFFICE TYPE A	1.000 EA	_____	 _____	_____	 _____
0960	643.72 TEMPORARY TRAFFIC SIGNAL	LUMP SUM	LUMP SUM		_____	 _____
0970	645.103 DEMOUNT GUIDE SIGN	4.000 EA	_____	 _____	_____	 _____
0980	645.106 DEMOUNT REGULATORY, WARNING, CONFIRMATION AND ROUTE MARKER ASSEMBLY SIGN	1.000 EA	_____	 _____	_____	 _____
0990	645.113 REINSTALL GUIDE SIGN	4.000 EA	_____	 _____	_____	 _____
1000	645.116 REINSTALL REGULATORY, WARNING, CONFIRMATION AND ROUTE MARKER ASSEMBLY SIGN	1.000 EA	_____	 _____	_____	 _____
1010	652.312 TYPE III BARRICADE	18.000 EA	_____	 _____	_____	 _____
1020	652.33 DRUM	85.000 EA	_____	 _____	_____	 _____

12/18/2017

Maine Department of Transportation

Proposal Schedule of Items

Page 10 of 12

Proposal ID: 022618.00

Project(s): 022618.00

SECTION: 1

PROJECT ITEMS

Alt Set ID:

Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
1030	652.34 CONE	100.000 EA	_____	 _____	_____	 _____
1040	652.35 CONSTRUCTION SIGNS	403.000 SF	_____	 _____	_____	 _____
1050	652.361 MAINTENANCE OF TRAFFIC CONTROL DEVICES	LUMP SUM	LUMP SUM		_____	 _____
1060	652.38 FLAGGER	260.000 HR	_____	 _____	_____	 _____
1070	652.41 PORTABLE CHANGEABLE MESSAGE SIGN	4.000 EA	_____	 _____	_____	 _____
1080	656.75 TEMPORARY SOIL EROSION AND WATER POLLUTION CONTROL	LUMP SUM	LUMP SUM		_____	 _____
1090	658.20 ACRYLIC LATEX COLOR FINISH, GREEN	45.000 SY	_____	 _____	_____	 _____
1100	659.10 MOBILIZATION	LUMP SUM	LUMP SUM		_____	 _____
1110	801.011 BYPASS PUMPING SYSTEM	LUMP SUM	LUMP SUM		_____	 _____
1120	801.03 TEST PITS	2.000 EA	_____	 _____	_____	 _____
1130	801.18 12 INCH PVC SANITARY SEWER (SDR-35)	175.000 LF	_____	 _____	_____	 _____
1140	802.10 12 INCH DUCTILE IRON WATERMAIN	500.000 LF	_____	 _____	_____	 _____

12/18/2017

Maine Department of Transportation

Proposal Schedule of Items

Page 11 of 12

Proposal ID: 022618.00

Project(s): 022618.00

SECTION: 1 PROJECT ITEMS

Alt Set ID:

Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
1150	802.181 12 INCH PREINSULATED DUCTILE IRON SANITARY SEWER	LUMP SUM		LUMP SUM		
1160	803.138 CONNECT 4", 6", 8", 12" SEWER SERVICES	45.000 LF				
1170	803.1732 SEWER MANHOLE - 4 FOOT DIAMETER	22.000 VF				
1180	812.164 REBUILDING SEWER MANHOLE	1.000 EA				
1190	822.302 12 INCH DUCTILE IRON PIPE	LUMP SUM		LUMP SUM		
1200	823.311 12 INCH GATE VALVE WITH BOX	5.000 EA				
1210	823.3251 8 INCH GATE VALVE WITH BOX	3.000 EA				
1220	824.30 FIRE HYDRANT	1.000 EA				
1230	825.33 1 INCH CORP STOP	6.000 EA				
1240	825.331 1" CURB STOP	6.000 EA				
1250	825.43 1" COPPER SERVICE	160.000 LF				
1260	825.5411 TEMPORARY WATER MAIN	LUMP SUM		LUMP SUM		

12/18/2017

Maine Department of Transportation

Proposal Schedule of Items

Page 12 of 12

Proposal ID: 022618.00

Project(s): 022618.00

SECTION: 1

PROJECT ITEMS

Alt Set ID:

Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
1270	827.304 TRENCH ROCK EXCAVATION	100.000 CY	_____	_____	_____	_____
1280	827.311 UNSUITABLE SOIL EXCAVATION, REMOVE AND REFILL- BELOW GRADE	150.000 CY	_____	_____	_____	_____
Section: 1			Total:		_____	_____
			Total Bid:		_____	_____

CONTRACT AGREEMENT, OFFER & AWARD

AGREEMENT made on the date last signed below, by and between the State of Maine, acting through and by its Department of Transportation (Department), an agency of state government with its principal administrative offices located at Child Street, Augusta, Maine, with a mailing address at 16 State House Station, Augusta, Maine 04333-0016, and

_____ a corporation or other legal entity organized under the laws of the State of _____, with its principal place of business located at _____

The Department and the Contractor, in consideration of the mutual promises set forth in this Agreement (the "Contract"), hereby agree as follows:

A. The Work.

The Contractor agrees to complete all Work as specified or indicated in the Contract including Extra Work in conformity with the Contract, WIN **022618.00**, for the **Billings Bridge Superstructure Replacement** in the town of **Paris**, County of **Oxford**, Maine. The Work includes construction, maintenance during construction, warranty as provided in the Contract, and other incidental work.

The Contractor shall be responsible for furnishing all supervision, labor, equipment, tools supplies, permanent materials and temporary materials required to perform the Work including construction quality control including inspection, testing and documentation, all required documentation at the conclusion of the project, warranting its work and performing all other work indicated in the Contract.

The Department shall have the right to alter the nature and extent of the Work as provided in the Contract; payment to be made as provided in the same.

B. Time.

The Contractor agrees to complete all Work, except warranty work, on or before **November 1, 2019**. Further, the Department may deduct from moneys otherwise due the Contractor, not as a penalty, but as Liquidated Damages in accordance with Sections 107.7 and 107.8 of the State of Maine Department of Transportation Standard Specifications, November 2014 Edition and related Special Provisions.

C. Price.

The quantities given in the Schedule of Items of the Bid Package will be used as the basis for determining the original Contract amount and for determining the amounts of the required Performance Surety Bond and Payment Surety Bond, and that the amount of this offer is _____

\$_____ Performance Bond and Payment Bond each being 100% of the amount of this Contract.

D. Contract.

This Contract, which may be amended, modified, or supplemented in writing only, consists of the Contract documents as defined in the Plans, Standard Specifications, November 2014 Edition, Standard Details November 2014 Edition as updated through advertisement, Supplemental Specifications, Special Provisions, Contract Agreement; and Contract Bonds. It is agreed and understood that this Contract will be governed by the documents listed above.

E. Certifications.

By signing below, the Contractor hereby certifies that to the best of the Contractor's knowledge and belief:

1. All of the statements, representations, covenants, and/or certifications required or set forth in the Bid and the Bid Documents, including those in the Federal Contract Provisions Supplement, and the Contract are still complete and accurate as of the date of this Agreement.
2. The Contractor knows of no legal, contractual, or financial impediment to entering into this Contract.
3. The person signing below is legally authorized by the Contractor to sign this Contract on behalf of the Contractor and to legally bind the Contractor to the terms of the Contract.

F. Offer.

The undersigned, having carefully examined the site of work, the Plans, Standard Specifications November 2014 Edition, Standard Details November 2014 Edition as updated through advertisement, Supplemental Specifications, Special Provisions, Contract Agreement; and Contract Bonds contained herein for construction of: **WIN 022618.00 Billings Bridge Superstructure Replacement plus other incidental work**, State of Maine, on which bids will be received until the time specified in the “Notice to Contractors” do(es) hereby bid and offer to enter into this contract to supply all the materials, tools, equipment and labor to construct the whole of the Work in strict accordance with the terms and conditions of this Contract at the unit prices in the attached “Schedule of Items”.

The Offeror agrees to perform the work required at the price specified above and in accordance with the bids provided in the attached “Schedule of Items” in strict accordance with the terms of this solicitation, and to provide the appropriate insurance and bonds if this offer is accepted by the Government in writing.

As Offeror also agrees:

First: To do any extra work, not covered by the attached “Schedule of Items”, which may be ordered by the Resident, and to accept as full compensation the amount determined upon a “Force Account” basis as provided in the Standard Specifications, November 2014 Edition, and as addressed in the contract documents.

Second: That the bid bond at 5% of the bid amount or the official bank check, cashier’s check, certificate of deposit or U. S. Postal Money Order in the amount given in the “Notice to Contractors”, payable to the Treasurer of the State of Maine and accompanying this bid, shall be forfeited, as liquidated damages, if in case this bid is accepted, and the undersigned shall fail to abide by the terms and conditions of the offer and fail to furnish satisfactory insurance and Contract bonds under the conditions stipulated in the Specifications within 15 days of notice of intent to award the contract.

Third: To begin the Work as stated in Section 107.2 of the Standard Specifications November 2014 Edition and complete the Work within the time limits given in the Special Provisions of this Contract.

Fourth: The Contractor will be bound to the Disadvantaged Business Enterprise (DBE) Requirements contained in the attached Notice (Additional Instructions to Bidders) and submit a completed Contractor’s Disadvantaged Business Enterprise Utilization Plan with their bid.

Fifth: That this offer shall remain open for 30 calendar days after the date of opening of bids.

Sixth: The Bidder hereby certifies, to the best of its knowledge and belief that: the Bidder has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of competitive bidding in connection with its bid, and its subsequent contract with the Department.

IN WITNESS WHEREOF, the Contractor, for itself, its successors and assigns, hereby execute two duplicate originals of this Agreement and thereby binds itself to all covenants, terms, and obligations contained in the Contract Documents.

CONTRACTOR

Date

(Signature of Legally Authorized Representative
of the Contractor)

Witness

(Name and Title Printed)

G. Award.

Your offer is hereby accepted.
documents referenced herein.

This award consummates the Contract, and the

MAINE DEPARTMENT OF TRANSPORTATION

Date

By: David Bernhardt, Commissioner

Witness

CONTRACT AGREEMENT, OFFER & AWARD

AGREEMENT made on the date last signed below, by and between the State of Maine, acting through and by its Department of Transportation (Department), an agency of state government with its principal administrative offices located at Child Street, Augusta, Maine, with a mailing address at 16 State House Station, Augusta, Maine 04333-0016, and

_____ a corporation or other legal entity organized under the laws of the State of _____, with its principal place of business located at _____

The Department and the Contractor, in consideration of the mutual promises set forth in this Agreement (the "Contract"), hereby agree as follows:

A. The Work.

The Contractor agrees to complete all Work as specified or indicated in the Contract including Extra Work in conformity with the Contract, WIN **022618.00**, for the **Billings Bridge Superstructure Replacement** in the town of **Paris**, County of **Oxford**, Maine. The Work includes construction, maintenance during construction, warranty as provided in the Contract, and other incidental work.

The Contractor shall be responsible for furnishing all supervision, labor, equipment, tools supplies, permanent materials and temporary materials required to perform the Work including construction quality control including inspection, testing and documentation, all required documentation at the conclusion of the project, warranting its work and performing all other work indicated in the Contract.

The Department shall have the right to alter the nature and extent of the Work as provided in the Contract; payment to be made as provided in the same.

B. Time.

The Contractor agrees to complete all Work, except warranty work, on or before **November 1, 2019**. Further, the Department may deduct from moneys otherwise due the Contractor, not as a penalty, but as Liquidated Damages in accordance with Sections 107.7 and 107.8 of the State of Maine Department of Transportation Standard Specifications, November 2014 Edition and related Special Provisions.

C. Price.

The quantities given in the Schedule of Items of the Bid Package will be used as the basis for determining the original Contract amount and for determining the amounts of the required Performance Surety Bond and Payment Surety Bond, and that the amount of this offer is _____

\$_____ Performance Bond and Payment Bond each being 100% of the amount of this Contract.

D. Contract.

This Contract, which may be amended, modified, or supplemented in writing only, consists of the Contract documents as defined in the Plans, Standard Specifications, November 2014 Edition, Standard Details November 2014 Edition as updated through advertisement, Supplemental Specifications, Special Provisions, Contract Agreement; and Contract Bonds. It is agreed and understood that this Contract will be governed by the documents listed above.

E. Certifications.

By signing below, the Contractor hereby certifies that to the best of the Contractor's knowledge and belief:

1. All of the statements, representations, covenants, and/or certifications required or set forth in the Bid and the Bid Documents, including those in the Federal Contract Provisions Supplement, and the Contract are still complete and accurate as of the date of this Agreement.
2. The Contractor knows of no legal, contractual, or financial impediment to entering into this Contract.
3. The person signing below is legally authorized by the Contractor to sign this Contract on behalf of the Contractor and to legally bind the Contractor to the terms of the Contract.

F. Offer.

The undersigned, having carefully examined the site of work, the Plans, Standard Specifications November 2014 Edition, Standard Details November 2014 Edition as updated through advertisement, Supplemental Specifications, Special Provisions, Contract Agreement; and Contract Bonds contained herein for construction of: **WIN 022618.00 Billings Bridge Superstructure Replacement plus other incidental work**, State of Maine, on which bids will be received until the time specified in the “Notice to Contractors” do(es) hereby bid and offer to enter into this contract to supply all the materials, tools, equipment and labor to construct the whole of the Work in strict accordance with the terms and conditions of this Contract at the unit prices in the attached “Schedule of Items”.

The Offeror agrees to perform the work required at the price specified above and in accordance with the bids provided in the attached “Schedule of Items” in strict accordance with the terms of this solicitation, and to provide the appropriate insurance and bonds if this offer is accepted by the Government in writing.

As Offeror also agrees:

First: To do any extra work, not covered by the attached “Schedule of Items”, which may be ordered by the Resident, and to accept as full compensation the amount determined upon a “Force Account” basis as provided in the Standard Specifications, November 2014 Edition, and as addressed in the contract documents.

Second: That the bid bond at 5% of the bid amount or the official bank check, cashier’s check, certificate of deposit or U. S. Postal Money Order in the amount given in the “Notice to Contractors”, payable to the Treasurer of the State of Maine and accompanying this bid, shall be forfeited, as liquidated damages, if in case this bid is accepted, and the undersigned shall fail to abide by the terms and conditions of the offer and fail to furnish satisfactory insurance and Contract bonds under the conditions stipulated in the Specifications within 15 days of notice of intent to award the contract.

Third: To begin the Work as stated in Section 107.2 of the Standard Specifications November 2014 Edition and complete the Work within the time limits given in the Special Provisions of this Contract.

Fourth: The Contractor will be bound to the Disadvantaged Business Enterprise (DBE) Requirements contained in the attached Notice (Additional Instructions to Bidders) and submit a completed Contractor’s Disadvantaged Business Enterprise Utilization Plan with their bid.

Fifth: That this offer shall remain open for 30 calendar days after the date of opening of bids.

Sixth: The Bidder hereby certifies, to the best of its knowledge and belief that: the Bidder has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of competitive bidding in connection with its bid, and its subsequent contract with the Department.

IN WITNESS WHEREOF, the Contractor, for itself, its successors and assigns, hereby execute two duplicate originals of this Agreement and thereby binds itself to all covenants, terms, and obligations contained in the Contract Documents.

CONTRACTOR

Date

(Signature of Legally Authorized Representative
of the Contractor)

Witness

(Name and Title Printed)

G. Award.

Your offer is hereby accepted.
documents referenced herein.

This award consummates the Contract, and the

MAINE DEPARTMENT OF TRANSPORTATION

Date

By: David Bernhardt, Commissioner

Witness

CONTRACT AGREEMENT, OFFER & AWARD

AGREEMENT made on the date last signed below, by and between the State of Maine, acting through and by its Department of Transportation (Department), an agency of state government with its principal administrative offices located at Child Street Augusta, Maine, with a mailing address at 16 State House Station, Augusta, Maine 04333-0016, and

(Name of the firm bidding the job)

a corporation or other legal entity organized under the laws of the State of Maine, with its principal place of business located at **(address of the firm bidding the job)**

The Department and the Contractor, in consideration of the mutual promises set forth in this Agreement (the "Contract"), hereby agree as follows:

A. The Work.

The Contractor agrees to complete all Work as specified or indicated in the Contract including Extra Work in conformity with the Contract, PIN No. **1224.00**, for the **Hot Mix Asphalt Overlay** in the town/city of **South Nowhere**, County of **Washington**, Maine. The Work includes construction, maintenance during construction, warranty as provided in the Contract, and other incidental work.

The Contractor shall be responsible for furnishing all supervision, labor, equipment, tools supplies, permanent materials and temporary materials required to perform the Work including construction quality control including inspection, testing and documentation, all required documentation at the conclusion of the project, warranting its work and performing all other work indicated in the Contract.

The Department shall have the right to alter the nature and extent of the Work as provided in the Contract; payment to be made as provided in the same.

B. Time.

The Contractor agrees to complete all Work, except warranty work, on or before **November 15, 2006**. Further, the Department may deduct from moneys otherwise due the Contractor, not as a penalty, but as Liquidated Damages in accordance with Sections 107.7 and 107.8 of the State of Maine Department of Transportation Standard Specifications, November 2014 Edition and related Special Provisions.

C. Price.

The quantities given in the Schedule of Items of the Bid Package will be used as the basis for determining the original Contract amount and for determining the amounts of the required Performance Surety Bond and Payment Surety Bond, and that the amount of this offer is (Place bid here in alphabetical form such as One Hundred and Two dollars and 10 cents)
\$ (repeat bid here in numerical terms, such as \$102.10) Performance Bond and Payment Bond each being 100% of the amount of this Contract.

D. Contract.

This Contract, which may be amended, modified, or supplemented in writing only, consists of the Contract documents as defined in the Plans, Standard Specifications, November 2014 Edition, Standard Details November 2014 Edition, Supplemental Specifications, Special Provisions, Contract Agreement, and Contract Bonds. It is agreed and understood that this Contract will be governed by the documents listed above.

E. Certifications.

By signing below, the Contractor hereby certifies that to the best of the Contractor's knowledge and belief:

1. All of the statements, representations, covenants, and/or certifications required or set forth in the Bid and the Bid Documents, including those in Appendix A to Division 100 of the Standard Specifications November 2014 Edition (Federal Contract Provisions Supplement), and the Contract are still complete and accurate as of the date of this Agreement.
2. The Contractor knows of no legal, contractual, or financial impediment to entering into this Contract.
3. The person signing below is legally authorized by the Contractor to sign this Contract on behalf of the Contractor and to legally bind the Contractor to the terms of the Contract.

F. Offer.

The undersigned, having carefully examined the site of work, the Plans, Standard Specifications, November 2014 Edition, Standard Details November 2014 Edition, Supplemental Specifications, Special Provisions, Contract Agreement; and Contract Bonds contained herein for construction of:

PIN 1234.00 South Nowhere, Hot Mix Asphalt Overlay

State of Maine, on which bids will be received until the time specified in the "Notice to Contractors" do(es) hereby bid and offer to enter into this contract to supply all the materials, tools, equipment and labor to construct the whole of the Work in strict accordance with the terms and conditions of this Contract at the unit prices in the attached "Schedule of Items".

The Offeror agrees to perform the work required at the price specified above and in accordance with the bids provided in the attached "Schedule of Items" in strict accordance with the terms of this solicitation, and to provide the appropriate insurance and bonds if this offer is accepted by the Government in writing.

As Offeror also agrees:

First: To do any extra work, not covered by the attached "Schedule of Items", which may be ordered by the Resident, and to accept as full compensation the amount determined upon a "Force Account" basis as provided in the Standard Specifications, November 2014 Edition, and as addressed in the contract documents.

Second: That the bid bond at 5% of the bid amount or the official bank check, cashier's check, certificate of deposit or U. S. Postal Money Order in the amount given in the "Notice to Contractors", payable to the Treasurer of the State of Maine and accompanying this bid, shall be forfeited, as liquidated damages, if in case this bid is accepted, and the undersigned shall fail to abide by the terms and conditions of the offer and fail to furnish satisfactory insurance and Contract bonds under the conditions stipulated in the Specifications within 15 days of notice of intent to award the contract.

Third: To begin the Work as stated in Section 107.2 of the Standard Specifications November 2014 Edition and complete the Work within the time limits given in the Special Provisions of this Contract.

Fourth: The Contractor will be bound to the Disadvantaged Business Enterprise (DBE) Requirements contained in the attached Notice (Additional Instructions to Bidders) and submit a completed Contractor's Disadvantaged Business Enterprise Utilization Plan with their bid.

Fifth: That this offer shall remain open for 30 calendar days after the date of opening of bids.

Sixth: The Bidder hereby certifies, to the best of its knowledge and belief that: the Bidder has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of competitive bidding in connection with its bid, and its subsequent contract with the Department.

IN WITNESS WHEREOF, the Contractor, for itself, its successors and assigns, hereby execute two duplicate originals of this Agreement and thereby binds itself to all covenants, terms, and obligations contained in the Contract Documents.

Date

(Witness Sign Here)
Witness

CONTRACTOR

(Sign Here)
(Signature of Legally Authorized Representative of the Contractor)

(Print Name Here)
(Name and Title Printed)

G. Award.

Your offer is hereby accepted. This award consummates the Contract, and the documents referenced herein.

MAINE DEPARTMENT OF TRANSPORTATION

Date

By: David Bernhardt, Commissioner

(Witness)

BOND # _____

CONTRACT PERFORMANCE BOND
(Surety Company Form)

KNOW ALL MEN BY THESE PRESENTS: That _____
_____ **in the State of** _____, as principal,
and.....
a corporation duly organized under the laws of the State of and having a
usual place of business
as Surety, are held and firmly bound unto the Treasurer of the State of Maine in the sum
of _____ **and 00/100 Dollars (\$** _____ **)**,
to be paid said Treasurer of the State of Maine or his successors in office, for which
payment well and truly to be made, Principal and Surety bind themselves, their heirs,
executors and administrators, successors and assigns, jointly and severally by these
presents.

The condition of this obligation is such that if the Principal designated as Contractor in
the Contract to construct Project Number _____ in the Municipality of
_____ promptly and faithfully performs the Contract, then this
obligation shall be null and void; otherwise it shall remain in full force and effect.

The Surety hereby waives notice of any alteration or extension of time made by the State
of Maine.

Signed and sealed this day of, 20.... .

WITNESSES:

Signature.....
Print Name Legibly

Signature
Print Name Legibly

SURETY ADDRESS:

.....
.....
.....

TELEPHONE.....

SIGNATURES:

CONTRACTOR:

.....
Print Name Legibly

SURETY:

.....
Print Name Legibly

NAME OF LOCAL AGENCY:

ADDRESS
.....
.....

BOND # _____

CONTRACT PAYMENT BOND
(Surety Company Form)

KNOW ALL MEN BY THESE PRESENTS: That _____
_____ **in the State of** _____, as principal,
and.....
a corporation duly organized under the laws of the State of and having a
usual place of business in
as Surety, are held and firmly bound unto the Treasurer of the State of Maine for the use
and benefit of claimants as herein below defined, in the sum of
_____ **and 00/100 Dollars (\$** _____ **)**
for the payment whereof Principal and Surety bind themselves, their heirs, executors and
administrators, successors and assigns, jointly and severally by these presents.

The condition of this obligation is such that if the Principal designated as Contractor in
the Contract to construct Project Number _____ in the Municipality of
_____ promptly satisfies all claims and demands incurred for all
labor and material, used or required by him in connection with the work contemplated by
said Contract, and fully reimburses the obligee for all outlay and expense which the
obligee may incur in making good any default of said Principal, then this obligation shall
be null and void; otherwise it shall remain in full force and effect.

A claimant is defined as one having a direct contract with the Principal or with a
Subcontractor of the Principal for labor, material or both, used or reasonably required for
use in the performance of the contract.

Signed and sealed this day of, 20

WITNESS:

SIGNATURES:

CONTRACTOR:

Signature.....

.....

Print Name Legibly

Print Name Legibly

SURETY:

Signature.....

.....

Print Name Legibly

Print Name Legibly

SURETY ADDRESS:

NAME OF LOCAL AGENCY:

.....

ADDRESS

.....

.....

TELEPHONE

.....

PARIS
BILLINGS BRIDGE
BRIDGE IMPROVMENTS
WIN 22618.00

GENERAL NOTE

The Maine Department of Environmental Protection (MDEP) has reported spills and releases involving petroleum products adjacent to the project. This involves releases due to spillage of petroleum products at the Dough Boy Varsity located between roughly Maine Department of Transportation (MaineDOT) station 103+00 to roughly MaineDOT station 104+00 left of center. Based on the scope of work presented, available data suggests that this contamination may only be adjacent to the immediate areas of any excavation proposed by the MaineDOT. However, in light of MDEP's findings, the contractor shall employ appropriate health and safety measures to protect its workers against hazards associated with working near petroleum-impacted soils. Furthermore, the Contractor shall remain alert for any additionally evidence of contamination. If the Contractor encounters evidence of soil or groundwater contamination, the Contractor shall secure the excavation, stop work in the contaminated area, and immediately notify the Resident. The Resident shall contact the Senior Geologist in MaineDOT's Office of Safety and Compliance at 624-3004 and the MDEP at 800-482-0777. Work may only continue with authorization from the Resident.

MaineDOT DBE Project Attainment Target (PAT)
for this Project is .025 %


The MaineDOT seeks to meet the specified annual Disadvantaged Business Enterprise (DBE) usage goal set out by 49 CFR 26.45 through the efforts of contractors seeking to employ qualified DBE subcontractors. We seek to meet this goal by race neutral means and do not, at this time, use contract specific requirements for each project. We do however, understand the capacity of Maine's DBE community and the unique characteristics a project may have that would differ from the broad annual goal.

Taking this into consideration, the MaineDOT will review each project and develop an anticipated attainment or Project Attainment Target (PAT) based on several factors that are project specific. Those factors include:

- ☐ Scope of Work
- ☐ DBE availability according to Specification Item
- ☐ Geographic location
- ☐ DBE capacity

This PAT is developed to assist contractors to better understand the DBE participation that the MaineDOT can reasonably expect for a specific project. The PAT is NOT a mandate but an assessment of the DBE opportunities that this project could meet or exceed. MaineDOT anticipates that each contractor will make the best effort to reach or exceed the PAT for this project.

BRIDGE NO. 2979

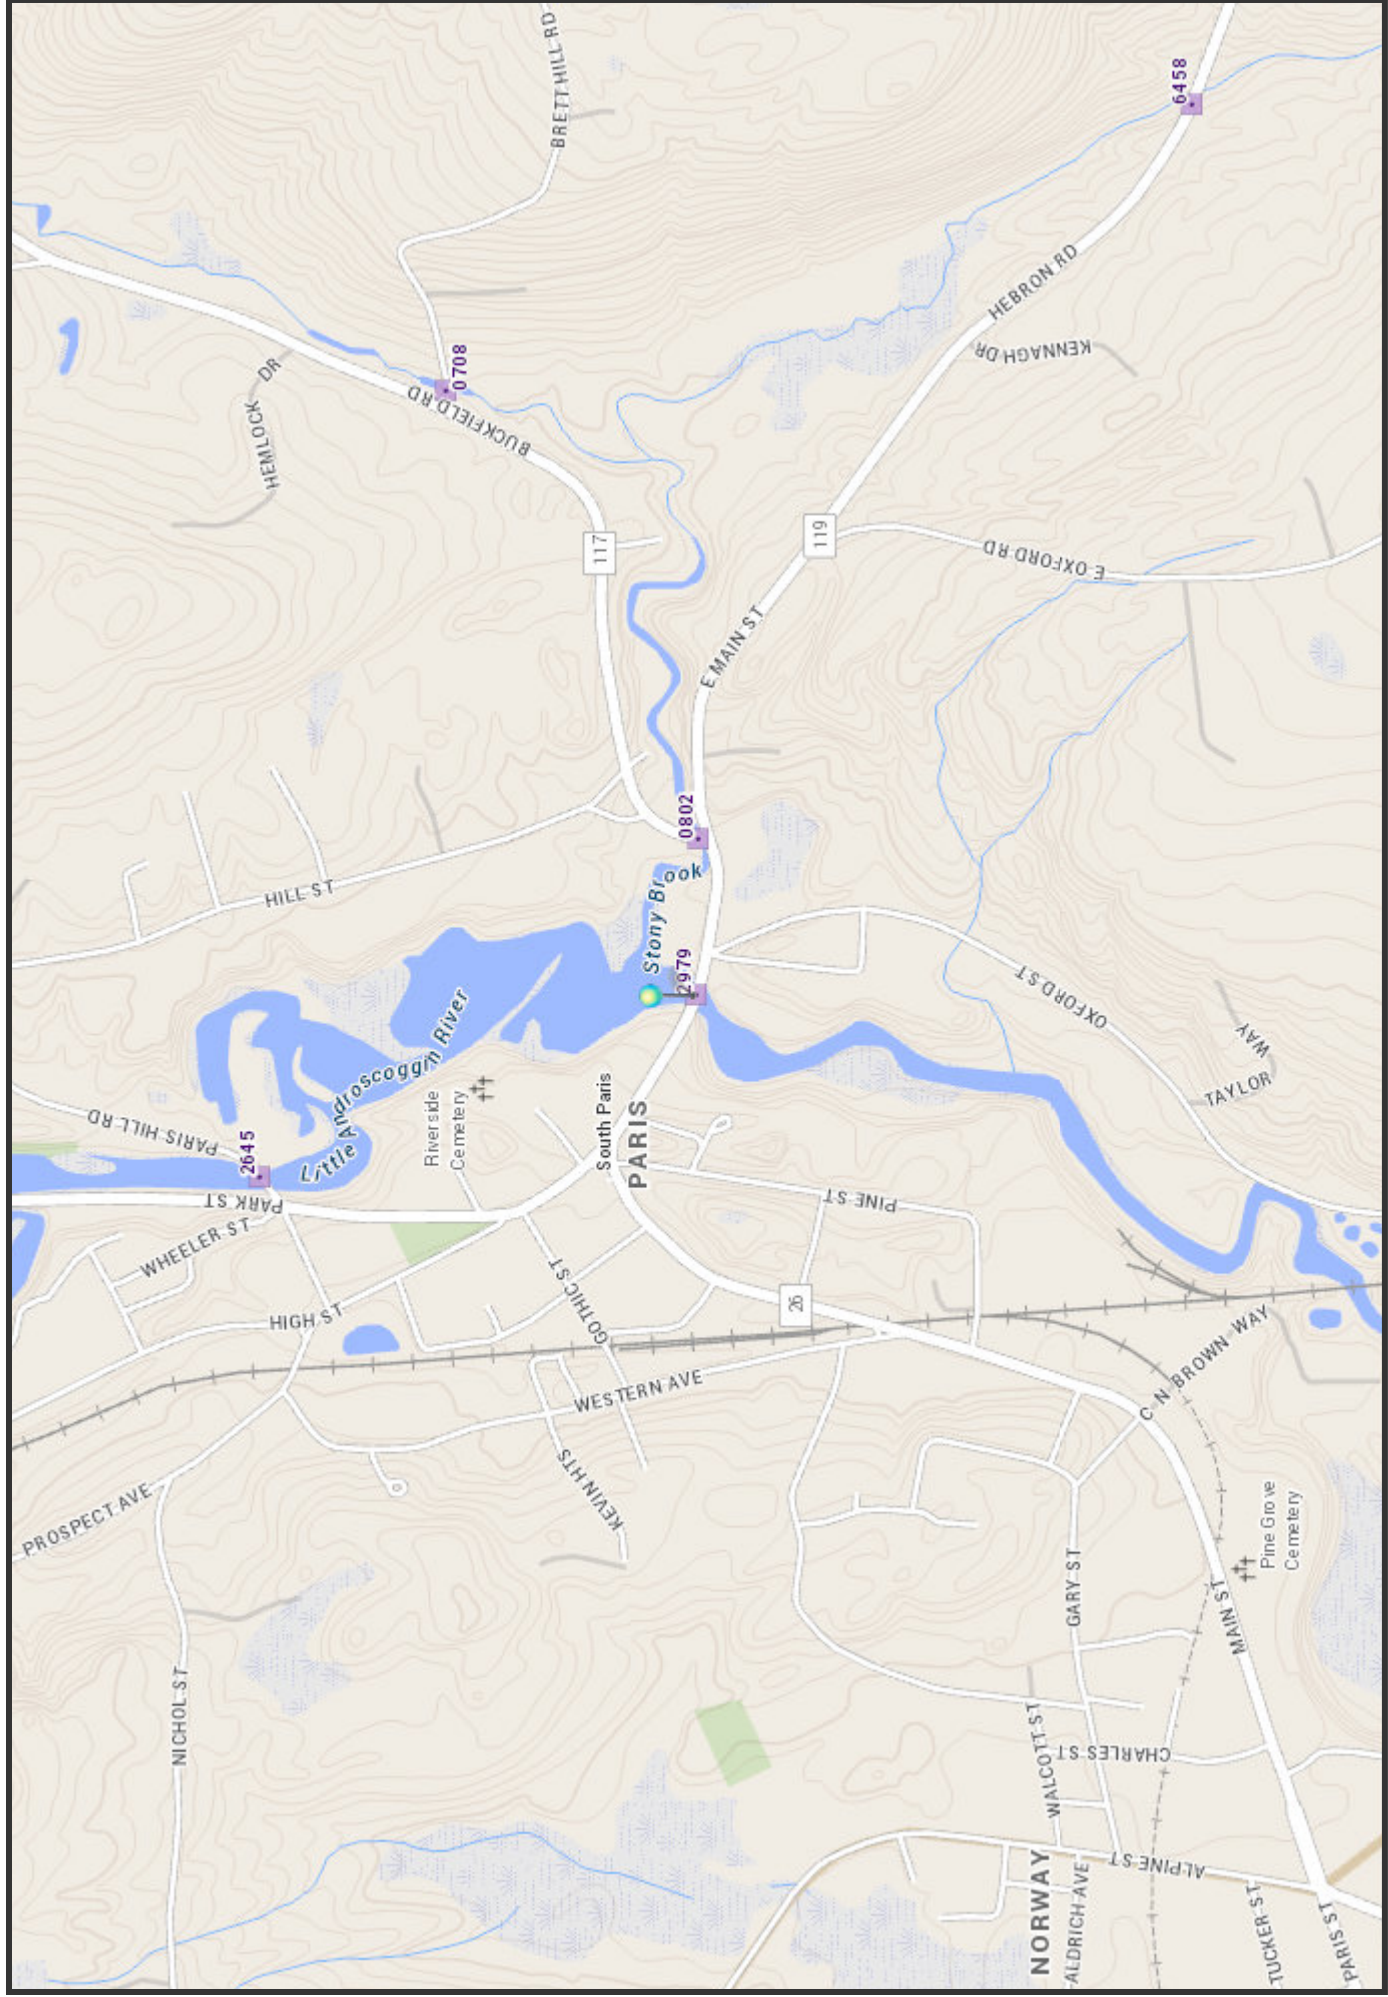

The Maine Department of Transportation provides this publication for information only. Reliance upon this information is at user risk. It is subject to revision and may be incomplete depending upon changing conditions. The Department assumes no liability if injuries or damages result from this information. This map is not intended to support emergency dispatch.

0.4 Miles
1 inch = 0.28 miles

Date: 11/15/2017
Time: 1:40:25 PM

General Decision Number: ME170116 12/15/2017 ME116

State: Maine

Construction Type: Highway

County: Oxford County in Maine.

HIGHWAY CONSTRUCTION PROJECTS

Note: Under Executive Order (EO) 13658, an hourly minimum wage of \$10.20 for calendar year 2017 applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2015. If this contract is covered by the EO, the contractor must pay all workers in any classification listed on this wage determination at least \$10.20 (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in calendar year 2017. The EO minimum wage rate will be adjusted annually. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Modification Number	Publication Date
0	09/29/2017
1	12/15/2017

* ENGI0004-022 12/01/2017

	Rates	Fringes
POWER EQUIPMENT OPERATOR:		
Grader/Blade.....	\$ 29.80	26.66
Milling Machine.....	\$ 29.80	26.66

SUME2014-035 06/23/2017		

	Rates	Fringes
CARPENTER, Includes Form Work....	\$ 18.34	2.84
HIGHWAY/PARKING LOT STRIPING:		
Laborer.....	\$ 14.80	1.27
IRONWORKER, REINFORCING.....	\$ 16.27	0.00
LABORER: Asphalt, Includes Raker, Shoveler, Spreader and Distributor.....	\$ 15.40	2.69
LABORER: Common or General.....	\$ 15.83	1.99
LABORER: Landscape.....	\$ 18.69	2.70

LABORER: Wheelman.....	\$ 15.64	4.29
OPERATOR:		
Backhoe/Excavator/Trackhoe.....	\$ 18.80	4.16
OPERATOR: Bobcat/Skid		
Steer/Skid Loader.....	\$ 20.38	1.66
OPERATOR: Broom/Sweeper.....	\$ 19.09	5.20
OPERATOR: Bulldozer.....	\$ 17.30	3.50
OPERATOR: Loader.....	\$ 18.59	5.53
OPERATOR: Mechanic.....	\$ 22.07	8.73
OPERATOR: Paver (Asphalt,		
Aggregate, and Concrete).....	\$ 21.46	8.78
OPERATOR: Screed.....	\$ 19.02	4.82
OPERATOR: Roller (Earth).....	\$ 16.43	3.40
OPERATOR: Roller Asphalt.....	\$ 24.16	3.55
TRAFFIC CONTROL: Flagger.....	\$ 9.38	0.00
TRAFFIC CONTROL:		
Laborer-Cones/		
Barricades/Barrels -		
Setter/Mover/Sweeper.....	\$ 17.47	4.80
TRUCK DRIVER: Dump Truck.....	\$ 15.83	1.16
TRUCK DRIVER: TackTruck.....	\$ 20.18	7.75

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

=====

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other

health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

Union Rate Identifiers

A four letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than "SU" or "UAVG" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers

Classifications listed under the "SU" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates

the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those classifications; however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

- * an existing published wage determination
- * a survey underlying a wage determination
- * a Wage and Hour Division letter setting forth a position on a wage determination matter
- * a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

=====

END OF GENERAL DECISION

**SPECIAL PROVISION
SECTION 104
GENERAL RIGHTS & RESPONSIBILITIES
(Bridge Closure Notification)**

Section 104, General Rights and Responsibilities, of the Standard Specifications is amended as follows:

104.4.10 Coordination of Bridge Closure/Bridge Width Restriction Notification:

Paragraph 2 is removed and replaced with the following:

A public notice shall be published in a local newspaper ten day prior to the closure.

SPECIAL PROVISION
SECTION 105
General Scope of Work
(Environmental Requirements)

In-Water work consists of any activity conducted below the normal high water mark of a river, stream, brook, lake, pond or “Coastal Wetland” areas that are subject to tidal action during the highest tide level for the year which an activity is proposed as identified in the tide tables published by the National Ocean Service. <http://www.oceanservice.noaa.gov/> For the full definition of “Coastal Wetlands”, please refer to 38 MRSA 480-B(2)

I. In-Water Work shall not be allowed between the dates of October 1 and July 14.
(In-Water work is allowed from July 15 to September 30)

II. In-Water work window applies to the following water bodies:

1. Little Androscoggin River at proposed bridge improvements

III. Special Conditions:

1. Special Conditions of Army Corps of Engineers (ACOE) Category II permit apply (see permit and conditions in contract documents).
2. All rubble removal removed from the site shall be disposed of in an upland location and not in a wetland or other protected natural resource.

IV. Approvals:

1. Temporary Soil Erosion and Water Pollution Control Plan
2. Permitted Resource Impacts (square feet), see ACOE permit for locations:

<i>Wetland:</i>	<i>Stream:</i>
<i>Permanent: PFO-335</i>	<i>Permanent: RUS-950</i>
	<i>Temporary: RUS-800</i>
	<i>Rubble Removal area: 2300</i>

V. All activities are prohibited (including placement and removal of cofferdams unless otherwise permitted by Regulatory Agencies) below the normal high water mark if outside the prescribed in-water work window, except for the following:

1. Work within a cofferdam constructed according to MaineDOT’s Standard Specifications and in adherence with the contractors approved “Soil Erosion and Water Pollution Control Plan”.

VI. No work is allowed that completely blocks a river, stream, or brook without providing downstream flow.

NOTE: Regulatory Review and Approval is required to modify the existing In-Water work window. Requests for work window extensions must be submitted to the MaineDOT Environmental Office. Approval of requests for work window extensions is not guaranteed and may result in delays in construction schedule that are the sole responsibility of the contractor.

SPECIAL PROVISION 105
CONSTRUCTION AREA

A Construction Area located in the **Town of Paris** has been established by the Maine Department of Transportation (MDOT) in accordance with provisions of 29-A § 2382 Maine Revised Statutes Annotated (MRSA).

- (a) The section of highway under construction in the town of Paris, Oxford County on E Main Street over Little Androscoggin River.
- (b) (Route 117 & 119) over Little Androscoggin River station 99+60.00 to station 105+75.00 of the construction plus approaches.

Per 29-A § 2382 (7) MRSA, the MDOT may “*issue permits for stated periods of time for loads and equipment employed on public way construction projects, United States Government projects or construction of private ways, when within construction areas established by the Department of Transportation. The permit:*

A. Must be procured from the municipal officers for a construction area within that municipality;

B. May require the contractor to be responsible for damage to ways used in the construction areas and may provide for:

(1) Withholding by the agency contracting the work of final payment under contract; or

(2) The furnishing of a bond by the contractor to guarantee suitable repair or payment of damages.

The suitability of repairs or the amount of damage is to be determined by the Department of Transportation on state-maintained ways and bridges, otherwise by the municipal officers;

C. May be granted by the Department of Transportation or by the state engineer in charge of the construction contract; and

D. For construction areas, carries no fee and does not come within the scope of this section.”

The Municipal Officers for the **Town of Paris** agreed that an Overlimit Permit will be issued to the Contractor for the purpose of using loads and equipment on municipal ways in excess of the limits as specified in 29-A MRSA, on the municipal ways as described in the “Construction Area”.

As noted above, a bond may be required by the municipality, the exact amount of said bond to be determined prior to use of any municipal way. The MDOT will assist in determining the bond amount if requested by the municipality.

The maximum speed limits for trucks on any town way will be 25 mph (40 km per hour) unless a higher legal limit is specifically agreed upon in writing by the Municipal Officers concerned.

SPECIAL PROVISION
SECTION 107
TIME
(Limitations of Operations & Contract Time)

The Contractor shall plan and conduct his operations in such a manner that Paris, Billings Bridge, remains open to un-restricted traffic except as indicated below. All traffic control items necessary to maintain traffic throughout the project shall be paid for by the appropriate pay items.

The Paris Billings Bridge may be limited to one lane of reversible traffic from Monday, April 8, 2019 to Saturday, September 14, 2019.

The new bridge shall be substantially complete with two lanes open to traffic on or before September 30, 2019. Substantially complete is defined as having the following completed: concrete deck, deck surface grinding, curb, bridge rail, approach rail, and approach roadway (except for HMA wearing course).

Bridge Night Closures:

Billings Bridge may be closed to traffic for a maximum of twenty (20) minutes per stoppage for the demolition and removal of the existing superstructure and erection of structural steel, with time between successive stoppages during nighttime hours to clear queues. Nighttime closures shall be limited to between the hours of 12:00 am to 5:00 am for a maximum of six (6) nights total. For any bridge closure which exceeds the time limit noted above, the Contractor will be assessed a penalty through traffic control violations as outlined in Section 652.8 in the Standard Specifications. Penalties shall be assessed starting one (1) minute beyond the allowed closure time that impacts traffic flow. Additional penalties will be assessed after each closure period to the maximum violation provided in Section 652.8.

Two weeks advance notice shall be provided to local travelers prior to utilizing short-duration closures as described above. Notification shall be provided through the use of Portable Changeable Message Signs (PCMS).

The contract completion date for all Work is November 1, 2019.

SPECIAL PROVISION
SECTION 107
TIME
(Schedule of Work Required)

Add the following to Section 107.4.2, Schedule of Work Required:

CPM Schedule for Bridge Closure Period: In addition to the requirements described above, the Contractor shall prepare separate and detailed CPM schedules for all phases of the project that include full roadway closures. These additional CPM schedules shall show all major construction activities, project phasing, controlling activities, project required milestones, and shall show all activity durations in hourly increments.

SPECIAL PROVISION
SECTION 202
DIAMOND GRINDING CONCRETE PAVEMENT

Description This work shall consist of diamond grinding the top surface of a Portland cement concrete bridge deck at the locations indicated on the Contract Plans.

Construction Requirements The equipment used to diamond grind the top surface of concrete bridge deck or approach slab shall be a self-propelled machine specifically designed to smooth and texture Portland cement concrete, equipped with diamond tipped saw blades. All equipment used to diamond grind shall be subject to the approval of the Engineer, prior to the start of work.

The concrete structural slab shall be diamond ground after it has reached an age of 14 days or a minimum compressive strength of 3500 psi.

Grinding shall be longitudinal, and shall begin and end at lines normal to the pavement centerline in any ground section. The diamond ground surface shall be uniform in appearance with a longitudinal corduroy type texture. The grooves shall be between 0.10 and 0.15 inches wide. The land area between the grooves shall be between 0.065 and 0.125 inches. The peak of the ridges shall be approximately 1/16 inch higher than the bottom of the grooves.

The cutting of grooves over an area already grooved will not be permitted. No cutting blade shall be introduced into an already established groove.

During the diamond grinding operations, the Engineer will verify, at random, that the desired groove depth is being achieved. If it is determined that the desired groove depth is not being achieved, the Contractor shall stop the grooving operations and make the necessary adjustments.

The Contractor shall supply the Engineer with two accurate, easily readable, gauges with which to verify the groove depth. The gauges shall be made available to the Engineer one week prior to the anticipated start of the grooving operation. Gauges shall be accompanied by manufacturer's instructions for their use, if deemed necessary.

Slurry, or debris, from the diamond grinding operation shall be continuously removed. The slurry, or debris, shall be disposed of properly by the Contractor.

Method of Measurement Diamond grinding concrete pavement will be measured by the square yard of total surface area to be grooved as noted on the plans.

Basis of Payment The accepted quantity of diamond grinding concrete payment will be paid for at the contract unit price per square yard complete in place.
Payment will be made under:

<u>Pay Item</u>	<u>Pay Unit</u>
202.1235 Diamond Grinding Concrete Pavement	Square Yard

SPECIAL PROVISIONS
SECTION 202
REMOVING STRUCTURES AND OBSTRUCTIONS
(Removing Pavement Surface)

The November 2014 Revision of the Standard Specifications, Section 202-Removing Structures and Obstructions, subsection 202.061-Removing Pavement Surface, has been removed and replaced in its entirety by the following:

202.061 Removing Pavement Surface The equipment for removing the bituminous surface shall be a power operated milling machine or grinder capable of removing bituminous concrete pavement to the required depth, transverse cross slope, and profile grade by the use of an automated grade and slope control system. The controls shall automatically increase or decrease the pavement removal depth as required, and readily maintain desired cross slope, to compensate for surface irregularities in the existing pavement course. The equipment shall be capable of accurately establishing profile grades by referencing from a fixed reference such as a grade wire, or from the existing pavement surface using a 30 foot minimum contact ski (floating beam), or 24 foot non-contact grade control beam.

The Contractor shall locate and remove all objects in the pavement through the work area that would be detrimental to the planing or grinding machine. Any structures or obstructions left within the travel lane or shoulders shall have tapers installed according to Standard Detail 202(01). The finished milled surface will be inspected before being accepted, and any deviations in the profile exceeding 1/2 inch under a 16 foot string line or straightedge placed parallel to the centerline will be corrected. Any deviations in the cross-slope that exceed 3/8 inch under a 10 foot string line or straightedge placed transversely to centerline will be corrected. All corrections will be made with approved methods and materials. Any areas that require corrective measures will be subject to the same acceptance tolerances. Excess material that becomes bonded to the milled surface will be removed to the Resident's satisfaction before the area is accepted.

On highways or expressways with directional traffic, the Contractor will be required to remove the pavement surface on the adjacent sections of travel lane and designated portions of adjacent shoulder before the end of the following calendar day unless the centerline edge is tapered to a 12:1. Failure to remove the centerline vertical edge by milling, using the approved taper, or matching the adjacent course the following day will constitute a traffic control violation unless an excusable delay is granted by the Department. The Contractor will be required to remove the specified pavement course over the full width of the mainline traveled ways prior to opening the sections to weekend or holiday traffic.

On roadways with two-way traffic, the Contractor will be required to remove the specified pavement course over the full width of the mainline traveled ways prior to opening the sections to weekend or holiday traffic.

During any period that a centerline vertical or tapered edge exists, the Contractor will be responsible for installing additional warning signage that clearly defines the centerline vertical or tapered edge and elevation differential hazard, as well as additional centerline delineation such as double RPM application, or temporary painted line. The Traffic Control Plan shall include the additional requirements. All signs and traffic control devices will conform to Section 719.01, and Section 652, and will be installed prior to the work, at a maximum spacing of 0.50 mile for the entire length of the effected roadway section. All additional signing, labor, traffic control devices, or incidentals will not be paid for directly, but will be considered incidental to the appropriate 652 bid items.

When pavement milling operations leave a 2 inch or less exposed vertical face at the edge of the traveled way, RPMs shall be placed on the remaining pavement surface along the vertical edge at 200 foot intervals. Uneven pavement signs shall be placed at a maximum spacing of ½ mile when pavement milling operations leave an exposed vertical face at the edge of travelway.

When pavement milling operations on directional or bi-directional traffic roadways leave an exposed vertical face greater than 2 inches at the edge of the traveled way the edge shall be either;

1. Be tapered to a zero edge by means of milling a 12:1 transition from the edge of traveled way onto the shoulder before opening the lane to traffic. Tapers shall be removed to form a vertical edge prior to the placement of the new pavement course. No additional payment will be made for tapers, or taper removal.
2. Have an additional 2 feet of pavement shall be removed from the shoulder to eliminate the vertical edge at the edge of travelway before opening the lane to traffic. Payment will be made under the pavement removal item.
3. A pavement layer will be placed to reduce the vertical edge to 2 inch or less before opening the lane to traffic.

As a minimum, the use of temporary painted line, or RPMs placed along the edge of traveled way at 200 foot intervals is required. When pavement milling is extended into the shoulder (including milled tapers), appropriate channelization devices shall be placed 2 feet outside the edge of the vertical face at intervals not exceeding 600 feet, and RPMs shall be placed on the remaining pavement surface along the vertical edge at 200 foot intervals. Uneven pavement signs shall be placed at a maximum spacing of ½ mile when any pavement milling operations leaves an exposed uneven pavement surface.

Any areas of concern, such as de-lamination or pot-holing shall be identified on a continuous basis as milling progresses. Proper corrective action will be determined by the Resident and paid for under the appropriate contract items, and if required, completed prior to opening lane to traffic. Any issues that arise **up to** 7 calendar days after being milled will be the responsibility of the MaineDOT unless otherwise noted in Special Provision Section 105 – Limitations Of Operations. Issues that arise after 7 calendar days will be the responsibility of the Contractor unless otherwise noted in Special Provision Section 105 – Limitations Of Operations.

SPECIAL PROVISION
SECTION 203
EXCAVATION AND EMBANKMENT
(Dredge Materials)

Description: Dredge Material (See MaineDOT Standard Specifications § 101.2 Definitions) is regulated as a Special Waste. This material can be reused with a Beneficial Use Permit issued by the Maine Department of Environmental Protection (MDEP). Further, the Beneficial Use of Dredge Material from Class A, Class AA and Class SA water bodies is exempt from Beneficial Use Permits. Work associated with the Billings Bridge Replacement Project in Paris will occur in a Class A water body; therefore, the Beneficial Use of Dredge Material from this initiative is exempt from Beneficial Use Permits.

CONSTRUCTION REQUIREMENTS

Management: The contractor shall ensure that all Dredge Material excavated from the Billings Bridge Replacement Project in Paris is Beneficially Used in the area(s) specified by MaineDOT.

Method of Measurement: Dredge Material will be measured by the cubic yard of material removed.

Basis of Payment: Payment for the Beneficial Use of Dredge Material will be incidental to the Contract Pay Items.

Payment shall be full compensation for excavation, dewatering, managing, transporting, and placement of the Dredge Materials.

SPECIAL PROVISION

SECTION 401 - HOT MIX ASPHALT PAVEMENT

The Standard Specification 401 – Hot Mix Asphalt Pavement, has been modified with the following revisions. All sections not revised by this Supplemental Specification shall be as outlined in Section 401 of the Standard Specifications.

401.18 Quality Control Method A, B & C The Contractor shall operate in accordance with the approved Quality Control Plan (QCP) to assure a product meeting the contract requirements. The QCP shall meet the requirements of Section 106.6 - Acceptance and this Section. The Contractor shall not begin paving operations until the Department approves the QCP in writing.

The Contractor shall cease paving operations whenever one of the following occurs on a lot in progress:

- a. Method A: The Pay Factor for VMA, Voids @ N_d , Percent PGAB, composite gradation, VFB, fines to effective binder or density using all Acceptance or all Quality Control tests for the current lot is less than 0.85. No ceasing of paving operations shall be required for fines to effective binder if the mean test value is equal to the LSL or USL and $s = 0$.
- b. Method B: The Pay Factor for VMA, Voids @ N_d , Percent PGAB, composite gradation, VFB, fines to effective binder or density using all Acceptance or all Quality Control tests for the current lot is less than 0.90. No ceasing of paving operations shall be required for fines to effective binder if the mean test value is equal to the LSL or USL and $s = 0$.
- c. Method C: The Pay Factor for Percent PGAB, percent passing the nominal maximum sieve, percent passing 2.36 mm sieve, percent passing 0.300 mm sieve, percent passing 0.075 mm sieve or density using all Acceptance or all available Quality Control tests for the current lot is less than 0.85. No ceasing of paving operations shall be required for percent passing the nominal maximum sieve, percent passing 2.36 mm sieve, percent passing 0.300 mm sieve, or percent passing 0.075 mm sieve if the mean test value is equal to the LSL or USL and $s = 0$.
- d. The Coarse Aggregate Angularity or Fine Aggregate Angularity value falls below the requirements of Table 3: Aggregate Consensus Properties Criteria in Section 703.07 for the design traffic level.
- e. Each of the first 2 control tests for a Method A or B lot fall outside the upper or lower limits for VMA, Voids @ N_d , or Percent PGAB; or under Method C, each of the first 2 control tests for the lot fall outside the upper or lower limits for the nominal maximum, 2.36 mm, 0.300 mm or 0.075 mm sieves, or percent PGAB.
- f. The Flat and Elongated Particles value exceeds 10% by ASTM D4791.
- g. There is any visible damage to the aggregate due to over-densification other than on variable depth shim courses.
- h. The Contractor fails to follow the approved QCP.

401.203 Method C Lot Size will be the entire production per JMF for the project, or if so agreed at the Pre-paving Conference, equal lots of up to 4500 tons, with unanticipated over-runs of up to 1500 ton rolled into the last lot. Sublot sizes shall be 750 ton for mixture properties, 500 ton for base or binder densities and 250 ton for surface densities. The minimum number of sublots for mixture properties shall be 4, and the minimum number of sublots for density shall be five.

TABLE 7: METHOD C ACCEPTANCE LIMITS

Property	USL and LSL
Passing 4.75 mm and larger sieves	Target +/-7%
Passing 2.36 mm to 1.18 mm sieves	Target +/-5%
Passing 0.60 mm	Target +/-4%
Passing 0.30 mm to 0.075 mm sieve	Target +/-2%
PGAB Content	Target +/-0.4%
% TMD (In place density)	95.0% +/- 2.5%

Pay Adjustment Method C

The Department will use density, Performance Graded Asphalt Binder content, and the percent passing the nominal maximum, 2.36 mm, 0.300 mm and 0.075 mm sieves for the type of HMA represented in the JMF. If the PGAB content falls below 0.80, then the PGAB pay factor shall be 0.55.

Density: For mixes having a density requirement, the Department will determine a pay factor using Table 7: Method C Acceptance Limits:

$$PA = (\text{density PF} - 1.0)(Q)(P) \times 0.50$$

PGAB Content and Gradation The Department will determine a pay factor using Table 7: Method C Acceptance Limits. The Department will calculate the price adjustment for Mixture Properties as follows:

$$PA = (\% \text{ Passing Nom. Max PF} - 1.0)(Q)(P) \times 0.05 + (\% \text{ passing 2.36 mm PF} - 1.0)(Q)(P) \times 0.05 + (\% \text{ passing 0.30 mm PF} - 1.0)(Q)(P) \times 0.05 + (\% \text{ passing 0.075 mm PF} - 1.0)(Q)(P) \times 0.10 + (\text{PGAB PF} - 1.0)(Q)(P) \times 0.25$$

401.223 Process for Dispute Resolution (Methods A B & C only)

TABLE 10: DISPUTE RESOLUTION VARIANCE LIMITS

PGAB Content	+/-0.4%
G_{mb}	+/-0.030
G_{mm}	+/-0.020
Voids @ N_d	+/-0.8%
VMA	+/-0.8%
Passing 4.75 mm and larger sieves	+/- 4.0%
Passing 2.36 mm to 0.60 mm sieves	+/- 3.0%
Passing 0.30 mm to 0.15	+/- 2.0 %
0.075 mm sieve	+/- 0.8%

SPECIAL PROVISION
SECTION 403
HOT MIX ASPHALT PAVEMENT

Desc. Of Course	Grad Design.	Item Number	Bit Cont. % of Mix	Total Thick	No. Of Layers	Comp. Notes
<u>4" – State Route 117/119 Travel Way, Shoulders & Berms – Full Depth</u>						
Wearing	12.5 mm	403.2081	N/A	1 ½"	1	4,8,30
Base	12.5 mm	403.2131	N/A	2 ½"	1	4,8,30
<u>1½" – State Route 117/119 Travelway & Shoulders – Mill & Overlay Areas</u>						
Wearing	12.5 mm	403.2081	N/A	1 ½"	1	4,8,30
Shim	9.5 mm	403.211	N/A	Varies	1/more	2,3,10,11,14
<u>3" – Commercial Entrances</u>						
Wearing	12.5 mm	403.208	N/A	1 ½"	1	1,4,8
Base	12.5 mm	403.213	N/A	1 ½"	1	1,4,8
<u>2" – Sidewalks, Drives & Incidentals</u>						
Wearing	9.5 mm	403.209	N/A	2"	2/more	2,3,10,11,14

COMPLEMENTARY NOTES

1. The required PGAB for this mixture will meet a **PG 64-28** grading.
2. The incentive/disincentive provisions for density shall not apply. Rollers shall meet the requirements of this special provision. The use of an oscillating steel roller shall be required to compact all mixtures pavements placed on bridge decks.
3. The design traffic level for mix placed shall be <0.3 million ESALS. The design, verification, Quality Control, and Acceptance tests for this mix will be performed at **50 gyrations**.
4. The design traffic level for mix placed shall be 0.3 to <3 million ESALS. The design, verification, Quality Control, and Acceptance tests for this mix will be performed at **50 gyrations**.
8. Section 106.6 Acceptance, (2) Method B. The Contractor may request a contract modification to change to testing method "A" prior to work starting on this item.
10. Section 106.6 Acceptance, (2) Method D.
11. The combined aggregate gradation required for this item shall be classified as a 9.5mm "**fine graded**" mixture, (using the Primary Control Sieve control point) as defined in 703.09.
14. The combined aggregate gradation required for this item shall be classified as a 9.5mm Thin Lift Mixture (TLM) mixture, using the Aggregate Gradation Control Points as defined in 703.09.
30. The required PGAB shall be a storage-stable, homogeneous, polymer modified asphalt binder that meets **PG 64E-28** grading requirements in AASHTO M 332.

Tack Coat

A tack coat of emulsified asphalt, RS-1 or RS-1h, Item 409.15 shall be applied to any existing pavement at a rate of approximately 0.03 gal/yd², and on milled pavement approximately 0.05 gal/yd² prior to placing a new course. A fog coat of emulsified asphalt shall be applied between shim/base courses and surface course as well as to any bridge membrane prior to the placement of HMA layers at a rate not to exceed 0.03 gal/yd². Tack used will be paid for at the contract unit price for Item 409.15 Bituminous Tack Coat.

SPECIAL PROVISION
SECTION 424
ASPHALT LOW MODULUS CRACK SEALER

Description This work shall consist of the furnishing and placement of crack sealing material in the cracks of existing bituminous concrete pavement in accordance with these Special Provisions. Placement shall consist of: 1) crack cleaning and drying, 2) material preparation and application, 3) material finishing and shaping and 4) barrier material and application.

Materials low modulus crack sealant material shall conform to ASTM D-3405 and the following specification.

Cone Penetration	90 - 150
Flow @ 60°C [140°F]	< 3.0mm [$\frac{1}{8}$ in]
Bond, non-immersed	Three 12.7mm [$\frac{1}{2}$ in] specimens pass 3 cycles @ 200% extension @ -29°C [-20°F]
Resilience, %	60 min
Asphalt Compatibility, ASTM D5329	pass*

* There shall be no failure in adhesion, formation of any oily exudate at the interface between the sealant and asphaltic concrete or other deleterious effects on the asphaltic concrete or sealant when tested at 60°C [140°F].

The contractor shall provide the Resident or authorized representative with a copy of the material manufacturer's recommendations pertaining to heating, application, and reheating prior to the beginning of operations or the changing of materials.

CONSTRUCTION REQUIREMENTS

Weather Low Modulus Crack Sealer shall not be applied on a wet surface or when the atmospheric temperature is below 10°C [50°F] in a shaded area at the job site, or when weather conditions are otherwise unfavorable to proper construction procedures.

Equipment Equipment used in the performance of the work shall be subject to the Resident's or authorized representative's approval and shall be maintained in a satisfactory working condition at all times.

(a) Air Compressor: Air compressors shall be portable and capable of furnishing not less than 3 m³ [4 yd³] of air per minute at not less than 620 kPa [90 psi] pressure at the nozzle. The

compressor shall be equipped with traps that will maintain the compressed air free of oil and water.

(b) Sweeper: Manually operated, gas powered air-broom or self-propelled sweeper designed especially for use in cleaning pavements shall be used to remove debris, dirt, and dust from the cracks.

(c) Hot Air Lance: Should operate with propane and compressed air in combination at 1100°C - 1650°C [2000°F - 3000°F], exit air heated at 310 m/s [1000 ft/s]. The lance should draw propane from no smaller than a 45 Kg [100 lb] tank using separate hoses for propane and air draw. The hoses shall be wrapped together with reflectorized wrap to keep them together and to protect workers in low light situations.

(d) Hand Tools: Shall consist of V-shaped squeegee, brooms, shovels, metal bars with chisel shaped ends, and any other tools which may be satisfactorily used to accomplish this work.

(e) Melting Kettle: The unit used to melt the joint sealing compound shall be a double boiler, indirect fired type. The space between inner and outer shells shall be filled with a suitable heat transfer oil or substitute having a flash point of not less than 320°C [608°F]. The kettle shall be equipped with a satisfactory means of agitating and mixing the joint sealer at all times. This may be accomplished by continuous stirring with mechanically operated paddles and/or a continuous circulating gear pump attached to the heating unit. The kettle must be equipped with thermostatic control calibrated between 94°C [200°F] and 290°C [550°F].

(f) Application Wand: The application wand shall apply a controlled flow of material via an insulated or heated hose. The nozzle shall distribute the material as called for in this specification. A pressure regulator shall be provided to regulate pressure at the nozzle. A bypass line into the holding tank is required for use when the nozzle is shut off.

Preparation All cracks greater than 5 mm [$\frac{1}{4}$ in] shall be blown free of loose material, dirt, vegetation, and other debris by high pressure air. Material removed from the crack shall be removed from the pavement surface by means of a power sweeper or appropriate hand tools as required. Cracks showing evidence of vegetation after being blown out shall be additionally cleaned by appropriate hand tools and additionally blown out. All cracks must be blown and heated via the hot air lance 10 minutes prior to the crack being sealed. Distance between the hot air lance and the crack sealing unit should be no more than 15 m [50 ft] to eliminate reinvasion of water, debris, and other incompressibles. All debris, vegetation, and water shall be removed to enhance adhesion of the crack sealing material. THIS WORK SHALL NOT BE DONE IN INCLEMENT WEATHER.

Preparation and Placement of Sealer The low modulus crack sealer material shall be heated and applied at the temperature specified by the manufacturer and approved by the Resident or authorized representative. Any material that has been heated above the manufacturer's specification shall not be used. Material that is reheated or held at temperature for an extended period of time may be used as allowed by the manufacturer's specification and approval of the

Resident or authorized representative. The Contractor shall provide the Resident or authorized representative with a suitable device for verifying the sealant temperature in the kettle and at the application site.

Any over application or spills are to be removed to the satisfaction of the Resident or authorized representative. Any sealed areas with damaged or contaminated sealer or visible voids are to be removed, prepared and resealed.

Sealer shall be delivered to the crack while the cracks are still hot from the hot air lance preparation through a pressure hose line and applicator shoe. The shoe width and the sealer overbanding area shall vary from 50 mm - 100 mm [2 in - 4 in] depending on the severity of the cracks. The applicator shall be followed by a V-shaped squeegee to minimize the thickness of the overband. Any loose material on the surface or in the crack, which may contaminate the crack sealer or impede bonding of the sealant to the pavement, is to be removed by hand tools prior to crack filling. No crack filling material shall be applied in a crack that is wet or where frost, snow, or ice is present. The ambient air temperature must be 10°C [50°F] or higher.

If the sealed area is to be opened to traffic immediately, a barrier material such as Glenzoil or an equivalent approved by the Resident shall be provided by the Contractor and shall be applied to the crack sealer to prevent pickup as directed by the Resident or authorized representative. **Areas which are designated by the Department to be overlaid shall have a cure time of 7 days.**

Quality of Work Excess of spilled sealer shall be removed from the pavement by approved methods and discarded. Any quality of Work determined to be below normal acceptable standards will not be accepted, and will be corrected and/or replaced as directed by the Resident or authorized representative.

Method of Measurement Asphalt Low Modulus Crack Sealer will be measured by the pound of sealant used. The manufacturer's weights of the sealant will be accepted as the basis for measurement.

Basis of Payment. The accepted quantity of Low Modulus Crack Sealer will be paid for at the contract unit price per pound complete in place. This price shall be full compensation for furnishing and placing crack sealer, including cleaning cracks and furnishing and placing barrier materials if necessary.

Payment will be made under:

<u>Pay Item</u>	<u>Pay Unit</u>
424.3331 Asphalt Low Modulus Crack Sealer, Applied	Pound

SPECIAL PROVISION
SECTION 424
HIGH MOLECULAR WEIGHT METHACRYLATE CRACK SEALER

Description This work shall consist of furnishing and applying a high molecular weight methacrylate crack sealer to an existing concrete bridge deck as shown on the plans or as ordered.

Materials The container label of the delivered product shall clearly show the product name, manufacturer name, and batch, lot, or other identifying number of the product. The product shall be mixed and prepared as instructed by the manufacturer. The following products may be used, or an equal approved by the Resident.

<u>MATERIAL</u>	<u>MANUFACTURER</u>
Duraguard 401	ChemMasters, Inc. 300 Edwards Street Madison, OH 44057 (440) 428-2105
KBP 204 HMWM Monomer Healer/Sealer Penetrant	KwikBond Polymers 923 Teal Drive Benicia, CA 94510 (866) 434-1772
Sikadur 52	Sika Corporation 201 Polito Avenue Lyndhurst, NJ 07071 (800) 933-7452

CONSTRUCTION REQUIREMENTS

Surface preparation. The concrete deck shall be clean and free of laitance, oil, surface moisture, membrane residue, and other foreign materials. Abrasive blast cleaning may be required by the Engineer to achieve a suitable surface.

Storage and Mixing. System components shall be stored and mixed in accordance with the manufacturer's instructions and recommendations. Open flames and spark producing equipment shall be removed from the work area prior to commencement of the mixing and application.

Conditions before application. Application shall not proceed unless the concrete substrate and ambient air temperatures are at least 40 degrees F. The Contractor shall be responsible for the protection of equipment and adjacent areas from spillage or other contamination.

Full-depth cracks and visible surface cracks shall be located and marked before application of the crack filler. Cracks greater than 1/8 inch wide shall be filled with oven-dried sand before application of the crack filler. Prior to the full crack sealing operation, a minimum of 1 full-depth crack, selected by the Engineer, shall be filled in accordance with this specification. Leakage from the underside of the deck will be monitored. The Engineer may require that the underside of subsequent cracks be sealed or that other measures be taken to minimize the amount of leakage through the bottom of the crack.

Application. The sealer shall be applied to the concrete surface within 5 minutes after mixing is completed. The crack sealer shall be poured and allowed to pond over each crack. The crack sealer shall be allowed to penetrate the cracks for a period of at least 5 minutes, or until full penetration occurs. Excess material shall be redistributed by roller or squeegee over the deck surface within 15 minutes of application, leaving no visible surface film. A second application may be required by the Engineer to ensure that all full-depth cracks and visible surface cracks are sealed.

Remaining areas of the deck shall be coated with crack sealer after individual cracks are sealed. The crack sealer shall be allowed to penetrate the deck surface for a period of at least 5 minutes. Excess material shall be removed so that no visible surface film remains. The amount of material applied shall be monitored to minimize the amount of excess.

Method of Measurement High molecular weight methacrylate crack sealer will be measured by the gallon.

Basis of Payment The accepted quantity of high molecular weight methacrylate crack sealer will be paid for at the contract unit price per gallon, complete in place.

<u>Pay item</u>	<u>Pay Unit</u>
424.304 High Molecular Weight Methacrylate Crack Sealer	Gallon

SPECIAL PROVISION
SECTION 502
STRUCTURAL CONCRETE
(Precast Deck Panels)

Description This work shall consist of casting, furnishing, and erecting prestressed structural concrete deck panels (hereafter called “precast deck panels”) and all related materials as an optional stay-in-place forming system in accordance with the contract plans and specifications.

Construction Precast Deck Panels shall comply with Section 535 – Precast, Prestressed Concrete Superstructure.

Precast deck panels shall be manufactured in conformity with the following tolerances:

Depth of slab	- 3 mm, + 6 mm [-1/8 in, + 1/4 in]
Width of slab	-0, + 6 mm [-0, + 1/4 in]
Length of slab	± 6 mm [± 1/4 in]
Horizontal alignment	6 mm [1/4 in] (deviation from line parallel to centerline)
Squareness	13 mm [1/2 in] max. Difference in diagonal meas.
Vertical Position of Strand group	+0, - 6 mm [+0, -1/4 in] Meas. from bottom of slab
Vertical position of individual strands	± 6 mm [± 1/4 in]
Horizontal strand position	± 13 mm [± 1/2 in]
Strand Projection	-6mm, +19 mm [- 1/4 in, + 3/4 in]
Bowing	± 6 mm [± 1/4 in]
Threaded jack inserts	± 6 mm [± 1/4 in] longitudinally and transversely

Basis of Payment All work will be considered incidental to and included in Pay Item 502.26 Structural Concrete Roadway and Sidewalk Slab on Steel Bridges. Payment shall include full compensation for all materials wholly or partly in the precast deck panels and related materials or work required for the panel erected as shown on the plans. Related materials and work will include, but not limited to furnishing and installing temporary supports, including adhesive and grout bedding, reinforcing steel, welded wire fabric and cast-in-place concrete.

SPECIAL PROVISION
SECTION 518
STRUCTURAL CONCRETE REPAIR

The last paragraph of Subsection 518.11, Basis of Payment is revised by the addition of the following:

<u>Pay Item</u>	<u>Pay Unit</u>
518.511 Full Depth Concrete Repair	SF

SPECIAL PROVISION
SECTION 524
TEMPORARY STRUCTURAL SUPPORTS
(Roadway Support During Staged Construction)

524.01 Description

The following sentence is added:

This work shall consist of designing, fabricating, erecting, maintaining and dismantling temporary structural support for the purpose of supporting the remaining portion of the existing deck to support traffic loads during staged construction as indicated on the Plans.

524.03 Design

The following sentence is added:

The design for the Temporary Structural Support for roadway support shall be submitted to the Resident at least 3 weeks prior to construction.

524.05 Method of Measurement

This section is revised as follows:

All Temporary Structural Supports used behind the abutments to support the portion of Route 117/119 carrying traffic during staged construction will be measured by one lump sum.

524.06 Basis of Payment

This section is revised as follows:

The Temporary Structural Supports provided under this provision will be paid for at the Contract lump sum price which shall be full compensation for all materials, equipment, labor, and incidentals necessary for the design, installation, maintenance, dismantling and removal of such support in accordance with this provision and the Standard Specifications.

Payments will be made under:

	<u>Pay Item</u>	<u>Pay Unit</u>
524.301	Temporary Structural Support	Lump Sum

SPECIAL PROVISION
SECTION 526
CONCRETE BARRIER
(Portable Concrete Barrier, Anchored)

Add to 526.01 Description.

Portable Concrete Barrier, Anchored Double faced concrete barrier anchored as shown on the plans.

Amend 526.02 Materials.

- a. Concrete. Add the following to the last paragraph: “Concrete for Portable Concrete Barrier, Anchored shall have a minimum compressive strength of 4000 PSI.”

Amend 526.03 Construction.

Add the following paragraph: “Portable Concrete Barrier, Anchored shall be anchored by a method satisfactory to the Resident.”

Amend 526.04 Method of Measurement.

Replace “Temporary concrete barrier” with “Temporary concrete barrier or portable concrete barrier” in the second paragraph.

Amend to 526.05 Basis of Payment.

Add the following paragraph: “Portable Concrete Barrier, Anchored will be paid for at the contract unit price per linear foot”.

Payment will be made under:

<u>Pay Item</u>	<u>Pay Unit</u>
526.302 Portable Concrete Barrier, Anchored	Linear Foot

SPECIAL PROVISION
SECTION 530
GLASS FIBER REINFORCED POLYMER
(Reinforcement Bars)

The following is added to the Standard Specifications as Section 530, Glass Fiber Reinforced Polymer, Reinforcement Bars:

530.01 Description This work shall consist of furnishing and placing Glass Fiber Reinforced Polymer (GFRP) reinforcement bars, in accordance with the Plans and as specified herein.

530.02 Materials GFRP reinforcement shall meet the requirements shown in the AASHTO Bridge Design Guide Specifications for GFRP-Reinforced Concrete Bridge Decks and Traffic Railings, including interim revisions, except as shown on the Plans and as stated herein. All GFRP reinforcement shall be deformed or sand coated.

GFRP reinforcement bars shall meet the tensile strength and modulus of elasticity specified on the Plans and shall be one of the following approved products, or approved equal:

Aslan 100 from Hughes Brothers, Inc.
ComBAR from Fiberline Composites, Inc.
MateenBar from Pultron Composites, Ltd.
V-Rod from Pultrall, Inc.

All GFRP reinforcement in the same structural component shall be supplied by the same manufacturer; there shall be no mixing of products from different manufacturers in a component unless permitted in the Contract Documents.

530.021 Documentation The GFRP reinforcement manufacturer shall submit two (2) copies of a Material Certification stating that the GFRP reinforcement incorporated into the Project meets the requirements of this specification to the Resident. The certification shall include the test values and test procedures used to determine the physical properties of the GFRP reinforcement. The certification shall bear the notarized signature of a responsible authorized representative of the GFRP reinforcement manufacturer. Each bundle of GFRP reinforcement shall be identified with the lot number affixed to each bundle by means of a durable tag.

530.03 Schedule of Material When the Plans do not include GFRP reinforcement bar schedules, the Contractor shall submit order lists, shape diagrams and bar layout drawings in accordance with Subsection 105.7 to the Resident for approval. The GFRP reinforcement shall not be ordered until these lists and drawings are approved. Approval shall not relieve the Contractor of full responsibility for the satisfactory completion of the Work specified herein. When the Department allows the use of precast concrete deck panels, or any other significant changes that affect the quantity of GFRP reinforcement, the Contractor shall be responsible for revising the reinforcement bar schedule; the revised schedule shall be submitted to the Resident for approval.

Substitution of different size GFRP reinforcement shall not be permitted except with the written authorization of the Engineer of Record.

When the Department allows the use of precast concrete deck panels, or any other significant changes that affect the quantity of GFRP reinforcement, the Contractor shall be responsible for revising the reinforcement bar schedule; the revised reinforcement schedule shall be submitted to the Resident for approval.

530.04 Fabrication Forming and fabrication tolerances of GFRP reinforcement shall be in conformance with the latest edition of the "Manual of Standard Practice of the Concrete Reinforcing Steel Institute" and the "Detailing Manual of the American Concrete Institute."

530.05 Protection of Material Delivery, storage, and handling of GFRP reinforcement shall be in accordance with the manufacturer's recommendations. The Contractor shall prevent bending, coating the bars with soil, oil, or other material, or other damage to the GFRP reinforcement.

All handling of GFRP reinforcement by mechanical means shall be done by equipment having padded contact areas, or using nylon webbing slings. The use of chains or wire rope slings will not be allowed, even when used with padding. All bundles of GFRP reinforcement shall be lifted with a strong back, spreader bar, multiple supports, or a platform bridge to prevent bar-to-bar abrasion from sags in the bundles. Support points during lifting or transporting of bundled GFRP reinforcement shall be spaced at a maximum of 15 feet, or as required by the manufacturer, whichever is more restrictive. Bundled bars shall be strapped together with non-metallic or padded straps in a manner to prevent bar-to-bar abrasion due to relative movement between bars.

Individual bars shall be handled in a manner that prevents damage to the coating due to abrasion or impact, and at no time shall any bar be moved by dragging over any surface, including other reinforcement bars. Sufficient personnel shall be assigned to assure compliance with the provisions above.

Bars loaded for transport shall be loaded and strapped down in a manner that will prevent damage from motion and vibration, to the greatest extent possible. Bundles of bent bars shall be transported strapped to wooden platforms or shall be crated. All individual bundles and layers of bundles shall be separated, and supported by dunnage.

GFRP reinforcement shall be stored on skids or other supports a minimum of 12 inches above the ground surface and protected at all times from damage and surface contamination. The storage supports shall be constructed of wood or other material that will not damage the surface of the GFRP reinforcement or sand coating. Bundles of bars shall be stored on supports in a single layer. Each bundle shall be placed on the supports out of contact with adjacent bundles. If it is expected that GFRP bars will be required to be stored outdoors for a period in excess of two months, then the GFRP reinforcement shall be protected from ultraviolet radiation. Prevent exposure of GFRP to temperatures above 120 degrees Fahrenheit.

All damaged bars shall be repaired in accordance with manufacturer recommendations and

inspected and accepted by the Resident prior to placing concrete. All bars with total damage greater than 2 percent of the bar surface area, including previously repaired areas, will be rejected. All cuts, scratches, cracks, abrasions, or other damage, visible to the naked eye, shall be repaired. All bars damaged prior to placement within the formwork shall be repaired prior to GFRP reinforcement placement.

530.06 Placing and Fastening GFRP reinforcement shall be accurately placed in the positions shown on the Plans. Support and firmly tie or otherwise secure GFRP reinforcement in place to prevent settlement, floating upward, or movement in any direction during the placing and setting of the concrete.

Field bending of GFRP reinforcement is not allowed.

Field cutting of GFRP reinforcement will only be permitted with the approval of the Resident. Field cutting shall be with a high-speed cutter, fine blade saw, diamond blade or masonry saw. The GFRP reinforcement shall not be shear cut. The ends of all field cut GFRP reinforcement shall be treated in accordance with the manufacturer's recommendations.

GFRP reinforcement supported on formwork shall rest on stays, blocks, ties, hangers, GFRP or plastic chairs, bar supports made of dielectric material, or other approved materials. Blocks used for this purpose shall be precast Portland cement mortar blocks of approved shape and dimensions. Blocks shall not be used in cases where the blocks will be visible in the finished product. Reinforcement bars used as support bars shall be GFRP, stainless steel, or non-metallic. The use of pebbles, stone, brick, metal pipe, wood, or metal chairs will not be allowed. Wire bar supports will not be allowed. Layers of bars may be separated by precast Portland cement mortar blocks or other approved devices.

Bars shall be fastened together at all intersections except where spacing is less than 1 foot in either direction, in which case, fastening at alternate intersections of each bar with other bars will be permitted providing this will hold all the bars securely in position. Ties shall be soft annealed wire that has been nylon, epoxy or plastic coated. Plastic ties will also be allowed. Placing reinforcement as concrete placement progresses, without definite and secure means of holding the GFRP reinforcement in its correct position, will not be allowed.

When specified on the Plans, GFRP reinforcement shall be anchored into drilled holes. The anchoring material shall be one of the products listed on the Maine Department of Transportation's Qualified Products List and the Contractor shall submit a selected material to the Resident for approval. Installation shall be in accordance with the manufacturer's recommendations.

At each anchor location, existing reinforcement will be located to avoid drilling through existing bars. Where interferences exist, location adjustments will be determined by the Resident. Minimum embedment lengths of reinforcement shall comply with the manufacturer's recommendations for the anchoring material selected. The embedment lengths will be verified by the Resident before installation of the reinforcement.

Termination of GFRP reinforcement shall be as shown on the Plans. Any exceptions or modifications shall be approved, in writing, by the Engineer of Record.

Immediately before placing concrete, GFRP reinforcement shall be free from all foreign material. Foreign material includes, but is not limited to, dirt, paint, oil, bitumen and dried concrete mortar. Reinforcement shall be inspected and approved by the Resident prior to concrete placement.

530.07 Splicing GFRP Reinforcement shall be spliced as shown on the Plans and as specified herein. No modifications of, or additions to, the splice arrangements shown on the Plans will be allowed without the prior approval of the Resident.

Any additional splices authorized shall be staggered as much as possible. All splices shall be made in a manner that will ensure that not less than 75% of the clear concrete cover and not less than 75% of the minimum clear distance to other reinforcement will be maintained, as compared to the cover and clear distance requirements for the un-spliced reinforcement.

Lapped splices shall be made by placing the bars in contact and tying them together. Ties shall meet the requirements specified herein.

530.08 Method of Measurement GFRP reinforcement will be measured by the linear foot based on the authorized quantity in the Contract or in the approved reinforcement bar schedule submitted by the Contractor. No adjustments to the quantity will be made except to account for changes at the direction of the Resident.

If precast concrete deck panels are used, GFRP reinforcement in precast concrete deck panels will be considered incidental to the deck concrete. No separate payment will be made.

Lap splices that are authorized at the Contractor's request will not be measured for payment.

530.09 Basis of Payment Payment for Glass Fiber Reinforced Polymer, Fabricated and Delivered, shall be considered full compensation for detailing, furnishing, and proper storage of GFRP reinforcement.

Payment for Glass Fiber Reinforced Polymer, Placing, shall be full compensation for installation, adjustment, and supplies related to placing GFRP reinforcement.

Payment for work associated with furnishing and revising the GFRP reinforcement bar schedule, and all expenses incurred by the Contractor and their suppliers to fulfill the requirements specified will be considered incidental to related Contract items. No separate payment will be made.

Payment will not be made for any materials used to hold reinforcement in place or for extra GFRP reinforcement due to substitutions and splices made for the Contractor's convenience.

When GFRP is specified to be anchored into drilled holes, no additional payment will be made

for drilling and anchoring GFRP reinforcement or cutting GFRP reinforcement.

Payment will be made under:

<u>Pay Item</u>	<u>Pay Unit</u>
530.30 GFRP, Reinforcement Bars, Fabricated & Delivered	Linear Foot
530.31 GFRP, Reinforcement Bars, Placing	Linear Foot

SPECIAL PROVISION
SECTION 609
Terminal Curb Type 2

609.10 Basis of Payment

Add the following:

The accepted quantity of terminal curb type 2 will be paid for at the contract unit price each for the number of units in place.

Payment will be made under:

<u>Pay Item</u>	<u>Pay Unit</u>
609.247 Terminal Curb Type 2 - 7 feet	EA

Highway Lighting Quality Control Checklist

Subsection 634.09 Field Testing

Project Pin # _____

Location (if multiple services, please be specific)- _____

Grounding Electrode Resistance at service _____

Number of Circuits _____

Hand-Off-Auto Switch? _____

Circuit #1

Open Circuit Resistance- (Ohm out both hot legs at the cabinet while they are shorted together at the last pole and the fuse holders are disconnected at each pole) _____

Megger Test- (Meg out both hot legs to ground at the cabinet while they are shorted together at the last pole and the fuse holders are disconnected at each pole) _____

Current draw- (during normal operation)

Leg #1

Leg #2

Operating Voltage at last pole _____

Circuit #2

Open Circuit Resistance- (Ohm out both hot legs at the cabinet while they are shorted together at the last pole and the fuse holders are disconnected at each pole) _____

Megger Test- (Meg out both hot legs to ground at the cabinet while they are shorted together at the last pole and the fuse holders are disconnected at each pole) _____

Current draw- (during normal operation)

Leg #1

Leg #2

Operating Voltage at last pole _____

I, _____, certify that this work was done in accordance with subsection 643.14 and current NEC _____ guidelines, and when tested, was functioning as intended.
(YEAR)

Electrician's Signature _____

Electrician's License # _____

Highway Lighting Quality Control Checklist

Subsection 634.09 Field Testing

Project Pin # _____

Location (if multiple services, please be specific)- _____

Grounding Electrode Resistance at service _____

Number of Circuits _____

Hand-Off-Auto Switch? _____

Circuit #3

Open Circuit Resistance- (Ohm out both hot legs at the cabinet while they are shorted together at the last pole and the fuse holders are disconnected at each pole) _____

Megger Test- (Meg out both hot legs to ground at the cabinet while they are shorted together at the last pole and the fuse holders are disconnected at each pole) _____

Current draw- (during normal operation)

Leg #1

Leg #2

Operating Voltage at last pole _____

Circuit #4

Open Circuit Resistance- (Ohm out both hot legs at the cabinet while they are shorted together at the last pole and the fuse holders are disconnected at each pole) _____

Megger Test- (Meg out both hot legs to ground at the cabinet while they are shorted together at the last pole and the fuse holders are disconnected at each pole) _____

Current draw- (during normal operation)

Leg #1

Leg #2

Operating Voltage at last pole _____

I, _____, certify that this work was done in accordance with subsection 643.14 and current NEC _____ guidelines, and when tested, was functioning as intended.
(YEAR)

Electrician's Signature _____

Electrician's License # _____

Traffic Signal Quality Control Checklist

Subsection 643.14 Field Testing

Project Pin # _____

Grounding Electrode Resistance at service _____

ID tags on loop amps / detector cards? _____

Location _____

Street Approach	_____
Loop #	_____ Resistance _____
Phase #	_____ Meg to ground _____
L,C, or R Lane	_____ Amount of bondo covering loop _____
Pulse or Presence	_____

Street Approach	_____
Loop #	_____ Resistance _____
Phase #	_____ Meg to ground _____
L,C, or R Lane	_____ Amount of bondo covering loop _____
Pulse or Presence	_____

Street Approach	_____
Loop #	_____ Resistance _____
Phase #	_____ Meg to ground _____
L,C, or R Lane	_____ Amount of bondo covering loop _____
Pulse or Presence	_____

I, _____, certify that this work was done in accordance
with subsection 643.14 and current NEC _____ guidelines, and
(YEAR)
when tested, was functioning as intended.

Electrician's Signature _____

Electrician's License # _____

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

The following specifications within this Special Provision Section cover the materials, payment, summary of work, and installation and testing requirements associated with the water and sewer installation work as depicted on Sheet 52 through Sheet 55 on Plans titled "Billings Bridge Over Little Androscoggin River, Oxford County.

The specifications under this Special Provision Section and associated water and sewer design shown on Sheets 52 through 55 were prepared by Wright-Pierce.

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

TABLE OF CONTENTS

<u>SECTION</u>	<u>TITLE</u>
00406	Compliance Statement
00408	Certification Regarding Debarment, Suspension, Ineligibility, and Voluntary Exclusion - Lower Tier [USDA RD only]
00409	RD Instruction 1940-Q

DIVISION 1 - GENERAL REQUIREMENTS

01000	American Iron and Steel Requirements
01010	Summary of Work
01150	Measurement and Payment
01340	Submittals
01515	Temporary Bypass Pumping
01580	Project Identification and Signs
01720	Project Record Documents

DIVISION 2 - SITE WORK

02076	Asbestos-Cement (Transite) Pipe Removal and Disposal
02200	Earthwork
02401	Temporary Dewatering System
02601	Manholes, Covers and Frames
02614	Pre-Insulated Ductile Iron Pipe
02615	Ductile Iron Pipe & Fittings for Potable Water
02620	Temporary Water Main
02622	Polyvinyl Chloride (PVC) Non Pressure Pipe
02624	Lined Ductile Iron Sewer Pipe & Fittings
02626	Copper Service Tubing & Fittings for Buried Applications
02640	Valves and Specialties for Buried Applications - General
02641	Gate Valves
02642	Corporation Stops
02643	Curb Stops
02644	Hydrant Assemblies
02645	Curb Boxes
02646	Valve Boxes
02648	Couplings & Connectors for Buried Applications

TABLE OF CONTENTS (CONT.)

SECTION

TITLE

02650	Buried Utility Markings
02675	Cleaning, Testing and Disinfection of Water Mains
02755	Final Sewer Testing

END OF SECTION

RD 400-6 (Rev. 4-00)

13459A

**SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION**

**SECTION 00406
COMPLIANCE STATEMENT**

This statement relates to a proposed contract with _____

(Name of borrower or grantee)

who expects to finance the contract with assistance from either the Rural Housing Service (RHS), Rural Business-Cooperative Service (RBS), or the Rural Utilities Service (RUS) or their successor agencies, United States Department of Agriculture (whether by a loan, grant, loan insurance, guarantee, or other form of financial assistance). I am the undersigned bidder or prospective contractor, I represent that:

1. I ☐ have, ☐ have not, participated in a previous contract or subcontract subject to Executive 11246 (regarding equal employment opportunity) or a preceding similar Executive Order.

2. If I have participated in such a contract or subcontract, I ☐ have, ☐ have not, filed all compliance reports that have been required to file in connection with the contract or subcontract.

If the proposed contract is for \$50,000 or more and I have 50 or more employees, I also represent that:

3. I ☐ have, ☐ have not previously had contracts subject to the written affirmative action programs requirements of the Secretary of Labor.

4. If I have participated in such a contract or subcontract, I ☐ have, ☐ have not developed and

I understand that if I have failed to file any compliance reports that have been required of me, I am not eligible and will not be eligible to have my bid considered or to enter into the proposed contract unless and until I make an arrangement regarding such reports that is satisfactory to either the RHS, RBS or RUS, or to the office where the reports are required to be filed.

placed on file at each establishment affirmative action programs as required by the rules and

I also certify that I do not maintain or provide for my employees any segregated facilities at any of my establishments, and that I do not permit my employees to perform their services at any location, under my control, where segregated facilities are maintained. I certify further that I will not maintain or provide for

my employees any segregated facilities at any of my establishments, and that I will not permit my employees to perform their services at any location, under my control, where segregated facilities are maintained. I agree that a breach of this certification is a violation of the Equal Opportunity clause in my contract. As used in this certification, the term "segregated facilities" means any waiting rooms, work areas, restrooms and wash rooms, restaurants and other eating areas time clocks, locker rooms and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing facilities provided for employees which are segregated by explicit directive or are in fact segregated on the basis of race, creed, color, or national origin, because of habit, local custom, or otherwise. I further agree that

(except where I have obtained identical certifications for proposed subcontractors for specific time periods)

I will obtain identical certifications from proposed subcontractors prior to the award of subcontracts exceeding \$10,000 which are not exempt from the provisions of the Equal Opportunity clause; that I will retain such certifications in my files; and that I will forward the following notice to such proposed subcontractors

(except where the proposed subcontractors have submitted identical certifications for specific time periods):

regulations of the Secretary of Labor.

(See Reverse).

According to the Paperwork Reduction Act of 1995, an agency may not conduct or sponsor, and a person is not required to respond to a collection of information unless it displays a valid OMB control number. The valid OMB control number for this information collection is 0575-0018. The time required to complete this information collection is estimated to average 10 minutes per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information.

RD 400-6 (Rev. 4-00)

**NOTICE TO PROSPECTIVE SUBCONTRACTORS OF REQUIREMENTS FOR
CERTIFICATIONS OF NON-SEGREGATED FACILITIES**

A certification of Nonsegregated Facilities, as required by the May 9, 1967, order (32F.R. 7439, May 19, 1967) on Elimination of Segregated Facilities, by the Secretary of Labor, must be submitted prior to the award of a subcontract exceeding \$10,000 which is not exempt from the provisions of the Equal Opportunity clause. The certification may be submitted either for each subcontract or for all subcontracts during a period (i.e. quarterly, semiannually, or annually).

NOTE: The penalty for making false statements in offers is prescribed in 18 U.S.C. 1001.

DATE _____

(Signature of Bidder or Prospective Contractor)

Address (including Zip Code)

END OF SECTION

Paris
WIN 022618.00
December 12, 2017

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 00408

U.S. DEPARTMENT OF AGRICULTURE

**CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY
AND VOLUNTARY EXCLUSION - LOWER TIER COVERED TRANSACTIONS**

This certification is required by the regulations implementing Executive Order 12549, Debarment and Suspension, 7 CFR Part 3017, Section 3017.510, Participant's responsibilities. The regulations were published as Part IV of the January 30, 1989, Federal Register (pages 4722-4733). Copies of the regulations may be obtained by contacting the Department of Agriculture agency with which this transaction originated

(BEFORE COMPLETING CERTIFICATION, READ INSTRUCTIONS ON REVERSE)

- (1) The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participation in this transaction by any Federal department or agency.
- (2) Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

Organization Name

PR/Award Number or Project Name

Name(s) and Title(s) of Authorized Representative(s)

Signature(s)

Date

Paris
WIN 022618.00
December 12, 2017

Instructions for Certification

1. By signing and submitting this form, the prospective lower tier participant is providing the certification set out on the reverse side in accordance with these instructions.
2. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.
3. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.
4. The terms "covered transaction," "debarred," "suspended," "ineligible," "lower tier covered transaction," "participant," "person," "primary covered transaction," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations.
5. The prospective lower tier participant agrees by submitting this form that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.
6. The prospective lower tier participant further agrees by submitting this form that it will include this clause titled "Certification regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion - Lower Tier Covered Transactions, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.
7. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that it is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the Nonprocurement List.
8. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of a participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
9. Except for transactions authorized under paragraph 5 of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

Paris
WIN 022618.00
December 12, 2017

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 00409

RD INSTRUCTION 1940-Q

RD Instruction 1940-Q
Exhibit A-1

CERTIFICATION FOR CONTRACTS, GRANTS AND LOANS

The undersigned certifies, to the best of his or her knowledge and belief, that:

1. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant or Federal loan, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant or loan.

2. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant or loan, the undersigned shall complete and submit Standard Form - LLL, "Disclosure of Lobbying Activities," in accordance with its instructions.

3. The undersigned shall require that the language of this certification be included in the award documents for all subawards at all tiers (including contracts, subcontracts, and subgrants under grants and loans) and that all subrecipients shall certify and disclose accordingly.

This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by section 1352, title 31, U.S. Code. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

(name)

(date)

(title)

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 10000

AMERICAN IRON AND STEEL REQUIREMENTS

PART 1 - GENERAL

1.1 SUMMARY

- A. In accordance with P.L. 113-76, Consolidated Appropriations Act, 2014, the work under water and sewer installation special provisions includes the requirement for American Iron and Steel (AIS). For the purposes of this project, iron and steel products shall be as defined herein.

1.2 DEFINITIONS

- A. Iron and Steel: For a product to be considered subject to the AIS requirements, it must be made of greater than 50% iron or steel, measured by cost. The cost should be based on the material costs.

Steel means an alloy that includes at least 50 percent iron, between 0.02% and 2% carbon, and may include other elements. Metallic elements such as chromium, nickel, molybdenum, manganese, and silicon may be added during the melting of steel for the purpose of enhancing properties such as corrosion resistance, hardness, or strength. This definition of steel includes carbon steel, alloy steel, stainless steel, tool steel and other specialty steels.

- B. Iron and Steel Products: refers to the following products made primarily of iron or steel: lined or unlined pipes and fittings, manhole covers and other municipal castings, hydrants, tanks, flanges, pipe clamps and restraints, valves, structural steel, reinforced precast concrete, and construction materials.

Only the products listed herein made primarily of iron or steel, permanently incorporated into the project must be produced in the US. For example, trench boxes, scaffolding or equipment, which are removed from the project site upon completion of the project, are not required to be made of U.S. Iron or Steel.

Mechanical and electrical components, equipment and systems are not considered construction materials. Mechanical equipment is typically that which has motorized parts and/or is powered by a motor. Electrical equipment is typically any machine

powered by electricity and includes components that are part of the electrical distribution system.

The following examples (including their appurtenances necessary for their intended use and operation) are NOT considered construction materials: pumps, motors, gear reducers, drives (including variable frequency drives (VFDs)), electric/pneumatic/manual accessories used to operate valves (such as electric valve actuators), mixers, gates, motorized screens (such as traveling screens), blowers/aeration equipment, compressors, meters, sensors, controls and switches, supervisory control and data acquisition (SCADA), membrane bioreactor systems, membrane filtration systems, filters, clarifiers and clarifier mechanisms, rakes, grinders, disinfection systems, presses (including belt presses), conveyors, cranes, HVAC (excluding ductwork), water heaters, heat exchangers, generators, cabinetry and housings (such as electrical boxes/enclosures), lighting fixtures, electrical conduit, emergency life systems, metal office furniture, shelving, laboratory equipment, analytical instrumentation, and dewatering equipment.

- C. Production: Production in the United States of the iron or steel products used in the project requires that all manufacturing processes, including application of coatings, must take place in the United States, with the exception of metallurgical processes involving refinement of steel additives. All manufacturing processes includes processes such as melting, refining, forming, rolling, drawing, finishing, fabricating and coating.

Further, if a domestic iron and steel product is taken out of the US for any part of the manufacturing process, it becomes foreign source material. However, raw materials such as iron ore, limestone and iron and steel scrap are not covered by the AIS requirement, and the 7 material(s), if any, being applied as a coating are similarly not covered. Non-iron or steel components of an iron and steel product may come from non-US sources. For example, for products such as valves and hydrants, the individual non-iron and steel components do not have to be of domestic origin.

Raw materials, such as iron ore, limestone, scrap iron, and scrap steel, can come from non-US sources.

PART 2 - PRODUCTS

2.1 GENERAL

- A. Iron and steel products shall include the following:
Lined or unlined pipes or fittings;
Manhole Covers
Municipal Castings (defined in more detail below)
Hydrants
Tanks

Flanges
Pipe clamps and restraints
Valves
Structural steel (defined in more detail below)
Reinforced precast concrete
Construction materials (defined in more detail below)

2.2 MUNICIPAL CASTINGS

A. Municipal castings are cast iron or steel infrastructure products that are melted and cast. They typically provide access, protection, or housing for components incorporated into utility owned drinking water, storm water, wastewater, and surface infrastructure. They are typically made of grey or ductile iron, or steel. Examples of municipal castings are:

Access Hatches
Ballast Screen
Benches (Iron or Steel)
Bollards
Cast Bases
Cast Iron Hinged Hatches, Square and Rectangular
Cast Iron Riser Rings
Catch Basin Inlet
Cleanout/Monument Boxes
Construction Covers and Frames
Curb and Corner Guards
Curb Openings
Detectable Warning Plates
Downspout Shoes (Boot, Inlet)
Drainage Grates, Frames and Curb Inlets
Inlets
Junction Boxes
Lampposts
Manhole Covers, Rings and Frames, Risers
Meter Boxes
Service Boxes
Steel Hinged Hatches, Square and Rectangular
Steel Riser Rings
Trash receptacles
Tree Grates
Tree Guards
Trench Grates
Valve Boxes, Covers and Risers

2.3 STRUCTURAL STEEL

A. Structural steel is rolled flanged shapes, having at least one dimension of their cross-

section three inches or greater, which are used in the construction of bridges, buildings, ships, railroad rolling stock, and for numerous other constructional purposes. Such shapes are designated as wide-flange shapes, standard I-beams, channels, angles, tees and zeeks. Other shapes include H-piles, sheet piling, tie plates, cross ties, and those for other special purposes.

2.4 CONSTRUCTION MATERIALS

- A. Construction materials are those articles, materials, or supplies made primarily of iron and steel, that are permanently incorporated into the project, not including mechanical and/or electrical components, equipment and systems. Some of these products may overlap with what is also considered “structural steel”. This includes, but is not limited to, the following products: wire rod, bar, angles, concrete reinforcing bar, wire, wire cloth, wire rope and cables, tubing, framing, joists, trusses, fasteners (i.e., nuts and bolts), welding rods, decking, grating, railings, stairs, access ramps, fire escapes, ladders, wall panels, dome structures, roofing, ductwork, surface drains, cable hanging systems, manhole steps, fencing and fence tubing, guardrails, doors, and stationary screens.

While reinforced precast concrete may not be at least 50% iron or steel, in this particular case, the reinforcing bar and wire must be produced in the US and meet the same standards as for any other iron or steel product. Additionally, the casting of the concrete product must take place in the US. The cement and other raw materials used in concrete production are not required to be of domestic origin. For reinforced concrete cast at the construction site, the reinforcing bar and wire are considered to be a construction material and must be produced in the US.

2.5 WAIVERS

- A. None.
- B. The following project-specific waivers have been obtained by the Owner.
- 1.
 - 2.

PART 3 - EXECUTION

3.1 CERTIFICATION

- A. The Contractor, through its subcontractors, suppliers and manufacturers shall provide written certification to create a paper trail that documents the location of the manufacturing process involved with the production of iron and steel materials. Each handler (supplier, fabricator, manufacturer, processor, etc.) of the iron and steel products shall certify that their step in the process was domestically performed. Each time a step in the manufacturing process takes place, the manufacturer delivers its work along with a certification of its origin.

At a minimum, the certification shall include the name of the manufacturer, the

location of the manufacturing facility where the product or process took place (not its headquarters), a description of the product or item being delivered, and a signature by a manufacturer's responsible party. Attached at the end of this section are sample certifications. These certifications should be submitted to the Owner through the Contractor.

3.2 INSTALLATION

- A. All iron and steel products, as defined herein, shall be produced in the United States in accordance with the American Iron and Steel requirements of the Consolidated Appropriations Act 2014. If a potentially non-compliant product is installed in the permanent work, the will be required to remove the non-domestic item from the project.

EXAMPLE LETTER FOR AIS CERTIFICATION COMPLIANCE

Documentation must be provided on company letterhead.

Date
Company Name
Company Address
City, State Zip

Subject: American Iron and Steel Step Certification for Project (XXXXXXXXXX)

I, (company representative), certify that the (melting, bending, coating, galvanizing, cutting, etc.) process for (manufacturing or fabricating) the following products and/or materials shipped or provided for the subject project is in full compliance with the American Iron and Steel requirement as mandated in EPA's State Revolving Fund Programs.

Item, Products and/or Materials:

- 1.
- 2.
- 3.

Such process took place at the following location:

If any of the above compliance statements change while providing material to this project we will immediately notify the prime contractor and the engineer.

Signed by company representative

EXAMPLE LETTER FOR AIS CERTIFICATION COMPLIANCE

Documentation must be provided on company letterhead.

Date
Company Name
Company Address
City, State Zip

Subject: American Iron and Steel Certification for Project (XXXXXXXXXX)

I, (company representative), certify that the following products and/or materials shipped/provided to the subject project are in full compliance with the American Iron and Steel requirement as mandated in EPA's State Revolving Fund Programs.

Item, Products and/or Materials:

- 1.
- 2.
- 3.

Such process took place at the following location:

If any of the above compliance statements change while providing material to this project we will immediately notify the prime contractor and the engineer.

Signed by company representative

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 01010

SUMMARY OF WORK

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included: Replacing the water and sewer main on the Billings Bridge in Paris associated with the Maine Department of Transportation's replacement of the bridge deck including replacement of buried mains on each side of the bridge.
1. Construction of New 12-inch Water main using Pre-Insulated Ductile Iron Restrained Joint Pipe on the bridge deck. The work will also include:
 - a. Furnishing and installing and testing a temporary 2-inch main
 - b. Installation of buried mains on each side of the bridge
 - c. Connections to the existing buried mains on each side of the bridge
 - d. An air release system as shown
 - e. Other appurtenances as shown on the Drawings and specified herein.
 2. Construction of New 12-inch gravity Sewer main using Pre-Insulated Ductile Iron Restrained Joint Pipe on the bridge deck. The work will also include:
 - a. Furnishing and installing a temporary bypass pumping system and the temporary bypass piping and connections
 - b. Installation of buried PVC mains on each side of the bridge
 - c. Connections to the existing buried mains on each side of the bridge
 - d. Installation of new manholes and connection to existing manholes.
 - e. Other appurtenances as shown on the Drawings and specified herein.
 3. Remove and/or relocate equipment as indicated on the Drawings.
 - a. The contractor shall be responsible for disposing of all asbestos containing material in accordance with local, state, or federal regulations.
 4. Testing of all piping and equipment systems for proper operation and performance.
- B. Removals, Relocations and Rearrangements
1. Examine the existing site for the work of all trades which will influence the cost of the work under the bid. This work shall include removals, relocations and rearrangements which may interfere with, disturb or complicate the performance of the work under the bid involving systems, equipment and related service lines, which shall continue to be utilized as part of the finished project. The Contractor is responsible for all coordination in this regard.

2. Provide in the bid a sufficient amount to include all removals, relocations, rearrangements and reconnections herein specified, necessary or required to provide approved operation and coordination of the combined new and existing systems and equipment.

PART 2 - PRODUCTS

Not Applicable.

PART 3 - EXECUTION

3.1 MAINTAIN EXISTING WORKS

- A. Existing Operations:
 1. Refer to construction sequence below. Uninterrupted service shall be provided at all times during construction except for planned shutdown events.
- B. Minimize Interference
 1. The Contractor shall at all times conduct his operations so as to interfere as little as possible with existing works. The Contractor shall develop a program, in cooperation with the Owner, Engineer, MDOT, water and sewer customers, and interested officials, which shall provide for the construction and putting into service of the new works in the most orderly manner possible. This program shall be adhered to except as deviations therefrom are expressly permitted.
 2. Work of connecting with, cutting into, and reconstructing existing pipes or structures shall be planned to interfere with the operation of the existing facilities for the shortest possible time and when the demands on the facilities best permit such interference. It may be necessary to work outside of normal working hours to minimize interference. Before starting work which will interfere with the operation of existing facilities, the Contractor shall do all possible preparatory work and shall see that all tools, materials, and equipment are made ready and at hand.

3.2 CONSTRUCTION SEQUENCE

- A. Phase 1 Bridge Construction
 1. The existing sewer on the southern side of the bridge must remain active at all times during phase 1 construction
 2. As part of phase 1 bridge construction, the Contractor shall install the new sewer main on the bridge, set new manholes and sewer lines.
 3. Replacement of SMH-38A and modification to SMH-36 will require separate sewer bypass pumping events from immediate upstream to immediate downstream manholes. Please refer to relevant specification and plans for manhole locations. Prior to connection to SMH-36 and 38A, all new sewer mains and manholes shall be tested in accordance with the specifications.
 4. Phase 2 Bridge Construction

5. New 12" sewer shall be active prior to commencing Phase 1.
6. Demolish existing sewer
7. Phase 1 Water – Construct bridge portion of the water main to isolation gate valves shall beyond each abutment shown on the plans.
8. Phase 2 Water – Install preassembled hydrant and valve assembly to connect to existing 8" water. Refer to East Side Connection detail on Sheet 53 of 57. Following connection, the existing water main on the east side and services will remain active, while the new 12" main is being installed to the gate valve on the east side of the bridge. The pre-assembled hydrant and valve assembly shall be swab disinfected prior to connection to the existing main. This connection will require a temporary shutdown of the existing water main, which shall not exceed 4 hours.
9. Phase 3 Water - Install and test temporary water to service impacted services on the west side of the bridge. Temporary water piping can be connected to the existing hydrant at station 99+00. Temporary water lines crossing the road shall be buried for protection. Contractor shall assume all provisions for temporary water freeze protection is work is completed during early spring, fall or winter seasons.
10. Following installation of all water mains, complete testing procedure as outlined in the specifications.
11. Following Owner acceptance of the water main, the Contractor shall connect new services to existing customer connection points at the property line.
12. The Contractor shall submit to the Engineer for review and acceptance a complete schedule of his proposed sequence of construction operations prior to commencing any work. This schedule shall include the Contractor's plans for doing the work.
13. The Contractor must submit to the Engineer a written request to deviate from the above sequence, provided he can demonstrate to the Engineer that the continuity and degree of service will not be adversely affected.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 01150

MEASUREMENT AND PAYMENT

PART 1 - GENERAL

1.1 DESCRIPTION

- A. For lump sum items, payment shall be made to the Contractor in accordance with an accepted Progress Schedule and Schedule of Values on the basis of actual work completed.
- B. For unit-price items, payment shall be based on the actual amount of work accepted and for the actual amount of materials in place, as shown by the final measurements.
 - 1. All units of measurement shall be standard United States convention as applied to the specific items of work by tradition and as interpreted by the Engineer.
 - 2. At the end of each day's work, the Contractor's Superintendent or other authorized representative of the Contractor shall meet with the Resident Project Representative and determine the quantities of unit price work accomplished and/or completed during the work day.
 - 3. The Resident Project Representative will then prepare two "Daily Progress Reports" which shall be signed by both the Resident Project Representative and Contractor's Representative.
 - 4. Once each month the Resident Project Representative will prepare two "Monthly Progress Summation" forms from the month's accumulation of "Daily Progress Reports" which shall also be signed by both the Resident Project Representative and Contractor's Representative.
 - 5. These completed forms will provide the basis of the Engineer's monthly quantity estimate upon which payment will be made. Items not appearing on both the Daily Progress Reports and Monthly Progress Summation will not be included for payment. Items appearing on forms not properly signed by the Contractor will not be included for payment.
 - 6. After the work is completed and before final payment is made there for, the Engineer will make final measurements to determine the quantities of various items of work accepted as the basis for final settlement.

1.2 SCOPE OF PAYMENT

- A. Payments to the Contractor will be made for the actual quantities of the Contract items performed and accepted in accordance with the Contract Documents. Upon completion of the construction, if these actual quantities show either an increase or decrease from the quantities given in the Bid Form, the Contract unit prices will still prevail.

Paris
WIN 022618.00
December 12, 2017

- B. The Contractor shall accept compensation, as herein provided, in full payment for furnishing all materials, labor, tools, equipment, and incidentals necessary to the completed work and for performing all work contemplated and embraced by the Contract; also for all loss or damage arising from the nature of the Work, or from the action of the elements, or from any unforeseen difficulties which may be encountered during the prosecution of the Work and until its final acceptance by the Engineer, and for all risks of every description connected with the prosecution of the work, except as provided herein, also for all expenses incurred in consequence of the suspension of the work as herein authorized.
- C. The payment of any partial estimate or of any retained percentage except by and under the approved final invoice, in no way shall affect the obligation of the Contractor to repair or renew any defective parts of the construction or to be responsible for all damage due to such defects.

1.3 PAYMENT FOR INCREASED OR DECREASED QUANTITIES

- A. When alterations in the quantities of work not requiring supplemental agreements, as hereinbefore provided for, are ordered and performed, the Contractor shall accept payment in full at the Contract price for the actual quantities of work done. No allowance will be made for anticipated profits. Increased or decreased work involving supplemental agreements will be paid for as stipulated in such agreements.

1.4 OMITTED ITEMS

- A. Should any items contained in the bid form be found unnecessary for the proper completion of the work contracted, the Engineer may eliminate such items from the Contract, and such action shall in no way invalidate the Contract, and no allowance will be made for items so eliminated in making final payment to the Contractor.

1.5 PARTIAL PAYMENTS

- A. Partial payments shall be made monthly as the work progresses. Partial payment shall be made subject to the provisions of the Supplemental and General Conditions. The breakdown of quantities will be determined by the Engineer.

1.6 PAYMENT FOR MATERIAL DELIVERED

- A. When requested by the Contractor and at the discretion of the Owner, payment may be made for all or part of the value of acceptable, non-perishable materials and equipment which are to be incorporated into bid items, have not been used, and have been delivered to the construction site or placed in storage places acceptable to the Owner. Payment shall be subject to the provisions of the General and Supplementary Conditions.
- B. No payment shall be made upon fuels, supplies, lumber, false work, or other materials, or on temporary structures or other work of any kind which are not a permanent part of the Contract.

1.7 FINAL PAYMENT

- A. The Engineer will make, as soon as practicable after the entire completion of the project, a final quantity invoice of the amount of the Work performed and the value of such Work. Owner shall make final payments of the sum found due less retainages subject to the provisions of the General and Supplementary Conditions.

1.8 INCIDENTAL WORK

- A. Incidental work items for which separate payment is not made include (but are not limited to) the following items:
1. Dewatering
 2. Clean-up and Erosion control
 3. Loam, seeding, grading, liming, fertilization, mulching and watering
 4. Pipe bedding and backfill
 5. Compaction testing of backfill
 6. Restoration of property, and replacement of fences, curbs, structures, sign posts, guard rails, rock wall, mail boxes, traffic loop detectors and other minor items disturbed by the water main construction activities
 7. Utility crossings and relocations, unless payment is otherwise made
 8. Trench boxes, steel and/or wood sheeting as required, including that left in place
 9. Project record documents
 10. Cleaning, testing and disinfection of all water lines and appurtenances
 11. Temporary construction and other facilities not to be permanently incorporated into the Work necessary for construction sequencing and maintenance of operations
 12. Weather protection
 13. Visits to the Project site or elsewhere by personnel or agents of the Contractor, including manufacturer's representatives, as may be required
 14. On-site and other facilities acceptable to Engineer for the storage of materials, supplies and equipment to be incorporated into the Work
 15. Removal of existing pavement and driveway restoration
 16. Trench Earthwork (except ledge)

1.9 DESCRIPTION OF PAY ITEMS

- A. The following sections describe the measurement of and payment for the work to be done under the respective items listed in the Bid Form.
- B. Each unit or lump sum price stated in the Bid Form shall constitute full compensation, as herein specified, for each item of the work completed.

Item No. 802.10 – Installation of 12-inch Ductile Iron Water Main and Fittings

- A. Method of Measurement: The quantity of water main to be paid for under Item No. 802.10 shall be the actual length in feet as measured along the center line of the pipe as laid including all fittings and valves.
- B. Basis of Payment: Installation of water main shall be paid for at the unit price per linear foot stated in the Bid Schedule. Said unit price shall be full compensations for installing all pipes

Paris
WIN 022618.00
December 12, 2017

(excluding pre-insulated water mains and sewer work), fittings of all sizes (except valves), solid sleeves, polyethylene encasement, bronze wedges, mechanical joint restrainer glands; labor, equipment, tools, and other materials required for the installation of the pipelines; for clearing and grubbing, cutting trees; for dewatering; for installing the pipelines; for excavating, removing, and disposal of the existing water mains where required; laying, setting, and jointing all pipes and fittings; for furnishing and placing all temporary sheeting and bracing; for rigid board insulation (use of at the owner's direction only); furnishing and installing all pipe bedding, blanket, and backfill; for compaction of trenches; for cleaning, testing, and disinfecting water mains; connections to existing water mains and abandoning existing water mains; for all labor, tools, and construction equipment; and for all other work and expenses incidental thereto.

Item No. 822.302 – Construction of the Bridge Crossing Pre-Insulated Water Mains and Appurtenant Work

- A. Payment of the lump sum price for Item No. 822.302 shall be full compensation for furnishing all labor, materials, tools and equipment required to construct all the water related work complete to the limit shown on the Drawings and as specified and all its appurtenances in its entirety, except for work included for payment under other items. Subbase, paving, pavement markings, traffic control, flagpersons, and all other work related to construction of the bridge including hanger supports and embedments will be paid for under the MDOT general bid items.

Item Nos. 823.311 & 823.3251 – Installation of 12-inch and 8-inch Gate Valves and Valve Boxes

- A. Method of Measurement: The quantity of gate valves to be paid for under Item Nos. 823.311 & 823.3251 shall be defined as the actual number of valves and valve boxes installed complete in place.
- B. Basis of Payment: Installation of gate valves shall be paid for at the unit price per each stated in the Bid Schedule. Said unit price shall be full compensation for installing all materials, labor, equipment, and tools; for installing, setting, and jointing; for restraining joints; for testing all valves and valve boxes; and for all other work and expenses incidental thereto.

Item No. 825.43 – Installation of 1-inch Copper Service Pipe

- A. Method of Measurement: The quantity of service pipe to be paid for under Item No. 825.43 shall be the actual length in feet as measured along the center line of the pipe as laid.
- B. Basis of Payment: Service pipe shall be paid for at the unit price per linear foot stated in the Bid Schedule. Said unit price shall be full compensation for all service pipe, labor, equipment, tools, and other materials required for the installation of service pipes; for trench dewatering; for excavating, laying, setting, and jointing all pipes and fittings; for cleaning, testing, and disinfecting; for backfilling; for replacing or rebuilding shrubs, fences, lawns, trees, or other materials, except other such items specifically included in the Bid Schedule; and for all other work and expenses incidental thereto.

Item No. 825.331 – Installation of 1-inch Curb Stops

- A. Method of Measurement: The quantity of curb stops to be paid for under Item No. 825.331 shall be defined as the actual number of curb stops installed complete in place.
- B. Basis of Payment: Curb stops and boxes shall be paid for at the unit price per each stated in the Bid Schedule. Said unit price shall be full compensation for all fittings, labor, equipment, tools

13459A

Paris
WIN 022618.00
December 12, 2017

and other materials required for the installation of the curb stop and box; for trench dewatering; for excavating and backfilling; for replacing or rebuilding shrubs, fences, lawns, trees, and other materials except other such items specifically included in the Bid Schedule; and for all other work and expenses incidental thereto.

Item No. 825.33 – Installation of 1-inch Corporation Stops

- A. Method of Measurement: The quantity of corporation stops to be paid for under Item No. 825.33 shall be the actual number furnished and installed for service connections.
- B. Basis of Payment: Corporation stops shall be paid for at the unit price per each stated in the Bid Schedule. Said unit price shall be full compensation for all fittings, labor, equipment, and tools necessary for the installation of the corporation stops; tapping the main; and for all the work and expenses incidental thereto.

Item No. 824.30 - Furnish and Install Fire Hydrant Assemblies

- A. Method of Measurement: The quantity of fire hydrant assemblies to be paid for under Item No. 824.30 shall be the actual number installed complete in place.
- B. Basis of Payment: Hydrants shall be paid for at the unit price each stated in the Bid Schedule. Said unit price shall be full compensation for furnishing all materials, labor, equipment, and tools; for installing, setting and jointing for excavation; for all thrust blocks; restraining joints; for the hydrant gate valve and box, restrained hydrant tee, pipe and hydrant; and of all other work and expenses incidental thereto.

Item No. 825.541 – Furnish, Install and Test Temporary Water

- A. Method of Measurement: Temporary water main measured for payment shall be lump sum.
- B. Basis of Payment: Temporary water lines, temporary hydrant assemblies, saddles, taps, corporation stops and appurtenances shall be paid for at a lump sum price. The lump sum shall be full compensation for furnishing all materials, labor, and equipment necessary to provide a fully operational temporary water system including mainlines and services as specified; removing all temporary lines at the resumption of water service; placing and maintaining fill over temporary mains at drives, walks, etc.; making connections to buildings; excavation (except ledge excavation) and connection to existing mains and services; cleaning, leakage testing, and disinfecting temporary lines; coordinating connections and shut-offs with the Owner; backfilling and repaving all trenches for the temporary water; site restoration; and for all other work and expenses incidental thereto.

Item No. 801.18 – Installation of 12-Inch PVC Sanitary Sewer

- A. Method of Measurement: The quantity of Sanitary Sewer main to be paid for under Item No. 801.18 shall be the actual length in feet as measured along the center line of the pipe as laid including all fittings. Pipes shall be measured between centers of the manholes minus half the inside diameter of each manhole. Pipe installed into the manhole will not be measured for payment.
- B. Basis of Payment:
 - 1. Installation of sanitary sewer shall be paid for at the unit price per linear foot stated in the Bid Schedule. Said unit price shall be full compensation for all labor, materials, and equipment necessary to complete this work including excavation (except ledge removal),

13459A

Paris
WIN 022618.00
December 12, 2017

dewatering, bedding, furnishing and installing pipe (including all fittings and appurtenances including but not limited to wyes, bends, stubs, etc), making connections to new and existing manholes, backfill including subbase in paved areas, compaction, cleaning, testing, maintaining existing flows during construction, and for all other work and expenses incidental thereto.

2. Payment for this work on interim requisitions shall be according to the following percentages:
 - a. Sewer pipe acceptably set in place and backfilled - 90 percent.
 - b. Sewer pipe successfully tested - 10 percent.

Item No. 802.181 – Construction of the Bridge Crossing Pre-Insulated Sanitary Sewer Main and Appurtenant Work

- A. Payment of the lump sum price for Item No. 801.181 shall be full compensation for furnishing all labor, materials, tools and equipment required to construct all the sewer related work complete to all the limits shown on the on the Drawings and as specified and all its' appurtenances in its entirety, except for work included for payment under other items. Subbase, paving, pavement markings, traffic control, flagpersons, and all other work related to construction of the bridge including hanger supports and embedments will be paid for under the MDOT general bid items.

Item No. 202.1912 - Asbestos Cement Pipe Removal and Disposal

- A. Method of Measurement: Removal and Disposal of Asbestos Cement Pipe accepted for payment shall be the actual number of linear feet of Asbestos Cement Pipe (all diameters) removed and disposed of in accordance with local, State and Federal Regulations.
- B. Basis of Payment: The Contract unit price per linear foot for Removal and Disposal of Asbestos Cement Pipe shall be full compensation for all labor, subcontractors, materials, tools and equipment necessary to complete this work including excavation, removing from existing bridge, handling and removing of pipe, bagging of pipe and miscellaneous friable pieces of pipe and contaminated trench materials, transporting to a licensed disposal site, disposal fees, coordination with regulatory agencies and Owner, and all else incidental thereto for which payment is not provided under other items.

Item No. 803.138 – Sanitary Service Connections (all sizes)

- A. Method of Measurement: This item shall consist of installing house sanitary service leads from sanitary sewer mains to the edge of right-of-ways shown on the Drawings and/or as determined in the field. The quantity of sewer services to be paid for under Item No. 803.138 shall be the actual length in feet as measured along the center line of the pipe measured from the top of the tee or wye in the main to the edge of the right-of-way.
- B. Basis of Payment: Sewer Services shall be paid for at the unit price per linear foot stated in the Bid Schedule. Said unit price shall be full compensation for excavation (except ledge excavation), dewatering, bedding, furnishing and installing pipe and fittings, connection to existing service, backfilling including aggregate base and subbase material, compaction, maintaining existing flows during construction, and for all other work and expenses incidental thereto.

Paris
WIN 022618.00
December 12, 2017

Item No. 803.1732 – Installation of 4-foot Diameter Sewer Manhole

- A. Method of Measurement: The quantity of sewer manholes to be paid for under Item No. 803.1732 shall be the actual number of vertical feet of structures installed and accepted completed in place, measured vertically from the lowest invert to the finish grade.
- B. Basis of Payment:
1. Sewer Manholes shall be paid for at the unit price per vertical foot stated in the Bid Schedule. Said unit price shall be full compensation for all labor, materials, tools, and equipment necessary to complete this work including excavation (except ledge excavation), removal and disposal of existing structures, bedding, furnishing and installing precast concrete sections, constructing inverts, waterproofing and testing, polywrap, backfill, compaction, watertight frames and covers, installing frames and covers to finish grade and temporary transition collars for grading, concrete and masonry materials, and all else incidental thereto.
 2. Payment for this item on interim requisitions shall be according to the following percentages:
 - a. 90 percent of the unit price upon installation of manholes.
 - b. 10 percent of the unit price upon successful completion of cleaning and final manhole testing.

Item No. 812.164 - Reconstruct Sewer Manhole Invert Channel

- A. Method of Measurement: The quantity of reconstructed sewer manhole inverts to be paid for under Item No. 812.164 shall be the actual number installed complete in place.
- B. Basis of Payment: Reconstructed sewer manhole inverts shall be paid for at the unit price per each stated in the Bid Schedule. Said unit price shall be full compensation for all labor, materials, tools, and equipment necessary to complete this work including coring hole for new inlet sewer pipe, demolition of the existing manhole invert channel, plugging entrance of abandoned sewer pipe, reconstruction of new invert channel to pass flows from new and existing inlet sewer pipes to the existing outlet pipe, and all else incidental thereto for which payment is not provided under other items.

Item No. 801.011 – Sewer Manhole Bypass Pumping System

- A. Method of Measurement: Temporary bypass pumping system measured for payment shall be the Contract lump sum price for all temporary piping, bypass pumping, and live connection work as shown.
- B. Basis of Payment: The Contract lump sum for temporary bypass system shall be full compensation for all contractor and subcontractor labor, materials, tools, and equipment necessary to complete this work, including bypass pumps, furnishing and installing temporary bypass piping and connections, ductile iron connection assembly piping, transition couplings, fitting and valves at the connection assemblies, concrete reinforcement at temporary connection, temporary lane crossings, traffic barriers, excavation, dewatering, bedding, backfill including aggregate base and subbase materials, and all else incidental thereto.

Item No. 801.03 - Test Pit Excavation and Backfill

- A. Method of Measurement: The quantity to be paid for under Item No. 801.03 shall be the actual number of exploratory excavations as authorized by the Engineer.

Paris
WIN 022618.00
December 12, 2017

- B. Basis of Payment; Test pit excavations shall be paid for at the unit price per each as stated in the Bid Schedule. Said unit price shall be full compensation for furnishing all labor, tools, and equipment; for backfilling and compacting; for temporary pavement; and for all other work and expenses incidental thereto.

Item No. 827.311 – Unsuitable Soil Excavation, Removal, and Replacement Backfill

- A. Method of Measurement: The quantity of unsuitable soil excavated to be paid for under Item No. 827.10 shall be the actual number of cubic yards of material placed as required by and/or authorized by the Owner as measured following excavation.
- B. Basis of Payment: Excavation and Replacement of Unsuitable Material shall be paid for at the unit price per cubic yard stated in the Bid Schedule. Said unit price shall be measured from a point fifteen inches below the road surface to twelve inches above the top of the pipe and to a width of two feet plus the inside pipe diameter.
- C. Bedding material placed from a point six inches below the bottom of the pipe to a point of one foot above the top of the pipe shall be covered under respective Bid Item Nos. 892.10, 822.302, 801.18, & 801.181 for installing water and sanitary sewer main.

Item No. 827.304 - Trench Ledge Excavation, Disposal and Replacement Backfill

- A. Method of Measurement: The quantity of ledge excavation, disposal, and replacement backfill to be paid shall be the Contract unit price per cubic yard shall be as stated in the Bid Schedule.

Mechanical Ledge excavation volume shall be measured as follows:

Pipelines: the actual volume of ledge removed between vertical planes which are a distance apart equal to the sum of 18 inches plus 1-1/3 times the nominal outside diameter of pipe which is to be installed in the trench (minimum of 3 feet) and extending to a depth of 6 inches below the invert grade of the pipe. Where two pipes are installed in the same trench, trench Ledge Excavation shall be measured as the actual volume of ledge removed between vertical planes which are a distance apart equal to the sum of 3 feet plus the sum of the pipes nominal outside diameter. For pipe encased in concrete per the structural details (rectangular encasement), the actual volume of ledge removed shall be measured as the actual volume removed between the vertical plans which are a distance apart equal to 3 feet plus the width of the pipe encasement and 6 inches below the base of the encasement. Ledge removed and included in the measurement for the tank and valve vault shall not be included in the pipe line measurement where the pipeline payment limits overlap the payment limits for the tank and valve vault.

Field measurements for computing ledge volumes shall be determined by one of the following methods as selected by the Engineer:

1. By field measurements of the length of the trench ledge excavated and the average depth of ledge excavation as determined by the field representative.
2. The volume of rocks shall be determined from their average length, width, and depth as measured by the field representative. Boulders more than 2 cubic yards in volume shall be paid for as ledge. Excavated rock which has not been properly disposed of will not be included for payment.

Paris
WIN 022618.00
December 12, 2017

- B. Basis of Payment: Mechanical ledge excavation and disposal shall be paid for at the unit price per cubic yard as stated in the Bid Schedule. Excavated rock which has not been properly disposed of will not be included for payment. Said unit price shall be full compensation for furnishing all materials, labor, tools, and equipment; for disposal of ledge; for furnishing and placing replacement borrow material; The Contract unit price per cubic yard shall be as stated in the Bid Schedule.

END OF SECTION

01340-1

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 01340

SUBMITTALS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included:
 - 1. Submit to the Engineer, Shop Drawings, Operation and Maintenance Manuals, Manufacturers' Certificates, Project Data, and Samples required by the Specification Sections.
- B. Related Work Specified Elsewhere:
 - 1. Project Record Documents: Section 01720

1.2 SHOP DRAWINGS

- A. Shop Drawings are required for each and every element of the work. Each shop drawing shall be assigned a sequential number for purposes of easy identification, and shall retain its assigned number, with appropriate subscript, on required resubmissions.
- B. Shop Drawings are generally defined as all fabrication and erection drawings, diagrams, brochures, schedules, bills of material, manufacturers data, spare parts lists, and other data prepared by the Contractor, his subcontractors, suppliers, or manufacturers which illustrate the manufacturer, fabrication, construction, and installation of the work, or a portion thereof.
- C. The Contractor shall submit to the Engineer a minimum of 6 copies of Shop Drawings and approved data and 1 electronic copy. The Engineer will retain 3 copies (for Owner's, Engineer's and Field Representative's files) and return 3 copies to the Contractor for distribution to subcontractors, suppliers and manufacturers. If the Contractor requires more than 3 then the number of copies submitted shall be adjusted accordingly. All shop drawing comments will be summarized on the Submittal Review Form.
- D. The Contractor shall provide a copy of the completed Submittal Certification Form (copy provided for Contractor's use at the end of this Specification Section) which shall be attached to every copy of each shop drawing. Shop Drawings shall show the principal dimensions, weight, structural and operating features, space required, clearances, type and/or brand of finish or shop coat, grease fittings, etc., depending on the subject of the drawing. When it is customary to do so, when the dimensions are of particular importance, or when so specified, the drawings shall be certified by

the manufacturer or fabricator as correct for the work.

- E. Shop Drawings shall be submitted as a complete package by specification section, unless otherwise reviewed and approved by the Engineer. It is the intent that all information, materials and samples associated with each specification section be included as a single submittal for the Engineer's review. Any deviation from this requirement, such as submitting miscellaneous metals grouped by structure, shall be requested in writing with an anticipated shop drawing breakdown/schedule prior to any associated submittal.
- F. The Contractor shall be responsible for the prompt and timely submittal of all shop and working drawings so that there shall be no delay to the work due to the absence of such drawings.
- G. No material or equipment shall be purchased or fabricated especially for the Contract until the required shop and working drawings have been submitted as hereinabove provided and reviewed for conformance to the Contract requirements. All such materials and equipment and the work involved in their installation or incorporation into the Work shall then be as shown in and represented by said drawings.
- H. Until the necessary review has been made, the Contractor shall not proceed with any portion of the work (such as the construction of foundations), the design or details of which are dependent upon the design or details of work, materials, equipment or other features for which review is required.
- I. All shop and working drawings shall be submitted to the Engineer by and/or through the Contractor, who shall be responsible for obtaining shop and working drawings from his subcontractors and returning reviewed drawings to them. Shop drawings shall be of standardized sizes to enable the Owner to maintain a permanent record of the submissions. Approved standard sizes shall be: (a) 24 inches by 36 inches; (b) 11 inches by 17 inches, and (c) 11 inches by 8-1/2 inches. Provision shall be made in preparing the shop drawings to provide a binding margin on the left hand side of the sheet. Shop drawings submitted other than as specified herein may be returned for resubmittal without being reviewed.
- J. Only drawings which have been checked and corrected by the fabricator should be submitted to the Contractor by his subcontractors and vendors. Prior to submitting drawings to the Engineer, the Contractor shall check thoroughly all such drawings to satisfy himself that the subject matter thereof conforms to the Drawings and Specifications in all respects. All drawings which are correct shall be marked with the date, checker's name, and indication of the Contractor's approval, and then shall be submitted to the Engineer.
- K. If a shop drawing shows any deviation from the Contract requirements, the Contractor shall make specific mention of the deviations in his letter of transmittal. Shop Drawings that contain significant deviations that are not brought to the attention of the Engineer may be subject to rejection.
- L. Should the Contractor submit equipment that requires modifications to the structures, piping, electrical conduit, wires and appurtenances, layout, etc., detailed

on the Drawings, he shall also submit details of the proposed modifications. If such equipment and modifications are accepted, the Contractor, at no additional cost to the Owner, shall do all work necessary to make such modifications.

- M. A maximum of two submissions of each Shop Drawing will be reviewed, checked, and commented upon without charge to the Contractor. Any additional submissions which are ordered by the Engineer to fulfill the stipulations of the Drawings and Specifications, and which are required by virtue of the Contractor's neglect or failure to comply with the requirements of the Drawings and Specifications, or to make those modifications and/or corrections ordered by the Engineer in the review of the first two submissions of each Shop Drawing, will be reviewed and checked as deemed necessary by the Engineer, and the cost of such review and checking, as determined by the Owner, and based upon Engineer's documentation of time and rates established for additional services in the Owner-Engineer Agreement for this Project, may be deducted from the Contractor to make all modifications and/or corrections as may be required by the Engineer in an accurate, complete, and timely fashion. Resubmittals for the sole purpose of providing written responses to review comments will not be considered a resubmittal counting towards the two submission limit.

1.3 SAMPLES

- A. The Contractor shall submit samples when requested by the Engineer to establish conformance with the specifications, and as necessary to define color selections available.

1.4 OPERATION AND MAINTENANCE MANUALS

- A. The Contractor shall furnish the Engineer 4 copies and 1 electronic copy of a complete instruction manual for installation, operation and maintenance of each item specified (unless otherwise specified). At least 3 months prior to the expected substantial completion date, the Contractor shall submit to the Engineer all manuals in accordance with the requirements specified herein.
- B. Each manual shall be provided in a stand-alone binder or shall be suitable for insertion into a 3-ring binder. Include the General Contractor's and Manufacturer's representative's contact information on the front cover. O&M manuals must be appropriate for the project and customized for the project. If a Manufacturer's standard O&M manual is included in the submittal, all non-applicable content must be removed or crossed out.
- C. Manuals shall include operating and maintenance information on all systems and pieces of equipment. The manual shall contain sufficient data to install, operate, maintain, repair and rebuild all components of the equipment, design data specific to the project. Descriptions of operation should include procedures for both normal and emergency operation. All information required by the Operations and Maintenance Manual Certification Form described herein and any additional information deemed necessary by the Owner and Engineer for proper installation,

operation and maintenance. Also include model numbers and serial numbers, as well as rated capacities and motor data, where applicable.

- D. Attached to every copy of each Operations and Maintenance Manual submitted, the Contractor shall provide a copy of the complete Operations and Maintenance Manual Certification Form (copy provided for the Contractor's use at the end of this Specification Section) signed by both the Contractor and the Manufacturer.

1.5 MANUFACTURER'S CERTIFICATES

- A. Prior to accepting the installation, the Contractor shall submit manufacturer's certificates for each item specified.
- B. Such manufacturer's certificates shall state that the equipment has been installed under either the continuous or periodic supervision of the manufacturer's authorized representative, that it has been adjusted and initially operated in the presence of the manufacturer's authorized representative, and that it is operating in accordance with the specified requirements, to the manufacturer's satisfaction. All costs for meeting this requirement shall be included in the Contractor's bid price.

1.6 SUBMISSION REQUIREMENTS

- A. Accompany submittals with transmittal letter, containing:
 - 1. Sequential Transmittal Number
 - 2. Date.
 - 3. Project title and number.
 - 4. Contractor's name and address.
 - 5. The sequential shop drawing number (called the Engineer's Shop Drawing number) of each shop drawing, project data and sample submitted.
 - i. Engineer's shop drawing number shall start at 001 for the first shop drawing in the first transmittal and continue sequentially until the last shop drawing is submitted.
 - ii. Resubmissions shall be denoted with a letter following the number. For example the first resubmission of Shop Drawing 001 shall be numbered 001A, a second resubmission of shop 001 shall be numbered 001B, and that sequence shall continue for any subsequent resubmissions.
 - iii. O+M submittals shall be numbered with separate and unique Engineer's shop drawing numbers.
 - 6. The Contractor's Shop Drawing number (if a different numbering system to the Engineer's number is used by the Contractor).
 - 7. Notification of deviations from Contract Documents.
 - 8. Other pertinent data.
- B. A completed Submittal Certification Form shall be attached to each copy of each shop drawing and must include:
 - 1. Identification of deviations from Contract Documents.
 - 2. Contractor's stamp, initialed or signed, certifying review of the submittal, verification of field measurements and compliance with Contract Documents.

3. Where specified or when requested by the Engineer, manufacturer's certification that equipment, accessories and shop painting meet or exceed the Specification requirements.
4. Where specified, manufacturer's guarantee.
- C. Requirements for Electronic Submittals:
 1. Each individual shop drawing or O&M submittal shall be contained in one PDF.
 2. The first page of the PDF shall be the Submittal Certification Form, which clearly identifies the submittal, specification section and shop drawing number. File names shall also identify the submittal contained in the PDF. Example file name: 02444-(Shop Drawing No.).pdf
 3. The electronic copy in PDF form shall be **exactly** as submitted in the hard copy. Electronic copies in PDF form shall be submitted on a CD or DVD and shall accompany the hard copies.
 4. PDF versions of 24x36 drawings shall be converted to 24 x 36 PDFs so as not to lose the clarity of the original drawing.
 5. Electronic submittals that are not submitted in accordance with the requirements stated above will not be reviewed by the Engineer.

1.7 RESUBMISSION REQUIREMENTS

- A. Revise initial drawings as required and resubmit as specified for initial submittal.
- B. Indicate on drawings any changes which have been made other than those required by Engineer. All renumbering of shop drawings, relabeling of individual pieces or assemblies or relocating of pieces or assemblies to other Drawings within the submittal shall be clearly brought to the attention of the Engineer.

1.8 ENGINEER'S REVIEW

- A. The review of shop and working drawings hereunder will be general only, and nothing contained in this specification shall relieve, diminish or alter in any respect the responsibilities of the Contractor under the Contract Documents and in particular, the specific responsibility of the Contractor for details of design and dimensions necessary for proper fitting and construction of the work as required by the Contract and for achieving the result and performance specified thereunder.
- B. The Engineer's review comments will be summarized on a Submittal Review Form, which includes an action code. A description of each action code is provided below.
 1. **No Exceptions Taken (Status 0 on shop drawing log).** The shop drawing complies with the Contract Document requirements. No changes or further information are required. Where appropriate, the submittal review form will be used to alert the Contractor, Owner and Field personnel of remaining items within that specification section that still needs to be submitted.
 2. **Make Corrections Indicated (Status 1 on shop drawing log).** The shop drawing complies with the Contract Document requirements except for minor

changes, as indicated. Resubmittal is not required unless it is specifically called for; however, Engineer requires that all comments will be addressed by the Contractor, unless otherwise notified in writing prior to execution of the relevant work.

3. **Conditional to Remarks (Status 2 on shop drawing log).** The shop drawing potentially complies with the Contract Document requirements, contingent upon satisfactory resolution of review comments. Remarks will explicitly list what information needs to be resubmitted. Resubmittal from the Contractor should include a cover letter or summary which indicates how each review comment has been addressed.
4. **Revise and Resubmit (Status 3 on shop drawing log).** The shop drawing does not comply with the Contract Document requirement as submitted, but may with changes indicated and/or submission of additional information. The entire package must be resubmitted with the necessary information and a cover letter which indicates how each review comment has been addressed and where to find the information in the resubmittal.
5. **Rejected (Status 4 on shop drawing log).** The shop drawing does not comply with the Contract Document requirements, for the reasons indicated in the remarks, and is unacceptable.
6. **In Review (Status 5 on shop drawing log).** The shop drawing is currently under review.
7. **For Information Only (Status 6 on shop drawing log).** The shop drawing review was informational only. No comments are provided.

SUBMITTAL CERTIFICATION FORM

PROJECT: _____ CONTRACTOR'S PROJ. NO: _____

CONTRACTOR: _____ ENGINEER'S PROJ. NO: _____

ENGINEER: _____

TRANSMITTAL NUMBER: _____ SHOP DRAWING NUMBER: _____

SPECIFICATION SECTION OR DRAWING NO: _____

DESCRIPTION: _____

MANUFACTURER: _____

The above referenced submittal has been reviewed by the undersigned and I/we certify that the material and/or equipment meets or exceeds the project specification requirements with

☐ NO DEVIATIONS

or

☐ A COMPLETE LIST OF DEVIATIONS AS FOLLOWS^a:

By: _____ By: _____

Contractor^b


Manufacturer^c

Date: _____ Date: _____

^a Any deviations not brought to the attention of the Engineer for review and concurrence shall be the responsibility of the Contractor to correct, if so directed.

^b Required on all submittals

^c When required by specifications Page ____ of ____

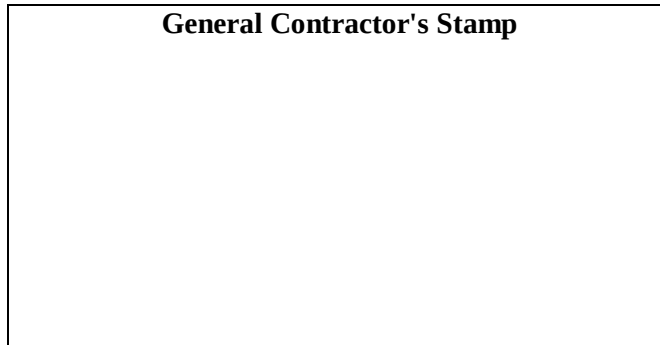

OPERATIONS AND MAINTENANCE MANUAL CERTIFICATION FORM

PROJECT: _____ CONTRACTOR'S PROJ. NO: _____

CONTRACTOR: _____ ENGINEER'S PROJ. NO: _____

ENGINEER: _____

TRANSMITTAL NUMBER: _____ SHOP DRAWING NUMBER: _____

SPECIFICATION SECTION OR DRAWING NO: _____

DESCRIPTION: _____

MANUFACTURER: _____

The above referenced operations and maintenance manual has been reviewed by the undersigned and I/we certify that the manual is customized as needed for this project, is suitable for mounting in a 3-ring binder, and contains the following items:

☐ Table of Contents	☐ Project-Related Design Data
☐ Maintenance Schedule and Summary	☐ Wiring Diagrams
☐ Lubrication Schedule	☐ Equipment Layout Drawings & Schematics
☐ Troubleshooting Information	☐ Equipment Performance Curves
☐ Warranty Information	☐ Parts and Service Contact Information
☐ Rebuild Information for All Components/ Systems	☐ Manufacturer's Contact Information
☐ Startup, Operation, Shutdown Procedures	☐ Emergency Operations Plan
☐ Safety Procedures	☐ List of Part Numbers for all Components
☐ Shop Drawings corrected to As-Built Conditions	☐ List of Spare Parts Supplied and Cost
	☐ List of Part Numbers for all Components

By: _____

Contractor^a

Date: _____

By: _____

Manufacturer^b


Date: _____

^a Contact information shall include name, address and telephone number.

^b Required on all Operation and Maintenance Manuals.

^c When required by Specifications.

Page ____ of ____

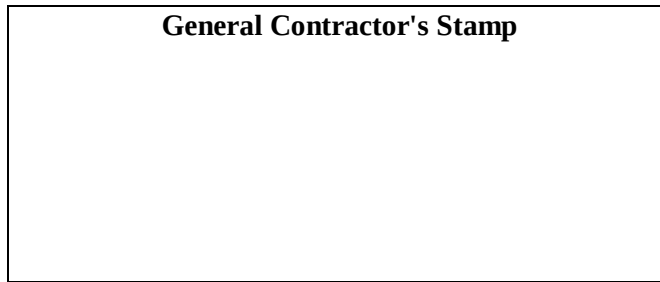

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 01515
TEMPORARY BYPASS PUMPING SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. The Contractor shall furnish, install, operate, maintain and remove the temporary bypass pumping system. The temporary system shall be able to reliably pump all incoming, raw, unscreened wastewater flows as scheduled herein. The temporary bypass pumping system shall be provided in order allow for the existing facilities to be shut down during the installation of new sewer facilities and connection to existing manholes.
- B. The Contractor may utilize onsite manholes to draw sewage from. The bypassed flow will be discharged into downstream manholes past the point of construction. Possible bypass systems could pump from MH-39 to MH-38, and from MH-37 to MH-35 when necessary to complete the sewer work. Other bypass scenarios may be necessary.
- C. The Contractor shall coordinate temporary bypass pumping with the Owner on a daily basis. The Contractor is required to report alarm conditions immediately to the Owner by use of a teledialer (phone/pager numbers to be provided by Owner). The Contractor shall furnish and maintain communication equipment, including teledialer, cellular telephones and two-way radios, to maintain communication on-site.
- D. The Contractor shall annunciate and log alarm conditions including high water level in upstream manhole and loss of primary pump. The alarm log shall include the type of alarm, time of alarm, time alarm acknowledged, and time alarm condition cleared.

1.2 RELATED WORK

- A. Section 01010 - Summary of Work
- B. Section 01340 - Submittals

1.3 SUBMITTALS

- A. Submit the following in accordance with Section 01340 and as specified herein.
 - 1. Proposed sequence of construction.
 - 2. Coordination Drawings showing detailed layout of equipment, pumps, suction and discharge piping, piping fittings, valves, supports, materials, temporary enclosure, etc. provided under this section. Provide catalog cut sheets/ technical data for equipment and appurtenances.

01515-2
TEMPORARY BYPASS PUMPING SYSTEMS

3. List of equipment, pumps, piping, fittings, valves, and materials to be utilized by the Contactor for the temporary bypass pumping system.
4. List of standby equipment and spare parts available on-site and off-site.
5. Performance curves for wastewater bypass pumps and suction lift, static head, headloss, and total dynamic head (TDH) calculations.
6. List of contact persons and communications equipment to be utilized.

PART 2 - PRODUCTS

2.1 WASTEWATER BYPASS PUMPING SYSTEM

A. General:

1. The Contractor shall furnish, install, operate, maintain and remove a wastewater bypass pumping system that will be capable of handling the following estimated range of flows, which includes infiltration and inflow.

Flow in sewer East of Bridge

	FLOW	
CONDITION	MGD	GPM
Average	<i>0.14</i>	<i>100</i>
Peak	<i>1</i>	<i>700</i>

Flow in sewer West of Bridge

	FLOW	
CONDITION	MGD	GPM
Average	<i>0.07</i>	<i>50</i>
Peak	<i>1</i>	<i>700</i>

2. The pumps will be required to pump from onsite sewer manholes to manholes downstream of the work area.
3. The bypass pumping system shall include a variable speed electrically or diesel driven lead pump with diesel driven back-up pump(s). The lead pump shall be flow-paced to match influent flow. All pumps shall be critically silenced to less than 68 decibels at 25 feet. Each pump shall be a skid-mounted unit.
4. The pump priming system shall be fully automatic, needing no form of adjustment or manual addition of water. The priming system shall be capable of priming the pump from a completely dry casing.
5. The pumps shall be centrifugal trash pumps suitable for handling raw, unscreened sewage with solids up to 3 inches in diameter, and capable of running completely dry for extended periods of time without damage. Pumps shall be capable of static suction lifts to 28 vertical feet, at sea level.
6. The pumpset shall be furnished with float or transducer level controls, and be equipped with a weatherproof, controller. The controller shall start/stop the pumps based on signals from high and low level floats or a transducer. The

01515-3
TEMPORARY BYPASS PUMPING SYSTEMS

- controller shall be capable of automatically varying the pump speed to match varying flow conditions and maintain a constant level in the influent manhole.
7. Contractor to provide portable spill guard containment dikes for supplied pumps.
 8. Bypass pumping systems shall be Dri-Prime diesel driven pumpsets as supplied by Godwin Pumps, Manchester, New Hampshire; Baker Corp, Oxford, Massachusetts; or equal.
 9. The services of a representative of the bypass pumping system supplier shall be provided to inspect the installation and supervise the startup and testing of the system.
 10. The Contractor shall operate and maintain the bypass pumping system at all times.

PART 3 - EXECUTION

3.1 GENERAL:

- A. The temporary bypass pumping system shall be furnished, installed, operated, maintained and removed as follows:
 1. The Contractor shall coordinate all Work as specified in Paragraph 3.2.
 2. The Contractor shall furnish, install, and test temporary bypass pumping system and discharge pipelines. Discharge piping shall be constructed of rigid galvanized steel pipe with ball and socket joints, Bauer HK Quick Coupling Piping or equal. Aluminum "irrigation" type piping or glued PVC pipe shall not be allowed.
 3. The Contractor shall test and debug all systems and verify that all necessary equipment, materials, spare parts, and labor are available on-site prior to operation of the system and prior to the demolition of any part of the existing pumping station facilities.
 4. The Contractor shall operate and maintain the system until the new sewer work is completed, tested and accepted by the Owner and Engineer.
 5. Upon receipt of approval by the Owner and Engineer, the Contractor shall remove the temporary bypass pumping system, including all appurtenant piping. Contractor shall restore the area impacted by the temporary bypass pumping system to a like-new condition.

3.2 COORDINATION OF WORK

- A. Provide all labor and equipment necessary to coordinate work of this section and maintain communications.
- B. Notify all personnel seven days in advance of any temporary bypass pumping work. The Owner will identify personnel to be notified in addition to those identified by the Contractor.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 01580

PROJECT IDENTIFICATION AND SIGNS

PART 1 - GENERAL

1.1 DESCRIPTION

A. Work Included:

1. Provide and erect sign(s) at the project site to identify the project and to indicate the applicable Federal and State Government Agencies that are participating in the development of the project.
- B. Do not place, or allow the placement of, other advertising sign boards at the project site or along rights-of-way furnished for the project work.

PART 2 - PRODUCTS

2.1 MATERIAL AND DESIGN

- A. Construct a sign of 3/4-inch exterior grade, high density overlaid plywood or other material, approved by the Engineer, suitable for signs.

PART 3 - EXECUTION

3.1 INSTALLATION


- A. Erect the sign in a prominent location as approved by the Engineer.
- B. Construct the sign in accordance with the following sample Drawing.
- C. Remove the sign when the Work has been completed at no additional cost to the Owner.

END OF SECTION

WIN 022618.00
December 12, 2017

TEMPORARY CONSTRUCTION SIGN FOR RURAL DEVELOPMENT PROJECTS

Recommended Fonts: Helvetica, Arial, or Myriad Pro

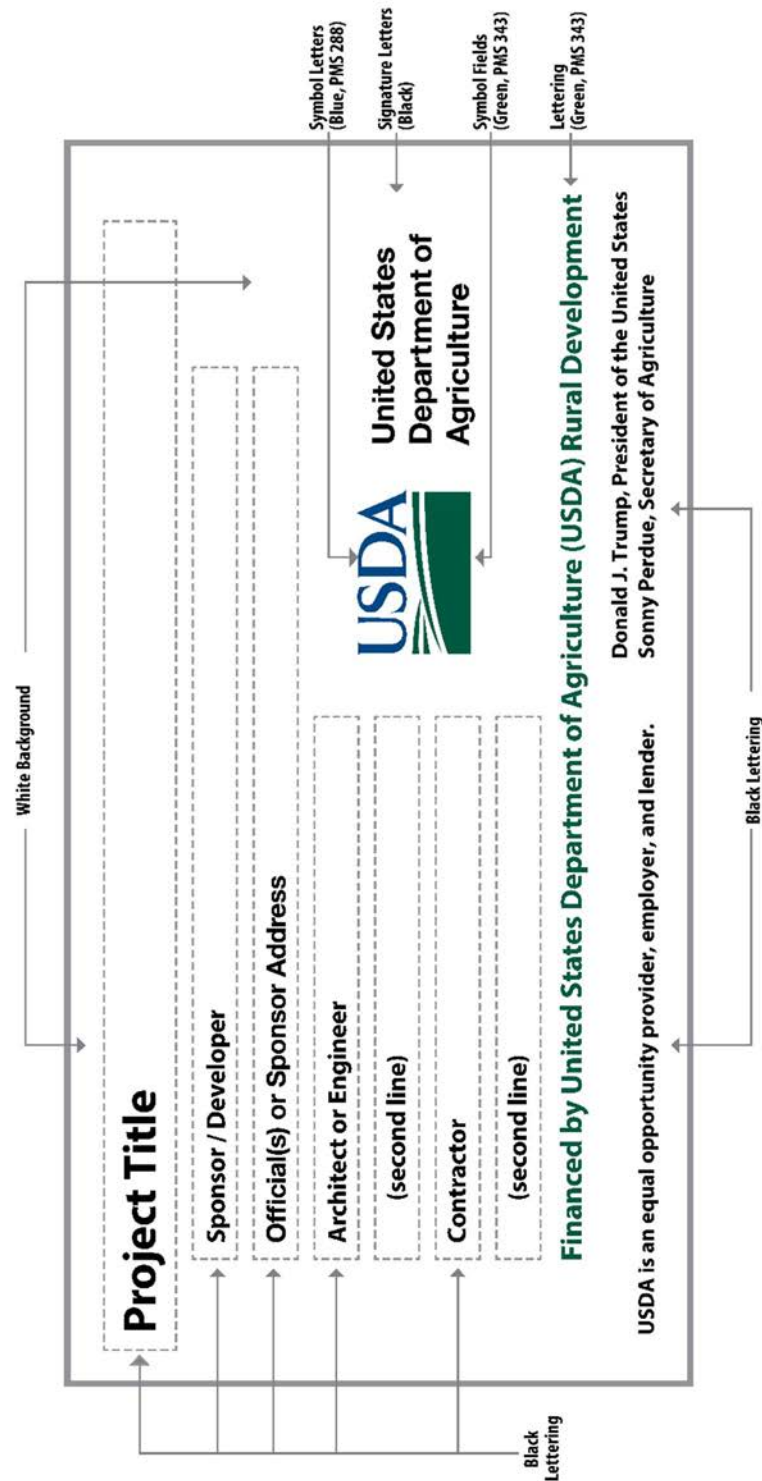

SIGN DIMENSIONS : 1200 mm x 2400 mm x 19 mm (approx. 4' x 8' x 3/4")
PLYWOOD PANEL (APA RATED A-B GRADE - EXTERIOR)

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 01720

PROJECT RECORD DOCUMENTS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included:
 - 1. Keep accurate record documents for all additions, substitutions of material, variations in work, and any other additions or revisions to the Contract.
- B. Related Work Specified Elsewhere:
 - 1. Shop Drawings, Project Data, and Samples are specified in "General Conditions" and Section 01340, Submittals.

1.2 MAINTENANCE OF DOCUMENTS

- A. Maintain at job site, one copy of:
 - 1. Contract Drawings
 - 2. Specifications
 - 3. Addenda
 - 4. Reviewed Shop Drawings
 - 5. Change Orders
 - 6. Any other modifications to the Contract
 - 7. Field Test Reports
- B. Store documents in files and racks specifically identified for this use, that are apart from documents used for construction.
- C. File documents in a logical manner indexed for easy reference.
- D. Maintain documents in clean, dry, legible condition.
- E. Do not use record documents for construction purposes.
- F. Make documents available at all times for inspection by the Engineer and Owner, and by the end of the project, transmit these documents to the Engineer.

1.3 RECORDING

- A. Label each document "PROJECT RECORD" in large high printed letters.
- B. Keep record documents current and do not permanently conceal any work until required information has been recorded.
- C. General Field Recording Issues:
 - 1. All ties should be taken from existing, permanent features such as utility poles, corners of houses and hydrants. Porches, sheds or other house additions should be avoided for they could be torn down. A minimum of two ties should be taken.

2. Stations should be recorded to the nearest foot.
 3. Inverts should be recorded to the nearest hundredth of a foot.
 4. Elevations should be recorded to the nearest hundredth of a foot.
 5. Building dimensions should be recorded to the nearest 1/4".
- D. Project Record Drawings - Legibly mark Contract Drawings to record existing utilities and actual construction of all work, including but not limited to the following (where applicable):
1. Existing Utilities
 - a. Water mains and services, water main gate valves, sewer mains and services, storm drains, culverts, steam lines, gas lines, tanks and other existing utilities encountered during construction must be accurately located and shown on the Drawings. In congested areas supplemental drawings or enlargements may be required.
 - b. Show any existing utilities encountered in plan and profile and properly labeled showing size, material and type of utility. Ties should be shown on plan. Utility should be drawn to scale in section (horizontally and vertically) and an elevation should be called out to the nearest hundredth of a foot.
 - c. When existing utility lines are broken and repaired, ties should be taken to these locations.
 - d. If existing water lines are replaced or relocated, document the area involved and pipe materials, size, etc. in a note, and with ties.
 2. Manholes, Catch Basins, Valve Pits and other structures.
 - a. Renumber structure stationing to reflect changes.
 - b. Show ties to center of structure covers or hatches.
 - c. In general, show inverts at center of structures. However, for manholes with drop structures, or steep channels (greater than 0.2' change on slope), show inverts at face of manhole.
 - d. Show inverts for other structures at the face of the structure.
 - e. Draw any new structures that are added on plan and profile.
 - f. Show any field or office redesigns.
 - g. Redraw plan if the structure's location is moved more than 5 feet in any direction. [Note: It is important to show existing utilities, as outlined in Paragraph 1 above, especially if they were one reason for relocating the sewer, manholes and other structures.]
 - h. Redraw profile if inverts changed by more than 6 inches.
 3. Gravity Sewer Line
 - a. Change sewer line slopes indicated on Drawings if inverts are changed.
 - b. Draw any new gravity lines that are added on plan and profile.
 - c. Show any field or office redesigns.
 - d. Redraw the sewer line profile if manhole inverts are redrawn.
 - e. Redraw the sewer line on plan corresponding to relocated manholes.
 4. Water Mains and Force Mains
 - a. Show ties to the location of all valves, bends (horizontal and vertical),

- tees and other fittings. The use of thrust blocks should be recorded.
- b. Revise elevations indicated on the Drawings to reflect actual construction.
5. House Services
- a. Draw all house services (even to empty lots) on plan, and show ties.
 - b. Show ties or distances to wyes from manhole.
 - c. Show chimneys heights in the profile.
 - d. The Wright-Pierce "Sanitary Sewer Service Location" forms shall be used to record sewer service information. A copy of these forms should be provided to the Owner, along with the Record Drawing Set.
6. Septic Tanks
- a. Show ties to center of tank covers.
 - b. Label size of septic tanks that are other than standard 1000 gallon capacity.
 - c. The Wright-Pierce "Sanitary Sewer Service Location" forms shall be used to record septic tank information. A copy of these forms should be provided to the Owner, along with the Record Drawing Set.
7. Ledge
- a. Ledge profiles should be shown. Note whether the plotted ledge profile reflects undisturbed or expanded conditions.
8. Yard Piping and Buried Electrical Conduit
- a. Site piping should be drawn to reflect the installed locations, with ties and elevation of all bends (horizontal and vertical).
 - b. Show routing for electrical conduits and pull boxes, especially in close proximity to buildings and when the conduits change direction or cross process piping.
9. Roads
- a. Show centerline road profile and level spot elevations.
 - b. Show pavement widths.
 - c. On road cross sections, show the pavement cross slope.
 - d. Show any deviations from the design plans.
10. Buildings
- a. In general, small changes to structures should not be redrawn. If any dimensional changes were made in the field, the numerical change should be made on the Drawing and be properly labeled. Update dimensions and elevations on Drawings.
 - b. Show finished concrete elevations (top of slab, top of wall, top of footing, etc.). Redraw any foundation, frost wall, etc. that was modified, deepened, or altered during construction.
 - c. Adjust finished concrete horizontal dimensions that are shown on the Drawings.
 - d. Adjust structural steel elevations and horizontal dimensions that are shown on the Drawings.
 - e. Show location of anchors, construction and control joints, and

- waterstops, when they are different from those shown on Drawings.
- f. Any additions or major changes should be shown in both plan and elevation (i.e. relocated doors, opposite door swings, change in wall location, relocation of floor drains).
 - g. Show approximate location and routing of electrical conduits in walls, slabs and ceilings. Most conduits are run in groups, therefore, use range of measurements to define location for entire section of conduits.
 - h. Special circuits for computers, alarms and instrumentation should be shown.
 - i. Show any changes in location and elevation of ductwork and devices, fuel piping and equipment, and heat piping and equipment.
 - j. Location of gravity sewer system below slabs in buildings should be shown, if changes are made in the configuration.
 - k. If wall mounted electrical switches, control boxes, thermostats, etc. have been relocated significantly, (other side of door, or to a wall other than indicated diagrammatically on electrical plans) make the revision accordingly.
- E. Specifications and Addenda - Legibly mark up each section to record:
- 1. Manufacturer, trade name, catalog number, and supplier of each product and item of equipment actually installed.
 - 2. Changes made by Change Order, Field Order, or other method.

1.4 SUBMITTALS

- A. At the completion of the project, deliver record documents to the Engineer.
- B. Accompany submittal with transmittal letter, in duplicate, containing:
 - 1. Date, project title and number.
 - 2. Contractor's name and address.
 - 3. Title and number of each record document with certification that each document is completed and accurate.
 - 4. Signature of Contractor, or his authorized representative.
- C. Failure to supply all information on the Project Record Drawings as specified in Part 1.3 may result in additional retainage from monthly partial payment requests, and in non-approval of final payments of the Contract and/or if contract time (as specified in accordance with the Standard General Conditions of the Construction Contract) has elapsed, this shall be grounds for the enactment of the liquidated damages as specified.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02076

ASBESTOS-CEMENT (TRANSITE) PIPE REMOVAL AND DISPOSAL

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included: Remove and dispose of Asbestos-Cement (AC) sewer main according to all applicable Federal, State, and local laws, regulations, and ordinances.

1.2 SCHEDULING

- A. Prior to initiating AC pipe removal, the Contractor shall prepare an abatement plan and provide a copy for record purposes to the Engineer. Refer to section 1.5 SUBMITTALS for more information.
- B. The Contractor shall update the abatement schedule as requested by the Engineer.

1.3 CODES, REGULATIONS, AND STANDARDS

- A. General Applicability
 - 1. Contractor shall perform all work in accordance with these specifications: U.S. Environmental Protection Agency (U.S. EPA) and Occupational Safety & Health Administration (OSHA) regulations, NIOSH recommendations, Maine Department of Environmental Protection (Maine DEP) rules and regulations, and any other applicable Federal, State and local government regulations and guidelines
 - 2. The most recent edition of any relevant regulation, standard, document, code or policy statement shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.
- B. Contractor Responsibility
 - 1. The Contractor shall assume full responsibility and liability for compliance with all applicable Federal, State and local regulations related to all aspects of the abatement project. The Contractor is responsible for providing and maintaining training, accreditation, medical exams, medical records, and personal protective equipment as required by applicable Federal, State and local regulations. The Contractor shall hold the Owner and Owner's Representative harmless for any failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of the Contractor, Contractor's employees, or subcontractors of the Contractor.
- C. The publications listed below form a part of this specification to the extent referenced. The publications listed below are not intended to be a comprehensive list

02076-2
ASBESTOS-CEMENT (TRANSITE) PIPE REMOVAL AND DISPOSAL

of all regulations, applicable to this work.

1. Environmental Protection Agency (EPA):
 - a. National Emission Standards for Hazardous Air Pollutants (NESHAP) Title 40, Part 61).
 - b. A Guide to Respiratory Protection for the Asbestos Abatement Industry.
2. Occupational Safety and Health Administration (OSHA):
 - a. Asbestos Construction Standard 29 CFR Part 1926.1101
 - b. Asbestos General Industry Standard 29 CFR 1910.1001
 - c. Respiratory Protection, 29 CFR 1910.134
 - d. Construction Industry Standards, 29 CFR 1926
3. U.S. Department of Transportation
 - a. 49 CFR 100 - 185, Transportation
4. National Institute for Occupational Safety and Health (NIOSH):
 - a. "Respiratory Protection A Guide for the Employee."
5. American National Standards Institute (ANSI):
 - a. Z86.1-1973 - Commodity Specification for Air
 - b. Z9.2 - HEPA Filter Specifications
 - c. Z88.2-1980-Respiratory Protective Equipment
6. Maine Department of Environmental Protection (Maine DEP):
 - a. Chapter 425 - Asbestos Management Regulations
 - b. Chapter 401 - Landfill Siting, Design, and Operation
 - c. Chapter 411 - Non-Hazardous Waste Transporter Licenses

1.4 PERSONNEL QUALIFICATIONS

- A. All personnel of the Contractor or any approved subcontractors involved with asbestos abatement work shall meet the following minimum qualifications:
 1. Medical examination within the past year in accordance with OSHA 1926.134 with a physician's written opinion that the worker has no condition that would preclude him/her from working with asbestos or wearing a respirator.
- B. The Contractor shall employ a competent person to oversee all aspects of AC pipe removal.
- C. There shall be a sufficient number of trained and qualified workers, foremen and superintendents to accomplish the work within the required schedule. No untrained or unqualified person shall be employed to speed up completion of the abatement work.

1.5 SUBMITTALS

- A. Submittals shall be in accordance with Specification Section 01300 - Submittals.
- B. At a minimum, the following submittals shall be submitted to the Engineer.
 1. Certification of compliance with OSHA requirements including but not limited to medical surveillance, record keeping and personnel exposure monitoring.
 2. Respiratory Protection Program. Include site specific exposure assessment for respirator selection.

02076-3
ASBESTOS-CEMENT (TRANSITE) PIPE REMOVAL AND DISPOSAL

3. A written project schedule. The schedule shall be date specific and include all phases of the project.
 4. Emergency Action Plan.
 5. Proposed waste disposal site and waste transporter. Include name, address, telephone number and operating permits, etc.
 6. Material safety data sheets (MSDS) for all materials and products to be used by the Contractor on this project.
 7. A work plan outlining the methods to be used during the removal of AC pipe. The work plan shall include the use of the Best Management Practices pertaining to the qualifications of field personnel and methods for dust control, packaging, transportation, and decontamination of equipment.
- C. During Abatement
1. Results of personnel exposure monitoring.
 2. Project schedule.
- D. Post Abatement Submittals
1. Disposal receipts (within timeframes regulated by EPA) signed by the landfill operator demonstrating that the AC pipe removed from the project has been packaged, transported and disposed of properly.
 2. Provide the Engineer with copies of on-site job logs, notifications, permits, accident reports, personnel exposure air monitoring results, waivers of lien.
 3. Copies of any notices of non-compliance issued by governmental authorities.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Polyethylene sheeting: shall be at least 6-mil thickness.
- B. Disposable bags and/or drums: shall be of 6-mil polyethylene, on which labels are directly printed, as required by EPA, OSHA and DOT regulations.
- C. Surfactant (wetting agent): shall be a 50/50 mixture of polyoxyethylene ether and polyoxyethylene ester, or equivalent, mixed in a proportion of 1 fluid ounce to 5 gallons of water or as specified by manufacturer.

PART 3 - EXECUTION

3.1 TOOLS AND EQUIPMENT

- A. Transportation Equipment: Transportation equipment, as required, shall be suitable for loading, temporary storage, transport, and unloading of contaminated waste without exposure to persons or property. The equipment shall be secured at all times and access limited to authorized personnel only.
- B. The Contractor shall provide approved respirators and protective clothing to all Contractor personnel. The Contractor shall also provide approved protective clothing to representatives of the Owner, and to representatives of the State or other governmental entity who may inspect the job site.

02076-4
ASBESTOS-CEMENT (TRANSITE) PIPE REMOVAL AND DISPOSAL

- C. Protective clothing requirements must include, but may not be limited to:
 - 1. One-time use, disposable, full-body coveralls made of Tyvek® fabric or approved equal.
 - 2. Hard Hats
 - 3. Eye protection
 - 4. Gloves
 - 5. Respiratory protective equipment as required by State law
 - 6. Other as appropriate for site conditions
- D. The Contractor shall have sufficient equipment to mix and spray wetting agents.
- E. The Contractor shall have a sufficient quantity of, ladders, hand tools and materials to conduct the abatement project in an efficient and workmanlike manner.

3.2 INSPECTION AND PREPARATION

- A. Before any work commences, post danger signs in and around the work area to comply with Federal, State, and local law.

3.3 WORK AREA PREPARATION:

- A. Regulated area access is to be restricted to authorized trained/accredited and protected personnel. The Contractor shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel.
- B. Prior to any asbestos related work in an area, restrict access to all persons other than trained personnel and authorized visitors. The Contractor shall erect signs around the perimeter in accordance with EPA, OSHA and this specification. Maintain a log of all people entering and exiting the workplace during abatement work.
- C. The Contractor shall be responsible for taking whatever steps are necessary to prevent a release to the environment and additional contamination of the areas beneath the AC pipe.

3.4 AC PIPE CONNECTION AND REMOVAL PROCEDURES

- A. Cutting of existing AC pipe shall be minimized. Cutting of AC pipe shall be performed in accordance with all applicable OSHA standards and shall minimize release of AC fibers.
- B. AC pipe shall be secured, wrapped, and disposed of in a timely manner. Stockpiling of removed pipe in an unsecured area shall not be allowed.
- C. AC pipe shall be transported to a licensed facility for proper disposal.
- D. Crushing of pipe in-place shall not be allowed.

3.5 GENERAL PROCEDURES

- A. Install polyethylene sheeting beneath the AC pipe to minimize contamination of adjacent soil or waterway.
- B. All surfaces shall be wetted during removal activities.
- C. If AC pipe is found to be friable or will be rendered friable, abatement shall be conducted in containment.

02076-5
ASBESTOS-CEMENT (TRANSITE) PIPE REMOVAL AND DISPOSAL

- D. AC pipe shall be removed from the trench or from under the bridge in an “intact” condition in sizes such that the piping may be handled without breakage.
- E. If AC pipe sections can be separated without cutting, the removal may be conducted without containment.
- F. Separated non-friable AC pipe sections may be removed without containment.
- G. If AC pipe sections require breaking/cutting to separate, all breaking/cutting activities shall be conducted within a glove bag or negative pressure regulated work area (containment).
- H. In the event of breakage of AC pipe during removal which results in pieces contacting soil or water, then the Contractor shall remove all debris and soil located adjacent to and beneath the debris as well as six inches of soil from beneath and surrounding the debris. All resultant debris and soils shall be properly handled, packaged and disposed of as friable, regulated asbestos waste.
- I. The Engineer and Owner shall be notified immediately in the event of breakage.
- J. AC pipe shall be double wrapped in 6-mil polyethylene sheeting and labeled prior to transport as required.

3.6 DISPOSAL ACTIVITIES

- A. It is the responsibility of the Contractor to determine current waste handling, transportation, and disposal regulations and or requirements for AC pipe and for each waste disposal facility. The Contractor must comply fully with these regulations and all U. S. Department of Transportation and EPA requirements.
- B. The Contractor will document actual disposal of the waste at the designated landfill by completing a Waste Shipment Record and forwarding a copy of it along with a copy of the Bill of Lading to the Engineer.
- C. All waste load-out and disposal activities shall be the responsibility of the Contractor.
- D. Contractor shall insure that transport vehicles do not leak water or other material while being loaded, transported or while on site partially loaded. At minimum, transport vehicles shall be lined with two layers of 6-mil thick polyethylene sheeting installed to form a watertight barrier within the vehicle. If water is observed leaking from any transport or storage container, contractor shall immediately stop work, unload the container (including dumpsters and semi-trailers) find and correct the source of the leak, and place waste material back into the container. This process will be repeated each time any water is observed leaking from a storage or transport vehicle that contains asbestos waste. Contractor shall also take all steps necessary, to decontaminate the ground or other surfaces that became wet due to water leaking from a container that holds asbestos waste.

3.7 CLEANING AND FINAL DECONTAMINATION

- A. After the removal of the AC pipe has been completed and before removal of barriers (as applicable), the entire area shall be thoroughly cleaned. All plastic barriers, tapes and disposable contaminated equipment shall also be disposed of as asbestos waste. All reusable contaminated equipment such as masks, hard hats, etc., shall be

Paris
WIN 022618.00
December 12, 2017

02076-6
ASBESTOS-CEMENT (TRANSITE) PIPE REMOVAL AND DISPOSAL

thoroughly decontaminated through wet cleaning or sealed within 6-mil polyethylene bags before removal from the work area.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02200

EARTHWORK

PART 1 - GENERAL

1.1 DESCRIPTION

- A. The Work described by this Section consists of all earthwork encountered and necessary for construction of the project as indicated in the Contract Documents, and includes but is not limited to the following:
 - 1. Excavation
 - 2. Backfilling and Filling
 - 3. Compaction
 - 4. Embankment Construction
 - 5. Grading
 - 6. Providing soil material as necessary
 - 7. Disposal of excess suitable material and unsuitable materials
- B. Related Work Specified Elsewhere: (When Applicable)
 - 1. The use of explosives is specified in the Supplementary Conditions section of this Contract, and in Division 1.
 - 2. Pipe, fittings and valves are specified in Division 2.

1.2 QUALITY ASSURANCE

- A. Requirements of Regulatory Agencies:
 - 1. All work shall be performed and completed in accordance with all local, state and federal regulations.
 - 2. The General Contractor shall secure all other necessary permits unless otherwise indicated from, and furnish proof of acceptance by, the municipal and state departments having jurisdiction and shall pay for all such permits, except as specifically stated elsewhere in the Contract Documents.
- B. Line and Grade:
 - 1. The Contractor shall establish the lines and grades in conformity with the Drawings and maintain same to properly perform the work.
- C. Testing Methods:
 - 1. Gradation Analysis: Where a gradation is specified the testing shall be in accordance with ASTM C-117-90 and ASTM C-136-93 (or latest revision).
 - 2. Compaction Control:
 - a. Unless otherwise indicated, wherever a percentage of compaction for backfill is indicated or specified, it shall be the in-place density divided by the maximum density and multiplied by 100. The maximum density

shall be the density at optimum moisture as determined by ASTM Standard Methods of Test for Moisture-Density Relations of Soil Using 10-lb. Hammer and 18-in. Drop, Designation D-1557-91 (Modified Proctor), or latest revision, unless otherwise indicated.

- b. The in-place density shall be determined in accordance with ASTM Standard Method of Test for Density of Soil in Place by the Sand Cone method, Designation D 1556-90, (or latest revision) or Nuclear method Designation D2922.
- c. Wherever specifically indicated, maximum density at optimum moisture may be determined by ASTM Standard Methods of Test for Moisture Density Relations of Soils, ASTM D-698-91 (Standard Proctor).
- d. An Independent Testing Laboratory will be retained by the Paris Utility District to conduct all laboratory and field soil sampling and testing, and to observe trench compaction. Laboratory testing will consist of sieve analyses, natural water content determinations, and compaction tests. Field testing will consist of in-place field density tests and determination of water contents.

1.3 SUBMITTALS

- A. Collection of samples and testing of all materials for submittals shall be performed by the Independent Testing Laboratory and paid for by the Paris Utility District
- B. Submit test results (including gradation analysis) and source location for all borrow material to be used at least 10 working days prior to its use on the site. Contractor shall identify and provide access to borrow sites.
- C. Submit moisture density curve for each type of soil

1.4 TESTS

The Independent Testing Laboratory shall conform to the following procedures and standards:

- A. Submit test results in accordance with the procedure specified in the General and Supplementary Conditions.
- B. All testing shall be performed by a qualified Independent Testing Laboratory acceptable to the Engineer at the Paris Utility District's expense unless otherwise indicated.
- C. Field density tests on embankment materials shall be as follows:
- D. Tests shall be taken on every 200 cubic yards of embankment material.
- E. Paved Areas and Building Slab Subgrade: Make at least one field density test of subgrade for every 2,000 sq. ft. of paved area or building slab, but in no case less than 3 tests. In each compacted fill layer, make one field density test for every 2,000 sq. ft. of overlaying building slab or paved area, but in no case less than 3 tests.
- F. Trenches: Field density test in trenches shall be taken at 75 linear foot intervals on every third lift.
- G. Foundation Wall Backfill: Take at least one (1) field density tests per lift per wall at

locations and elevations as designated by the Engineer.

- H. In addition to the above tests the Independent Testing Laboratory will perform additional density tests at locations and times requested by the Engineer.
- I. Additional density testing will be required by the Engineer if the Engineer is not satisfied with the apparent results of the Contractor's compaction operation.
 - 1. If the test results fail to meet the requirements of these specifications, the Contractor shall undertake whatever action is necessary, at no additional cost to the Owner, to obtain the required compaction. The cost of retesting will be paid by Owner. The cost of retesting will be determined by Engineer and Owner will invoice Contractor for this cost. If unpaid after 60 days, the invoice amount for retesting will be deducted from the Contract Price. No allowance will be considered for delays in the performance of the work.
 - 2. If the test results pass and meet the requirements of these Specifications, the cost of the testing service will be borne by the Owner, but no allowance will be considered for delays in the performance of the work.

1.5 JOB CONDITIONS

- A. Site Information:
 - 1. Data on indicated subsurface conditions are not intended as representations or warranties of accuracy or continuity between soil borings. It is expressly understood that Owner and Engineer will not be responsible for interpretations or conclusions drawn there from by the Contractor. Data are made available for the convenience of Contractor.
 - 2. Additional test borings and other exploratory operations may be made by Contractor at no additional cost to Owner.
- B. Existing Utilities and Structures:
 - 1. The locations of utilities and structures shown on the Drawings are approximate as determined from physical evidence on or above the surface of the ground and from information supplied by the utilities. The Engineer in no way warrants that these locations are correct. It shall be the responsibility of the Contractor to determine the actual locations of any utilities or structures within the project area.

PART 2 - PRODUCTS

2.1 SOIL MATERIAL

- A. Aggregate Base: Shall be screened or crushed gravel of hard durable particles free from vegetable matter, lumps or balls of clay and other deleterious substances. Type B Aggregate for base shall not contain particles of rock that will not pass the 4 inch square mesh sieve. The gradation of the part that passes a 3-inch sieve shall meet the following grading requirements:

<u>Sieve Designation</u>	<u>Percent by Weight Passing Square Mesh Sieves</u>
	Type B <u>Aggregate</u>
1/2 inch	35-75
1/4 inch	25-60
No. 40	0-25
No. 200	0-5

- B. Aggregate Leveling Course and Untreated Surface Course: Shall be screened or crushed gravel consisting of hard durable particles which are free from vegetable matter, lumps or balls of clay and other deleterious substances. The gradation of the material shall meet the grading requirements of the following table:

<u>Sieve Designation</u>	<u>Percentage by Weight Passing Square Mesh Sieves</u>
1 inch	95-100
3/4 inch	90-100
No. 4	40-65
No. 10	10-45
No. 200	0-7

- C. Blanket Drain Material: Shall be gravel of hard durable particles free from vegetable matter, lumps or balls of clay and other deleterious substances. Blanket drain material shall not contain particles of rock which will not pass the 2-inch square mesh. The gradation of the part that passes a 2-inch sieve shall meet the following grading requirements:

<u>Sieve Designation</u>	<u>Percentage by Weight Passing Square Mesh Sieves</u>
2 inch	100
1/4 inch	25-70
No. 40	0-30
No. 200	0-5

The blanket drain material shall have a permeability of 5×10^{-3} cm/sec. or faster. Permeability supersedes gradation requirements.

- D. Common Borrow: Shall consist of approved material required for the construction of the work where designated. Common borrow shall be free from frozen material, perishable rubbish, peat, organic, and other unsuitable material.

<u>Sieve Designation</u>	<u>Percentage by Weight Passing Square Mesh Sieves</u>
6-inch	100
No. 200	0-8

- E. Common borrow may be used for embankments unless otherwise indicated and provided that the material is at a moisture content suitable for compaction to the specified density. No rocks shall exceed $3/4$ of the depth of the specified lift thickness.
- F. Crushed Stone: Shall be a uniform material consisting of clean, hard, and durable particles or fragments, free from vegetable or other objectionable matter, containing angular pieces, as are those which come from a mechanical crusher. Gradation requirements shall be as follows:

<u>Sieve Designation</u>	<u>Percent by Weight Passing Square Mesh Sieve</u>
1-1/2 inch	100
1 inch	95-100
1/2 inch	25-60
No. 4	0-10

- G. Screened Stone: Shall be a well graded stone consisting of clean, hard, and durable particles or fragments, free from vegetable or other objectionable matter, meeting the

following gradation requirements:

<u>Sieve Designation</u>	<u>Percent by Weight Passing Square Mesh Sieve</u>
1 inch	100
3/4 inch	90-100
3/8 inch	20-55
No. 4	0-10
No. 8	0-5

- H. Select Fill (Structural Fill): Shall consist of well graded granular material free of organic material, loam, wood, trash, snow, ice, frozen soil and other objectionable material and having no rocks with a maximum dimension of over 4 inches and meeting the following gradation requirements, except where it is used for pipe bedding in which case the maximum size shall be 2 inches.

<u>Sieve Designation</u>	<u>Percent by Weight Passing Square Mesh Sieve</u>
4 inch	100
3 inch	90-100
1/4 inch	25-90
No. 40	0-30
No. 200	0-5

- I. Sand: Shall be well graded durable material free of organic matter and conform to the following gradation requirements:

<u>Sieve Designation</u>	<u>Percent by Weight Passing Square Mesh Sieve</u>
3/8 inch	100
No. 4	95-100
No. 16	50-85
No. 50	10-30
No.100	2-10
No.200	0-5

Sand conforming to the requirement for fine aggregate in ASTM Standard Specifications for Concrete Aggregate, Designation C-33, will meet the above requirement.

- J. Till Liner (Glacial Till): Shall consist of approved material required for the construction of the aerated lagoon's secondary liner where designated. The till liner material shall be free from frozen material, peat, trash, ice, organic and other objectionable material.

<u>Sieve Designation</u>	<u>Percent by Weight Passing Square Mesh Sieve</u>
6 inch	100
No. 200	20-50

The till liner material shall have a permeability of 1×10^{-5} cm/sec. or slower. Permeability supersedes gradation requirements.

2.2 CONCRETE

- A. If concrete is required for excess excavation, provide 3,000 psi concrete complying with requirements of Section 03300.

2.3 FILTER FABRIC

- A. If filter fabric is required, refer to Section 02260.

PART 3 - EXECUTION

3.1 INSPECTION

- A. Examine the areas and conditions under which excavating, backfilling, filling, compaction and grading are to be performed and notify the Engineer in writing of conditions detrimental to the proper and timely completion of the work. Do not proceed with the work until unsatisfactory conditions have been corrected.

3.2 EXCAVATION

- A. General:

1. Excavation consists of removal and disposal of all material encountered when establishing line and grade elevations required for execution of the work.
2. The Contractor shall make excavations in such manner and to such widths as will give suitable room for building the structures or laying and jointing the piping; shall furnish and place all sheeting, bracing, and supports; shall do all cofferdamming, pumping, and draining; and shall render the bottom of the excavations firm, dry and acceptable in all respects.
3. All excavation shall be classified as either earth or ledge.
 - a. Earth Excavation shall consist of the removal, hauling and disposal of all earth materials encountered during excavation including but not limited to native soil or fill, pavement (bituminous or concrete), existing sewers

- and manholes, ashes, loam, clay, swamp muck, debris, soft or disintegrated rock or hard pan which can be removed with a backhoe, or a combination of such materials, and boulders that do not meet the definition of "Ledge" below.
- b. Ledge Excavation: Shall consist of the removal, hauling, and disposal of all ledge or rock encountered during excavation. "Ledge" and "rock" shall be defined as any natural compound, natural mixture that in the opinion of the Engineer can be removed from its existing position and state only by drilling and blasting, wedging, sledging, boring or breaking up with power operated tools. No boulder, ledge, slab, or other single piece of excavated material less than two cubic yards in total volume shall be considered to be rock unless, in the opinion of the Engineer it must be removed from its existing position by one of the methods mentioned above.
- 4. The Contractor shall not have any right of property in any materials taken from any excavation. Do not remove any such materials from the construction site without the approval of the Engineer. This provision shall in no way relieve the Contractor of his obligations to remove and dispose of any material determined by the Engineer to be unsuitable for backfilling. The Contractor shall dispose of unsuitable and excess material in accordance with the applicable sections of the Contract Documents.
- B. Additional Excavation: When excavation has reached required subgrade elevations, notify the Engineer and Resident Project Representative who will observe the conditions.
 - 1. If material unsuitable for the structure or paved area or pipeline (in the opinion of the Engineer) is found at or below the grade to which excavation would normally be carried in accordance with the Drawings and/or Specifications, the Contractor shall remove such material to the required width and depth and replace it with thoroughly compacted select fill, screened stone, crushed stone, or concrete as directed by the Engineer.
 - 2. All excavated materials designated by the Engineer as unsuitable shall become the property of the Contractor and disposed of at locations in accordance with all State and local laws and the provisions of the Contract Documents.
 - C. Unauthorized Excavation: Shall consist of removal of materials beyond indicated subgrade elevations or dimensions without specific authorization of Engineer. Unauthorized excavation, as well as remedial work required by the Engineer shall be at the Contractor's expense. Remedial work required is as follows:
 - 1. Under footings, foundation bases, or retaining walls, fill unauthorized excavation with select fill or screened stone compacted to 95%. Provide 12" minimum select fill or screened stone directly under footings. Concrete fill may be used to bring elevations to proper position, when acceptable to Engineer.

2. If the bottom of a trench is excavated beyond the limits indicated, backfill the resulting void with thoroughly compacted screened stone, unless otherwise indicated.
 3. Elsewhere, backfill and compact unauthorized excavations as specified for authorized excavations of same classification, unless otherwise directed by Engineer.
- D. Structural Excavation:
1. Shall consist of the removal, hauling, disposal, of all material encountered in the excavation to permit proper installation of structures.
 2. Excavations for structures shall be carried to the lines and subgrades shown on the Drawings.
 3. Excavate areas large enough to provide suitable room for building the structures.
 4. The extent of open excavation shall be controlled by prevailing conditions subject to any limits designated by the Engineer.
 5. Provide, install, and maintain sheeting and bracing as necessary to support the sides of the excavation and to prevent any movement of earth which could diminish the width of the excavation or otherwise injure the work, adjacent structures, or persons and property in accordance with all state and OSHA safety standards.
 6. Erect suitable fences around structure excavation and other dangerous locations created by the work, at no additional cost to the Owner.
 7. Exposed subgrade surfaces shall remain undisturbed, protected, and maintained as uniform, plane areas and shape to receive the foundation components of the structure.
 - a. Conform to elevations and dimensions shown within a tolerance of plus or minus 0.10', and extending a sufficient distance from footings and foundations to permit placing and removal of concrete formwork, installation of services, other construction, and for inspection.
 - b. In excavating for footings and foundations, take care not to disturb bottom of excavation. Excavate by hand to final grade and trim bottoms to required lines and grades to leave solid base to receive the structure.
 - c. If a structure is to be constructed within the embankment, the fill shall first be brought to a minimum of 3 feet above the base of the footing. A suitable excavation shall then be made as though the fill were undisturbed earth.
- E. Trench Excavation: Shall consist of removal, hauling and disposal of all material encountered in the excavation to the widths and depths shown on the Drawings to permit proper installation of underground utilities.
1. Excavate trenches to the uniform width shown on the Drawings sufficiently wide to provide sufficient space for installation, backfilling, and compaction. Every effort should be made to keep the sides of the trenches firm and undisturbed until backfilling has been completed and consolidated.

2. Trenches shall be excavated with approximately vertical sides between the elevation of the center of the pipe and an elevation one foot above the top of the pipe.
 3. Grade bottoms of trenches as indicated for pipe and bedding to establish the indicated slopes and invert elevations, notching under pipe joints to provide solid bearing for the entire body of the pipe, where applicable.
 4. If pipe is to be laid in embankments or other recently filled material, the material shall first be placed to the top of the fill or to a height of at least two feet above the top of the pipe, whichever is the lesser. Particular care shall be taken to ensure maximum consolidation of material under the pipe location. The pipe trench shall be excavated as though in undisturbed material.
 5. Unless otherwise specifically directed or permitted by the Engineer, begin excavation at the low end of sewer and storm lines and proceed upgrade.
 6. Perform excavation for force mains and water mains in a logical sequence.
 7. The extent of open excavation shall be controlled by prevailing conditions subject to any limits prescribed by the Engineer.
 8. As the excavation progresses, install such shoring and bracing necessary to prevent caving and sliding and to meet the requirements of the state and OSHA safety standards, as outlined in the appropriate section of this Specification.
- F. Protection of Persons, Property and Utilities:
1. Barricade open excavations occurring as part of this work and post with warning lights in compliance with local and State regulations.
 2. Protect structures, utilities, sidewalks, pavements, and other facilities from damage caused by settlement, lateral movement, undermining, washout and other hazards created by earthwork operations. Exercise extreme caution and utilize sheeting, bracing, and whatever other precautionary measures that may be required.
 3. Rules and regulations governing the respective utilities shall be observed in execution of all work. Active utilities and structures shall be adequately protected from damage, and removed or relocated only as indicated or specified. Inactive and abandoned utilities encountered in excavation and grading operations shall be removed, plugged or capped only with written authorization of the utility owner. Report in writing to the Engineer, the locations of such abandoned utilities. Extreme care shall be taken when performing work in the vicinity of existing utility lines, utilizing hand excavation in such areas, as far as practicable.
 4. Repair, or have repaired, all damage to existing utilities, structures, lawns, other public and private property which results from construction operations, at no additional expense to the Owner, to the complete satisfaction of the Engineer, the utility, the property owner, and the Owner.
- G. Use of Explosives:
1. Do not bring explosives onto site or use in work without prior written permission from authorities having jurisdiction. Contractor is solely

- responsible for handling, storage, and use of explosive materials when their use is permitted.
2. All blasting shall be performed in accordance with all pertinent provisions of the "Manual of Accident Prevention in Construction" of the Associated General Contractors of America, Inc.
- H. Stability of Excavations:
1. Slope sides of excavations to comply with all codes and ordinances having jurisdiction. Shore and brace where sloping is not possible because of space restrictions or stability of material excavated.
 2. Maintain sides and slopes of excavations in a safe condition until completion of backfilling.
- I. Shoring and Bracing:
1. Provide materials for shoring and bracing, such as sheet piling, uprights, stringers and cross-braces, in good serviceable condition.
 2. Provide trench shoring and bracing to comply with local codes and authorities having jurisdiction. Refer to Specification Section 02156.
 3. Maintain shoring and bracing in excavations regardless of time period excavations will be open. Install shoring and bracing as excavation progresses.
- J. Material Storage:
1. Stockpile excavated materials which are satisfactory for use on the work until required for backfill or fill. Place, grade and shape stockpiles for proper drainage and protect with temporary seeding or other acceptable methods to control erosion.
 2. Locate and retain soil materials away from edge of excavations.
 3. Dispose of excess soil material and waste materials as herein specified.
- K. Dewatering:
1. To ensure proper conditions at all times during construction, the Contractor shall provide and maintain ample means and devices (including spare units kept ready for immediate use in case of breakdowns) with which to intercept and/or remove promptly and dispose properly of all water entering trenches and other excavations (including surface and subsurface waters).
 2. Excavations shall be kept dry until the structures, pipes, and appurtenances to be built therein have been completed to such extent that they will not be floated or otherwise damaged. Refer to Specification Section 02401.
- L. Cold Weather Protection:
1. Protect excavation bottoms against freezing when atmospheric temperature is less than 35°F.
 2. No frozen material shall be used as backfill or fill and no backfill shall be placed on frozen material.
- M. Separation of Surface Material:
1. The Contractor shall remove only as much of any existing pavement as is necessary for the prosecution of the work.

2. Prior to excavation, existing pavement shall be cut where in the opinion of the Engineer it is necessary to prevent damage to the remaining road surface.
 3. Where pavement is removed in large pieces, it shall be disposed of before proceeding with the excavation.
 4. From areas within which excavations are to be made, loam and topsoil shall be carefully removed and separately stored to be used again as directed; or, if the Contractor prefers not to separate surface materials, he shall furnish, as directed, loam and topsoil at least equal in quantity and quality to that excavated.
- N. Dust Control:
1. During the progress of the work, the Contractor shall conduct his operations and maintain the area of his activities, including sweeping and sprinkling of streets as necessary, so as to minimize the creation and dispersion of dust. Refer to Specification Section 01562.
 2. If the Engineer decides that it is necessary to use calcium chloride for more effective dust control, the contractor shall furnish and spread the material, as directed.

3.3 BACKFILL AND FILL

- A. General:
1. Backfilling shall consist of replacing material removed to permit installation of structures or utilities, as indicated in the Contract Documents.
 2. Filling shall consist of placing material in areas to bring them up to grades indicated on the Drawings.
 3. The Contractor shall provide and place all necessary backfill and fill material, in layers to the required grade elevations.
 4. Backfill excavations as promptly as work permits, but not until completion of the following:
 - a. Acceptance by Engineer of construction below finish grade including, where applicable, dampproofing, waterproofing, and perimeter insulation.
 - b. Inspection, approval, and recording locations of underground utilities.
 - c. Removal of concrete formwork.
 - d. Removal of shoring and bracing, and backfilling of voids with satisfactory materials. Temporary sheet piling driven below bottom of structures shall be removed in manner to prevent settlement of the structure or utilities, or cut off and left in place if required.
 - e. Removal of trash and debris.
 - f. Permanent or temporary horizontal bracing is in place on horizontally supported walls.
 - g. Density testing having results meeting requirements specified herein.
 5. In general, and unless otherwise indicated, material used for backfill of trenches and excavations around structures shall be suitable excavated material which was removed in the course of making the construction excavation. Unless

- otherwise specified or allowed by the Engineer the backfill and fill shall be placed in layers not to exceed 8 inches in thickness.
6. All fill and backfill under structures and pavement, and adjacent to structures, shall be compacted crushed stone or select fill as specified or as indicated on the Drawings. The fill and backfill materials shall be placed in layers not exceeding 8 inches in thickness.
 7. All structures (including manholes) shall be placed on a 6-inch mat of screened stone unless otherwise indicated.
 8. Suitable excavated material shall meet the following requirements:
 - a. Free from large clods, silt lumps or balls of clay.
 - b. Free from stones and rock fragments with larger than 12 inch max. dimension.
 - c. Free from organics, peat, etc.
 - d. Free from frozen material.
 9. If sufficient suitable excavated material is not available from the excavations, and where indicated on the Drawings, the backfill material shall be select fill or common borrow, unless otherwise indicated, as required and as directed by the Engineer.
 10. Do not backfill with, or on, frozen materials.
 11. Remove, or otherwise treat as necessary, previously placed material that has frozen prior to placing backfill.
 12. Do not mechanically or hand compact material that is, in the opinion of the Engineer, too wet.
 13. Do not continue backfilling until the previously placed and new materials have dried sufficiently to permit proper compaction.
 14. The nature of the backfill materials will govern the methods best suited for their placement and compaction. Compaction methods and required percent compaction is covered in Compaction section.
 15. Before compaction, moisten or aerate each layer as necessary to provide a water content necessary to meet the required percentage of maximum dry density for each area classification specified.
 16. Do not allow large masses of backfill material to be dropped into the excavation in such a manner that may damage pipes and structures.
 17. Place material in a manner that will prevent stones and lumps from becoming nested.
 18. Completely fill all voids between stones with fine material.
 19. Do not place backfill on or against new concrete until it has attained sufficient strength to support loads without distortion, cracking, and other damage.
 20. Deposit backfill and fill material evenly on all sides of structures to avoid unequal soil pressures.
 21. Keep stones or rock fragments with a dimension greater than two inches at least one foot away from the pipe or structure during backfilling.
 22. Leave sheeting in place when damage is likely to result from its withdrawal.

23. Completely fill voids left by the removal of sheeting with screened stone which is compacted thoroughly.
- B. Pipe Bedding, Initial Backfill and Trench Backfill
 1. Place bedding and backfill in layers of uniform thickness specified herein, and as shown on the Drawings.
 2. Thoroughly compact each layer by means of a suitable vibrator or mechanical tamper.
 3. Install pipe bedding and initial backfill in layers of uniform thickness not greater than eight (8) inches.
 4. Deposit the remainder of the backfill in uniform layers not greater than eight inches.
 5. Provide underground utility marking tape for new utility trenches as shown on the Drawings. Refer to Section 02650 – Buried Utility Markings.
 6. Where soft silt and clay soils are encountered the trench shall be excavated six inches below the normal bedding and backfilled with 6-inches of compacted sand.
 7. Backfill trenches with concrete where trench excavations pass within 18 inches of column or wall footings and which are carried below the bottom of such footings, or which pass under wall footings. Place concrete to the level of the bottom of adjacent footings.
 8. The following schedule lists the bedding materials for various types of pipe. Refer to the pipe trench detail for dimensional requirements.

BEDDING REQUIREMENTS

DI or Concrete Pipe	screened stone or select fill.
PVC or PE Pipe	screened stone.

9. The following schedule lists the initial backfill requirements for various types of pipes. Refer to the pipe trench detail for dimensional requirements.

INITIAL BACKFILL REQUIREMENTS

DI or Concrete, Pipe	Screened stone or select fill
PVC or PE Pipe	Screened stone or sand

10. Special bedding and backfill requirements shown on the Drawings supersede requirements of this section.

11. Where pipes or structures pass through or under the impervious core of the lagoon embankments, bedding and backfill material shall consist of the impervious embankment material. Extra care should be given to properly and thoroughly compact the bedding material around the pipe.
- C. Improper Backfill:
 1. When excavation and trenches have been improperly backfilled, and when settlement occurs, reopen the excavation to the depth required, as directed by the Engineer.
 2. Refill and compact the excavation or trench with suitable material and restore the surface to the required grade and condition.
 3. Excavation, backfilling, and compacting work performed to correct improper backfilling shall be performed at no additional cost to the Owner.
- D. Ground Surface Preparation:
 1. Remove vegetation, debris, unsatisfactory soil materials, obstructions, and deleterious materials from ground surface prior to placement of fills. Plow, strip, scarify or break-up sloped surface steeper than 1 vertical to 4 horizontal.
 2. When existing ground surface has a density less than that specified under "compaction" for the particular area classification, break up the ground surface, pulverize, moisture-condition to the optimum moisture content, and compact to required depth and percentage of maximum density.

3.4 COMPACTION

- A. General:
 1. Control soil compaction during construction to provide not less than the minimum percentage of density specified for each area classification.
- B. Percentage of Maximum Density Requirements:
 1. Compact soil to not less than the following percentages of maximum dry density determined in accordance with ASTM D1557 as indicated.
 - a. Structures: Compact each layer of backfill or fill material below or adjacent to structures to at least 95% of maximum dry density (ASTM D1557).
 - b. Off Traveled Way Areas: Compact each layer of backfill or fill material to at least 90% of maximum dry density (ASTM D1557).
 - c. Walkways: Compact each layer of backfill or fill material to at least 93% of maximum dry density (ASTM D1557).
 - d. Roadways, Drives and Paved Areas: Compact each layer of fill, subbase material, and base material to at least 95% of maximum dry density (ASTM D1557).
 - e. Pipes: Compact bedding material and each layer of backfill to at least 90% maximum dry density (ASTM D1557). Where backfilling with excavated material, compact to native field density.
 - f. Embankments: Compact each layer of embankment material to at least 95% of maximum dry density (ASTM D1557).

C. Moisture Control:

1. Where subgrade or a layer of soil material must be moisture conditioned before compaction, uniformly apply water to surface of subgrade, or layer of soil material, in quantities controlled to prevent free water appearing on surface during or subsequent to compaction operations.
2. Remove and replace, or scarify and air dry, soil material that is too wet to permit compaction to specified density.
3. Soil material that has been removed because it is too wet to permit compaction may be stockpiled or spread and allowed to dry. Assist drying by discing, harrowing or pulverizing until moisture content is reduced to a satisfactory level.

D. Embankment Compaction:

1. After each embankment layer has been spread to the required maximum 8-inch thickness and its moisture content has been adjusted as necessary, it shall be rolled with a sufficient number of passes to obtain the required compaction. One pass is defined as the required number of successive trips which by means of sufficient overlap will insure complete coverage and uniform compaction of an entire lift. Additional passes shall not be made until the previous pass has been completed.
2. When any section of an embankment sinks or weaves excessively under the roller or under hauling units and other equipment, it will be evident that the required degree of compaction is not being obtained and that a reduction in the moisture content is required. If at any place or time such sinking and weaving produces surface cracks which, in the judgment of the Engineer are of such character, amount, or extent to indicate an unfavorable condition, he will recommend operations on that part of the embankment to be suspended until such time as it shall have become sufficiently stabilized. The ideal condition of the embankment is that attained when the entire embankment below the surface being rolled is so firm and hard as to show only the slightest weaving and deflection as the roller passes.
3. If the moisture content is insufficient to obtain the required compaction, the rolling shall not proceed except with the written approval of the Engineer, and in that event, additional rolling shall be done to obtain the required compaction. If the moisture content is greater than the limit specified, the material of such water content may be removed and stockpiled for later use or the rolling shall be delayed until such time as the material has dried sufficiently so that the moisture content is within the specified limits. No adjustment in price will be made on account of any operation of the Contractor in removing and stockpiling, or in drying the materials or on account of delays occasioned thereby.
4. If because of insufficient overlap, too much or too little water, or other cause attributable to defective work, the compaction obtained over any area is less than that required, the condition shall be remedied, and if additional rollings are

ordered, they will be done at no cost to the Owner. If the material itself is unsatisfactory or if additional rolling or other means fails to produce satisfactory results, the area in question shall be removed down to material of satisfactory density and the removal, replacement, and re-rolling shall be done by the Contractor, without additional compensation.

5. Material compaction by hand--operated equipment or power-driven tampers shall be spread in layers not more than 6 inches thick. The degree of compaction obtained by these tamping operations shall be equal in every respect to that secured by the rolling operation.
- E. Compaction Methods: The Contractor may select any method of compaction that is suitable to compact the material to the required density.
1. General: Whatever method of compacting backfill is used, care shall be taken that stones and lumps shall not become nested and that all voids between stones shall be completely filled with fine material. All voids left by the removal of sheeting shall be completely backfilled with suitable materials and thoroughly compacted.
 2. Tamping or Rolling: If the material is to be compacted by tamping or rolling, the material shall be deposited and spread in uniform, parallel layers not exceeding the uncompacted thicknesses specified. Before the next layer is placed, each layer shall be tamped as required so as to obtain a thoroughly compacted mass. Care shall be taken that the material close to the excavation side slopes, as well as in all other portions of the fill area, is thoroughly compacted. When the excavation width and the depth to which backfill has been placed are sufficient to make it feasible, and it can be done effectively and without damage to the pipe or structure, backfill may, on approval, be compacted by the use of suitable rollers, tractors, or similar powered equipment instead of by tamping. For compaction by tamping or rolling, the rate at which backfilling material is deposited shall not exceed that permitted by the facilities for its spreading, leveling, and compacting as furnished by the Contractor.
- F. Reconditioning Compacted Areas: Where completed compacted areas are disturbed by subsequent construction operations or adverse weather, scarify surface, re-shape, and compact to required density prior to further construction.

3.5 GRADING:

- A. General:
1. Grading shall consist of that work necessary to bring all areas to the final grades.
 2. Uniformly grade areas within limits of work requiring grading, including adjacent transition areas.
 3. Smooth finished surface within specified tolerances, compact with uniform levels or slopes between points where elevations are shown, or between such points and existing grades.
- B. Grading Outside Building Lines:

1. Grade areas adjacent to building to drain away from structures and to prevent ponding.
2. Grade surfaces to be free from irregular surface changes, and as follows:
 - a. Lawn or Unpaved Areas: Finish grade areas to receive topsoil to within not more than 1" above or below the required subgrade elevations.
 - b. Walks: Shape surface of areas under walks to line, grade and cross-section, with finish surface not more than 1/2" above or below the required subgrade elevation.
 - c. Pavements: Shape surface of areas under pavement to line, grade and cross-section, with finish surface not more than 3/8" above or below the required subgrade elevation.
- C. Grading Surface of Fill Under Building Slabs:
 1. Grade surface to be smooth and even, free of voids, and compacted as specified, to the required elevation.
 2. Provide final grades within a tolerance of 1/2" when tested with a 10' straight edge.
- D. Compaction:
 1. After grading, compact subgrade surfaces to the depth and percentage of maximum density for each area classification.
- E. Protection of Graded Areas:
 1. Protect newly graded areas from traffic and erosion. Keep free of trash and debris.
 2. Repair and re-establish grades in settled, eroded, and rutted areas to specified tolerances.

3.6 BASE COURSE AND LEVELING COURSE

- A. General:
 1. Base course consists of placing the specified materials in layers to support a leveling course or paved surface, as indicated in the Drawings.
- B. Grade Control:
 1. During construction, maintain lines and grades including crown and cross-slope of base course and leveling course.
- C. Placing:
 1. Place base course on prepared subbase conforming to indicated cross-section and thickness. Maintain optimum moisture content for compacting base materials.
 2. Place leveling course on prepared base course, conforming to indicated cross-section and thickness. Maintain optimum moisture content for compaction.
- D. Shaping and Compacting:
 1. All layers of aggregate base course and leveling course shall be compacted to the required density immediately after placing. As soon as the compaction of any layer has been completed, the next layer shall be placed.

2. The Contractor shall bear full responsibility for and make all necessary repairs to the base leveling courses and the subgrade until the full depth of the base leveling courses is placed and compacted. Repairs shall be made at no additional cost to the Owner.
3. If the top of any layer of the aggregate base or leveling course becomes contaminated by degradation of the aggregate or addition of foreign materials, the contaminated material shall be removed and replaced with the specified material at the Contractor's expense.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION
TEMPORARY DEWATERING SYSTEM

PART 1 - GENERAL

1.1 DESCRIPTION

A. Work Included:

1. Design, furnish, operate, maintain, and remove temporary dewatering system to lower and control ground water table levels and hydrostatic pressures to permit excavation, backfill, and construction to be performed in the dry; collect and dispose of ground and surface water where necessary to complete the work.

1.2 DESIGN REQUIREMENTS

A. Dewatering system shall be of sufficient size and capacity necessary to lower and maintain ground water table to an elevation at least two feet below the lowest foundation subgrade or bottom of pipe trench to allow material to be excavated in a dry condition. Materials to be removed shall be sufficiently dry to permit excavation to grades shown and to stabilize excavation slopes where temporary excavation support systems are not required. Operate dewatering system continuously until backfill work has been completed.

B. Control of surface and subsurface water is part of dewatering system requirements. Maintain adequate control so that:

1. The stability of excavated and constructed slopes are not adversely affected by saturated soil, including water entering prepared subbase and subgrades where underlying materials are not free draining or are subject to swelling or freeze-thaw action.
2. Erosion is controlled.
3. Flooding of excavations or damage to structures does not occur.
4. Surface water drains away from excavations.
5. Excavations are protected from becoming wet from surface water, or insure excavations are dry before additional work is undertaken
6. Prevent loss of fines, seepage, boils, quick conditions or softening of foundation strata.
7. Maintain stability of sides and bottom of excavation. Construction operations are performed in the dry.
8. Any existing dewatering wells that can affect dewatering and excavation shall be sealed below the excavation subgrade.

C. Design shall include an assessment of how the dewatering operations will affect the stability of all adjacent structures

- D. Contractor is responsible to perform whatever additional geotechnical investigations are needed to design the dewatering system to allow for proper construction of new facilities while protecting adjacent structures from damage due to settlement, and in accordance with this specification.

PART 2 - PRODUCTS

Not Applicable

PART 3 - EXECUTION

3.1 PERFORMANCE

A. General:

1. Prior to any excavation below the ground water table, place system into operation to lower water table as required and operate it continuously 24 hours a day, 7 days a week until utilities and structures have been satisfactorily constructed, which includes the placement of backfill materials and dewatering is no longer required.
2. Keep work areas dewatered until the structures, pipes, and appurtenances to be built there have been completed to such an extent that they will not be damaged by water.
3. Thoroughly brace or otherwise protect against flotation all pipelines and structures which are not stable.
4. Maintain standby backup equipment and power supply throughout the duration of the dewatering operation.
5. Prevent soil particles from entering the discharge points.
6. Ground water level shall be maintained at least one foot below the bottom of the excavation.

B. Disposal of Water:

1. Dispose of water pumped or drained from the construction site in a suitable manner to avoid siltation of adjacent drainage structures and piping, wetlands or water bodies, injury to public health, damage to public and private property, and damage to the work completed or in progress.
2. Provide suitable temporary channels for water that may flow along or across the construction site.
3. Provide treatment as necessary to prevent discharge of contaminated ground water caused by Contractor's operations, or any contaminated ground water that may pass through the excavation support system selected by the Contractor.
4. Contractor must obtain all necessary regulatory approvals for the disposal of dewatering flows. These may include, among others, approval by the USEPA under the National Pollutant Discharge Elimination System (NPDES) program for construction activities.

- C. Damage:
 - 1. Avoid damage to and settlement of adjacent buildings, roads, structures, utilities and other facilities.
 - 2. Any damage to or settlement of structures resulting from the dewatering operations, or the failure of the Contractor to maintain the work in a suitably dry condition shall be repaired by the Contractor at no additional cost to the Owner.
- D. Temporary Underdrains:
 - 1. When necessary, temporary underdrains may be placed in excavations.
 - 2. Underdrain pipe shall be perforated corrugated metal, polyethylene or P.V.C. pipe.
 - 3. Entirely surround the underdrain and fill the space between the underdrain and the pipe or structure with free draining material.
- E. Excavation Sump Pumping:
 - 1. When necessary and where appropriate to the geotechnical conditions encountered, excavations may be over excavated 6 to 12 inches and filled with screened stone to allow sump pumping of groundwater.
 - 2. The system shall be installed with suitable screens and filters so that pumping of fines does not occur.
- F. Well and Wellpoint System:
 - 1. If necessary, dewater the excavations and trenches with an efficient well or wellpoint system to drain the soil and prevent saturated soil from flowing into the excavated wells and area.
 - 2. Wellpoint and well system shall be of the type designed for dewatering work and shall be installed with suitable screens and filters so that pumping of fines does not occur.
 - 3. Pumping units shall be capable of maintaining sufficient suction to handle large volumes of air and water at the same time.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02601

MANHOLES, COVERS AND FRAMES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included: Construct manholes, covers, frames, brick masonry, inverts and apply waterproofing in conformance with the dimensions, elevations, and locations shown on the Drawings and as specified herein.
- B. Related Work Specified Elsewhere (when applicable):
 - 1. Final sewer testing is specified in this Division.
 - 2. Pipe, excavation, backfill, paving and dewatering are specified in the appropriate Sections in this Division.

1.2 QUALITY ASSURANCE

- A. Precast Manhole Base, Barrel and Top Sections:
 - 1. Conform to ASTM C478-97 except as modified herein, and on the Drawings.
 - 2. Average strength of 4,000 psi at 28 days.
 - 3. Testing:
 - a. Determine concrete strength by tests on 6-inch by 12-inch vibrated test cylinders cured in the same manner as the bases, barrels and tops.
 - b. Have tests conducted at the manufacturer's plant or at a testing laboratory approved by the Engineer.
 - c. Have not less than 2 tests made for each 100 vertical feet of precast manhole sections.
- B. Manhole Steps
 - 1. Conform to ASTM C478-06 for load carrying capacity and pull out resistance.
 - 2. Acceptable Manufacturers:
 - a. Parson Environmental Products, Inc.
 - b. M. A. Industries, Inc.
 - c. Or equivalent.
- C. Frames and Covers:
 - 1. Acceptable Manufacturers:
 - a. EJ Castings
 - b. LeBaron Foundry Company.
 - c. Or equivalent.
- D. Masonry:
 - 1. Brick: Shall comply with the ASTM Standard Specifications for Sewer Brick (made from clay or shale), Designation C32, for Grade SS, hard brick.

2. Cement: ASTM C-150.
3. Hydrated Lime: ASTM C-207
4. Sand: ASTM C144
- E. Waterproofing:
 1. Acceptable Manufacturers:
 - a. Karnak #220 AF Fibered Emulsion Dampproofing, Karnak Corp., Clark, NJ.
 - b. PPS 922 Superseal, International Precast Supply.
 - c. Or approved equal.

1.3 SUBMITTALS TO THE ARCHITECT/ENGINEER

- A. Submit shop drawings and manufacturer's literature in conformance with Section 01340 and the Standard General Conditions of the Construction Contract.
- B. Precast Manhole Sections: Submit test results and receive approval from the Engineer prior to delivery to the site.

PART 2 - PRODUCTS

2.1 PRECAST MANHOLE SECTIONS

- A. Dimensions, shall be as shown on the Drawings:
 1. Base & Riser Sections:
 - a. Diameter: As shown on the Drawings.
 - b. Length: As required.
 - c. Wall Thickness: Not less than 5 inches.
 - d. Joints: Bell-and-spigot or tongue-and-groove formed on machine rings to insure accurate joint surfaces.
 2. Tops:
 - a. Diameter: Eccentric cone type, 24 inches I.D. at top, 48 inches I.D. at bottom unless otherwise shown on the Drawings.
 - b. Length: 4 feet.
 - c. Wall thickness: Not less than 5 inches at the base, tapering to not less than 8 inches at the top.
 - d. Joints: Bell-and-spigot or tongue-and-groove formed on machine rings to insure accurate joint surfaces.
 - e. Exterior face of cone sections shall not flare out beyond the vertical.
 3. Flat Slab Tops:
 - a. Location: Where shallow installations do not permit the use of a cone-type top and where indicated on the Drawings.
 - b. Slab thickness: Not less than 6 inches.
 - c. Constructed to support an HS-20 wheel loading.
- B. Openings:
 1. Provide openings in the risers to receive pipes entering the manhole.
 2. Make openings at the manufacturing plant.

3. Size: To provide a uniform annular space between the outside wall of pipe and riser.
 4. Location: To permit setting of the entering pipes at the correct elevations.
 5. Openings shall have a flexible watertight union between pipe and the manhole base.
 - a. Cast into the manhole base and sized to the type of pipe being used.
 - b. Type of flexible joint being used shall be approved by the Engineer. Install materials according to the Manufacturer's instructions.
 - i. Lock Joint Flexible Manhole Sleeve made by Interpace Corporation.
 - ii. Kor N Seal made by National Pollution Control System, Inc.
 - iii. Press Wedge II made by Press-Seal Gasket Corporation.
 - iv. A-Lok Manhole Pipe Seal made by A-Loc Corporation.
 - v. Or equivalent.
- C. Joints:
1. Joint gaskets to be flexible self seating butyl rubber joint sealant installed according to manufacturer's recommendations. Install a double row of joint sealants for every manhole joint. For cold weather applications, use adhesive with joint sealant as recommended by manufacturer.
Acceptable Materials:
 - a. Kent-Seal No. 2
 - b. Ram-Nek
 - c. Or equivalent.
 2. Joints between precast sections shall conform to related standards and manufacturer's instructions.
 3. All manholes greater than 6 ft. diameter and all manholes used as wet wells, valve pits and other dry-pit type structures shall be installed with exterior joint collars. The joint collar shall be installed according to the manufacturer's instructions. Acceptable materials:
 - a. MacWrap exterior joint sealer as manufactured by Mar-Mac Manufacturing Company.
 - b. Or equivalent.
- D. Waterproofing:
1. The exterior surface of all manholes shall be given two coats of waterproofing material at a application rate as recommended by the manufacturer.
 2. The coating shall be applied after the manholes have cured adequately and can be applied by brush or spray in accordance with the manufacturer's written instruction.
 3. Sufficient time shall be allowed between coats to permit sufficient drying so that the application of the second coat has no effect on the first coat.
- E. Frost Protective Wrapping:
1. The frost protective wrap shall be constructed of an ultraviolet resistant polyethylene material and shall be a minimum thickness of 6 mils.

2.2 FRAMES AND COVERS

- A. Standard Units:
 - 1. Made of cast iron conforming to ASTM A48-76, Class 30 minimum.
 - 2. Have machined bearing surfaces to prevent rocking.
 - 3. Castings shall be smooth with no sharp edges.
 - 4. Constructed to support an HS-20 wheel loading.
 - 5. Dimensions and Style shall conform to the Drawings, Standard castings differing in non-essential details are subject to approval by the Engineer:
 - a. Covers -solid with SEWER in 3-inch letters diamond pattern.
 - b. Frame - 24-inch diameter clear opening, with flange bracing ribs.
 - 6. Minimum weight of frame and cover shall be 370 lbs.
- B. Water Tight Units (where indicated on the Drawings):
 - 1. Same features as above for Standard Units, with 22-inch diameter minimum clear opening.
 - 2. Sealing features:
 - a. Inner lid held by a bronze tightening bolt in a locking bar.
 - b. Neoprene gasket
 - c. Water tight pick hole.
 - 3. Minimum weight of frame and cover shall be 510 lbs.

2.3 MANHOLE STEPS

- A. Polyethylene coated steel safety type designed with a minimum concentrated live load of 300 pounds.
- B. Thoroughly clean all surfaces to be embedded with a suitable cleaning agent to ensure that the surfaces are free from all foreign matter such as dirt, oil and grease.
- C. The steps shall become thoroughly dry before being placed into the concrete.
- D. All steps shall be cast into walls of the precast section so as to form a continuous ladder with a distance of 12-inches between steps.

2.4 MASONRY

- A. Brick:
 - 1. Sound, hard, uniformly burned, regular and uniform in shape and size, compact texture, and satisfactory to the Engineer.
 - 2. Immediately remove rejected brick from the work.
- B. Mortar:
 - 1. Composition (by volume):
 - a. 1 part portland cement.
 - b. 1/2 part hydrated lime.
 - c. 4-1/2 parts sand.
 - 2. The proportion of cement to lime may vary from 1:1/4 for hard brick to 1:3/4 for softer brick, but in no case shall the volume of sand exceed 3 times the sum of the volume of cement and lime.
- C. Cement shall be Type II portland cement.

- D. Hydrated lime shall be Type S.
- E. Sand:
 - 1. Shall consist of inert natural sand.
 - 2. Grading:

<u>Sieve</u>	<u>Percent Passing</u>
No. 4	100
No. 8	95-100
No. 16	70-100
No. 30	40-75
No. 50	10-35
No. 100	2-15
No. 200	0-5

PART 3 - EXECUTION

3.1 PERFORMANCE

- A. Precast Manhole Sections:
 - 1. Perform jointing in accordance with manufacturer's recommendations and as approved by the Engineer.
 - 2. Install riser sections and tops level and plumb.
 - 3. Make all joints watertight.
 - 4. When necessary, cut openings carefully to prevent damage to barrel sections and tops. Replace damaged manhole sections and tops at no additional cost to the Owner.
 - 5. When manhole steps are included in the Work, install barrel sections and tops so that steps are in alignment.
- B. Drop Manholes:
 - 1. The difference in elevation between the invert of the inlet pipe and outlet pipe is to be either less than 6-inches (which does not require a drop manhole) or more than 24-inches (which does require a drop manhole).
 - 2. Where difference in elevation between the invert of the inlet pipe to the invert of the outlet pipe exceeds 24 inches, construct a drop manhole as shown on the Drawings or as directed by the Engineer.
- C. Adjust to Grade:
 - 1. Adjust tops of manholes to grade with brick masonry.
 - 2. Concrete rings are not acceptable for adjusting to grade.
- D. Pipe Connections to Manholes: Connect pipes to manholes with joint design and materials approved by the Engineer.
- E. Invert Channels:
 - 1. After manhole and all pipes entering or exiting the manhole have been installed, construct the invert channels and shelf.

2. Channels to be smooth and semicircular in shape conforming to the inside of the adjacent sewer section.
 3. Make changes in direction of flow with smooth curves having a radius as large as permitted by the size of the manhole.
 4. Stop the pipes at the inside face of the manhole where changes of direction occur.
 5. Form invert channels and shelf with brick.
 6. The maximum change in elevation from the invert of the inlet pipe to the invert of the outlet pipe is 6-inches. Shape invert to make smooth transition in vertical grade.
 7. Slope the floor of the manhole (shelf) to the flow channel, as shown on the Drawings.
- F. Masonry:
1. Laying Brick:
 - a. Use only clean bricks in brickwork for manholes.
 - b. Moisten the brick by suitable means until they are neither so dry as to absorb water from the mortar nor so wet as to be slippery when laid.
 - c. Lay each brick in a full bed and joint of mortar without requiring subsequent grouting, flushing, or filling, and thoroughly bond as directed.
 - d. Construct all joints in a neat workmanlike manner. Construct the brick surfaces inside the manholes so they are smooth with no mortar extending beyond the bricks and no voids in the joints. Maximum mortar joints shall be 1/2 inch.
 - e. Outside faces of brick masonry shall be plastered with mortar from 1/4-inch to 3/8-inch thick.
 - f. Completed brickwork shall be watertight.
 2. Curing:
 - a. Protect brick masonry from drying too rapidly by using burlaps which are kept moist, or by other approved means.
 - b. Protect brick masonry from the weather and frost as required.
- G. Frames and Covers:
1. Set all frames in a full bed of mortar, true to grade and concentric with the manhole opening.
 2. Completely fill all voids beneath the bottom flange to make a watertight fit.
 3. Place a ring of mortar at least one inch thick around the outside of the bottom flange, extending to the outer edge of the manhole all around its circumference.
 4. Clean the frame seats before setting the covers in place.
- H. Plugging and Patching:
1. Fill all exterior cavities with non-shrink grout and with bituminous waterproofing once the concrete and mortar has set.
 2. Touch up damaged water proofing.

- I. Cleaning:
 - 1. Thoroughly clean manholes, steps, frames and covers of all debris and foreign matter.
- J. Bedding and Backfilling:
 - 1. Bedding of manholes shall be 6 inches of 3/4" screened stone.
 - 2. Backfill a minimum of 18 inches all around manhole with gravel borrow.
- K. Frost Protective Wrap:
 - 1. The Contractor shall comply with the manufacturer's instructions for the particular conditions of installations in each case.
 - 2. Clean each manhole exterior of all dirt and remove any sharp protrusions.
 - 3. Apply two (2) 6-inch wide vertical strips of bituminous waterproofing material and/or duct tape from the top to bottom of the manhole per layer.
 - 4. Prior to installing pipe through each manhole or valve pit, wrap each manhole to the maximum depth of frost penetration, but not less than 5 feet below grade, with four (4) layers of the polyethylene material by beginning the wrap at the adhesive strip and proceeding around the manhole, valve pit, etc., continuously by overlapping the adhesive strip by 24 inches on the final layer. Cut the polyethylene wrap in areas where piping exits the manhole. The size of the cut is to be equivalent to the pipes outside diameter.
 - 5. Tuck and pleat the polyethylene wrap at the top of each manhole in a continuous manner, minimizing the size of each fold. Extend the polyethylene wrap past the top of the manhole frame and temporarily tuck the remainder inside the frame, until final backfill and paving.
 - 6. In paved areas, cut the polyethylene wrap flush with the manhole rim after the pavement is in place.
 - 7. In unpaved areas, pull the polyethylene wrap together, and tie around frame with galvanized wire.
 - 8. Protect the installed frost barrier from harmful weather exposures and from possible physical abuses, where possible by prompt installation of concealing work or, where that is not possible, by temporary covering or enclosure.
 - 9. Backfill around the manhole/frost barrier with material as outlined in Section 02200 - Earthwork.

3.2 MANHOLE TESTING

- A. General:
 - 1. Perform either a vacuum test or a combination of the exfiltration and infiltration tests on all manholes.
 - 2. All testing must be performed in the presence of the Engineer.
 - 3. Suitably plug all pipes entering each manhole and brace plugs to prevent blow out.
- B. Exfiltration Tests After Backfilling:
 - 1. Fill each manhole with water to the top of the manhole frame.

2. A period of up to 2 hours may be permitted, if the Contractor so wishes, to allow for absorption.
 3. At the end of the absorption period, refill each manhole with water to the top of the manhole frame and begin the 4-hour test period.
 4. At the end of the 4-hour test period, refill each manhole to the top of the manhole frame and measure the volume of water added. The leakage for each manhole shall not exceed 1/16 gallon per foot of diameter per vertical foot (above ground water) per 4-hour period.
- C. Infiltration Tests:
1. When the groundwater is above the bottom of the manhole, infiltration testing may be performed on that portion of the manhole below water level.
 2. After a 15-minute period, if no water is visibly moving down the interior surfaces of a manhole, the portion of the manhole below groundwater may be considered to be satisfactorily watertight.
 3. The remaining portion above the groundwater level must be tested for exfiltration as specified above.
- D. Vacuum Test:
1. The manhole shall be tested by a vacuum test after assembly of the manhole, connection piping and backfilling. Vacuum testing to be conducted prior to construction of invert channels.
 2. Plug all lifting holes completely with non-shrink grout.
 3. Properly tighten all boot clamps and brace all plugs to prevent them from being sucked into the manhole.
 4. Install the testing equipment according to the manufacturer's instructions.
 5. A vacuum of 10 inches of Hg shall be drawn on the manhole and the loss of 1 inch of Hg vacuum timed. The manhole shall be considered to have passed the test if the time for the loss of 1 inch of Hg vacuum is:
 - a. Greater than 2 minutes for manholes less than 10-feet deep.
 - b. Greater than 2.5 minutes for manholes 10 to 15-feet deep.
 - c. Greater than 3 minutes for manholes more than 15-feet deep.
 6. If the manhole fails the initial test, the Contractor shall locate the leak(s) and make repairs. The manhole shall be retested until a satisfactory test result is obtained.
- E. Manhole Repairs:
1. Correct leakage by reconstruction, replacement of gaskets and/or other methods as approved by the Engineer.
 2. The use of lead-wool or expanding mortar will not be permitted.
- F. After the manholes have been backfilled and prior to final acceptance, any signs of leaks or weeping visible inside the manholes shall be repaired and the manhole made watertight.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02614

PRE-INSULATED DUCTILE IRON PIPE

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included: Furnish and install pre-insulated pipe system and accessories where shown on the Drawings.
- B. Related work specified elsewhere (when applicable):
 - 1. Trench excavation and backfill are specified in Division 2.
 - 2. Carrier pipe materials are specified elsewhere.

1.2 QUALITY ASSURANCE

- A. Provide pipe and fittings manufactured in North America.
- B. Acceptable Manufacturers:
 - 1. Urecon, Ltd.
 - 2. Or approved equal meeting all requirements of Part 2 of this Section.
- C. Manufacturer shall submit shop drawings for approval.
 - 1. Shop drawings shall show jacket system, insulation, end seals, joint kits, etc.
 - 2. The entire system shall be factory engineered.
 - 3. The product shall be manufactured in accordance with ISO 9001-2000 Standards or approved equal.
- D. A representative of the manufacturer shall be present for all critical periods.
 - 1. Critical periods shall include but not be limited to:
 - a. Inspection of materials for damages after receipt at jobsite.
 - b. Supervision of joint assembly.
 - c. Supervision of hydrostatic testing.
 - d. Other supervision as required to provide a complete integral system.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Core Pipe
 - 2. Ductile Iron Restrained Joint Pipe is detailed in Specification Section 02615 for water main and Section 02624 for sewer main.
- B. Insulation
 - 1. Material: rigid polyurethane foam, factory applied.
 - 2. Thickness: 50 mm (2 in.) minimum or as required.

3. Density: (ASTM D 1622) 35 to 46 kg/m³ (2.2 to 3.0 lbs/ft³).
4. Closed cell content: (ASTM D 2856) 90%, minimum.
5. Water absorption: (ASTM D 2842) 4.0% by volume.
6. Thermal conductivity: (ASTM C518) 0.020 to 0.026 W/m °C.
- C. Outer Jacket
 1. 18-gauge, hot-dipped galvanized steel, spiral lock seam jacket.
 2. Jacket outer diameter shall be 18-inches minimum.
- D. Insulation Kits for Fittings
 1. Insulation kits for fittings shall consist of rigid polyisocyanurate or urethane foam insulation complete with a thin elastomeric coating on the outside surfaces for strength during transit and installation, and fabricated galvanized steel or aluminum outer protective jacket consistent with that on the factory insulated pipe. All kits to be supplied complete with stainless steel bands, band-it clips, and screws to suit.
- E. Expansion/Contraction Joint
 1. Expansion/contraction joints shall be installed at the locations indicated on the drawings and shall be manufactured of ductile iron conforming to the material properties of ANSI/AWWA C153/21.53. All expansion joints shall be capable of expanding or contracting to the amounts shown on the drawings, or indicated in the specifications, but in no case shall there be less than 4" total axial movement. Each expansion joint shall be pressure tested against its own restraint to a minimum of 350 psi. All pressure containing parts shall be lined with a minimum of 15 mils of fusion bonded epoxy, conforming to the applicable requirements of ANSI/AWWA C213, and shall be tested with a 1500 volt spark test conforming to stated specification.
 2. Expansion/Contraction joints shall be EX-TEND 200, manufactured by EBAA Iron, Inc. or approved equal.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. All pre-insulated piping shall be installed per the manufacturer's recommendations.
- B. Bridge crossing water main pipe section shall be pressure tested and disinfected in accordance with Specification Section 02675 - Cleaning, Testing and Disinfection of Water Mains.
- C. Bridge crossing sewer pipe section shall be pressure tested by in accordance with Specification Section 02755 – Final Sewer Testing.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02615

DUCTILE IRON PIPE & FITTINGS FOR POTABLE WATER

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included: Provide and install ductile iron pipe and fittings of the type(s) and size(s) in the location(s) shown on the Drawings and as specified herein.
- B. Related Work Specified Elsewhere:
 - 1. Pipe and Pipe Fittings - General is specified in the appropriate Section in this Division.
 - 2. Excavation, Bedding and Backfill are specified in this Division.
 - 3. Water Main Anti Corrosion Encasement is specified in this Division

1.2 QUALITY ASSURANCE

- A. Standards (As Applicable):
 - 1. Cement-mortar lining for water: ANSI A21.4 (AWWA C104).
 - 2. Rubber gasket joints: ANSI A21.11 (AWWA C111).
 - 3. Ductile iron pipe thickness: ANSI A21.50 (AWWA C150).
 - 4. Ductile iron pipe centrifugally cast in metal or sand lined molds: ANSI A21.51 (AWWA C151).
 - 5. Pipe flanges and fittings: ANSI B16.1 and ANSI A21.10 (AWWA C110).
 - 6. Threaded, flanged pipe: ANSI A21.15 (AWWA C115).
 - 7. Cast and ductile iron fittings: ANSI A21.10 (AWWA C110).
 - 8. Ductile iron compact fittings: ANSI 21.53 (AWWA C153).
- B. Acceptable Manufacturers for Pipe:
 - 1. US Pipe
 - 2. American Pipe
 - 3. McWane
 - 4. Or equivalent.
- C. Acceptable Manufacturers for Fittings:
 - 1. Any manufacturer will be considered

1.3 DELIVERY, STORAGE & HANDLING

- A. Exercise extra care when handling ductile iron pipe because it is comparatively brittle.
- B. Exercise extra care when handling cement lined pipe because damage to the lining will render it unfit for use.

- C. Protect the spherical spigot ends and the plain ends of all pipe during shipment by wood lagging securely fastened in place.

PART 2 - PRODUCTS

2.1 PIPE MATERIALS

A. General:

1. All exterior (buried) ductile iron pipe shall have push-on or mechanical joints unless otherwise specified or shown on the Drawings. Pipe within valve pits and other structures is considered interior pipe and shall be flanged.
2. All exterior pre-insulated bridge crossing pipe shall be restrained joint DI having similar bell diameter as push on pipe to minimize required insulation diameter. Restrained joint bridge crossing pipe shall be TR-Flex by U.S. Pipe, Flex-Ring by American Ductile Iron Pipe, or approved equal.
3. Unless otherwise shown on the Drawings or in the pipe schedule, the minimum thickness of ductile iron pipe shall be:
 - a. For pipe 4 inches in diameter and smaller: Class 51.
 - b. For pipe 6 inches in diameter and larger: Class 52Pipe with flanges: Class 53.
4. Pipe for use with sleeve type couplings shall have plain ends (without bells or beads) cast or machined at right angles to the axis.
5. Pipe shall be double thickness cement lined and seal coated unless noted otherwise on the Drawings, and except for air piping lines which shall be completely unlined.
6. Pipe for use with split type couplings shall have ends with cast or machined shoulders or grooves that meet the requirements of the manufacturer of the couplings.
7. Factory applied bituminous coatings (in accordance with AWWA C151) shall be furnished on the exterior of all underground piping unless specified otherwise.
8. The outside of pipe within structures and exposed shall not be coated with bituminous coating, but shall be thoroughly cleaned and given one shop coat of Intertol Rustinhibitive Primer 621 by Koppers Co.; Multiprime by PPG Industries; Chromox 13R50 Primer made by Mobil Chemical Co.; or equivalent.

B. Joints (as shown on Drawings or as specified):

1. Push-on and Mechanical Joint:
 - a. The plain ends of push-on pipes shall be factory machined to a true circle and chamfered to facilitate fitting the gasket.
 - b. Provide gaskets manufactured from a composition material suitable for exposure to the fluid to be contained within the pipe. On high temperature applications such as air lines, the gaskets shall be suitable for service from 40 °F to 250°F.
 - c. Bolts and nuts for buried mechanical joints shall meet the AWWA C-111 requirements and be made of high strength, low alloy steel.

2. Flanged:
 - a. Provide specially drilled flanges when required for connection to existing piping or special equipment.
 - b. Flanges shall be long-hub screwed tightly on pipe by machine at the foundry prior to facing and drilling.
 - c. Gaskets:
 - (1) Ring type of rubber with cloth insertion.
 - (2) Thickness of gaskets 12 inches in diameter and smaller: 1/16 inch.
 - (3) Thickness of gaskets larger than 12 inches in diameter: 3/32 inch.
 - d. Fasteners:
 - (1) Make joints with bolt, studs with a nut on each end, or one tapped flanged with a stud and nut.
 - (2) The number and size of bolts shall meet the requirements of the applicable ANSI standard.
 - (3) Nuts, bolts, and studs shall be Grade B meeting the requirements of ASTM A307.
 - (4) After jointing, coat entire joint with bituminous material compatible with pipe coating unless other coating required by Section 09900.
 - e. When applicable, provide and install flange clamps as shown on the Drawings.
3. Joint Bracing:
 - a. Provide joint bracing to prevent the piping from pulling apart under pressure as required and as shown on the Drawings.
 - b. Types of bracing:
 - i. Use in conjunction with mechanical joint fittings.
 - ii. The joint restraint ring and its wedging components shall be made of ductile iron conforming to ASTM A536-80.
 - iii. Dimensions of the restrainer must allow use with standard M.J. bell conforming to AWWA C111 and AWWA C153.
 - iv. Restrainer must restrain up to 350 psi of working pressure in 3-inch to 16-inch sizes and 250 psi of working pressure in 18-inch to 48-inch sizes with a 2:1 safety factor.
 - v. Torque limiting twist off nuts shall be used to ensure proper actuation of the restraining wedges (used on i,ii,iii below).
 - c. Acceptable Manufacturers
 - i. Sigma Super Lug
 - ii. Ford Uni-Flange Series 1400
 - iii. EBBA Mega Lug
 - iv. Romac Grip Ring
 - v. Star Grip Series 300
 - vi. Romac Romagrip

2.2 FITTINGS

A. Standard Fittings:

1. Material shall be ASTM A536 latest, grade 70-50-05, in accordance with AWWA C110 (latest revision) for fittings larger than 24" and C153 (latest revision) for fittings 3" thru 24"
2. Pressure rating of 350 psi for D.I. compact fittings and 250 psi for all others unless indicated otherwise on the Drawings or as specified.
3. Joints the same as the pipe with which they are used or as shown on the Drawings.
4. Fittings shall be cement line AWWA C104 (latest revision) or fusion bonded epoxy coated with a 5-mil nominal thickness per AWWA C550 and C116.
5. Interior seal coated AWWA C104 with minimum of 4 mils dry film thickness.
6. Exterior bituminous coated, 4 mils minimum dry film thickness or fusion bonded epoxy coated with 5-mil nominal thickness per AWWA C550 and C116.
7. The "compact design" fittings must provide adequate space for the MJ joint and accessories to be installed without special tools (i.e. Lowell wrench can be used).

PART 3 - EXECUTION

3.1 INSPECTION

- A. Provide all labor necessary to assist the Engineer to inspect pipe, fittings, gaskets, and other materials.
- B. Carefully inspect all materials at the time of delivery and just prior to installation.
- C. Carefully inspect all pipe and fittings for:
 1. Defects, such as weak structural components, that adversely affect the execution and quality of work.
 2. Deviations beyond allowable tolerances for pipe clearances.
- D. Immediately remove all rejected materials from the project site.

3.2 INSTALLATION

A. General:

1. Install in strict accordance with the pipe and fitting manufacturer's instructions and recommendations and as specified or as shown on the Drawings.
2. Concrete thrust blocks or other acceptable thrust resistant system is required at all fittings on pressure pipe. Where thrust blocks are used, these shall be placed against undisturbed soil or screened gravel compacted to 95 percent and shall be placed so that the joints are accessible for repairs.

B. Assembling Joints:

1. Push-on Joints:
 - a. Insert the gasket into the groove of the bell.
 - b. Uniformly apply a thin film of special lubricant over the inner surface of the gasket that will contact the spigot end of the pipe.

- c. Insert the chamfered end of the plain pipe into the gasket and push until it seats against the bottom of the socket.
 - 2. Bolted Joints:
 - a. Remove rust preventive coatings from machined surfaces prior to assembly.
 - b. Thoroughly clean and carefully smooth all burrs and other defects from pipe ends, sockets, sleeves, housings and gaskets.
 - c. After jointing coat all bolts with bituminous material compatible with the pipe coating required herein.
 - 3. Flanged Joints:
 - a. Insert the nuts and bolts (or studs), finger tighten, and progressively tighten diametrically opposite bolts uniformly around the flange to the proper tension.
 - b. Execute care when tightening joints to prevent undue strain upon valves, pumps, and other equipment.
 - 4. Mechanical Joints:
 - a. Thoroughly clean, with a wire brush, surfaces that will be in contact with the gaskets.
 - b. Lubricate the gasket, bell, and spigot by washing with soapy water.
 - c. Slip the gland and gasket, in that order, over the spigot and insert the spigot into the bell until properly seated.
 - d. Evenly seat the gasket in the bell at all points, center the spigot, and firmly press the gland against the gasket.
 - e. Insert the bolts, install the nuts finger tight, and progressively tighten diametrically opposite nuts uniformly around the joint to the proper tension with a torque wrench.
 - f. The correct range of torque (as indicated by a torque wrench) and the length of wrench (if not a torque wrench) shall not exceed:
 - (1) Range or Torque: 60-90 ft.-lbs.
 - (2) Length of Wrench: 10 inches.
 - g. If effective joint sealing is not attained at the maximum torque specified above, disassemble, thoroughly clean, and reassemble the joint. Do not overstress the bolts to tighten a leaking joint.
 - 5. Bell and Spigot Joints:
 - a. Thoroughly clean the bell and spigots and remove excess tar and other obstructions.
 - b. Insert the spigot firmly into place and hold securely until the joint has been properly completed.
- C. Fabrication:
 - 1. Tapped Connections:
 - a. Make all tapped connections as shown on the Drawings or as required by the Engineer.
 - b. Make all connections watertight and of adequate strength to prevent pullout.

- c. Drill and tap normal to the longitudinal axis of the pipe.
 - d. Taps in fittings shall be located where indicated by the manufacturer for that particular type of fitting.
 - e. The maximum sizes of taps in pipes and fittings without busses shall not exceed the sizes listed in the appendix of ANS A21.51 based on 2 full threads for ductile iron and 3 full threads for cast iron.
2. Cutting:
- a. Perform all cutting as set forth in AWWA C600.
 - b. Carefully chamfer all cut ends to be used with push-on joints to prevent damage to gaskets when pipe is installed.
- D. Pipe Deflection:
1. Push-on and Mechanical Joints:
- a. The maximum permissible deflection of alignment at joints shall be limited to that given in AWWA C600.
2. Flexible Joints:
- a. The maximum deflection in any direction shall not exceed the manufacturer's instructions and recommendations.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02620

TEMPORARY WATER MAIN

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included: Furnish, install and test all polyethylene or PVC temporary water pipe, pipe fittings and services and appurtenances of the type(s) and size(s) and in the location(s) as shown on the Drawings and as herein specified.
- B. Related Work Specified Elsewhere:
 - 1. Cleaning and Testing is specified in Specification Section 02675.

1.2 QUALITY ASSURANCE

- A. Provide pipe and fittings manufactured by a single manufacturer.
- B. Pressure rating or pressure class of pipe as detailed herein.
- C. Standards:
 - 1. ASTM D 1248 Polyethylene Plastics Molding and Extrusion Materials.
 - 2. ASTM D 1505 Density of Plastics by the Density Gradient Technique.
 - 3. ASTM D 1693 Environmental Stress Cracking of Ethylene Plastics.
 - 4. ASTM D 1928 Preparation of Compression Molded Polyethylene Test Samples.
 - 5. ASTM D 1784 - Rigid Polyvinyl Chloride (PVC) Compounds and Chlorinated Polyvinyl Chloride (PVC) Compounds.
 - 6. ASTM D 2241 - PVC Pressure Rated Pipe (SDR Series).
 - 7. ASTM D 3139 - Joints for Plastic Pressure Pipes using Flexible Elastomeric Seals.
- D. Acceptable Manufacturers:
 - 1. Ryerson & Son, Inc. "Mono-Line"
 - 2. Dupont, "Aldyl-D"
 - 3. Sheldon "Sclairpipe"
 - 4. Certainteed Yelomine PVC
 - 5. Or approved equal.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Polyethylene Pipe:
 - 1. The pipe shall be obtained by polymerization of no less than 85% ethylene and no less than 95% of total olefins by weight.

2. The polyethylene resin shall be classified as a Type III, Class C, Category 3. Nominal density shall be 0.941 to 0.959.
 3. The polyethylene compound shall be suitably protected against degradation by ultraviolet light by means of carbon black, well dispersed in a concentration of not less than 2%.
 4. The polyethylene resin compound shall have a resistance to environmental stress cracking as determined by procedure detailed in ASTM D 1693 with sample preparation by procedure C of ASTM D 1928 of not less than 40 hours.
 5. Pipe shall be homogeneous throughout and free of visible cracks, holes, foreign material, blisters, or other deleterious faults.
 6. Polyethylene fittings shall have the same pressure rating as the pipe itself.
 7. Adaptors: When applicable, provide adaptors for connecting polyethylene pipe to pipes constructed from other materials. All flanges shall have metal backing rings.
 8. Pipe pressure rating shall be 150 psi (SDR-11) minimum.
- B. Polyvinyl Chloride (PVC) Pipe:
1. PVC pipe shall be made from Type 1, Grade 1, 2000 psi design stress, Class 12454-B formulation Polyvinyl Chloride.
 2. PVC formulation shall contain impact modifiers and ultraviolet inhibitors for use in above-ground temporary applications.
 3. Pipe shall have potable water service certification in accordance with NSF No. 14 (National Sanitation Foundation Standard) for Thermoplastic materials, pipe fittings, valves, traps, and joining materials.
 4. Pipe pressure rating shall be 150 psi (SDR-18) minimum.

2.2 FABRICATION

- A. Polyethylene Pipe:
1. Thermal Butt-Fusion:
 - a. Join the pipe to itself, or to the polyethylene fittings or to the flange connections by means of thermal butt-fusion.
 - b. Have all fusion performed by personnel trained by the pipe supplier or other qualified persons, using tools approved by the pipe supplier.
 - c. The polyethylene fittings and flanged connections to be joined by thermal butt-fusion shall be from the same type, grade and class of polyethylene compound as the polyethylene pipe unless otherwise approved.
 - d. Joint strength must be equal to that of the adjacent pipe.
 2. Mechanical Connections: The mechanical connections of the polyethylene pipe to auxiliary equipment shall be in accordance with the pipe suppliers written instructions.
- B. Polyvinyl Chloride (PVC) Pipe:
1. Fittings shall be supplied with Teflon coated "O"-ring to minimize assembly and disassembly effort required to install, remove and reinstall the system.

2. Mechanical Connections: The mechanical connections of the PVC pipe to auxiliary equipment shall be in accordance with the pipe suppliers written instructions.
- C. Services:
 1. Services shall be polyethylene pipe or NSF certified hose.
 2. Minimum services size shall be ¾-inch. Larger services may be required for non-residential uses. Engineer shall determine minimum service size.

PART 3 - EXECUTION

3.1 INSTALLATION OF TEMPORARY MAIN

- A. Temporary water mains shall be placed in a manner that protects the pipeline from traffic, vandalism, etc. Pipeline shall be laid along edge of roadways or in curblines whenever possible.
- B. Water mains shall be protected at all driveway entrances and curb cuts by the use of gravel, temporary pavement, or steel access ramps. In lieu of access ramps, in areas that will have new pavement, a shallow trench may be cut to allow the shallow burial of the temporary main. If trenching is used, trenches shall be sawcut, refilled with compacted gravel and repaved with trench pavement prior to final paving.

3.2 INSTALLATION OF SERVICES

- A. All services tapped to the temporary main will have a shutoff at the main to allow isolation of the individual service.
- B. Residential services may be back-fed through an external hose bib if available. If a hose bib is utilized, Contractor shall shutoff the existing feed to the structure at the meter to prevent back-feeding the old main and shall confirm that the connection properly services the entire structure.
- C. For services where no external hose bib or other connection is available or larger than residential flows are required, the Contractor shall excavate the existing building service and connect the service to the temporary main with the appropriate size piping.
- D. For fire protection (sprinkler) services, the Contractor shall coordinate with the Building Owner and Fire Department for service size and sprinkler service connection requirements. Contractor shall not connect sprinkler services without express written permission of the Building Owner.

3.3 CLEANING AND TESTING

- A. Temporary water main shall be pressure tested at 150 psi and disinfected per Specification Section 02675.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02622

POLYVINYL CHLORIDE (PVC) NON-PRESSURE PIPE

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included:
 - 1. Provide and install PVC non-pressure pipe and fittings of the size(s) and type(s) and in the location(s) shown on the Drawings and as specified herein.
- B. Related Work Specified Elsewhere: (When Applicable)
 - 1. Excavation and backfill, dewatering, pavement, borrow and bedding material, and cleaning and testing requirements are specified in the appropriate sections of this division.
 - 2. Pipe & Pipe Fittings - General is specified in Division 15.

1.2 QUALITY ASSURANCE

- A. Manufacturers:
 - 1. Certain-Teed.
 - 2. J-M Manufacturing.
 - 3. Or equivalent.

1.3 SUBMITTALS TO THE ENGINEER

- A. Submit shop drawings in accordance with the General Conditions of the Construction Contract.
- B. Submit manufacturer's "Certification of Conformance" that pipe and fittings meet or exceed the requirements of these Specifications.
- C. Submit other documents as specified in the appropriate Sections of this Division.

1.4 DELIVERY STORAGE AND HANDLING

- A. Provide all labor necessary to assist the Engineer to inspect pipe, fittings, gaskets and other materials.
- B. Carefully inspect all materials at the time of delivery and just prior to installation.
- C. Carefully inspect all pipe and fittings for:
 - 1. Defects and damage
 - 2. Deviations beyond allowable tolerances for joint dimensions.
 - 3. Removal of debris and foreign matter.
- D. Examine area and structures to receive piping for:
 - 1. Defects, such as weak structural components that adversely affect the execution and quality of work.

2. Deviations beyond allowable tolerance for pipe clearances.
- E. All materials and methods not meeting the requirements of the Contract Documents will be rejected.
- F. Immediately remove all rejected materials from the project site.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Pipe and Fittings:
 1. The polyvinyl chloride pipe and fittings, including those required for stubs, shall conform to ASTM standard specification for PVC Sewer Pipe and Fittings, Designation D 3034 (SDR 35) (4" to 15"), F679 (18" to 27"), or F1760-01 (for recycled pipe, all diameters).
 2. Straight pipe shall be furnished in lengths of not more than 14 feet.
 3. Saddles will not be allowed.
- B. Joints:
 1. Joints for the polyvinyl chloride pipe shall be push-on joints using factory installed elastomeric ring gaskets.
 2. The gaskets shall be securely fixed into place by the manufacturer so that they cannot be dislodged during joint assembly.
 3. The gaskets shall be of a composition and texture which is resistant to common ingredients of sewage and industrial wastes, including oils and ground water, and which will endure permanently under the conditions of the proposed use.
 4. The joints shall conform to ASTM Specifications for Joints for Drain and Sewer Plastic Pipes using Flexible Elastomeric Seals, Designation D3212-76.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Inspection:
 1. Each pipe unit shall be inspected before being installed. No single piece of pipe shall be laid unless it is generally straight.
 2. The centerline of the pipe shall not deviate from a straight line drawn between the centers of the openings at the ends of the pipe by more than 1/16 inch per foot of length.
 3. If a piece of pipe fails to meet this requirement for straightness it shall be rejected and removed from the site.
 4. Any pipe unit or fitting discovered to be defective either before or after installation shall be removed and replaced with a sound unit.
- B. Jointing:
 1. All pipe and fittings shall be cleared of all debris, dirt, etc., before being installed and shall be kept clean until accepted in the completed work.

02622-3
POLYVINYL CHLORIDE (PVC) NON-PRESSURE PIPE

2. Pipe and fittings shall be installed to the lines and grades indicated on the drawings or as required by the Engineer. Care shall be taken to insure true alignments and gradients.
 3. All joint surfaces shall be cleaned. Immediately before jointing the pipe, the bell or groove shall be lubricated in accordance with the manufacturer's recommendation.
 4. Each pipe unit shall than be carefully pushed into place without damage to pipe or gasket. Suitable devices shall be used to force the pipe units together so that they will fit with a minimum open recess inside and outside and have tightly sealed joints. Care shall be taken not to use such force as to wedge apart and split the bell or groove ends.
 5. Joints shall not be "pulled" or "cramped" unless permitted by the Engineer.
- C. Service Connections:
1. All service connections to new pipe shall utilize a wye fitting.
 2. All service connections must enter the top half of the mainline pipe.
- D. Pipe Deflection:
1. Pipe provided under this specification shall be installed so there is no more than a maximum deflection of 5.0 percent. Such deflection shall be computed by multiplying the amount of deflection (normal diameter less minimum diameter when measured) by 100 and dividing by the nominal diameter of the pipe.
 2. The Contractor shall wait a minimum of 30 days after completion of a section of sewer, including placement and compaction of backfill, before measuring the amount of deflection by pulling a specially designed gage assembly through the completed section. The gage assembly shall be in accordance with the recommendations of the pipe manufacturer and be acceptable to the Engineer.
 3. Should the installed pipe fail to meet this requirement, the Contractor shall do all work to correct the problem as the Engineer may require without additional compensation.
- E. Testing:
1. Clean and test pipe in accordance with appropriate sections of this division.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02624

LINED DUCTILE IRON SEWER PIPE & FITTINGS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included: Provide and install lined ductile iron sewer pipe and fittings of the type(s) and size(s) in the location(s) shown on the Drawings and as specified herein.
- B. Related Work Specified Elsewhere:
 - 1. Pre-Insulated Ductile Iron Pipe is specified in the appropriate Section in this Division.
 - 2. Excavation, Bedding and Backfill are specified in this Division.
 - 3. Testing is specified in this Division.
 - 4. Polyethylene Encasement is specified in this Division

1.2 QUALITY ASSURANCE

- A. Standards (As Applicable):
 - 1. Polyethylene Encasement: ANSI A21.5 (AWWA C105).
 - 2. Rubber gasket joints: ANSI A21.11 (AWWA C111).
 - 3. Ductile iron pipe thickness: ANSI A21.50 (AWWA C150).
 - 4. Ductile iron pipe centrifugally cast in metal or sand lined molds: ANSI A21.51 (AWWA C151).
 - 5. Pipe flanges and fittings: ANSI B16.1 and ANSI A21.10 (AWWA C110).
 - 6. Cast and ductile iron fittings: ANSI A21.10 (AWWA C110).
 - 7. Ductile Iron Compact Fittings: ANSI 21.53 (AWWA C153).
 - 8. Installation of Ductile Iron Pipe: AWWA C600.
- B. Acceptable Pipe Manufacturers:
 - 1. Tyler
 - 2. Griffin
 - 3. Union
 - 4. US Pipe
 - 5. Or equivalent.
- C. Acceptable Lining Products:
 - 1. Protecto 401™ Ceramic Epoxy from Induron®
 - 2. Or equivalent.

1.3 DELIVERY, STORAGE & HANDLING

- A. Handle ductile iron pipe in accordance with manufacturer's recommendations.

- B. Lined pipe and fittings must be handled only from the outside of the pipe and fittings. No forks, chains, straps, hooks, etc. shall be placed inside the pipe and fittings for lifting, positioning, or laying. The pipe shall not be dropped or unloaded by rolling.
- C. Care should be taken not to let the pipe strike sharp objects while swinging or being off loaded. Ductile iron pipe should never be placed on grade by use of hydraulic pressure from an excavator bucket or by banging with heavy hammers.
- D. Protect the spherical spigot ends and the plain ends of all pipe during shipment by wood lagging securely fastened in place.

PART 2 - PRODUCTS

2.1 PIPE MATERIALS

A. General:

- 1. All pre-insulated bridge crossing pipe shall be restrained joint DI having similar bell diameter as push on pipe to minimize required insulation diameter. Restrained joint bridge crossing pipe shall be TR-Flex by U.S. Pipe, Flex-Ring by American Ductile Iron Pipe, or approved equal
- 2. Unless otherwise shown on the Drawings or in the pipe schedule, the minimum thickness of ductile iron pipe shall be:
 - a. For pipe 4 inches in diameter and smaller: Class 51.
 - b. For pipe 6 inches in diameter and larger: Class 52.
 - c. Pipe with flanges: Class 53.
- 3. Pipe for use with sleeve type couplings shall have plain ends (without bells or beads) cast or machined at right angles to the axis.
- 4. Pipe interior shall be lined with a protective coating as specified herein.
- 5. Factory applied bituminous coatings (in accordance with AWWA C151) shall be furnished on the exterior of all underground piping unless specified otherwise.
- 6. All ductile iron sewers that are not pre-insulated shall be encased in polyethylene film when the trench is backfilled.

B. Joints (as shown on Drawings or as specified):

- 1. Push-on and Mechanical Joint:
 - a. The plain ends of push-on pipes shall be factory machined to a true circle and chamfered to facilitate fitting the gasket.
 - b. Provide gaskets manufactured from a composition material suitable for exposure to the fluid to be contained within the pipe.
 - i. Nitrile gaskets shall be used where petroleum contamination exists.
 - c. Bolts and nuts for buried mechanical joints shall meet the AWWA C-111 requirements equal to ductile iron or KOR-10 steel T-bolts and nuts.

2.2 FITTINGS

A. Standard Fittings:

- 1. Ductile iron compact.

2. Pressure rating of 350 psi unless indicated otherwise on the Drawings or as specified.
3. Restrained joints as specified for pipe.
4. Protective lining and seal coat as specified for pipe.
5. Factory applied exterior bituminous coatings shall be furnished for all underground fittings.

2.3 PROTECTIVE INTERIOR COATING

A. Condition of Ductile Iron Prior to Surface Preparation

1. All Ductile Iron pipe and fittings shall be delivered to the application facility without asphalt, cement lining, or any other lining on the interior surface. Because complete removal of old linings may not be possible, the intent of this specification is that the entire interior of the Ductile Iron pipe and fittings shall not have been lined with any substance prior to the application of the specified lining material and no coating shall have been applied to the first six inches of the exterior of the spigot ends.

B. Lining Material

1. The lining material shall be PROTECTO 401 Ceramic Epoxy or equal. The material shall be an amine cured novalac epoxy containing at least 20% by volume of ceramic quartz pigment. Any request for substitution must be accompanied by a successful history of lining pipe and fittings for sewer service, a test report verifying the following properties and a certification of the test results.
 - a. A permeability rating of 0.00 when tested according to the procedure described in Method A of ASTM E 96, Procedure A with a test duration of 30 days.
 - b. The following tests must be run on coupons from factory lined Ductile Iron pipe.
 - i. ASTM B 117 Salt Spray (scribed panel) - Results to equal 0.0 undercutting after two years.
 - ii. ASTM G 95 Cathodic Disbondment (1.5 volts at 77°F) - Results to equal no more than 0.5 mm undercutting after 30 days.
 - iii. Immersion Testing - Rated using ASTM D 714.
 - 20% Sulfuric Acid - No effect after two years.
 - 140°F 25% Sodium Hydroxide - No effect after two years.
 - 160°F Distilled Water (scribed panel) - No effect after two years.
 - 120°F Tap Water (scribed panel) - 0.0 undercutting after two years with no effect.
 - c. Abrasion Resistance - Less than .075 mm (3 mils) loss after one million cycles on a $\pm 22.5^\circ$ sliding aggregate slurry abrasion tester using a sharp natural siliceous gravel with a particle size between 2 mm and 10 mm (European Standard SN598).

C. Application

1. Applicator - The lining shall be applied by a certified firm with a successful history of applying linings to the interior of Ductile Iron pipe and fittings.
2. Surface Preparation - Prior to abrasive blasting, the entire area to receive the protective compound shall be inspected for oil, grease, etc. Any areas where oil or grease is present, or any substance which can be removed by solvent, shall be solvent cleaned to remove these substances. After the surface has been made free of grease, oil or other substances, all areas to receive the protective compounds shall be abrasive blasted using compressed air nozzles with sand or grit abrasive material. The entire surface to be lined shall be struck with the blast media so that all rust, loose oxides, etc., are removed from the surface. Only slight stains and tightly adhering oxide may be left on the surface. Any area where rust reappears before lining must be reblasted.
3. Lining - After surface preparation, the interior of the pipe shall receive 40 mils nominal dry film thickness of PROTECTO 401. No lining shall be applied when the substrate or ambient temperature is below 40°F. The surface also must be dry and dust free.
4. Coating of Bell Sockets and Spigot Ends - Due to the tolerances involved, bell interior and spigot exterior up to 6 inches back from the end of the spigot end must be coated with 6 mils nominal, 10 mils maximum PROTECTO Joint Compound. The Joint Compound shall be applied by brush to ensure coverage. Care should be taken that the Joint Compound is smooth without excess buildup in the gasket seat or on the spigot ends. Coating of the gasket seat and spigot ends shall be done after the application of the linings.
5. Number of Coats - The number of coats of lining material applied shall be as recommended by the lining manufacturer. However, in no case shall this material be applied above the dry thickness per coat recommended by the lining manufacturer in printed literature. The maximum or minimum time between coats shall be that time recommended by the lining material manufacturer. No material shall be used for lining which is not indefinitely recoatable with itself without roughening of the surface.
6. Touch-Up & Repair - PROTECTO Joint Compound shall be used for touch-up or repair in accordance with manufacturer's recommendations.

D. Inspection and Certification

1. Inspection
 - a. All Ductile Iron pipe and fitting linings shall be checked for thickness using a magnetic film thickness gauge. The thickness testing shall be done using the method outlined in SSPC PA-2 Film Thickness Rating.
 - b. The interior lining of all pipe and barrels and fittings shall be tested for pinholes with a nondestructive 2,500 volt test. Any defects found shall be repaired prior to shipment.

- c. Each pipe joint and fitting shall be marked with the date of application of the lining system along with its numerical sequence of application on that date and records maintained by the applicator of his work.

PART 3 - EXECUTION

3.1 INSPECTION

- A. Provide all labor necessary to assist the Engineer to inspect pipe, fittings, gaskets, and other materials.
- B. Carefully inspect all materials at the time of delivery and just prior to installation.
- C. Carefully inspect all pipe and fittings for:
 - 1. Defects, such as weak structural components that adversely affect the execution and quality of work.
 - 2. Deviations beyond allowable tolerances for pipe clearances.
- D. Immediately remove all rejected materials from the project site.

3.2 INSTALLATION

- A. General:
 - 1. Install in strict accordance with the pipe and fitting manufacturer's instructions and recommendations and as specified or as shown on the Drawings.
- B. Assembling Joints:
 - 1. Push-on Joints:
 - a. Insert the gasket into the groove of the bell.
 - b. Uniformly apply a thin film of special lubricant over the inner surface of the gasket that will contact the spigot end of the pipe.
 - c. Insert the chamfered end of the plain pipe into the gasket and push until it seats against the bottom of the socket.
 - 2. Mechanical Joints:
 - a. Thoroughly clean, with a wire brush, surfaces that will be in contact with the gaskets.
 - b. Lubricate the gasket, bell, and spigot by washing with soapy water.
 - c. Slip the gland and gasket, in that order, over the spigot and insert the spigot into the bell until properly seated.
 - d. Evenly seat the gasket in the bell at all points, center the spigot, and firmly press the gland against the gasket.
 - e. Insert the bolts, install the nuts finger tight, and progressively tighten diametrically opposite nuts uniformly around the joint to the proper tension with a torque wrench.
 - f. The correct range of torque (as indicated by a torque wrench) and the length of wrench (if not a torque wrench) shall not exceed:
 - (1) Range or Torque: 60-90 ft.-lbs.
 - (2) Length of Wrench: 10 inches.

- g. If effective joint sealing is not attained at the maximum torque specified above, disassemble, thoroughly clean, and reassemble the joint. Do not overstress the bolts to tighten a leaking joint.
 - 5. Bell and Spigot Joints:
 - a. Thoroughly clean the bell and spigots and remove excess tar and other obstructions.
 - b. Insert the spigot firmly into place and hold securely until the joint has been properly completed.
- C. Fabrication:
 - l. Cutting:
 - a. Perform all cutting as recommended by the manufacturer of the lining.
 - b. Carefully chamfer all cut ends to be used with push-on joints to prevent damage to gaskets when pipe is installed.

3.3 TESTING

- A. Per the requirements specified in other sections within this Division.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02626

COPPER SERVICE TUBING & FITTINGS FOR BURIED APPLICATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Furnish and install copper tubing of the type and size and in the locations shown on the Drawings and as specified herein.

1.2 QUALITY ASSURANCE

- A. Seamless copper water tube, ASTM B88.
- B. Tubing shall be American made.

1.3 DELIVERY, STORAGE, & HANDLING

- A. Exercise extra care when handling copper tubing and fittings.
- B. Protect materials during shipment.
- C. Materials delivered to the site shall be new, clean, unused, and free from rust or other imperfections.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Tubing:
 - 1. Type K, soft annealed.
- B. Brass Fittings:
 - 1. Waterworks brass (85-5-5-5), compression fittings with BUNA-N gasket.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Jointing
 - 1. Compression joints
 - a. Cut pipe squarely.
 - b. Ream or file pipe to remove burrs.
 - c. Seat pipe in fittings and tighten nut.
 - 2. Adapters: Use as required to connect to existing services.
- B. Bending Pipe

1. Bend pipe by the method and to the radius to comply with the manufacturer's recommendations.
2. Bend pipe with suitable tools to provide smooth bend free of any cracks or buckles.
3. Provide "goose neck" in services as shown on Drawings.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02640

VALVES AND SPECIALTIES FOR BURIED APPLICATIONS - GENERAL

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Furnish, install, support, and test valves, hydrants, cocks, stops, and other specified materials, when applicable, (hereinafter referred to as "valves") in the location and of the size and quantities shown on the Drawings and/or as specified herein.

1.2 SUBMITTALS TO THE ENGINEER

- A. Submit shop drawings and operation and maintenance manuals in accordance with Section 01340 and the General Conditions of the Construction Contract.
- B. Catalog Data: Submit manufacturer's literature and illustrations for each size of valve furnished.
- C. Certificates: Submit manufacturer's certification that valves and accessories meet or exceed the requirements of these Specifications.

1.3 INSTALLATION

- A. Shipping:
 - 1. Prepare valves and accessories for shipment as required for complete protection.
 - 2. Seal valve ends to prevent entry of foreign matter into valve body.
 - 3. Box, crate, completely enclose, and protect valves and accessories from accumulations of foreign matter.
- B. Storage:
 - 1. Store valves and accessories in an area on the construction site protected from weather, moisture, or possible damage.
 - 2. Do not store valves or accessories directly on the ground.
- C. Handling: Handle valves and accessories to prevent damage of any nature to the interior and the exterior surfaces.

1.4 INSPECTION

- A. Carefully inspect all materials for:
 - 1. Defects in workmanship and materials.
 - 2. Removal of debris and foreign material in valve openings and seats.
 - 3. Proper functioning of all operating mechanisms.
 - 4. Tightness of all nuts and bolts.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Materials are specified in appropriate Sections in this Division.
- B. The specifications direct attention to certain required features of the valves but do not purport to cover all details entering into their design and construction. Nevertheless, the Contractor shall furnish the valves complete in all details and ready for operation for the intended purpose.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install valves and accessories in strict accordance with manufacturer's instructions and recommendations, as shown on the Drawings and/or as specified herein.
- B. Carefully erect all valves and support them in their respective positions free from distortion and strain.
- C. Independently support all valves connected to equipment, and in piping systems that cannot support valves.
- D. Repair any scratches, marks and other types of surface damage etc. with original coating as supplied by the factory.
- E. Install valves such that operators are plumb and vertical.
- F. All valves (and actuators where specified) shall be installed in a manner that will provide for proper clearances and ease of operation. In addition, valve operators must be capable of being rotated in 90° increments to facilitate field installation.

3.2 ADJUSTMENTS

- A. Check and adjust all valves and accessories for smooth operation.

3.3 TESTING

- A. The Contractor shall test all valves in the presence of the Engineer to demonstrate that each valve complies with specified requirements and allowable leakage rates.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02641

GATE VALVES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included: Furnish, install and test gate valves of the type(s) and size(s) and in the location(s) shown on the Drawings and as specified.
- B. Related Work Specified Elsewhere:
 - 1. "Valve Boxes" and "Ductile Iron Pipe & Fittings for Buried Applications" are specified in this Division.

1.2 QUALITY ASSURANCE

- A. All gate valves of same type and style shall be manufactured by one manufacturer.
- B. Acceptable Manufacturers:
 - 1. American Flow Control
 - 2. Kennedy
 - 3. Darling
 - 4. Mueller
 - 5. Or approved equal.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Waterworks type NRS valves (AWWA):
 - 1. Valve Body, bonnet and stuffing box - Ductile iron (ASTM A395 or VA536 C1B), coated inside and out with fusion bonded epoxy meeting AWWA C550. Face-to-face dimensions shall comply with ANSI B16.10 and flanges to comply with ANSI B16.1.
 - 2. Resilient Wedge - Ductile iron wedge with bonded Nitrile elastomer covering.
 - 3. Stem – Copper Alloy, ASTM B584, or stainless steel ASTM A276 or A473
 - 4. Stuffing box O-rings
 - a. Two O-rings, each nitrile rubber.
 - b. Capable of changing under pressure.
 - 5. Wedgenut - Bronze, ASTM B62, B148, B584 or B763.

6. Bolting - stainless steel Type 18-8, ASTM F593, GP1
7. End Connections
 - a. Buried valves - mechanical joints
8. Operation
 - a. Buried valves - 2 inch square nut, cast iron, ASTM A126, C1B
 - b. PUD Opening Direction – left (**counterclockwise**)
9. Valve Pressure rating: 200 psi.
10. Standards - valves shall meet or exceed AWWA C515, latest edition.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install valves with stem position vertical.
- B. Valve box vertical and centered over operating nut.
- C. Valve box supported during backfilling and maintained vertical.
- D. Install and test in accordance with AWWA C515, latest revision.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02642
CORPORATION STOPS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included: Furnish and install corporation stops of the type(s) and size(s) and in the location(s) shown on the Drawings and as specified herein.

1.2 QUALITY ASSURANCE

- A. All corporation stops shall be manufactured by one manufacturer.
- B. Qualifications of Manufacturer: Products have proven reliable in similar installations over a reasonable number of years.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Constructed of brass, "lead free".
- B. Outlet shall be polyethylene pipe compression (PEP) joint. Stainless steel stiffeners required.
- C. Inlet shall have CC thread.
- D. Acceptable Manufacturers:
 - 1. Ford (F600)
 - 2. Red Head Mfg. Co.
 - 3. Mueller
 - 4. A. Y. McDonald
 - 5. Or equivalent

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install at locations shown on the Drawings and as specified in accordance with manufacturer's instructions.
- B. Check and adjust all corporation stops for smooth operation.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02643

CURB STOPS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included: Furnish and install curb stops of the type(s) and size(s) and in the location(s) shown on the Drawings and as specified herein.

1.2 QUALITY ASSURANCE

- A. All curb stops shall be manufactured by one manufacturer.
- B. Qualifications of Manufacturer: Products shall have proven reliable in similar installations over a reasonable number of years.
- C. Acceptable Manufacturers:
 - 1. A Y McDonald
 - 2. Ford Meter Box Company
 - 3. Mueller 300
 - 4. Red Hat

PART 2 - PRODUCTS

2.1 PRODUCT CONSTRUCTION

- A. Constructed of brass, "lead free".
- B. Inlet and outlet shall be compression pack joint.
- C. Ball type.
- D. 300 psi working pressure shall be required.
- E. Open Left.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install at locations shown on the Drawings and in accordance with manufacturer's instructions.

3.2 ADJUSTMENTS

- A. Check and adjust all curb stops for smooth operation.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02644

HYDRANT ASSEMBLIES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included: Furnish and install hydrant assemblies of the type(s) and size (s) and in the locations (s) shown on the Drawings and as specified herein.
- B. Hydrant Assemblies consist of:
 - 1. Hydrant tee.
 - 2. 6 inch gate valve and valve box.
 - 3. 6 inch hydrant branch piping.
 - 4. Hydrant.
 - 5. Drainage material.
 - 6. Thrust blocking and joint bracing.
- C. Related Work Specified Elsewhere:
 - 1. Excavation and backfill, pavement, dewatering, borrow and bedding are specified in this Division.

1.2 QUALITY ASSURANCE

- A. Hydrants shall conform to AWWA C502 and all hydrants shall be from one manufacturer.
- B. Gate valves shall conform to AWWA C515 (Reduced Wall Resilient-Seated Gate Valves for Water Supply).
- C. Acceptable Manufacturer:
 - 1. Paris Utility District Standard: Waterous – Pacer by AMERICAN Cast Iron Pipe Company, Birmingham, Alabama

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Fire Hydrants:
 - 1. Dry barrel type with a 5-inch minimum valve opening.
 - 2. Two (2) 2-1/2-inch hose connections and one (1) 4-1/2-inch pumper connection.
 - a. 2-1/2 inch outlets: 60o V threads, 7-1/2 threads to the inch, external threads 3-1/16 inches, O.D. National Standard threads.

- b. 4-1/2-inch outlet: 4 threads to the inch, external threads 5-3/4 inches, O.D. National Standard threads.
 - c. Supply adapters if existing firefighting equipment does not match the threads specified above.
- 3. 150 pounds working pressure and 300 pounds hydrostatic test pressure.
- 4. Working parts shall be bronze and open counterclockwise unless otherwise specified.
- 5. Designed with standpipe breaking ring or breakable sections.
- 6. Supply one (1) collision repair kit for every twenty-five (25) hydrants installed.
- 7. Caps shall be attached to hydrant body by chains.
- 8. Hydrant drains are not allowed.
- B. Gate Valves: Waterworks type non-rising stem AWWA valve as specified in the appropriate section of this Division.
- C. Valve Boxes:
 - 1. Cast iron, minimum thickness 3/10 inch with the word "WATER" cast in covers.
 - 2. Be of such length as required without full extensions.
 - 3. As specified in this Division.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install hydrants as shown in the details and using manufacturer's written instructions.
- B. No hydrant assembly shall be backfilled until approved by the Engineer.
- C. Provide drainage material and thrust blocks as shown.
- D. Provide barrel extensions as required for hydrant to be installed at proper grade.
- E. Provide finish paint on all exposed surfaces. Color shall meet Owner's requirements as approved by the Engineer.

3.2 CLEANING

- A. Clean all hydrants of concrete, etc. and repaint as necessary to the satisfaction of the Engineer.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02645

CURB BOXES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included: Furnish and install curb boxes of type (s) and size (s) and in the locations shown on the Drawings and as specified herein.

1.2 QUALITY ASSURANCE

- A. All curb boxes shall be manufactured by one manufacturer.
- B. Qualifications of Manufacturer: Products have proven reliable in similar installations over a reasonable number of years.
- C. Acceptable Manufacturers:
 - 1. Bingham & Taylor
 - 2. Or equivalent.

PART 2 - PRODUCTS

2.1 MATERIALS AND FABRICATION

- A. Cast iron base piece, steel upper, cast iron lid, and threaded bronze plug with pentagon nut (Rope Thread).
- B. Extension type and arch pattern base with 5/8" diameter stainless steel minimum, 36" stationary rod with brass cotter pin. Yoke shall be integral to the rod.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install as shown on the Drawings and/or as requested by the Engineer.
 - 1. When installation is complete no pressure shall be exerted by the curb box on either the curb stop or the service pipe.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02646

VALVE BOXES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included: Furnish and install valve boxes of type(s) and size(s) and in the locations shown on the Drawings and as specified herein.

1.2 QUALITY ASSURANCE

- A. All valve boxes shall be manufactured by one manufacturer.
- B. Qualifications of Manufacturer: Products to have been proven reliable in similar installations over a reasonable number of years.
- C. Acceptable Manufacturers:
 - 1. Bingham & Taylor
 - 2. Or Equivalent

PART 2 - PRODUCTS

2.1 MATERIALS

- A. The valve box shall be ductile iron, slip type two-piece integral base, 5-1/4 inch shaft. Top section with flanges.
- B. Cast or Ductile iron, with drop type covers and the word "Water" cast in.
- C. 36" minimum belled Base Section.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Installation as shown on the Drawings and/or as specified herein.
 - 1. When installation is complete, no pressure shall be exerted by valve box on the water main or on the valve.
 - 2. Be of such length as required without full extension. Minimum lap 6 inches.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02648

COUPLINGS & CONNECTORS FOR BURIED APPLICATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Furnish and install couplings and connectors of the type and size in the location shown on the Drawings and as specified herein.

1.2 QUALITY ASSURANCE

- A. Minimum pressure rating equal to that of the pipeline in which they are to be installed.
- B. Couplings and connectors, other than those specified herein, are subject to the Engineer's approval.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. All Couplings and Connectors:
 - 1. Gasket Materials: Composition suitable for exposure to the liquids to be contained within the pipes.
 - 2. Diameters to properly fit the specific types of pipes on which couplings and connectors are to be installed.
- B. Sleeve Type Flexible Couplings
 - 1. Buried Couplings:
 - a. Ductile iron center sleeve and end rings made per ASTM A536, Grade 65-45-12
 - b. Two wedge-section virgin SBR or GPDM rubber gaskets compounded for water service,
 - c. Nuts and bolts shall be 304 stainless steel or ductile iron low alloy steel per ANSI/AWWA A21.11/C-111 with anti-galling protection.
 - d. Acceptable Manufacturers:
 - (1) Romac Industries Macro HP or Alpha
 - (2) Krausz Hymax
 - (3) Or Equal
- C. Solid Sleeve Couplings
 - 1. Solid sleeves shall be ductile iron with mechanical joint ends.
 - 2. Couplings shall meet AWWA/ANSI C-153/A21.53 and C-111/A21.11 for joints, and C-104/A21.4 for cement lining in sizes 3"-24".

3. Nuts and bolts shall be ductile iron low alloy steel per ANSI/AWWA A21.11/C-111.
- D. Flexible Couplings for drain connections
 1. Rubber material with stainless steel clamps
 2. Must provide a positive seal against infiltration and exfiltration
 3. Coupling materials must conform to ASTM C443, C564, and D1869.
- E. Mechanical Joint Adaptors (Foster Adaptor[®])
 1. Required to connect fittings and valves with mechanical joints
 2. Ductile iron construction mechanical joint bolt pattern.
 3. Bolts and nuts shall meet AWWA C-111.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Sleeve Type Couplings:
 1. Thoroughly clean pipe ends a minimum of 12-inches from the ends prior to installing couplings, and use soapy water as a gasket lubricant.
 2. Slip an end ring and gasket over each pipe and place the center sleeve centered over the joint.
 3. Insert the other pipe length into the center sleeve the proper distance.
 4. Press the gaskets and end rings evenly and firmly into the center sleeve flares.
 5. Insert the bolts, finger tighten and progressively tighten diametrically opposite nuts uniformly around the adapter with a torque wrench applying the torque recommended by the manufacturer.
 6. Insert and tighten the tapered threaded lock pins.
- B. Install thrust rods, supports, and other provisions to properly support pipe weight and axial equipment loads.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02650

BURIED UTILITY MARKINGS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work Included:
 - 1. This work shall consist of providing and installing utility line markings above all buried lines installed as part of this contract and replacing existing markings disturbed as part of this contract.
- B. Related Work Specified Elsewhere:
 - 1. Pipe, excavation, backfill, insulation are specified in the appropriate Sections in this Division.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Materials and color shall be in accordance with latest AASHTO specifications for pipe and utility marking.
- B. Marking tape color shall be in accordance with latest American Public Works Association (APWA) Uniform Color Code and American National Standards Institute ANSI Standard Z535.1, Safety Color Code specifications for buried utility marking as noted in the Schedule below.
 - 1. Schedule

Marker Color	Buried Utility
Blue	Potable Water & Associated lines
Green	Sanitary Sewers, Storm Drain and other Drain lines
Orange	Telecommunication, signal, alarm
Purple	Reclaimed, Recycled, Irrigation Water and Slurry Lines
Red	Electric Power lines cables conduits and lighting cables
Yellow	Gas, Oil, Steam, Petroleum or Gaseous Material Lines

- 2. Warning Information shall be in Black Letters with typical wording of:
 - a. "CAUTION: BURIED (NAME OF UTILITY LINE) BELOW"
- C. For ferrous pipe material use 0.004" minimum polyethylene film; 6" wide clearly marking type of buried utility.
- D. For non-ferrous pipe material (e.g. Concrete, PVC, PE, etc.) use detection tape

composite of polyethylene and metallic core 6" wide clearly marking type of buried utility.

- E. Seton Identification Products, New Haven, CT, Utility Safeguard LLC or equal.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Marking tape shall be installed over utility lines centerline and buried 24" below grade.
- B. Markings damaged during opening of trench shall be reinstalled with 2' overlap at broken sections.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02675

CLEANING, TESTING AND DISINFECTION OF WATER MAINS

PART 1 GENERAL

1.1 DESCRIPTION

- A. The work of this section includes the furnishing of all labor, tools, equipment and materials and performing all operations necessary for the flushing, pressure testing, leakage testing and chlorination of water mains as specified herein and as required to complete the work.

1.2 QUALITY ASSURANCE

- A. Standards (as applicable):
 - 1. All work shall be in accordance with this specification and AWWA C651. Where conflicts appear between these specifications and AWWA C651 the more stringent requirement shall apply.
 - 2. Chlorine solution for disinfecting water mains and appurtenances shall be made from either liquid sodium hypochlorite, or solid calcium hypochlorite, which shall conform to the latest AWWA B300 Standard for Hypochlorite.
 - 3. Chlorine test kits shall be as described in the current edition of AWWA M12 - Simplified Procedures for Water Examination.
 - 4. Disposal of chlorinated water as per AWWA C651, Appendix B.

1.3 COORDINATION

- A. Use of water will only be as approved and coordinated by the Owner.
- B. All flushing, pressure and leakage testing and chlorinating shall be done by the Contractor in the presence of the Engineer and in the presence of the Owner or Owner's Representative in accordance with the requirements of the local and state plumbing codes and the appropriate Sections of these Specifications, at no additional cost to the Owner.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Each temporary blow-off shall consist of a corporation cock, type K copper tubing and a curb stop, each of not less than 1-inch diameter.
- B. A pumping unit or proportionate feeder suitable for delivering a hypochlorite solution to the isolated main shall be provided. The unit used shall prevent chlorine solution from flowing back into the existing system.

PART 3 - EXECUTION

3.1 GENERAL

- A. Thoroughly clean all piping prior to testing. Remove all dirt, dust, oil, grease and other foreign material. Exercise care while cleaning to avoid damage to linings and coatings.
- B. Supply all labor, equipment, materials, gages, and pumps required to conduct the tests. The drawings do not detail taps, gages, plugs and other related materials required to perform testing. These materials are the responsibility of the Contractor.
- C. Flushing, testing and chlorinating of the mainline shall closely follow main laying work. As the mainline is installed, it shall be tested approximately every 1,000 feet, or between line valves, whichever is less. Should the mainlines fail to be flushed, tested, and chlorinated as specified, the main laying work shall be suspended until the flushing, testing and chlorinating is done.
- D. Final acceptance of the water main shall be based on successful (negative) results of bacteriological tests, which shall be done on samples taken from the main following chlorination and final flushing. Locations of samples shall be determined by the Engineer.
- E. The testing and related procedures described herein, shall be performed in the order listed.
- F. The Contractor, with the assistance of the Owner, shall fill mains as slowly as practicable so as not to cause dirty water and serious pressure drops within the existing system.

3.2 FLUSHING

- A. All new water mains, and existing water mains that have been drained and cut-into for making connections, shall be thoroughly flushed prior to pressure or leakage testing or final chlorination. Flushing shall be accomplished by partially opening and closing valves, hydrants, and blowoffs, several times, under expected line pressure, with flow velocities of not less than 2.5 feet per second, in the main. The size and number of hydrant outlets and/or main taps to provide the required flow (at 40 psi residual pressure) is as follows:

02675-3
CLEANING, TESTING AND DISINFECTION OF WATER MAINS

Minimum Required Flow and Openings Required to Flush Water Mains
(Assuming 40 psi Residual Pressure in Water Mains)

Main Diameter (in.)	Flow Required to Produce 2.5 fps in Main (gpm)	Minimum Size of Taps (in.)	Hydrant Outlets Number	Size (in.)
4	100	15/16	1	2-1/2
6	220	1-3/8	1	2-1/2
8	390	1-7/8	1	2-1/2
10	610	2-5/16	1	2-1/2
12	880	2-13/16	1	2-1/2
16	1565	3-5/8	2	2-1/2

1. If less than a 40 psi residual is available in the main, with the size tap shown above then a larger, or more tap(s) or hydrant outlets will be required, as determined by the Engineer.
2. The length of time for flushing, at or above the minimum allowable velocity, shall be computed to allow a minimum of 3 times the total volume of water in the main to be flushed to waste. Flushing shall be done in the presence of the Engineer.

3.3 AIR REMOVAL

- A. Following flushing, and before applying the specified test pressure, air shall be completely expelled from the mains, valves, and hydrants. After all air has been expelled, the air blowoffs can be closed, and the test pressure applied.

3.4 PRESSURE TEST

- A. All new water mains, or any sections thereof, shall be subjected to a hydrostatic pressure of at least 1.5 times the working pressure that will exist at the point of testing, or 150 psi, whichever is greater. Test pressures shall meet the following requirements:
1. Be of at least 2-hour duration.
 2. Be not less than 1.25 times the expected system working pressure at the highest point along the test section.
 3. Not exceed main or thrust-restraint design pressures.
 4. Not vary by more than + 5 psi for the duration of the test.
 5. Not exceed 2-times the rated pressure of the valves or hydrants when the pressure boundary includes closed valves or hydrants. Valves shall not be operated in either direction at differential pressure greater than the rated pressure.

02675-4
CLEANING, TESTING AND DISINFECTION OF WATER MAINS

6. Not exceed 1.5-times the rated pressure of the valves when the pressure boundary of the test section includes closed butterfly valves or resilient seated gate valves.
- B. Each section of main shall be slowly raised to the specified test pressure for two separate periods. The first period shall be for 15-minutes, after which the pressure shall be allowed to drop slowly back to system pressure. The pressure shall then be slowly raised again to the specified test pressure and maintained for 2-hours. The test pressure shall be based on the elevation of the lowest point of the main, in the test section and shall be corrected to the elevation of the test gauge, as directed by the Engineer. The test pressure shall be applied by means of a pump connected to the main, in an approved manner, and which will prevent any backflow into the existing system. Valves shall not be operated in either the closing or opening direction, at differential pressure greater than the rated pressure.
- C. Any exposed main, fittings, valves, hydrants and joints shall be carefully examined during the test. Any damaged or defective main, fittings, hydrants, or valves discovered following, or as a result of the pressure test shall be repaired or replaced with sound material. If faulty materials are removed and replaced, the pressure testing procedure shall be repeated.

3.5 LEAKAGE TEST

- A. Leakage testing shall be conducted concurrently with the pressure test.
- B. Leakage is defined as the quantity of water that must be pumped into the new main during the test, or any section thereof, required to maintain pressure within 5 psi of the starting test pressure. Leakage shall be recorded to the nearest one-tenth of a gallon. The Contractor shall employ qualified personnel throughout the testing. Leakage shall not be measured by a drop in pressure over a period of time.
- C. Leakage in the test section must be less than an amount determined as follows:

$$L = \frac{SD(P^{0.5})}{148,000}, \text{ where}$$

L = allowable gallons of leakage per hour

S = the length of main tested, in feet

D = the nominal main diameter in inches

P = the average test pressure during the test, in psi

- D. The leakage formula is based allowable leakage of 11.65 gallons per day, per mile of main, per inch (nominal) of main diameter, at a pressure of 150 psi. Allowable leakage under various conditions is shown below.

02675-5
CLEANING, TESTING AND DISINFECTION OF WATER MAINS

Allowable Leakage (gph) per 1,000 Feet of Mainline

Average Test Pressure(psi)	Nominal Diameter (inches)						
	6	8	10	12	16	20	24
250	0.64	0.85	1.07	1.28	1.71	2.14	2.56
225	0.61	0.81	1.01	1.22	1.62	2.03	2.43
200	0.57	0.76	0.96	1.15	1.53	1.91	2.29
175	0.54	0.72	0.89	1.07	1.43	1.79	2.15
150	0.50	0.66	0.83	0.99	1.32	1.66	1.99
125	0.45	0.60	0.76	0.91	1.21	1.51	1.81
100	0.41	0.54	0.68	0.81	1.08	1.35	1.62

1. If the mainline under test contains sections of various diameters, the allowable leakage will be the sum of the computed leakage for each size.
 2. When testing against closed metal seated valves, an additional leakage shall be allowed per closed valve of 0.0078 gallons per hour, per inch of nominal valve diameter.
 3. When hydrants are in the test section, the test shall be made against the closed hydrant(s).
- E. Acceptance shall be determined on the basis of allowable leakage. If leakage in any test is greater than that specified, the Contractor shall locate and make repairs as necessary until the leakage is within the specified allowance.
1. All visible leaks are to be repaired regardless of the amount of leakage.
 2. All water mains shall be pressure and leakage tested in the presence of the Engineer, in order to qualify for acceptance.

3.6 CHLORINATION

- A. The method of chlorination shall be the *Continuous Feed Method* as described hereinafter. Chlorination procedures will not be allowed until acceptable flushing and pressure testing has been performed and accepted. The continuous feed method consists of the following steps:
1. Prior to the application of chlorine, confirm that valves are closed to prevent back-feeding chlorine solution into the existing system.
 2. At a point not more than 10 feet downstream from the beginning of the new main, fill the main with chlorinated potable water, having an initial concentration of 25 mg/l free chlorine residual.
 - a. Water from the existing distribution system or other approved source of supply shall flow at a constant measured rate, into the new main. In the absence of a meter, the rate may be approximated by measuring the discharge rate at the end of the test section with a pito-gauge or by measuring the time to fill a container of known volume.

02675-6
CLEANING, TESTING AND DISINFECTION OF WATER MAINS

3. The application of chlorine solution shall continue until the entire main is filled with water having 25 mg/l of free available chlorine. To assure that 10 mg/l free chlorine residual concentration is achieved throughout the test section, the Contractor shall measure chlorine concentration at regular intervals.
- B. The amount of chlorine required to obtain a concentration of 25 mg/l per 100 feet of various diameter mains is as follows.

Chlorine Required to Obtain 25 mg/l per 100 feet of Various Diameters

Main Diameter (inches)	Sodium Hypochlorite (gallons)				Calcium Hypochlorite (ounces)
	5% Available Chlorine	10% Available Chlorine	12.5% Available Chlorine	15% Available Chlorine	65% Available Chlorine
4	0.03	0.02	0.02	0.01	0.02
6	0.08	0.04	0.03	0.03	0.75
8	0.13	0.07	0.06	0.06	1.30
10	0.20	0.10	0.09	0.07	2.10
12	0.28	0.15	0.12	0.10	2.90
16	0.50	0.25	0.22	0.17	5.30
20	0.80	0.40	0.34	0.28	8.40
24	1.30	0.60	0.50	0.40	12.00

1. The above quantities are to be added to a sufficient quantity of water, dissolved, and mixed. The solution shall be injected into the main as specified.
2. The quantities shown are based on concentrations of available chlorine by volume. Extended or improper storage may have caused a loss of available chlorine.
- C. The chlorinated water shall be retained in the main for a minimum of 24-hours. At the end of this 24 hour period, retest portions of the main to confirm that a minimum of 10 mg/l free available chlorine residual exists in the main. If the residual chlorine is less than 10 mg/L, acceptable bacteria results may not be obtained.

3.7 FINAL FLUSHING OF CHLORINATED WATER

- A. After the initial 24-hour period period, the heavily chlorinated water shall be flushed from the main until chlorine measurements show the concentration in water leaving the main is no higher than that generally prevailing in the system.
- B. The Contractor shall obtain approval of location(s) for discharging the heavily chlorinated water, which will result from the chlorination procedures. Great care shall be exercised in the selection of the rate of flow and the discharge points, in order to minimize complaints, and damage to public or private property.

- C. The heavily chlorinated water shall be suitably and thoroughly neutralized prior to disposal into the environment. In no case shall chlorinated or neutralized water be discharged directly into a water body. If necessary, state, federal, and local regulatory agencies should be contacted to determine special provisions for the disposal of heavily chlorinated water.

3.8 BACTERIOLOGICAL TESTS

- A. After final flushing and before the water main is placed in service, water samples shall be collected twice (24-hours apart) by the Engineer or Owner and tested for bacteriological quality in accordance with standard methods. Water samples shall show the absence of coliform organisms and background bacteria.
- B. If, during construction, trench water has entered the main, or if in the opinion of the Engineer excessive quantities of dirt or debris have entered the main, bacteriological samples shall be taken at intervals of approximately 200 feet and shall be identified as to location. Samples shall be taken of water that has stood in the main for at least 24-hours after final flushing has been completed.
- C. Samples shall be obtained through a corporation cock and copper tubing installed by the Contractor.
- D. The Engineer or Owner shall deliver samples to a laboratory approved by the Department of Health Services for bacterial analysis. The Owner shall pay for the cost of analysis. Only after each consecutive sample is approved shall the mains be incorporated into the water system. In the event that positive reports of contamination are received, the mains shall be flushed and chlorinated as many times as may be necessary to obtain approved (negative) results.

3.9 RE-CHLORINATION

- A. If the initial chlorination fails to produce satisfactory bacteriological samples, the main shall be re-flushed and re-sampled.

3.10 CHLORINATION PROCEDURES WHEN CUTTING INTO OR REPAIRING EXISTING MAINS

- A. Trench Treatment. If during excavation the trench is either wet or filled with water, it is recommended that liberal quantities of hypochlorite tablets be applied to open trench areas to lessen the danger from pollution.
- B. The interior of all main and fittings used in making a repair shall be swabbed or sprayed with a 1 percent hypochlorite solution before they are installed.
- C. If valve and hydrant locations permit thorough flushing toward the work location from both directions, it shall be done. Flushing shall be started as soon as the repairs are completed and shall be continued until discolored water is eliminated.
- D. Slug Chlorination. Where practical and in addition to the procedures above, a section of main in which the break is located shall be isolated. All service connections shall be shut off, and the section flushed and chlorinated by the *Slug Chlorination* method. This method allows the chlorine dose to be increased to as much as 300 mg/l, and the

02675-8
CLEANING, TESTING AND DISINFECTION OF WATER MAINS

contact time reduced to as little as 1-hour. After chlorination, the section shall be properly flushed until discolored water is eliminated and the water is free of noticeable chlorine odor.

- E. Bacteriological samples shall be taken after repairs. If the direction of flow is unknown, samples shall be taken on each side of the main break. If positive samples are recorded, daily sampling shall be continued until two consecutive negative samples are recorded.

END OF SECTION

SPECIAL PROVISION
SECTION 800
WATER & SEWER UTILITIES INSTALLATION

SECTION 02755

FINAL SEWER TESTING

PART 1 - GENERAL

1.1 DESCRIPTION

A. Work Included:

1. Final sewer testing work includes the performance of testing and inspecting each and every length of sewer pipe, pipe joints and each item of appurtenant construction.
2. Perform testing at a time acceptable to the Engineer, which may be during the construction operations, after completion of a substantial and convenient section of the work, or after the completion of all pipe laying operations.
3. Provide all labor, pumps, pipe, connections, gages, measuring devices and all other necessary apparatus to conduct tests.

B. Related Work Specified Elsewhere (When Applicable):

1. Excavation, backfill, dewatering, pipe, pipe fittings and manholes are specified in the appropriate Sections in this Division.
2. Manhole testing is specified in Section 02601 - Manholes, Covers and Frames.

PART 2 - PRODUCTS

Not Applicable

PART 3 - EXECUTION

3.1 PERFORMANCE

A. General:

1. All sewers, manholes, and appurtenant work, in order to be eligible for acceptance by the Engineer, shall be subjected to tests that will determine the degree of watertightness and horizontal and vertical alignment.
2. Thoroughly clean and/or flush all sewer lines to be tested, in a manner and to the extent acceptable to the Engineer, prior to initiating test procedures.
3. Perform all tests and inspections in the presence of the Engineer and the plumbing or building inspector in accordance with the requirements of the local and state plumbing codes.
4. Perform testing by test patterns determined by or acceptable to the Engineer.
5. Remedial Work:
 - a. Perform all work necessary to correct deficiencies discovered as a result of testing and/or inspections.

- b. Completely retest all portions of the original construction on which remedial work has been performed.
 - c. Perform all remedial work and retesting in a manner and at a time acceptable to by the Engineer at no additional cost to the Owner.
- B. Line Acceptance Tests (Gravity sewers with no active service connections):
 - 1. Test all gravity sewer lines with no active service connections for leakage by conducting a low pressure air test.
 - 2. Equipment:
 - a. Pneumatic plugs shall have a sealing length equal to or greater than the diameter of the pipe to be inspected.
 - b. Pneumatic plugs shall resist internal test pressures without requiring external bracing or blocking.
 - c. All air used shall pass through a single central panel.
 - d. Connect 3 individual hoses:
 - i. From the control panel to the pneumatic plugs for inflation.
 - ii. From the control panel to the sealed sewer line for introducing the low pressure air.
 - iii. From the sealed sewer line to the control panel for continually monitoring the air pressure rise in the sealed line.
 - 3. Testing Pneumatic Plugs:
 - a. Seal test all pneumatic plugs prior to using them in the actual test.
 - b. Lay one length of pipe on the ground and seal both ends with the pneumatic plugs to be tested.
 - c. Pressurize the sealed pipe to 5 psig.
 - d. The pneumatic plugs are acceptable if they remain in place without bracing.
 - 4. Testing Sewer Pipeline:
 - a. After the sewer pipe has been cleaned and the pneumatic plugs checked, place the plugs in the sewer line at each manhole and inflate them.
 - b. Introduce low pressure air into the sealed sewer pipeline until the air pressure reaches 4 psig greater than the average groundwater pressure.
 - c. Allow a minimum of 2 minutes for the air pressure to stabilize to a minimum of 3.5 psig greater than the groundwater pressure. Groundwater is assumed to be at ground surface unless the Contractor can prove by otherwise by test pitting.
 - d. After the stabilization period, disconnect the air hose from the control panel to the air supply.
 - e. The pipeline will be acceptable if the pressure decrease is not greater than 1/2 psig in the time stated in the following table for the length of pipe being tested:

<u>Pipe Diameter</u> <u>(inches)</u>	<u>Time (Min.) for Length of Pipe</u>			
	<u>0-100 ft</u>	<u>101-200 ft</u>	<u>201-300 ft</u>	<u>301-400 ft</u>
4	2.0	2.0	2.0	2.0
6	3.0	3.0	3.0	3.0
8	4.0	4.0	4.0	5.0
10	5.0	5.0	6.0	8.0
12	5.5	5.5	8.5	11.5
15	7.0	8.5	13.0	17.0
18	8.5	12.0	19.0	25.0
21	10.0	17.5	26.0	35.0
24	11.5	23.0	34.0	45.5
27 and larger	14.5	29	43.0	58.0

5. Test Results:
 - a. If the installation fails the low pressure air test, determine the source of leakage.
 - b. Repair or replace all defective materials and/or workmanship and repeat low pressure air test at no additional cost to the Owner.
- C. Line Acceptance Tests (Gravity sewers with active services):
 1. Test all new gravity sewer lines with active services by conducting a low-pressure air test on all joints using a packer after all services have been connected or capped at the property line and all trenches backfilled but before the surface course of permanent pavement is installed.
 2. Equipment:
 - a. Closed-circuit television system.
 - b. Testing devices (packer):
 - i. Capable of isolating individual joints by creating a sealed void space around the joint being tested.
 - ii. Constructed such that low pressure air can be admitted into the void area.
 - iii. Shall contain a pressure gauge accurate to one tenth (0.1) psi in-line with the feed line to monitor the void pressure.
 - iv. Capable of performing in sewer lines where flows do not exceed 1/4 of the pipe diameter without resorting to any method of flow control.
 3. Testing Sewer Pipeline Joints:
 - a. Test all joints except those with visible infiltration.
 - b. Procedure:
 - i. Pull television camera through sewer line in front of the packer.
 - ii. Position the packer on each joint to be tested.
 - iii. Inflate the sleeves on each end of the packer.
 - iv. Apply four (4.0) psi pressure above the existing hydrostatic pressure

- on the outside of the joint to the void area created around the inside perimeter of the joint.
- v. Shut off the supply of air once the pressure has stabilized at the required amount.
 - vi. Monitor the void pressure for thirty (30) seconds.
 - vii. Repair the joint if the pressure drops more than one half (1/2) psi in the thirty (30) seconds.
- c. Water or chemical pressure testing may be used in lieu of air testing subject to review and approval by the Engineer.
 - d. Re-clean and re-inspect all lines not approved by the Engineer at no additional cost to the Owner.
 - e. Repairing of Joints:
 - i. When a joint fails the pressure test, excavate and repair the failed joint. Repairing joints with chemical grout will not be permitted.
 - f. The Engineer may request checking of the testing equipment for accuracy.
 - i. Perform standard air test on a clean continuous section of pipe.
 - ii. Repair the equipment if the void pressure drops.
 - g. Testing Operation Inspection:
 - i. Reset each joint, as specified herein, prior to acceptance and final payment for joint testing. Retest all joints that fail until the test requirements are met.
 - h. The contractor will supply a black and white photograph of every joint that fails the pressure test.
- D. Alignment Tests (Gravity Sewers):
- 1. Perform tests for the correctness of horizontal and vertical alignment on each and every length of gravity sewer pipeline between manholes.
 - 2. Alignment tests to be conducted after all pipe has been installed and backfilled.
 - 3. The observation test shall be conducted after all upstream work has been completed and the pipeline cleaned of debris.
 - 4. Notify the Engineer at least 24 hours in advance of the proposed observation testing.
 - 5. Introduce water into the sewer lines to be tested from the upstream manhole prior to the observation test but no more than 24 hours in advance of the test.
 - 6. Beam a source of light, acceptable to the Engineer, through the pipeline from both ends and the Engineer will directly observe the light in the downstream, and/or upstream manhole of each test section.
 - 7. The length of pipe between manholes, diameter of pipe and amount of light observed in the manhole at the end of each pipe section will determine acceptance of the alignment test by the Engineer.
 - 8. The amount of vertical and horizontal deflection shall not be greater than the ASTM allowance and (manufacturer's recommendations) for the pipe being tested.

9. No standing water shall be allowed. The presence of standing water shall be cause for rejection of that pipe (including manhole) section.
 10. Improper alignment will be corrected by re-excavation and resetting of pipe at no additional cost to the Owner.
- E. Pipe Deflection: (Gravity Sewers)
1. Pipe provided under this specification shall be installed so there is no more than a maximum deflection of 5.0 percent. Such deflection shall be computed by multiplying the amount of deflection (normal diameter less minimum diameter when measured) by 100 and dividing by the nominal diameter of the pipe.
 2. The Contractor shall wait a minimum of 30 days after completion of a section of sewer, including placement and compaction of backfill, before measuring the amount of deflection by pulling a specially designed gage assembly through the completed section. The gage assembly shall be in accordance with the recommendations of the pipe manufacturer and be acceptable to the Engineer.
 3. Should the installed pipe fail to meet this requirement, the Contractor shall do all work to correct the problem as the Engineer may require without additional compensation.
- F. Inspection of Appurtenant Installations:
1. Completely inspect, at a time determined by the Engineer, all manholes and inlets to ascertain their compliance with the Drawings and Specifications.
 2. Provide access to each manhole and inlet and check the following characteristics:
 - a. Shape and finish of invert channels,
 - b. Watertightness and finish of masonry structures,
 - c. Location, type, and attachment of stops,
 - d. Elevation and attachment of frames, covers, and openings,
 - e. Pattern and machining of covers, and
 - f. Drop connection arrangements.
- G. Manhole Leakage Testing:
1. Specified in the "Manholes, Covers and Frames" Section in Division 2.

END OF SECTION

STANDARD DETAIL UPDATES

Standard Details and Standard Detail updates are available at:
<http://maine.gov/mdot/contractors/publications/standarddetail/>

<u>Detail #</u>	<u>Description</u>	<u>Revision Date</u>
501(02)	Pipe Pile Splice	3/05/2015
501(03)	H – Pile Splice	3/05/2015
504(07)	Diaphragm & Crossframe Notes	10/13/2015
505(01)	Shear Connectors	10/24/2016
507(13)	Steel Bridge Railing	6/03/2015
507(14)	Steel Bridge Railing	6/03/2015
507(31)	Barrier – Mounted Steel Bridge	8/06/2015
526(02)	Temporary Concrete Barrier	8/06/2015
652(06)	Construction Signs	10/24/2016
652(12)	Construction Traffic Control	10/24/2016
802(05)	Roadway Culvert End Slope Treatment	1/03/2017
504(10)	Drip Bar Details	9/06/2017

SUPPLEMENTAL SPECIFICATIONS
(Corrections, Additions, & Revisions to Standard Specifications - November 2014)

SECTION 101
CONTRACT INTERPRETATION

101.2 Definitions

Page 1-5 – Remove the definition of Bridge in its entirety and replace with:

“Bridge A structure that is erected over a depression or an obstruction, such as water, a highway or a railway, and has an opening measured along the centerline of the Roadway of more than 20 feet between: The faces of abutments; spring line of arches; extreme ends of openings of box culverts, pipes or pipe arches; or the extreme ends of openings for multiple box culverts, pipes or pipe arches.”

Page 1-12 – Remove the definition of Large Culvert in its entirety and replace with:

“Large Culvert Any structure not defined as a Culvert or Bridge that provides a drainage or non-drainage opening under the Roadway or Approaches to the Roadway, with an opening that is 5 feet but less than 10 feet.”

Remove the definition of Minor Span in its entirety and replace with:

“Minor Span Same definition as Bridge, except having an opening of between 10 feet and 20 feet, inclusive.”

SECTION 103
AWARD AND CONTRACTING

Amend this Section by adding the following:

“103.1a Tie Bids - In the case where two responsive bids from responsible bidders are equal monetarily, the Department shall determine the apparent low bidder by flipping a coin. The coin shall have sides clearly marked as heads and tails. The contractor whose first letter in their official company name that comes first in the alphabet shall be heads.

If there are three bids, each bidder will flip the coin and the bidder with the odd toss will be the winner. (i.e. if the results are two heads and a tails, the bidder who had tails is the winner). For a three way tie, bidders may flip their own coin or have the Contracts Engineer flip for them.

The coin flip will occur at the next bid opening by the Contracts and Specifications Engineer or a designee. The tied bidders may attend the coin flip in person or watch on the internet as they choose.”

In 103.3.2 Notice of Determination Revise this section by removing sections A – M and replacing with the following A - K:

(A) Default(s) or termination(s) on past or current Contracts.

**(B) Failure on past or current Contracts to pay or settle all bills for labor, Materials or services;
to comply with directives of the Department, to fulfill warranty obligations, or to provide Closeout Documentation.**

(C) "Below Standard" performance as determined from the Department's Contractor's Performance Rating process.

(D) Insufficient bonding capability or Inability of the Contractor to obtain or retain performance or Payment Bonds meeting MDOT requirements, or a pattern of unsupported Claims.

(E) Failure to accept an Award of a Contract made by the Department.

(F) Failure to provide information requested by the Department in a timely manner.

(G) Debarment, suspension or a denial of prequalification or 'award of contract' by any federal, State, or local governmental procurement agency or the Contractor's Agreement to refrain from Bidding as part of the settlement with any such agencies or any of the reasons contained in Section 102.02 of the "Rules Regarding Debarment of Contractors", Maine Department of Transportation Register 17-229, Chapter 102 (October 2, 1985).

(H) Failure to demonstrate ability to do work to the satisfaction and at the sole discretion of the Department.

(I) Number of personnel working directly for the Contractor with applicable knowledge and experience is significantly below industry standards.

(J) Safety Record, Environmental Record, Civil Rights or Equal Opportunity Record significantly below industry standards.

(K) Serious misconduct that the Department reasonably determines will substantially and adversely affect the cost, quality or timeliness of Work, or the safety of Workers or the public, any deceptive, evasive or fraudulent statements or omissions contained in the Application, made or omitted at any interview or hearing, or otherwise made to or omitted from the Department; or any other substantial deficiencies in experience or conduct that are clearly below industry standards and that clearly demonstrate in the sole discretion of the Department, that the Contractor is "Not Qualified".

SECTION 104

GENERAL RIGHTS AND RESPONSIBILITIES

This Section shall be amended by adding the following two sub-sections:

104.3.8.1 Electronic Payroll Submission On federally funded projects the prime contractor, all subcontractors, and lower-tier subcontractors will submit their certified payrolls electronically utilizing the Elations system. There is no charge to the contracting community for the use of this service. The submission of paper payrolls will not be allowed or accepted. Additional information can be found at <http://www.maine.gov/mdot/contractors/> under the “Bidder Info” go to “Electronic Payroll System.”

104.3.8.2 Payment Tracking On federally funded projects the prime contractor and all subcontractors and lower-tier subcontractors will track and confirm the delivery and receipt of all payments through the Elation System

104.4.10 Coordination of Road Closure / Bridge Closure / Bridge Width Restrictions
Revise the last sentence by adding a period after ‘Resident’; remove the “and” after Resident; and adding “**not covered by Pay Items**” between ‘costs’ and ‘will’. So that the last paragraph reads “**All Newspaper notices, radio announcements and any notifications will be subject to the approval of the Resident. All costs not covered by Pay Items will be considered incidental to the Contract.**”.

104.5.5 Prompt Payment of Subcontractors Add the following paragraph to this subsection:

C. Payment Tracking Federal Projects On federally funded projects, the prime contractor, subcontractors and lower-tier subcontractors will track and confirm the delivery and receipt of all payments through the Elation System. They will be responsible for entering all payments to all sub and lower tier contractors. MaineDOT will run a query monthly to ensure that contractors are complying and generate an e-mail to contractors who have not responded to confirm receipt of MaineDOT payment or contractor payment to lower tier subcontractors.

SECTION 105

GENERAL SCOPE OF WORK

105.2.5 Compliance with Health and Safety Laws Remove the second paragraph of this subsection in its entirety and replace with:

“For related provisions, see Sections 105.2.3 – Project Specific Emergency Planning,

105.3 – Traffic Control and Management and 105.4 – Maintenance of work.”

105.4.5 Special Detours Remove this subsection in its entirety and replace with:

“105.4.5 Maintenance of Existing Structures When a new Bridge or Minor Span is being installed on a new alignment and the existing structure is to remain in service, the Department will maintain the existing structure and the portions of the roadway required for maintaining traffic until such time that the new structure is opened to traffic and the existing structure is taken out of service. A similar situation exists when a new Bridge or Minor Span is being installed on the same alignment as the existing structure, requiring a temporary detour to be installed by the Contractor per Section 510, Special Detours, prior to removal of the existing structure. In this case, the Department will maintain the existing structure and the portions of the existing roadway required for maintaining traffic until such time that either the temporary detour is opened to traffic or the Contractor begins any work on the existing structure, including, but not limited to, repairs, modifications, moving, demolition or removal. In either case, once the new structure or temporary detour is opened to traffic, or the Contractor begins any work on the existing structure, the Contractor shall be solely responsible for all maintenance of the existing structure and the portions of the existing approaches that lie outside the new roadway or the temporary detour, respectively. This specification is not intended to supersede Standard Specification Section 104.3.11, Responsibility for Property of Others.”

105.6.2.4 Department Verification Add the following to the end of the first sentence:
“or other approved method, such as reference staking, to allow the Department to independently verify the accuracy of the work, as approved by the Department.”

SECTION 106
QUALITY

106.3.4 Storage Revise this Section by adding the following sentence after the first sentence:
“Materials shall not be stored under or in close proximity to Highway Structures unless the Contractor receives written permission from the Resident.”

106.4.1 General - In the first sentence, remove “When required by Special Provision,” and replace with **“When required elsewhere in the Contract, ”**

SECTION 108
PAYMENT

108.3 Retainage - Remove the paragraph beginning with “ The Contractor may withdraw...” in its entirety.

108.4.1 Price Adjustment for Hot Mix Asphalt:
Remove this section in its entirety and replace with the following

For all contracts with hot mix asphalt in excess of 500 tons total, a price adjustment for performance graded binder will be made for the following pay items:

Item 403.102	Hot Mix Asphalt – Special Areas
Item 403.206	Hot Mix Asphalt - 25 mm
Item 403.207	Hot Mix Asphalt - 19 mm
Item 403.2071	Hot Mix Asphalt - 19 mm (Polymer Modified)
Item 403.2072	Hot Mix Asphalt - 19 mm (Asphalt Rich Base)
Item 403.208	Hot Mix Asphalt - 12.5 mm
Item 403.2081	Hot Mix Asphalt - 12.5 mm (Polymer Modified)
Item 403.209	Hot Mix Asphalt - 9.5 mm (sidewalks, drives, & incidentals)
Item 403.210	Hot Mix Asphalt - 9.5 mm
Item 403.2101	Hot Mix Asphalt - 9.5 mm (Polymer Modified)
Item 403.2102	Hot Mix Asphalt - 9.5 mm (Asphalt Rich Base)
Item 403.2104	Hot Mix Asphalt - 9.5 mm (Thin Lift Surface Treatment)
Item 403.21041	Hot Mix Asphalt - 9.5 mm (Polymer Modified Thin Lift Surface Treatment)
Item 403.211	Hot Mix Asphalt – Shim
Item 403.2111	Hot Mix Asphalt – Shim (Polymer Modified)
Item 403.212	Hot Mix Asphalt - 4.75 mm (Shim)
Item 403.213	Hot Mix Asphalt - 12.5 mm (base and intermediate course)
Item 403.2131	Hot Mix Asphalt - 12.5 mm (base and intermediate course Polymer Modified)
Item 403.2132	Hot Mix Asphalt - 12.5 mm (Asphalt Rich Base and intermediate course)
Item 403.214	Hot Mix Asphalt - 4.75 mm (Surface)
Item 403.235	Hot Mix Asphalt (High Performance Rubberized HMA)
Item 403.301	Hot Mix Asphalt (Asphalt Rubber Gap-Graded)
Item 404.70	Colored Hot Mix Asphalt – 9.5mm (Surface)
Item 404.72	Colored Hot Mix Asphalt – 9.5mm (Islands, sidewalks, & incidentals)
Item 461.13	Light Capital Pavement
Item 461.210	9.5 mm HMA - Paver Placed Surface
Item 462.30	Ultra-Thin Bonded Wearing Course
Item 462.301	Polymer Modified Ultra-Thin Bonded Wearing Course

Price adjustments will be based on the variance in costs for the performance graded binder component of hot mix asphalt. They will be determined as follows:

The quantity of hot mix asphalt for each pay item will be multiplied by the performance graded binder percentages given in the table below times the difference in price between the base price and the period price of asphalt cement. Adjustments will be made upward or downward, as prices increase or decrease.

Item 403.102–6.2%

Item 403.206–4.8%

Item 403.207–5.2%
Item 403.2071–5.2%
Item 403.2072–5.8%
Item 403.208–5.6%
Item 403.2081–5.6%
Item 403.209–6.2%
Item 403.210–6.2%
Item 403.2101–6.2%
Item 403.2102–6.8%
Item 403.2104–6.2%
Item 403.21041–6.2%
Item 403.211–6.2%
Item 403.2111–6.2%
Item 403.212–6.8%
Item 403.213–5.6%
Item 403.2131–5.6%
Item 403.2132–6.2%
Item 403.214–6.8%
Item 403.235–5.5%
Item 403.301–6.2%
Item 404.70–6.2%
Item 404.72–6.2%
Item 461.13–6.5%
Item 461.210 – 6.4%
Item 462.30–0.0021 tons/SY
Item 462.301–0.0021 tons/SY

Hot Mix Asphalt: The quantity of hot mix asphalt will be determined from the quantity shown on the progress estimate for each pay period.

Base Price: The base price of performance graded binder to be used is the price per standard ton current with the bid opening date. This price is determined by using the average New England Selling Price (Excluding the Connecticut market area), as listed in the Asphalt Weekly Monitor.

Period Price: The period price of performance graded binder will be determined by the Department by using the average New England Selling Price (Excluding the Connecticut market area), listed in the Asphalt Weekly Monitor current with the paving date. The maximum Period Price for paving after the adjusted Contract Completion Date will be the Period Price on the adjusted Contract Completion Date.

SECTION 109 **CHANGES**

109.5.1 Definitions - Types of Delays

Delete Paragraph 'A' in its entirety and replace with:

"A. Excusable Delay Except as expressly provided otherwise by this Contract, an "Excusable Delay" is a Delay to the Critical Path that is directly and solely caused by (1) a weather related Event of such an unusually severe nature that a Federal Emergency Disaster is declared. The Contractor will only be entitled to an adjustment of time if the Project falls within the geographic boundaries prescribed under the disaster declaration. or (2) a flooding event at the effected location of the Project that results in a Q25 headwater elevation, or greater, but less than a Q50 headwater elevation. Theoretical headwater elevations will be determined by the Department; actual headwater elevations will be determined by the Contractor and verified by the Department or (3) An Uncontrollable Event."

APPENDIX A TO DIVISION 100

Remove Section D in its entirety as this is now covered in Section 105.10 EQUAL OPPORTUNITY AND CIVIL RIGHTS.

SECTION 203 **EXCAVATION AND EMBANKMENT**

203.02 Materials

At the bottom of page 2-12, add as the first item in the list:

Crushed Stone, ¾ inch 703.13

203.042 Rock Excavation and Blasting

On page 2-16, add the word "No" to the third sentence in Section 5 Submittals, Subsection V, 1 so that it reads:

"No blasting products will be allowed on the job site if the date codes are missing."

SECTION 304 **AGGREGATE BASE AND SUBBASE COURSE**

304.02 – Aggregate Add the following sentence before the sentence starting with "When designated on the plans...": **"Aggregate Base Course – Type C will be capped with 2" of millings or Untreated Aggregate Surface Course – Type B. Payment for this material will be made under 304.16"**

Revise the sentence beginning "When designated on the Plans, Type E..." by removing "When designated on the Plans," so it reads **"Type E subbase may be used 9 inches below and lower beneath the pavement."**

SECTION 307 **FULL DEPTH RECYCLED PAVEMENT**

Remove this Section in its entirety and replace with:

SECTION 307
FULL DEPTH RECYCLING
(UNTREATED OR TREATED WITH EMULSIFIED ASPHALT STABILIZER)

307.01 Description This work shall consist of pulverizing a portion of the existing roadway structure into a homogenous mass, adding an emulsified asphalt stabilizer (if required) to the depth of the pulverized material specified in the contract, placing and compacting this material to the lines, grades, and dimensions shown on the plans or established by the Resident.

MATERIALS

307.02 Pulverized Material Pulverized material shall consist of the existing asphalt pavement layers and one inch or more as specified of the underlying gravel, pulverized and blended into a homogenous mass. Pulverized material will be processed to 100% passing a 2 inch square mesh sieve.

307.021 New Aggregate and Additional Recycled Material New aggregate, if required by the contract, shall meet the requirements of Subsection 703.10 - Aggregate for Untreated Surface Course and Leveling Course, Type A. Aggregate Subbase Course Gravel Type D processed to 100 percent passing a 2 inch square mesh sieve and meeting the requirements of 703.06 – Aggregate for Base and Subbase may be used in areas requiring depths greater than 2 inches. New aggregate, will be measured and paid for under the appropriate item.

Recycled material, if required, shall consist of salvaged asphalt material from the project or from off-site stockpiles that has been processed before use to 100 percent passing a 2 inch square mesh sieve. Recycled material shall be conditionally accepted at the source by the Resident. It shall be free of winter sand, granular fill, construction debris, or other materials not generally considered asphalt pavement.

Recycled material generated and salvaged from the project shall be used within the roadway limits to the extent it is available as described in 307.09. No additional payment will be made for material salvaged from the project.

Recycled material supplied from off-site stockpiles shall be paid for as described in the contract, or by contract modification.

307.022 Emulsified Asphalt Stabilizer. If required, the emulsified asphalt stabilizer shall be grade MS-2, MS-4, SS-1, or CSS-1 meeting the requirements of Subsection 702.04 Emulsified Asphalt.

307.023 Water Water shall be clean and free from deleterious concentrations of acids, alkalis, salts or other organic or chemical substances.

307.024 Portland Cement If required, Portland Cement shall be Type I or II meeting the requirements of AASHTO M85.

307.025 Hydrated Lime If required, Hydrated Lime shall meet the requirements of AASHTO M216.

EQUIPMENT

307.03 Pulverizer The pulverizer shall be a self-propelled machine, specifically manufactured for full-depth recycling work and capable of reducing the required existing materials to a size that will pass a 2 inch square mesh sieve. The machine shall be equipped with standard automatic depth controls and must maintain a consistent cutting depth and width. The machine also shall be equipped with a gauge to show depth of material being processed.

307.04 Liquid Mixer Unit or Distributor. If treatment of the recycled layer with emulsified asphalt is required by the contract, a liquid mixing unit or distributor shall be used to introduce the emulsified asphalt stabilizer into the pulverized material. The mixing unit shall contain a liquid distribution and mixing system which has been specifically manufactured for full-depth recycling work, capable of mixing the pulverized material with an evenly metered distribution of emulsified asphalt into a homogeneous mixture, to the depth and width required.

The mixing unit shall be designed, equipped, maintained, and operated so that emulsified asphalt stabilizer at constant temperature may be applied uniformly on variable widths of pulverized material up to 6 feet at readily determined and controlled rates from 0.01 to 1.06 gal/yd² with uniform pressure and with an allowable variation from any specified rate not to exceed 0.01 gal/ yd². Mixing units shall include a tachometer, pressure gages, and accurate volume measuring devices or a calibrated tank and a thermometer for measuring temperatures of tank contents.

307.041 Cement or Lime Spreader If required by the contract, spreading of the Portland Cement or Hydrated Lime shall be done with a spreader truck designed to spread dry particulate (such as Portland Cement or Lime) or other approved means to insure a uniform distribution across the roadway and minimize fugitive dust. Pneumatic application, including through a slotted pipe, will not be permitted. Other systems that have been developed include fog systems, vacuum systems, etc. Slurry applications may also be accepted. The Department reserves the right to accept or reject the method of spreading cement. The Contractor shall provide a method for verifying that the correct amount of cement is being applied.

307.05 Placement Equipment Placement of the Full Depth recycled material to the required slope and grade shall be done with an approved highway grader or by another method approved by the Resident.

307.06 Rollers The full depth recycled material shall be rolled with a vibratory pad foot roller, a vibratory steel drum soil compactor and a pneumatic tire roller. The pad foot roller drum shall have a minimum of 112 tamping feet 3 inches in height, a minimum contact area per foot of 17 inch², and a minimum width of 84 inches. The vibratory steel drum roller shall have a minimum 84 inch width single drum. The pneumatic tire roller shall meet the requirements of Section 401.10 and the minimum allowable tire pressure shall be 85 psi.

MIX DESIGN

If treatment of the recycled layer with emulsified asphalt is required by the contract, the Department will supply a mix design for the emulsified asphalt stabilized material based on test results from pavement and soil analysis taken to the design depth. The Department will provide the following information prior to construction:

1. Percent of emulsified asphalt to be used.
2. Quantity of lime or cement to be added.
3. Optimum moisture content for proper compaction.
4. Additional aggregate (if required).

After a test strip has been completed or as the work progresses, it may be necessary for the Resident to make necessary adjustments to the mix design. Changes to compensation will be in accordance with the Mix Design Special Provision.

CONSTRUCTION REQUIREMENTS

307.06 Pulverizing The entire depth of existing pavement shall be pulverized together with 1 inch or more of the underlying gravel into a homogenous mass. All pulverizing shall be done with equipment that will provide a homogenous mass of pulverized material, processed in-place, which will pass a 2 inch square mesh sieve.

307.07 Weather Limitations Full depth recycled work shall be performed when;

- A. Recycling operations will be allowed between May 15th and September 15th inclusive in Zone 1 - Areas north of US Route 2 from Gilead to Bangor and north of Route 9 from Bangor to Calais.
- B. The atmospheric temperature, as determined by an approved thermometer placed in the shade at the recycling location, is 50°F and rising.
- C. When there is no standing water on the surface.
- D. During generally dry conditions, or when weather conditions are such that proper pulverizing, mixing, grading, finishing and curing can be obtained using proper procedures, and when compaction can be accomplished as determined by the Resident.

- E. When the surface is not frozen and when overnight temperatures are expected to be above 32°F.
- F. Wind conditions are such that the spreading of lime or cement on the roadway ahead of the recycling machine will not adversely affect the operation.

307.08 Surface Tolerance The complete surface of the Full Depth Recycled course shall be shaped and maintained to a tolerance, above or below the required cross sectional shape, of $\frac{3}{8}$ inch.

307.09 Full Depth Recycling Procedure New aggregate or recycled material meeting the requirements of Section 307.021 - New Aggregate and Additional Recycled Material, shall be added as necessary to restore cross-slope and/or grade before pulverizing. Locations will be shown on the plans or described in the construction notes. The Resident may add other locations while construction of the project is in progress. The Contractor will use recycled material to the extent it is available, in lieu of new aggregate. The material shall then be pulverized, processed, and blended into a homogeneous mass passing a 2 inch square mesh sieve. Material found not pulverized down to a 2 inch size will be required to be reprocessed by the recycler with successive passes until approved by the Resident.

Should the Contractor be required to add new aggregate or recycled material to restore cross-slope and/or grade after the initial pulverizing process, those areas will require re-processing to blend into a homogenous mass passing a 2 in square mesh sieve.

Sufficient water shall be added during the recycling process to maintain optimum moisture for compaction.

The resultant material from the initial pulverizing processes shall be graded and compacted to the cross-slope and profile shown on the plans or as directed by the Resident. The Contractor will also be responsible for re-establishing the existing profile grade. The completed surface of the full depth recycled course shall be shaped and maintained to a tolerance, above or below the required cross sectional shape, of $\frac{3}{8}$ inch. Areas not meeting this tolerance will be repaired as described in Section 307.091. The initial pulverizing process density requirements will be the same as Section 307.101 unless otherwise directed by the Resident.

Additives, if required, shall be introduced following completion of the initial pulverizing and blending process. Emulsified asphalt stabilizer shall be incorporated into the top of the processed material as specified in section 307.04 to the depth specified in the contract by use of the liquid mixer unit or a distributor, at the rate specified in the mix design. The emulsified asphalt shall then be uniformly blended into a homogeneous mass until an apparent uniform distribution has occurred. The rate of application may be adjusted as necessary by the Resident. Cement or lime shall be introduced as described in section 307.041. The resultant material shall be graded and compacted to the cross-slope and profile shown on the plans or as directed by the Resident. The Contractor will also be responsible for re-establishing the existing profile grade.

After final compaction, the roadway surface shall be treated with a light application of water, and rolled with pneumatic-tired rollers to create a close-knit texture. The finished layer shall be free from:

- A. Surface laminations.
- B. Segregation of fine and coarse aggregate.
- C. Corrugations, centerline differential, potholes, or any other defects that may adversely affect the performance of the layer, or any layers to be placed upon it.

The Contractor shall protect and maintain the recycled layer until a lift of pavement is applied. Any damage or defects in the layer shall be repaired immediately. An even and uniform surface shall be maintained. The recycled surface shall be swept prior to hot mix asphalt overlay placement.

307.091 Repairs Repairs and maintenance of the recycled layers, resulting from damage caused by traffic, weather or environmental conditions, or resulting from damage caused by the Contractor's operations or equipment, shall be completed at no additional cost to the Department.

For recycled layers stabilized with emulsified asphalt, low areas will be repaired using a hot mix asphalt shim. Areas up to 1 inch high can be repaired by milling or shimming with hot mix asphalt. Areas greater than 1 inch high will be repaired using a hot mix asphalt shim. All repair work will be done with the Resident's approval at the Contractor's expense.

TESTING REQUIREMENTS

307.10 Quality Control The Contractor shall operate in accordance with the approved Quality Control Plan (QCP) to assure a product meeting the contract requirements. The QCP shall meet the requirements of Section 106.4 - Quality Control and this Section. The Contractor shall not begin recycling operations until the Department approves the QCP in writing.

Prior to performing any recycling process, the Department and the Contractor shall hold a Pre-recycle conference to discuss the recycling schedule, type and amount of equipment to be used, sequence of operations, and traffic control. A copy of the QC random numbers to be used on the project shall be provided to the Resident. All field supervisors including the responsible onsite recycling process supervisor shall attend this meeting.

The QCP shall address any items that affect the quality of the Recycling Process including, but not limited to, the following:

- A. Sources for all materials, including New Aggregate and Additional Recycled Material.
- B. Make and type of rollers including weight, weight per inch of steel wheels, and average contact pressure for pneumatic tired rollers.
- C. Testing Plan.
- D. Recycling operations including recycling speed, methods to ensure that segregation is minimized, grading and compacting operations.

- E. Methods for protecting the finished product from damage and procedures for any necessary corrective action.**
- F. Method of grade checks.**
- G. Examples of Quality Control forms.**
- H. Name, responsibilities, and qualifications of the Responsible onsite Recycling Supervisor experienced and knowledgeable with the process.**
- I. A note that all testing will be done in accordance with AASHTO and MDOT/ACM procedures.**

The Project Superintendent shall be named in the QCP, and the responsibilities for successful implementation of the QCP shall be outlined.

The Contractor shall sample, test, and evaluate the full depth reclamation process in accordance with the following minimum frequencies:

MINIMUM QUALITY CONTROL FREQUENCIES

Test or Action	Frequency	Test Method
Density	1 per 1000 feet / lane	AASHTO T 310
Air Temperature	4 per day at even intervals	
Surface Temperature	At the beginning and end of each days operation	
Yield of all materials (Daily yield, yield since last test, and total project yield.)	1 per 1000 ft/lane	

The Department may view any QC test and request a QC test at any time. The Contractor shall submit all QC test reports and summaries in writing, signed by the appropriate technician, to the Department's onsite representative by 1:00 P.M. on the next working day, except when otherwise noted in the QCP due to local restrictions. The Contractor shall make all test results, including randomly sampled densities, available to the Department onsite.

The Contractor shall cease recycling operations whenever one of the following occurs:

- A. The Contractor fails to follow the approved QCP.**
- B. The Contractor fails to achieve 98 percent density after corrective action has been taken.**
- C. The finished product is visually defective, as determined by the Resident.**
- D. The computed yield differs from the mix design by 10 percent or more.**

Recycling operations shall not resume until the Department approves the corrective action to be taken.

307.101 Test Strip The contractor shall assemble all items of equipment for the recycling operation on the first day of the recycling work. The Contractor shall construct a test

strip for the project at a location approved by the Resident. The Responsible onsite Recycling Supervisor will work with Department personnel to determine the suitability of the mixed material, moisture control within the mixed material, and compaction and surface finish. The test strip section is required to:

- A. Demonstrate that the equipment and processes can produce recycled layers to meet the requirements specified in these special provisions.
- B. Determine the effect on the gradation of the recycled material by varying the forward speed of the recycling machine and the rotation rate of the milling drum.
- C. Determine the optimum moisture necessary to achieve proper compaction of the recycled layer.
- D. Determine the sequence and manner of rolling necessary to obtain the compaction requirements and establish a target density. The Contractor and the Department will both conduct testing with their respective gauges at this time.

The test strip shall be at least 300 feet in length of a full lane-width (or a half-road width). Full recycling production will not start until a passing test strip has been accomplished. If a test strip fails to meet the requirements of this specification, the Contractor will be required to repair or replace the test strip to the satisfaction of the Resident. Any repairs, replacement, or duplication of the test strip will be at the Contractor's expense.

After the test strip has been pulverized, and the roadway brought to proper shape, the Contractor shall add water until it is determined that optimum moisture has been obtained. The test strip shall then be rolled using the specified compaction equipment as directed until the density readings show an increase in dry density of less than 1 pcf for the final four roller passes of each roller. The Contractor and Department will each determine a target density using their respective gauges by performing several additional density tests and averaging them. The average of these tests will be used as the target density of the recycled material for QC and Acceptance purposes.

Following completion of the test strip, compaction of the material shall continue until a density of not less than 98 percent of the test strip target density has been achieved for the full width and depth of the layer. During the construction and compaction of the Full Depth Recycled base, should three consecutive Acceptance test results for density fail to meet a minimum of 95 percent of the target density, or exceed 102 percent of target density, a new test strip shall be constructed.

ACCEPTANCE TEST FREQUENCY

Property	Frequency	Test Method
In-place Density	1 per 2000 ft / lane	AASHTO T 310

308.102 Curing. No new pavement shall be placed on the full depth recycled pavement until curing has reduced the moisture content to 1 percent or less by total weight of the mixture, or a curing period of 4 days has elapsed, whichever comes first.

307.11 Method of Measurement Full Depth Recycled Pavement (Untreated or Treated with Emulsified Asphalt Stabilizer) will be measured by the square yard.

307.12 Basis of Payment The accepted quantity of Full Depth Recycled Asphalt Pavement (Untreated or Treated with Emulsified Asphalt Stabilizer) will be paid for at the contract unit price per square yard, complete in-place which price will be full compensation for furnishing all equipment, materials and labor for pulverizing, blending, placing, grading, compacting, and for all incidentals necessary to complete the work.

The addition of materials to restore profile grade and/or cross-slope in areas shown on the plans or described in the construction notes will be paid separately under designated pay items within the contract. No additional payment will be made for materials salvaged from the project.

Payments will be made under:

<u>Pay Item</u>	<u>Pay Unit</u>
307.331 Full Depth Recycled Pavement (Untreated)	Square Yard
307.332 Full Depth Recycled Pavement (with Emulsified Asphalt Stabilizer) 5 in. depth	Square Yard
307.333 Full Depth Recycled Pavement (with Emulsified Asphalt Stabilizer) 6 in. depth	Square Yard

SECTION 411

UNTREATED AGGRAGATE SURFACE COURSE

411.02 – Aggregate Add the following to the end of the first sentence: “- Type A”

SECTION 501

FOUNDATION PILES

501.05 – Method of Measurement

b. **Piles Furnished** – After the second sentence, add the sentence “**Measurement will not include any pile tips**”.

c. **Piles in Place** – Add the sentence to the end of the second paragraph, “**Measurement will include the pile tips**”.

d. Pile Tips – Add the words “**on the Pile**” to the end of the sentence.

SECTION 502 **STRUCTURAL CONCRETE**

502.05 Composition and Proportioning

Replace Table 1 with

TABLE 1

Concrete CLASS	Minimum Compressive Strength (PSI)	Permeability as indicated by Surface Resistivity (KOhm-cm)	Entrained Air (%)		Notes
			LSL	USL	
S	3,000	N/A	N/A	N/A	4,5
A	4,000	14	6.0	9.0	1,4,5
P	-----	-----	5.5	7.5	1,2,3,4
LP	5,000	17	6.0	9.0	1,4,5
Fill	3,000	N/A	6.0	9.0	4,5

In the list of information submitted by the contractor for a mix design:

Item J Replace “Target Coulomb Value.” with “Target KOhm-cm Value.”

Note #1 - Remove, “...**Standard Specification Section 711.05, Protective Coating for Concrete Surfaces, and per the manufacturer’s recommendations, at no additional cost to the Department.**” and replace with, “...**Standard Specification Section 515, Protective Coating for Concrete Surfaces, at no additional cost to the Department.**”

502.1703 Acceptance Methods A and B

In the paragraph that starts with “The Department will take Acceptance...” Remove the word chloride from chloride permeability in the last sentence.

Replace the paragraph starting with “Rapid Chloride Permeability specimens...” With the following:

“Surface Resistivity specimens will be tested by the Department in accordance with AASHTO TP-95 at an age $\geq$ 56 days. Four 4 inch x 8 inch cylinders will be cast per subplot placed. The average of three concrete specimens per subplot will constitute a test result and this average will be used to determine the permeability for pay adjustment computations.”

502.1706 Acceptance Method C

Remove in its entirety and Replace with:

502.1706 Acceptance Method C The Department will determine the acceptability of the concrete through Acceptance testing. Acceptance tests will include compressive strength, air content and permeability. Method C concrete not meeting the requirements listed in Table 1 shall be removed and replaced at no cost to the Department. At the Department's sole discretion, material not meeting requirements may be left in place and paid for at a reduced price as described in Section 502.195.

502.1707 Resolution of Disputed Acceptance Test Results

Section B

Remove "Rapid Chloride" from the section heading.

In paragraph 4 replace T-277 with TP-95

502.192 Pay Adjustment for Chloride Permeability

Remove "Chloride" from the heading and from the first sentence.

Replace the sentence that starts with "values greater than..." and replace with "values less than 10 KOhms-cm for Class A concrete or 11 KOhms-cm for Class LP concrete shall be subject to rejection and replacement, at no additional cost to the Department."

502.194 Pay Adjustments for Compressive Strength, Chloride Permeability and Air Content, Methods A and B

Remove the word "Chloride" from the section heading and from the equation for CPF.

502.195 Pay Adjustment Method C

In Table 6: Method C Pay Reductions (page 5-53)

Under "Entrained Air" for "Class Fill", in the first line, change from "< 4.0 (Removal)" to "< **4.5 (Removal)**"

In Table 6: Method C PAY REDUCTIONS, revise the Chloride Permeability section by removing it in its entirety and replacing it with:

Surface Resistivity {Permeability in Kohm-cms and Pay Reduction per CY}			
15-16 (\$50)	13 (\$25)	N/A	N/A
13-14 (\$75)	12(\$50)	N/A	N/A

12 (\$100)	11 (\$75)	N/A	N/A
11 (\$125)	10 (\$100)	N/A	N/A
< 11 (Removal)	< 10 (Removal)	N/A	N/A

SECTION 503

REINFORCING STEEL

503.06 Placing and Fastening Revise this Subsection by removing, in its entirety, the paragraph which begins, “Stainless steel reinforcement shall not be tied to any other type of reinforcement.....”

SECTION 504

STRUCTURAL STEEL

504.26 Welding Remove the second paragraph beginning with “The range of heat....” in its entirety.

504.29 Welding ASTM A 709 HPS 70W Steel. Remove the third paragraph beginning with “Make Weld runoff tabs...” in its entirety.

SECTION 510

SPECIAL DETOURS

510.032 Geometric and Approach Design a. Horizontal alignment
The third paragraph of this section is revised to read as follows:

“The roadway width shall be increased on curved portions of the Special Detour to account for the off tracking characteristics of WB-62 vehicle in accordance with **the AASHTO publication A Policy On Geometric Design of Highways and Streets (the Green Book), chapter 3 table entitled Design Widths of Pavements for Turning Roadways.**”

SECTION 527

ENERGY ABSORBING UNIT

527.02 Materials This section is revised to read as follows.

527.02 Materials Work Zone Crash Cushions must comply with NCHRP Report 350. Work Zone Crash Cushions shall be selected from MaineDOT’s Qualified Products List of Crash Cushions / Impact Attenuators, or an approved equal.

SECTION 534

PRECAST STRUCTURAL CONCRETE

534.14 Process Control Test Cylinders

Revise this subsection to read:

“534.14 Acceptance and Quality Control Testing of Concrete Refer to Section 712.061.”

SECTION 535

PRECAST, PRESTRESSED CONCRETE SUPERSTRUCTURE

Section 535.08 – Quality Assurance

Revise the second paragraph to read:

“The QAI will perform acceptance sampling and testing and will witness or review documentation, workmanship and testing to assure the Work is being performed in accordance with the Contract Documents.”

Section 535.15 - Process Control Test Cylinders

Revise the first paragraph to read:

“535.15 Acceptance and Quality Control Testing of Concrete Acceptance of structural precast/prestressed units, for each day’s production, will be determined by the Department, based on compliance with this specification and satisfactory concrete testing results. At least once per week, the QAI will make 2 concrete cylinders (6 cylinders when the Contract includes permeability requirements) for use by the Department; cylinders shall be standard cured in accordance with AASHTO T23 (ASTM C31). The QAI will perform entrained air content and slump flow testing, determine water-cement ratio and determine temperature of the sampled concrete at the time of cylinder casting. All testing equipment required by the QAI to perform this testing shall be provided in accordance with Standard Specification Section 502.041, Testing Equipment. In addition, the Contractor shall provide a slump cone meeting the requirements of AASHTO T 119. Providing and maintaining testing and curing equipment shall be considered incidental to the work and no additional payment will be made.”

Insert the following as the second paragraph of Section 535.15:

“Quality Control concrete test cylinders shall be made for each day’s cast and each form bed used. Cylinders tested to determine strand release strength and design strength shall be field cured in accordance with AASHTO T23 (ASTM C31). 28 day cylinders shall be standard cured. Record unit identification, entrained air content, water-cement ratio, slump flow and temperature of the sampled concrete at the time of cylinder casting.”

SECTION 604

MANHOLES, INLETS CATCH BASINS

604.04 Adjusting Catch Basins and Manholes,

Add the following paragraph to the end of 604.04 b:

The Department will allow the use of metal ring inserts set into the manhole top frame or composite risers placed beneath the manhole frame to adjust manhole slope and grade for paving projects. The use of metal ring inserts shall be in accordance with 604.04 d. Ring Insert Requirements. The use of composite risers shall be in accordance with 604.04 e. Composite Riser Requirements.

Add the following paragraph after the first paragraph of 604.04 c:

The Department will allow the use of metal ring inserts set into the manhole top frame or composite risers placed beneath the manhole frame to adjust manhole slope and grade for paving projects. The use of metal ring inserts shall be in accordance with 604.04 d. Ring Insert Requirements. The use of composite risers shall be in accordance with 604.04 e. Composite Riser Requirements.

Add the following sections to 604.04:

d. Ring Insert Requirements Ring inserts to adjust manhole top frame slope and grade will be allowed in accordance with the following requirements:

1) Materials

- i. All ring inserts must be made of iron. *Multiple ring inserts will not be allowed.* The single ring insert may be any height up to a maximum of 2 inches tall.**
- ii. Ring inserts shall not be welded to the manhole frame to prevent brittle failure of the cast iron frame.**
- iii. Ring inserts shall be fastened to the manhole frame using liquid steel-filled epoxy such as Loctite Fixmaster Steel Liquid or equivalent. The epoxy shall be installed in accordance with the manufacturer's recommendations.**

2) Where Ring Inserts May/May Not Be Used

- i. MaineDOT will allow the use of a single manhole ring insert to raise manholes on state and state-aid highways.**
- ii. *Manhole ring inserts may not be used along state and state-aid highway sections where the speed limit is 40 miles per hour or more.* The standard brick and mortar or flat composite risers beneath the manhole frame must be used at these locations.**

3) Construction Requirements For The Use of Iron Manhole Ring Inserts

- i. Wherever iron ring inserts are used to raise manhole top elevations, the rings shall be fastened to the existing manhole frame using liquid steel-filled epoxy. The liquid steel-filled epoxy shall be placed evenly around the entire manhole frame before placing the ring insert. *Unbonded ring inserts will not be allowed.* If the manufacturer's recommended construction practices result in loose or unacceptable manhole cover restraint, standard brick and mortar or flat composite risers beneath the manhole frame must be used at these locations.

e. Composite Riser Requirements Flat or beveled, doughnut-shaped, composite risers placed beneath the manhole frame to adjust slope and grade are allowed. The composite riser shall be fastened to both the top of the concrete cone and bottom of the manhole frame with the manufacturer's recommended epoxy. Composite risers may be used at all locations on state and state-aid highways under any legal speed limit without restriction.

SECTION 606 **GUARDRAIL**

606.09 Basis of Payment Amend the first sentence of the eighth paragraph of this subsection by removing the word "meter" and replace it with "linear foot".

SECTION 608 **SIDEWALKS**

608.021 Sidewalk Materials Revise this section by removing the second paragraph which begins with "Portland cement concrete shall..." in its entirety and replace with "**Portland cement concrete shall be Class A and meet the requirements of Section 502, Structural Concrete.**"

SECTION 609 **CURB**

609.03 Vertical Stone Curb, Terminal Section and Transition Sections and Portland Cement Concrete Curb, Terminal Sections and Transition Sections

Amend this section by adding the following paragraph to the end of it:

"The Contractor may elect to substitute concrete to backfill Stone Curbing or Stone Edging at their option. If the concrete backfill option is elected, the following is added to Standard Specification 609 – Curb"

609.02 Materials Amend this section by adding the following to it:

Portland cement and Portland Pozzolan Cement	701.01
Water	701.02
Fine Aggregate for Concrete	703.01
Coarse Aggregate for Concrete	703.02

The Contractor shall submit a concrete mix design for the Portland Cement Concrete to the Resident, with a minimum designed compressive strength of 4000 psi Class A concrete.

609.10 Basis of Payment Revise by changing the fifth paragraph which begins with “There will be no separate payment...” this section by removing the word “cement” and replacing it with “**concrete fill, mortar**”.

SECTION 619 **MULCH**

619.07 Basis of Payment Amend this section by adding the words “; **Bark Mulch and Erosion Control Mix will be paid for by the Cubic Yard;**” into the first sentence so that it reads:

“The accepted areas mulched will be paid for at the contract price per unit; **Bark Mulch and Erosion Control Mix will be paid for by the Cubic Yard;** which shall be full compensation for furnishing and spreading the hay or straw and mulch binder, cellulose fiber mulch, bark mulch or erosion control mix.

Revise the second sentence by removing “ **for pay item 619.1201**” So that it reads:

“When Mulch is measured in Bales, each bale will be paid for at 60% of the contract price per Unit”.

Revise this section by removing all pay items and replace them with the following:

619.12 Mulch	Unit
619.13 Bark Mulch	Cubic Yard
619.14 Erosion Control Mix	Cubic Yard

SECTION 621 **LANDSCAPING**

621.0002 Materials - General

In the list of items change “Organic Humus” to “**Humus**”.

621.0019 Plant Pits and Beds

c Class A Planting

In the third paragraph beginning with “ The plant pit...” change “½ inch” to “**1 inch**”

SECTION 626

FOUNDATIONS, CONDUIT AND JUNCTION BOXES FOR HIGHWAY SIGNING, LIGHTING AND SIGNALS

626.02 General Amend the Material list by adding the following to the list:

Gravel Borrow	703.20

Revise the Material List by removing:

Prewired Conduit	715.04
Metallic Junction and Fuse Box	715.05

626.021 Miscellaneous Material Amend this section by adding the following to the end of it:

“All concrete for concrete encasement of conduit shall be Fill Class concrete in accordance with the applicable requirements of Section 502 – Structural Concrete.”

Amend the third paragraph that begins with “If grouting is necessary...” by adding **“included on the Qualified Product List and”** after the word “material”.

626.03 General Amend this section by adding the following section to the end of it

“626.0301 Electrical Supply Lines and Service Connections The following requirements shall apply to Electric Supply Lines and Service Connections feeding traffic signalization equipment control boxes and lighting breaker boxes.

Whenever possible, the meter and breaker panel feeding traffic signal control boxes or lighting control boxes shall be constructed within 30 feet of the service drop pole.

All service connections to MaineDOT traffic signal control boxes or lighting breaker boxes constructed in trenches shall be in steel conduit or concrete encased PVC conduit.

Where trenchless technologies are employed to install the service connection conduit, Schedule 120 PVC conduit shall be used for the trenchless bore section of conduit. In addition, concrete encasement shall be used for any conduit placed in trench sections more than 10 feet before or after the limits of the trenchless bore conduit.

The construction practices described above shall be used for service connections up to a maximum of 600 feet. There may be rare exceptional cases where the service connection must exceed 600 feet. In these cases, the power companies may require primary power be run over 600 feet for the purpose of power consumption and dependable service. These cases will be evaluated on a case-by-case basis for alternate power feed methods and/or the need for steel or concrete encased conduit.”

626.031 Conduit Revise this section by removing the second paragraph which begins with “Trenches for conduits...” and replace it with the following:

“Trenches for conduits shall be excavated to a width that will permit proper installation of the conduit and to a minimum depth of 3 feet below finish grade as measured from the top of the conduit. If deeper depths are required, the conduit shall be installed at the depth shown on the plans or as directed. Conduit shall not interfere with poles, guardrail posts, sign foundations or other objects.”

Amend the third paragraph which begins with “All junction or pull boxes...” by adding **“concrete, in accordance with the applicable requirements of Section 502 – Structural Concrete,”** after Class LP.

Revise the fifth paragraph which begins with “After the trench has been...” by adding the following to the end of it:

“Where concrete encasement is required around the conduit, backfilling with approved material may begin adjacent to and above the encased conduit no sooner than 24 hours after concrete placement.”

Remove the following:

“All underground conduit shall be placed to at least the depth shown on the plans and shall not interfere with poles, guardrail posts, sign foundations or other objects.”

Revise the paragraph beginning with “All conduit ends shall...” by removing “Prewired Conduit shall be sealed during construction to prevent entry of moisture, dirt, or rocks.”

626.033 Polyvinylchloride Conduit Installation Amend the first paragraph of this section which begins with “Polyvinylchloride conduit and High Density...” by adding the following to the end of it:

“In addition, PVC conduit used for Electrical Supply Lines and Services feeding control cabinets for traffic signalization equipment or highway lighting breaker boxes shall be concrete encased. When trenchless technologies are used to install PVC conduit, concrete encasement shall not be required.

Concrete encasement shall consist of a minimum of 4 inches of concrete above, below and on both sides of the conduit that shall have a minimum compressive strength of 3000 psi and a maximum aggregate size of 1-inch (Fill Class concrete). The concrete encasement may be backfilled no sooner than 24 hours after placement. “

“NON-METALLIC UNDER PAVEMENT CONDUIT INSTALLATION

Where noted on the drawings, non-metallic under pavement conduit of schedule 80 or greater rating shall be provided to facilitate conduit crossing of the existing highway and ramps without disruption to the existing highway and ramp pavement surface. The non-metallic under pavement conduit shall be hydraulically jacked or directional bored below

the highway and ramp at a depth of not less than (36 inches). Under pavement conduit shall extend for a distance of (10 feet) beyond the highway or ramp edge at each side.”

Amend the sixth paragraph which begins with “Where PVC conduit runs are...” by changing “3 inch minimum bedding” to **“6 inch minimum bedding”**.

626.034 Concrete Foundations

Revise this section by removing the third paragraph which begins with “In the absence of Design Requirements...” in its entirety and replace with the following:

“In the absence of design requirements being provided on the plans, the Contractor shall prepare and submit the foundation design(s) to the Department for review. The Contractor may propose an alternate shallow spread footing or drilled shaft configuration/design than that set forth on the drawings. Design shall be in accordance with AASHTO LRFD Specifications for Structural Supports for Highway Sign, Luminaires and Traffic Signals, current edition; AASHTO LRFD Bridge Design Specifications, current edition; and FHWA-NHI-10-016 Drilled Shafts, Construction Procedures and Design Methods, current edition. Where conflicting requirements occur, the more stringent requirements shall govern. In addition to other design requirements, foundation design shall account for Torsion for which a minimum Factor of Safety equal to 1.2 shall be achieved. In evaluating axial capacity and torsional resistance in cohesionless soils, load transfer coefficient or side resistance coefficient (beta, β) will be used in accordance with Subsection 13.3.5.1 of FHWA-NHI-10-016, with beta determined in accordance with Equations 13-13 and 13-11 for silty sands to sandy silts (with varying amounts of gravel). The design criteria for the resistance of drilled shaft and spread footing foundations against overturning, sliding and bearing capacity failure shall meet the requirements of Section 4 of AASHTO LRFD Bridge Design Specifications, current edition. The structural design of foundations shall meet the requirements of AASHTO LRFD Bridge Design Specifications, current edition. The Contractor shall submit to the Department for review, three (3) copies of detailed plans and calculations of the proposed design. Design shall be prepared and sealed by a Professional Engineer licensed in the State of Maine. Construction of foundation(s) shall not commence until the Department has reviewed the foundation design.”

On Page 6-85, add the following paragraph before the paragraph beginning with “Drilled shafts shall not be...”.

“ No foundation design will be required for 18- and 24-inch diameter foundations for structures less than 30-feet tall and with no projecting arms. A foundation design prepared by a Professional Engineer licensed in accordance with the laws of the State of Maine will be required for all other foundations. Precast foundations will be permitted for 18 and 24-inch diameter foundations for structures less than 30-feet tall and with no projecting arms. Where precast foundations are permitted flowable concrete fill shall be used as backfill in the annular space, and placed from the bottom up. Construction of precast foundations shall conform to the Standard Details and all requirements of Section 712.061 except that the concrete shall have a minimum permeability of 17 kOhm-cm and the use of calcium nitrite will not be required. “

On Page 6-86, Revise the paragraph beginning with “Concrete for drilled shafts...” so that a portion of it reads as follows:

“....The Contractor shall provide temporary dewatering of excavations for foundations such that concrete is placed in the dry. **Concrete for drilled shafts shall be placed in accordance with Section 502.10 as temporary casing is withdrawn to prevent debris from contaminating the foundation and to ensure concrete is cast against the surrounding soil. Concrete for drilled shafts and spread footings shall be Class LP in accordance with Section 502 - Structural Concrete. Precast foundations will not be permitted except as specified above in this Section.** Backfill for spread footing foundations shall be Gravel Borrow meeting the requirements of Section 703.20 - Gravel Borrow.....”

626.05 Basis of Payment Amend this section by removing the following paragraphs:
The one which starts with “Payment will be made for the total number of linear feet of prewired conduit...”
The one which starts with “Prewired conduit within the foundations...”

Amend this subsection by adding the following paragraph and Pay Items:

“Payment will be made for the total number of linear feet of under pavement conduit actually furnished, installed and accepted at the contract price per linear foot. This price shall include the cost of: furnishing and installing the conduit; excavating; furnishing special backfilling materials, pull wire, fittings, grounding and bonding; test cleaning interiors of conduits and all materials, labor, equipment and incidentals necessary to complete the work.”

Pay Item	PayUnit
626.221 Non-metallic Conduit, Concrete Encased	Linear Foot
626.251 Non-Metallic Under pavement Conduit (Schedule 80 or greater rating)	Linear Foot

Remove the following Pay Items:

626.23 Prewired Conduit Secondary Wiring	Linear Foot
626.24 Prewired Conduit Primary Wiring	Linear Foot

SECTION 627

PAVEMENT MARKINGS

Revise this section by removing it in its entirety and replacing with the following:

627.01 Description This work shall consist of furnishing and placing reflectorized pavement lines and markings, removing pavement lines and markings, and furnishing and applying reflectorized paint to curbing in reasonably close conformity with the plans and as designated.

627.02 Materials Materials shall conform to the requirements specified in the following Sections of Division 700 - Materials.

Pavement Marking Paint	708.03
Reflectorized Plastic Pavement Marking	712.05

Temporary Bi-directional Yellow Delineators shall be Temporary Object Markers (T.O.M.) as manufactured by the Davidson Plastic Company, 18726 East Valley Highway, Kent, WA 98031 or an approved equal.

627.04 General All pavement lines and markings shall be applied in accordance with the latest edition of Manual on Uniform Traffic Control Devices.

Longitudinal lines placed on tangent roadway segments shall be straight and true. Longitudinal lines placed on curves shall be continuous smoothly curved lines consistent with the roadway alignment. All pavement markings placed shall meet the tolerance limits shown on the plans.

Unless otherwise shown on the plans, non-interstate lines shall be 4 inches wide and broken lines shall consist of alternate 10 foot painted line segments and 30 foot gaps. On controlled access divided highways and on the interstate system lines shall be 6 inches wide and broken lines shall consist of alternate 15 foot painted line segments and 25 foot gaps. Width tolerance shall be +/- 1/4 inch.

Temporary pavement marking lines, defined in Special Provision Section 652, Maintenance of Traffic, Temporary Centerline, will be applied as many times as necessary to properly delineate traffic lanes for the safe passage of traffic. Bi-directional delineators may be used in place of temporary lines, except where specified otherwise in Special Provision 652 Maintenance of Traffic, Temporary Centerline. Delineators will be applied at 40 foot intervals.

In overnight lane closure areas that are not to be overlaid, temporary plastic lines or raised pavement markers shall be used through the length of the taper.

Newly painted lines, markings and curb shall be protected from traffic by the use of cones, stationary vehicles or other approved methods until the paint is dry.

627.05 Preparation of Surface Immediately before applying the pavement marking paint to the pavement or curb, the surface shall be dry and entirely free from dirt, grease, oil, or other foreign matter.

Surface preparation for application of plastic markings shall conform to the manufacturer's recommendations.

627.06 Application Prior to applying paint for final pavement lines, the Contractor shall perform a test for paint thickness by furnishing and placing a piece of

smooth, clean metal with an area of at least 144 in² in the path of the striping truck. The striping truck shall be passed over the piece of metal, painting the surface as it passes, without applying beads. The result of this test will be used to determine the pressure setting and speed of the truck when applying paint to obtain the specified thickness. Additional paint thickness testing may be required on the final paint markings. The wet thickness of paint without beads on final pavement lines shall be a minimum of 16 mils.

On other final pavement markings and on curb, where the paint is applied by hand painting or spraying, application shall be in two uniform covering coats, each at least 10 mils thick. Before the second coat of paint has dried, the glass beads shall be applied by a pressure system that will force the glass beads onto the undried paint as uniformly as possible.

Glass beads shall be applied to the final and temporary pavement lines, marking and curb at a sufficient rate and in sufficient quantity to assure complete and uniform coverage of hand painted surfaces and achieve proper reflectivity.

Permanent and temporary white lines and markings shall have a minimum final reflectivity value of 250 millicandelas per square meter per lux (mcd/m²/lux) and permanent and temporary yellow lines and markings shall have a minimum final reflectivity value of 150 millicandelas per square meter per lux (mcd/m²/lux), as measured by the Department. Measurements taken to determine reflectivity shall be done within 4 weeks after final placement.

If the final reflectivity values are less than the described minimums, the Contractor shall repaint those areas not meeting required reflectivity at no cost to the Department. If the final reflectivity values are less than the described minimums after the second attempt, the Contractor will submit in writing a plan of action to meet the reflectivity minimums prior to continuing any work. Once the plan has been reviewed and approved by the Department, the Contractor shall re apply at no cost to the Department.

Temporary painted lines and markings shall be applied as specified for permanent painted lines, except that the thickness shall be a minimum of 16 mils.

Temporary pliant polymer marking material shall be used for temporary markings on the final pavement and on pavements not to be resurfaced when such pavement markings do not conform to the final pavement markings pattern.

The plastic final pavement lines and markings shall be applied in accordance with the manufacturer's recommendations by the inlay method of application.

627.07 Establishment Period Inlaid plastic pavement lines and marking material furnished and installed under this contract for final pavement markings shall still be subject to a six-month period of establishment.

The period of establishment shall commence as soon as the plastic pavement lines and markings are complete and in place and shall continue for six months. At the end of the establishment period, a minimum of 95% of the plastic pavement lines and markings shall still be in place to be acceptable.

If less than 95% of the plastic pavement lines and markings are in place after six months, the Contractor shall replace all unsatisfactory plastic pavement lines and markings on the project without additional payment. Plastic pavement lines and markings designated for replacement shall be installed according to these specifications, unless otherwise directed. Plastic pavement lines and markings replaced at the end of the six month establishment period will not be subject to a further establishment period.

627.08 Removing Lines and Markings When it is necessary to remove pavement lines and markings, it shall be done by high pressure water, grinding or other approved acceptable means. The method chosen must be capable of completely eradicating the existing line or marking without excessive damage to the pavement. Burning and the use of solvents to remove temporary markings from final pavement or from existing pavement not to be resurfaced will not be permitted.

627.09 Method of Measurement The quantity of pavement marking lines identified in the contract as a plan quantity pay item, the measurement of payment will be the number of feet shown in the Schedule of Items. This quantity will be considered final and no adjustments will be made except when changes resulting in increases or decreases are made by the Resident.

The accepted quantity of temporary or permanent pavement marking lines when identified in the contract as a linear foot item shall be measured and paid for at the contract unit price per linear foot for the total amount applied and accepted.

Double yellow centerline, broken or solid, will be considered one line for measurement purposes. The measurement of broken lines will include the gaps when painted and will not include the gaps when plastic. Double Yellow Centerline, broken or solid shall not be paid through intersections or side roads and will be paid for the actual length of painted line.

Broken white lines will include the gaps when painted and will not include the gaps when plastic inlaid pavement lines are applied. Yellow or white solid edge lines and will not be paid through intersections or side roads and will be measured by the actual length of painted line.

Temporary pavement marking lines shall not be paid through intersections or side roads and will be measured per linear foot of actual length of painted and accepted.

Reflectorized curb will be measured or computed by the square foot of curb surface actually painted and reflectorized.

The accepted quantity of removing existing pavement markings will be measured by the square foot.

Temporary Bi-directional Yellow Delineators will be measured by each unit, complete in place, maintained, and accepted.

627.10 Basis of Payment The accepted quantity of pavement marking lines identified in the contract as a plan quantity pay item will be paid for at the contract unit price for plan quantity. No adjustment will be made to the quantity for payment, except as described 627.09 Method of Measurement

The quantity of permanent or temporary pavement marking lines identified in the contract paid by the linear foot will be measured for payment as described under section 627.09 Method of Measurement.

All other permanent pavement markings will be paid for at the contract unit price per square foot in accordance with 627.09 Method of Measurement.

If allowed by Special Provision, the Contractor may utilize Temporary Bi-Directional Yellow and White (as required) Delineators. When utilized, payment will be made as temporary pavement marking lines, measured and paid at the contract unit price per linear foot. Such payment will include as many applications as required and removal.

Payment for final plastic pavement lines and markings will be made in two parts. The first payment of 75% will be made when plastic pavement lines and markings are placed. The payment of the remaining 25% will be made at the end of the establishment period for all plastic line and pavement markings accepted.

The accepted quantity of any pavement marking lines will be paid for at the contract unit price and will include as many applications as required and removal when required.

The accepted quantity of Temporary Bi-directional Yellow Delineators will be paid for at the contract unit price.

Payment will be made under:

<u>Pay Item</u>	<u>Pay Unit</u>
627.18 12 inch Solid White Pavement Marking Line	Linear Foot
627.711 White or Yellow Pavement Marking Line - Plan Quantity	Linear Foot
627.733 4" White or Yellow Painted Pavement Marking Line	Linear Foot
627.744 6" White or Yellow Painted Pavement Marking Line	Linear Foot
627.75 White or Yellow Pavement & Curb Marking	Square Foot
627.77 Removing Existing Pavement Marking	Square Foot

627.78	Temporary 4" Painted Pavement Marking Line, White or Yellow	Linear Foot
627.781	Temporary 6" Painted Pavement Marking Line, White or Yellow	Linear Foot
627.407	Reflectorized Plastic, White or Yellow Pavement Marking	Square Foot
627.4071	Reflectorized Plastic, White or Yellow Pavement Marking Line - Plan Quantity	Linear Foot
627.811	Temporary Bi-directional Yellow Delineators	Each

SECTION 639

ENGINEERING FACILITIES

Revise this section by removing this section in its entirety and replace with the following:

639.01 Description This work shall consist of providing, erecting, lighting, equipping and maintaining buildings to be solely used by the Resident and other assigned Department representatives as a field office. Upon completion of the work, the buildings and equipment shall remain the property of the Contractor.

639.02 Materials Materials for buildings shall be of good quality customarily used in standard frame house or office trailer construction.

639.03 General The building of the type called for shall be provided before the start of work, and shall remain until work is completed and accepted, unless earlier removal is authorized. The location shall be approved by the Resident and should be adjacent or virtually adjacent to the Project.

A fire extinguisher shall be provided in each building or office trailer for electrical and chemical fires and effective on all solvents used in the building.

Walls, roof, floor, windows, and doors shall be tightly constructed to the required area.

Furnishings shall be supplied as called for. Doors shall be equipped with locks and all keys shall be in the possession of the Resident. Windows shall be equipped with latches so they may be locked on the inside. Window screens and screen doors shall be supplied when necessary. Adequate desk and desk space shall be provided. If a portable table is supplied, it should be adjustable to accommodate the various heights of employees. A 5-way adjustable office chair shall be provided in the quantities listed.

639.04 Field Offices Field Offices are designated Type A, Type B, or Type C. Buildings, including trailers, may be provided if they substantially equal or exceed the following requirements. Air conditioning, appropriate to the building size, shall be provided in all field offices.

The walls, roof, and floor of the building shall be completely insulated with a minimum insulation value of R-15. Office trailers shall be either new or in very good used condition. The interior walls shall be covered with suitable wall paneling. The entire office trailer shall be for the exclusive use of the Resident. The office trailer shall be winterized and completely enclosed at the bottom, if the trailer will be used in cold weather.

Other types of buildings and facilities may be furnished of equal or better quality. A public work area will be provided in the field office that shall be designed and constructed so that individuals with disabilities can approach, enter, and exit this area.

At least one accessible route to the field office shall be provided from accessible parking. The accessible route shall comply with the Americans with Disabilities Act Accessibility Guidelines (ADAAG) and this specification.

The minimum clear width of an accessible route shall be 36 inches except at doors. The least possible slope shall be used for an accessible route. An accessible route with a running slope greater than 1:20 shall be considered a ramp. Maximum ramp slope is 1:12. The maximum rise for any run of a ramp shall be 30 inches and the minimum clear width shall be 36 inches. Nowhere shall the cross slope of an accessible route exceed 1:50. Changes in level up to ¼ inch may be vertical and without edge treatment. Changes in level between ¼ inch and ½ inch shall be beveled with a slope no greater than 1:2. Ramp floor surfaces shall be stable, firm, and slip-resistant.

Ground floor surfaces along accessible routes and in accessible rooms and spaces including floors, walks, ramps, stairs, and curb ramps, shall be stable, firm, and slip-resistant.

The main door to the public work area shall have a minimum clear opening of 32 inches with the door opened 90 degrees, measured between the face of door and the opposite stop. Minimum maneuvering clearances at doors shall be provided. The floor or ground area within the required clearances shall be level and clear.

The handle and other operating devices on accessible doors shall have a shape that is easy to grasp with one hand and does not require tight grasping. Lever-operated mechanisms push type mechanisms, and U-shaped handles are acceptable designs. Hardware required for accessible door passage shall be mounted no higher than 48 inches above finished floor.

A minimum of 3 parking spaces will be supplied for Class B & C Field Offices and 6 for Class A. One wheelchair accessible parking space shall be located on the shortest accessible route of travel from adjacent parking to an accessible entrance.

Level landings shall be provided at bottom and top of each run. The landing shall be at least as wide as the ramp run leading to it with a minimum length of 60 inches.

If a ramp run has a rise greater than 6 inches or a horizontal projection greater than 72 inches, then it shall have handrails on both sides. Handrails shall have the following features:

- 1) Handrails shall be provided along both sides of ramp segments. The inside handrail on switchback ramps shall always be continuous.
- 2) If handrails are not continuous, they shall extend at least 12 inches beyond the top and bottom of the ramp segment and shall be parallel with the floor or ground surface.
- 3) The clear space between the handrail and the wall shall be 1½ inch.
- 4) Gripping surfaces shall be continuous.
- 5) Top of handrail gripping surfaces shall be mounted between 34 and 38 inches above ramp surfaces.
- 6) Ends of handrails shall be either rounded or returned smoothly to floor, wall, or post.
- 7) Handrails shall not rotate within their fittings.
- 8) The diameter or width of the gripping surfaces of a handrail shall be 1¼ to 1½ inch, or the shape shall provide an equivalent gripping surface.

Firm and sturdy steps shall also be provided with 7 inch maximum riser and 11 inch minimum depth, and at least one handrail extending from the top of the steps to a minimum 12 inches beyond the bottom of the steps.

The Contractor will make reasonable effort(s) to provide wheelchair accessible toilet facilities when "portable" facilities are provided.

The Contractor shall provide wheelchair accessible toilet facilities when flush type facilities, that is, those with running water, are provided; and the Contractor shall provide wheelchair accessible portable facilities, if used, when the contract duration exceeds two continuous construction seasons.

In addition to the facilities previously specified in this subsection, each field office shall meet the following minimum requirements:

<u>Description</u>	<u>Quantity</u>		
	<u>Type A</u>	<u>Type B</u>	<u>Type C</u>
Floor Area (Outside Dimension) - ft ²	312	220	125
Inside Wall Height – feet	7	7	7

Window Area - ft ²	55	35	35
Drafting Table Surface Area - ft ²	15	15	15
Drafting Stools - each	2	1	1
Office Desks - each	2	1	1
Ergonomic Swivel Chairs -ea (5-way adjustable)	3	2	2
Folding Chairs - each	3	2	2
Lighting Units - each	4	2	2
Electric Wall Outlets - each	6	4	3
Power Strip Surge Protectors - each	3	2	1
Wall Closets - each	1	1	1
Plan Rack for minimum of 6 sets of plans	1	1	0
Toilet Facility	1	1	1
Wastebaskets - each	2	2	1

All windows shall be provided with shades or blinds.

The toilet facility shall be for the exclusive use of State personnel. If requested, the Contractor will supply a lock to ensure exclusive use.

The Resident will have the option to reject any furniture or supplies provided to the field office based on general condition.

One hundred ten volt, 60 cycle, continuous electric service shall be supplied for lighting and 15 amp duplex wall outlets. Lighting shall consist of florescent light units with rapid start bulbs or LED shop style lights located over the work areas for a minimum of 50 foot candles overall. At least one external light source will be provided.

Drafting surfaces shall be 40 inches above the floor and have shelves beneath. Shelves for plans and rolls shall also be furnished overhead. Drafting stools shall be approximately 28 inches high.

Desks shall be single or double pedestal standard office type, and shall be in addition to "built-in" type desks in the office trailer.

Field offices shall be furnished with one four-drawer letter size metal filing cabinet.

Wall closets shall be 21 inches wide, 15 inches deep, and at least 4 feet high.

Each office shall be furnished with a broom, dustpan, sweeping compound, trash bags, and with cleaning material for cleaning glass. If the field office is carpeted, then a vacuum cleaner will be provided. The contractor will be responsible for disposing of trash from the field office.

The Contractor shall provide a fully functional wireless desktop copier/scanner/printer, capable of copying field books, for the Resident's use during the

project. All maintenance and supplies, except paper, shall be the responsibility of the Contractor.

The Contractor shall provide bottled water and a microwave for the duration of the project. All maintenance and supplies shall be the responsibility of the Contractor. Alternate source of water, such as a water cooler, may be provided as approved by resident.

The Contractor shall provide a 4 cubic-foot refrigerator in the field office for the duration of the project.

Each office shall be furnished with a 10-person general-purpose first aid kit. The first aid kit shall be periodically inspected and refilled as necessary.

639.08 Heat Heat appropriate to the building size shall be supplied by the Contractor to maintain an acceptable room temperature during occupancy.

639.091 Broadband Connection The contractor will supply one computer broadband connection, modem lease and router. The router shall have wireless access and be 802.11n or newer capable. The type of connection supplied will be contingent upon the availability of services (i.e. DSL or Cable Broadband). It shall be the contractor's option to provide dynamic or static IP addresses through the service. The selected service will have a minimum download connection of 5.0 Mbps and 1.0 Mbps upload. The contractor shall be responsible for the installation charges and all reinstallation charges following suspended periods. Monthly service and maintenance charges shall be billed by the Internet Service Provider (ISP) directly to the contractor.

639.10 Method of Measurement Field office will be measured by the unit or lump sum for each building provided, equipped and maintained satisfactorily.

639.11 Basis of Payment The accepted quantity of field office will be paid for at the contract unit price each or lump sum which payment shall be full compensation for furnishing until contract completion, erecting, equipping, maintaining, furnishing electricity, heating, installing and maintaining toilet facilities and if necessary removing the buildings or office trailers.

Payment for these items will be made in 3 parts; the first payment of $\frac{1}{2}$ to be made after the Contractor has supplied the building or office trailer and it has been approved. The remaining payments shall be made at intervals as follows:

A second payment of $\frac{1}{4}$ shall be made when one-half of the anticipated work has been completed.

The final payment of the remaining $\frac{1}{4}$ shall be made upon completion of the work.

Payment will be made under:

<u>Pay Item</u>	<u>Pay Unit</u>
639.18 Field Office, Type A	Each
639.19 Field Office, Type B	Each
639.20 Field Office, Type C	Each

SECTION 652

MAINTENANCE OF TRAFFIC

652.3.3 Submittal of Traffic Control Plan On page **6-148**, note **f**, in the last sentence revise the “105.2.2” to “105.2.3” so that the last sentence reads, “**For a related provision, see Section 105.2.3 – Project Specific Emergency Planning.**”.

652.3.4 General Revise the eighth paragraph by removing “Earth Berm” and replace it with “**Concrete Barrier**”.

Amend this section by adding the following paragraph before the paragraph beginning with “Special Detours and temporary structures...”:

“A temporary ramp shall be constructed with HMA at the ends of the roadway section paved or milled each day. The use of millings or RAP will not be allowed, but cold patch may be temporarily utilized until HMA plants are open for the season. The maximum ramp change in elevation shall not exceed 4” vertical. For Interstate Highways or roadways with speed limits equaling or exceeding 50 mph; temporary ramps shall be constructed at a length of eight feet per inch of transition depth. For roadways with speed limits less than 50 mph and greater than 25 mph, temporary ramps shall be constructed at a length of four feet per inch of transition depth. For roadways with speed limits 25 mph or less, temporary ramps shall be constructed at a length of two feet per inch of transition depth. Materials, placement, maintenance, and removal shall be incidental to contract items.”

652.4 Flaggers Revise this section by removing the first paragraph, and replace it with the following”

“The Contractor shall furnish flaggers as required by the TCP or as otherwise specified by the Resident. All flaggers must have successfully completed a flagger test approved by the Department and administered by a Department-approved Flagger-Certifier. All flaggers must carry an official certification card with them at all times while flagging.

For daytime conditions, flaggers shall wear a top (vest, shirt or jacket) that is orange, yellow, yellow-green, or fluorescent versions of these colors meeting ANSI 107-2004, Class 2 or Class 3, along with a hardhat with 360 ° retro-reflectivity.

For nighttime conditions, flaggers shall wear all Class 3 apparel, meeting ANSI 107-2004, including a Class 3 top (vest, shirt or jacket) and a Class E bottom (pants or coveralls),

shall be worn along with a hardhat with 360 ° retro-reflectivity and shall be visible at a minimum distance of 1000 ft. Flagger stations must be illuminated in nighttime conditions to assure visibility and will be specifically addressed in detail in the Contractor's TCP".

652.41 TRAFFIC OFFICERS

Revise this subsection so that the subsection number and title is
"652.4.1 TRAFFIC OFFICERS "

SECTION 656

TEMPORARY SOIL EROSION AND WATER POLLUTION CONTROL

656.5.2 If No Pay Item Add the following to the end of the first paragraph:

"Failure by the Contractor to follow Standard Specification or Special Provision - Section 656 will result in a violation letter and a reduction in payment as shown in the schedule list in 656.5.1. The Department's Resident or any other representative of The Department reserves the right to suspend the work at any time and request a meeting to discuss violations and remedies. The Department shall not be held responsible for any delay in the work due to any suspension under this item."

SECTION 660

ON-THE-JOB TRAINING

660.06 Method of Measurement

Remove the first sentence in its entirety and replace with **" The OJT item will be measured by the number of OJT hours by a trainee who has successfully completed an approved training program."**

660.07 Basis of payment to the Contractor

Remove the last word in the first sentence so that the first sentence reads " The OJT shall be paid for once successfully completed at the contract unit price per **hour**."

Payment will be made under

Change the Pay Item from "660.22" to **"660.21"** and change the Pay Unit from "Each" to **"Hour"**.

SECTION 672

PRECAST CONCRETE BLOCK GRAVITY WALL

672.035 Backfill Material– Revise this section by adding the following after the second paragraph:

Backfill materials shall meet the criteria in the following table.

<u>Base Polymer</u>	<u>Property</u>	<u>Criteria</u>	<u>Test Method</u>
Polyester (PET)	pH	3< pH > 9	AASHTO T-289
Polyolefin (PP & HDPE)	pH	pH > 3	AASHTO T-289

672.04 Design Requirements – Revise this section by replacing items 2 and 3 in the second paragraph with the following:

- 2. FHWA-NHI-10-024 and FHWA-NHI-10-025, Design and Construction of Mechanically Stabilized Earth Walls and Reinforced Soil Slopes, Volumes I and II, current edition.**
- 3. FHWA-NHI-09-087 Corrosion/Degradation of Soil Reinforcements for Mechanically Stabilized Earth Walls and Reinforced Soil Slopes, current edition.**

SECTION 673

WETCAST SMALL LANDSCAPE BLOCK WALL

673.035 Backfill Material – Revise this section by adding the following after the second paragraph:

Backfill materials shall meet the criteria in the following table.

<u>Base Polymer</u>	<u>Property</u>	<u>Criteria</u>	<u>Test Method</u>
Polyester (PET)	pH	3< pH > 9	AASHTO T-289
Polyolefin (PP & HDPE)	pH	pH > 3	AASHTO T-289

673.04 Design Requirements – Revise this section by replacing items 2 and 3 in the second paragraph with the following:

2. FHWA-NHI-10-024 and FHWA-NHI-10-025, Design and Construction of Mechanically Stabilized Earth Walls and Reinforced Soil Slopes, Volumes I and II, current edition.
3. FHWA-NHI-09-087 Corrosion/Degradation of Soil Reinforcements for Mechanically Stabilized Earth Walls and Reinforced Soil Slopes, current edition

SECTION 677

MECHANICALLY STABILIZED EARTH RETAINING WALL

677.03 Design Requirements – Revise this section by replacing items 6, 7 and 8 in the second paragraph with the following:

6. FHWA-NHI-10-024, Design and Construction of Mechanically Stabilized Earth Walls and Reinforced Soil Slopes, Volumes I, current edition.
7. FHWA-NHI-10-025, Design and Construction of Mechanically Stabilized Earth Walls and Reinforced Soil Slopes, Volumes II, current edition.
8. FHWA-NHI-09-087 Corrosion/Degradation of Soil Reinforcements for Mechanically Stabilized Earth Walls and Reinforced Soil Slopes, current edition

SECTION 674

PREFABRICATED CONCRETE MODULAR GRAVITY WALL

674.02 Materials

Amend this section by adding the following after “Concrete Units:” and before the paragraph beginning with “Tolerances”.

Concrete shall be Class P. The concrete shall contain a minimum of 5.5 gallons per cubic yard of calcium nitrite solution.

The minimum permeability of the concrete as indicated by Surface Resistivity shall be 17 KOhm-cm.

Defects Defects which may cause rejection of precast units include, but are not limited to, the following:

Any discontinuity (crack, rock pocket, etc.) of the concrete which could allow moisture to reach the reinforcing steel.

Rock pockets or honeycomb over 6 square inches in area or over 1 inch deep.

Edge or corner breakage exceeding 12 inches in length or 1 inch in depth.

Any other defect that clearly and substantially impacts the quality, durability, or maintainability of the structure, as determined by the Fabrication Engineer.

Repair honeycombing, ragged or irregular edges and other non-structural or cosmetic defects using a patching material from the MaineDOT Qualified Products List (QPL). The repair, including preparation of the repair area, mixing and application and curing of the patching material, shall be in accordance with the manufacturer's product data sheet. Corners that are not exposed in the final product may be ground smooth with no further repair necessary if the depth of the defect does not exceed 1/2 inch. Remove form ties and other hardware to a depth of not less than 1 inch from the face of the concrete and patch the holes using a patching material from the MaineDOT QPL.

Repair structural defects only with the approval of the Fabrication Engineer. Submit a nonconformance report (NCR) to the Fabrication Engineer with a proposed repair procedure. Do not perform structural repairs without an NCR that has been reviewed by the Fabrication Engineer. Structural defects include, but are not be limited to, exposed reinforcing steel or strand, cracks in bearing areas, through cracks and cracks 0.013 inch in width that extend more than 12 inches in length in any direction. Give the QAI adequate notice prior to beginning any structural repairs.

SECTION 677

MECHANICALLY STABILIZED EARTH RETAINING WALL

On page 6 - 203 change "636.041" to "677.041"

Amend 677.042 Precast Panel Tolerances and Surface Finish by the addition of the following:

Defects Defects which may cause rejection of precast units include, but are not limited to, the following:

Any discontinuity (crack, rock pocket, etc.) of the concrete which could allow moisture to reach the reinforcing steel.

Rock pockets or honeycomb over 6 square inches in area or over 1 inch deep.

Edge or corner breakage exceeding 12 inches in length or 1 inch in depth.

Any other defect that clearly and substantially impacts the quality, durability, or maintainability of the structure, as determined by the Fabrication Engineer.

Repair honeycombing, ragged or irregular edges and other non-structural or cosmetic defects using a patching material from the MaineDOT Qualified Products List (QPL). The repair, including preparation of the repair area, mixing and application and curing of the patching material, shall be in accordance with the manufacturer's product data sheet. Corners that are not exposed in the final product may be ground smooth with no

further repair necessary if the depth of the defect does not exceed 1/2 inch. Remove form ties and other hardware to a depth of not less than 1 inch from the face of the concrete and patch the holes using a patching material from the MaineDOT QPL.

Repair structural defects only with the approval of the Fabrication Engineer. Submit a nonconformance report (NCR) to the Fabrication Engineer with a proposed repair procedure. Do not perform structural repairs without an NCR that has been reviewed by the Fabrication Engineer. Structural defects include, but are not be limited to, exposed reinforcing steel or strand, cracks in bearing areas, through cracks and cracks 0.013 inch in width that extend more than 12 inches in length in any direction. Give the QAI adequate notice prior to beginning any structural repairs.

SECTION 702 **BITUMINOUS MATERIAL**

702.04 Emulsified Asphalt

Revise this Section by removing the first paragraph in its entirety and replace with the following:

Emulsified Asphalt shall conform to the requirements of AASHTO M 140. Cationic emulsified asphalt shall conform to the requirements of AASHTO M 208. Anionic emulsified asphalt Grade RS-1h shall conform to the requirements in the following table:

Type	Rapid-Setting	
Grade	RS-1h	
Tests on Emulsions	min	max
Viscosity, Saybolt Furol at 25°C SFS	20	100
Storage Stability test, 24-h, % ^A	-	1.0
Demulsibility, 35 ml, 0.02 N CaCl ₂ , %	60	-
Sieve Test, % ^A	-	0.10
Residue by distillation, %	55	-
Tests on Residue from Distillation Test	min	max
Penetration, 25°C 100g, 5 s	40	90
Ductility, 25°C 5 cm/min, cm	40	-
Solubility in trichloroethylene or n-propyl bromide, %	97.5	-

^A This requirement is waived if successful application of material has been achieved in the field.

SECTION 703 **AGGREGATES**

703.01 Fine Aggregate for Concrete Replace the second paragraph with the following:

“All fine aggregate shall be free from injurious amounts of organic impurities. Should the fine aggregate, when subjected to the colorimetric test for organic impurities, AASHTO T 21, produce a color darker than organic plate number 3, the fine aggregate shall be rejected.”

703.0201 Alkali Silica Reactive Aggregates. Remove this section in its entirety and replace with the following:

All coarse and fine aggregates proposed for use in concrete shall be tested for Alkali Silica Reactivity (ASR) potential under AASHTO T 303 (ASTM C 1260), Accelerated Detection of Potentially Deleterious Expansion of Mortar Bars Due to Alkali-Silica Reaction, prior to being accepted for use. Acceptance will be based on testing performed by an accredited independent lab submitted to the Department. Aggregate submittals will be required on a 5-year cycle, unless the source or character of the aggregate in question has changed within 5 years from the last test date.

As per AASHTO T 303 (ASTM C 1260): Use of a particular coarse or fine aggregate will be allowed with no restrictions when the mortar bars made with this aggregate expand less than or equal to 0.10 percent at 30 days from casting. Use of a particular coarse or fine aggregate will be classified as potentially reactive when the mortar bars made with this aggregate expand greater than 0.10 percent at 30 days from casting. Use of this aggregate will only be allowed with the use of cement-pozzolan blends and/or chemical admixtures that result in mortar bar expansion of less than 0.10 percent at 30 days from casting as tested under ASTM C 1567.

Acceptable pozzolans and chemical admixtures that may be used when an aggregate is classified as potentially reactive include, but are not limited to the following:

Class F Coal Fly Ash meeting the requirements of AASHTO M 295.

Ground Granulated Blast Furnace Slag (Grade 100 or 120) meeting the requirements of AASHTO M 302.

Densified Silica Fume meeting the requirements of AASHTO M 307.

Lithium based admixtures

Metakaolin

Pozzolans or chemical admixtures required to offset the effects of potentially reactive aggregates will be incorporated into the concrete at no additional cost to the Department.

703.06 Aggregate for Base and Subbase - Remove the first two paragraphs in their entirety and replace with these:

“The following shall apply to Sections (a.) and (c.) below. The material shall have a Micro-Deval value of 25.0 or less as determined by AASHTO T 327. If the Micro- Deval value exceeds 25.0, the Washington State Degradation DOT Test Method T113, Method of Test for Determination of Degradation Value (January 2009 version) shall be performed, except that the test shall be performed on the portion of the sample that

passes the ½ in sieve and is retained on the No. 10 sieve. If the material has a Washington Degradation value of less than 15, the material shall be rejected.

The material used in Section (b.) below shall have a Micro-Deval value of 25.0 or less as determined by AASHTO T 327. If the Micro-Deval value exceeds 25.0 the material may be used if it does not exceed 25 percent loss on AASHTO T 96, Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine. “

703.081 RAP for Asphalt Pavement

Remove this section in its entirety and replace with the following:

703.081 RAP for Asphalt Pavement Recycled Asphalt Pavement (RAP) may be introduced into hot-mix asphalt pavement at percentages approved by the Department according to the MaineDOT Policies and Procedures for HMA Sampling and Testing. If approved by the Department, the Contractor shall provide documentation stating the source, test results for average residual asphalt content, and stockpile gradations showing RAP materials have been sized to meet the maximum aggregate size requirements of each mix designation. The Department will obtain samples for verification and approval prior to its use.

The maximum allowable percent of RAP shall be determined by the asphalt content, the percent passing the 0.075 mm sieve, the ratio between the percent passing the 0.075 mm sieve and the asphalt content, and Coarse Micro-Deval loss values as tested by the Department. The maximum percentage of RAP allowable shall be the lowest percentage as determined according to Table 4 below:

Table 4: Maximum Percent RAP According to Test Results

Classification	Maximum RAP Percentage Allowed	Asphalt content standard deviation	Percent passing 0.075 mm sieve standard deviation	Percent passing 0.075 mm sieve / asphalt content ratio	Residual aggregate M-D loss value
Class III	10%	≤ 1.0	N/A	≤ 4.0	≤ 18
Class II	20%	≤ 0.5	≤ 1.0	≤ 2.8	
Class I	30%	≤ 0.3	≤ 0.5	≤ 1.8	

The Department will monitor RAP asphalt content and gradation during production by testing samples from the stockpile at approximately 15,000 T intervals (in terms of mix production). The allowable variance limits (from the numerical average values used for mix designs) for this testing are determined based upon the maximum allowable RAP percentage, and are shown below in Table 5.

Table 5: RAP Verification Limits

Classification	Asphalt content (compared to aim)	Percent passing 0.075 mm sieve (compared to aim)
Class III	± 1.5	± 2.0
Class II	± 1.0	± 1.5
Class I	± 0.5	± 0.7

For specification purposes, RAP will be categorized as follows:

Class III – A maximum of 10.0 percent of Class III RAP may be used in any base, intermediate base, surface, or shim mixture. A maximum of 20.0 percent of Class III RAP may be used in hand-placed mixes for item 403.209.

Class II – A maximum of 20.0 percent Class II RAP in any base, binder, surface, or shim course.

Class I – A maximum of 20.0 percent Class I RAP may be used in any base, intermediate base, surface, or shim mixture without requiring a change to the specified asphalt binder. A maximum of 30.0 percent Class I RAP may be used in in any base or intermediate base mixture provided that a PG 58-28 asphalt binder is used. A maximum of 30.0 percent Class I RAP may be used in any surface or shim mixture provided that PG 58-34 or 52-34 asphalt binder is used. Mixtures exceeding 20.0 percent Class I RAP must be evaluated and approved by the Department.

The Contractor may use up to two different RAP sources in any one mix design. The total RAP percentage of the mix shall not exceed the maximum allowed for the highest classification RAP source used (i.e. if a Class I & Class III used, total RAP must not exceed 30.0%). The blended RAP material must meet all the requirements of the classification for which the RAP is entered (i.e. 10% Class III with 20% Class I, blend must meet Class I criteria). The Department may take belt cuts of the blended RAP to verify the material meets these requirements. If the Contractor elects to use more than one RAP source in a design, the Contractor shall provide an acceptable point of sampling blended RAP material from the feed belt.

In the event that RAP source or properties change, the Contractor shall notify the Department of the change and submit new documentation stating the new source or properties a minimum of 72 hours prior to the change to allow for obtaining new samples and approval.

Remove the gradation requirements table, and replace with the following:

Sieve Designation	Percentage by Weight Passing Square Mesh Sieves	
	Material for Underwater Backfill	Material for Embankment Construction
6 inch	100	
No. 40	0-70	0-70
No. 200	0-7.0	0-20.0

703.33 Stone Ballast - In the third paragraph, remove the words “less than” before 2.60 and add the words “or greater” after 2.60.

SECTION 712

MISCELLANEOUS HIGHWAY MATERIAL

Section 712.061- Structural Precast Concrete Units

Under the heading, Quality Control and Quality Assurance, revise the fourth paragraph to read:

“Acceptance is the prerogative of the Department. The Department will conduct Quality Assurance (QA) in accordance with Standard Specification Subsection 106.5. Testing deemed necessary by the Department that is in addition to the minimum testing requirements will be scheduled to minimize interference with the production schedule. The QAI will perform acceptance sampling and testing and will witness or review documentation, workmanship and testing to assure the Work is being performed in accordance with the Contract Documents.”

Under the heading, Concrete Testing, revise the first paragraph to read as the following two paragraphs:

“Concrete Testing Acceptance of structural precast units, for each day’s production, will be determined by the Department, based on compliance with this specification and satisfactory concrete testing results. At least once per week, the QAI will make 2 concrete cylinders (6 cylinders when the Contract includes permeability requirements) for use by the Department; cylinders shall be standard cured in accordance with AASHTO T23 (ASTM C31). The QAI will perform entrained air content and slump flow testing, determine water-cement ratio and determine temperature of the sampled concrete at the time of cylinder casting. All testing equipment required by the QAI to perform this testing shall be in accordance with Standard Specification Section 502.041, Testing Equipment. In addition, the Contractor shall provide a slump cone meeting the

requirements of AASHTO T 119. Providing and maintaining testing and curing equipment shall be considered incidental to the work and no additional payment will be made.

Quality Control test cylinders shall be made and tested in accordance with the following standards:

AASHTO T 22 (ASTM C39) Test Method for Compressive Strength of Cylindrical Concrete Specimens

AASHTO T23 (ASTM C31) Practice for Making and Curing Concrete Test Specimens in Field

AASHTO T141 (ASTM C172) Practice for Sampling Freshly Mixed Concrete

AASHTO T152 (ASTM C231) Test Method for Air Content of Freshly Mixed Concrete by the Pressure Method

AASHTO T196 (ASTM C173) Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method

ASTM C1064 Test Method for Temperature of Freshly mixed Portland Cement Concrete

ASTM C1611 Standard Test Method for Slump Flow of Self-Consolidating Concrete”

Under the heading, Concrete Testing, delete the paragraph that begins:

“At least once per week, the Contractor shall make 2 concrete cylinders.....for use by the Department.....”

SECTION 713

STRUCTURAL STEEL AND RELATED MATERIAL

Section 713.01- Structural Steel Revise this Section by removing the sentence:

“ Impact test sampling and testing procedures shall be in accordance with AASHTO T.”

And replace it with: **“Impact test sampling and testing procedures shall be in accordance with AASHTO T 243 M/T 243 and AASHTO T 244.”**

SECTION 717

ROADSIDE IMPROVEMENT MATERIAL

717.02 Agricultural Ground Limestone

In the table after the third paragraph which starts with “Liquid lime...” change the Specification for Nitrogen (N) from “15.5 percent of which 1% is from ammoniac nitrogen and 14.5 /5 is from Nitrate Nitrogen” to read **“15.5 % of which 1% is from Ammoniacal Nitrogen and 14.5 % is from Nitrate Nitrogen”**

717.061 Erosion Control Blankets Revise this section by removing it in its entirety and replacing it with the following:

“717.061 Erosion Control Blankets Shall consist of a machine produced rolled blanket of biodegradable fibers, evenly distributed over the entire area of blanket, of a consistent thickness, sewn into a biodegradable mesh on the top and bottom surface using a cotton blend thread. The blanket shall remain in place when subject to shear stress of 1.55 lb/ft². The blanket shall remain intact until grass is established. The blanket shall be a product currently listed on the department’s Qualified Products List (QPL) of Erosion Control Products.

See Section 618.10 - Seeding, Maintenance and Acceptance.”

APPENDIX A TO DIVISION 100

SECTION 1 - BIDDING PROVISIONS

A. Federally Required Certifications By signing and delivering a Bid, the Bidder certifies as provided in all certifications set forth in this Appendix A - Federal Contract Provisions Supplement including:

- Certification Regarding No Kickbacks to Procure Contract as provided on this page 1 below.
- Certification Regarding Non-collusion as provided on page 1 below.
- Certification Regarding Non-segregated Facilities as provided by FHWA Form 1273, section III set forth on page 21 below.
- "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion" as provided by FHWA Form 1273, section XI set forth on page 32 below.
- "Certification Regarding Use of Contract Funds for Lobbying" as provided by FHWA Form 1273, section XII set forth on page 35 below.

Unless otherwise provided below, the term "Bidder", for the purposes of these certifications, includes the Bidder, its principals, and the person(s) signing the Bid. Upon execution of the Contract, the Bidder (then called the Contractor) will again make all the certifications indicated in this paragraph above.

CERTIFICATION REGARDING NO KICKBACKS TO PROCURE CONTRACT Except expressly stated by the Bidder on sheets submitted with the Bid (if any), the Bidder hereby certifies, to the best of its knowledge and belief, that it has not:

(A) employed or retained for a commission, percentage, brokerage, contingent fee, or other consideration, any firm or person (other than a bona fide employee working solely for me) to solicit or secure this contract;

(B) agreed, as an express or implied condition for obtaining this contract, to employ or retain the services of any firm or person in connection with carrying out the contract, or;

(C) paid, or agreed to pay, to any firm, organization, or person (other than a bona fide employee working solely for me) any fee, contribution, donation, or consideration of any kind for, or in connection with, procuring or carrying out the contract;

By signing and submitting a Bid, the Bidder acknowledges that this certification is to be furnished to the Maine Department of Transportation and the Federal Highway Administration, U.S. Department of Transportation in connection with this contract in anticipation of federal aid highway funds and is subject to applicable state and federal laws, both criminal and civil.

CERTIFICATION REGARDING NONCOLLUSION Under penalty of perjury as provided by federal law (28 U.S.C. §1746), the Bidder hereby certifies, to the best of its knowledge and belief, that:

the Bidder has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of competitive bidding in connection with the Contract.

For a related provisions, see Section 102.7.2 (C) of the Standard Specifications - "Effects of Signing and Delivery of Bids" - "Certifications", Section 3 of this Appendix A entitled "Other Federal Requirements" including section XI - "Certification Regarding Debarment, Suspension, Ineligibility, and Voluntary Exclusion" and section XII. - "Certification Regarding Use of Contract Funds for Lobbying."

B. Bid Rigging Hotline To report bid rigging activities call: **1-800-424-9071**

The U.S. Department of Transportation (DOT) operates the above toll-free "hotline" Monday through Friday, 8:00 a.m. to 5:00 p.m., eastern time. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use the "hotline" to report such activities.

The "hotline" is part of the DOT's continuing effort to identify and investigate highway construction contract fraud and abuse and is operated under the direction of the DOT Inspector General. All information will be treated confidentially and caller anonymity will be respected.

SECTION 2 - FEDERAL EEO AND CIVIL RIGHTS REQUIREMENTS

Unless expressly otherwise provided in the Bid Documents, the provisions contained in this Section 2 of this "Federal Contract Provisions Supplement" are hereby incorporated into the Bid Documents and Contract.

A. Nondiscrimination & Civil Rights - Title VI The Contractor and its subcontractors shall not discriminate on the basis of race, color, national origin, or sex in the performance of this Contract. The Contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT assisted contracts. Failure by the Contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the Department deems appropriate. The Contractor and subcontractors shall comply with Title VI of the Civil Rights Act of 1964, as amended, and with all State of Maine and other Federal Civil Rights laws.

For related provisions, see Subsection B - "Nondiscrimination and Affirmative Action - Executive Order 11246" of this Section 2 and Section 3 - Other Federal Requirements of this "Federal Contract Provisions Supplement" including section II - "Nondiscrimination" of the "Required Contract Provisions, Federal Aid Construction Contracts", FHWA-1273.

B. Nondiscrimination and Affirmative Action - Executive Order 11246 Pursuant to Executive Order 11246, which was issued by President Johnson in 1965 and amended in 1967 and 1978, this Contract provides as follows.

The Contractor shall take specific affirmative actions to ensure equal employment opportunity. The evaluation of the Contractor's compliance with these specifications shall be based upon its efforts to achieve maximum results from its actions. The Contractor shall document these efforts fully, and shall implement affirmative action steps at least as extensive as the following:

Ensure and maintain a working environment free of harassment, intimidations, and coercion at all sites, and in all facilities at which the Contractor's employees are assigned to work. The Contractor, where possible, will assign two or more women to each construction project. The Contractor shall specifically ensure that all forepersons, superintendents, and other on-site supervisory personnel are aware of and carry out the Contractor's obligation to maintain such a working environment, with specific attention to minority or female individuals working at such sites or in such facilities.

Establish and maintain a current list of minority and female recruitment sources, provide written notification to minority and female recruitment sources and to community organizations when the Contractor or its union have employment opportunities available, and to maintain a record of the organization's responses.

Maintain a current file of the names, addresses and telephone numbers of each minority and female off-the-street applicant and minority or female referral from a union, a recruitment source or community organization and of what action was taken with respect to each such individual. If such individual was sent to the union hiring hall for referral and was not referred back to the Contractor by the union or, if referred, not employed by the Contractor, this shall be documented in the file with the reason therefore, along with whatever additional actions the Contractor may have taken.

Provide immediate written notification to the Department's Civil Rights Office when the union or unions with which the Contractor has a collective bargaining agreement has not referred to the Contractor a minority person or woman sent by the Contractor, or when the Contractor has other information that the union referral process has impeded the Design-Builder's efforts to meet its obligations.

Develop on-the-job training opportunities and/or participate in training programs for the area which expressly include minorities and women, including upgrading programs and apprenticeship and trainee programs relevant to the Contractor's employment needs, especially those programs funded or approved by the Department of Labor. The Contractor shall provide notice of these programs to the sources compiled under B above.

Disseminate the Contractor's EEO policy by providing notice of the policy to unions and training programs and requesting their cooperation in assisting the Contractor in meeting its EEO obligation; by including it in any policy manual and collective bargaining agreement; by publicizing it in the company newspaper, annual report, etc.; by specific review of the policy with all management personnel and with all minority and female employees at least once a year; and by posting the company EEO policy on bulletin boards accessible to all employees at each location where construction work is performed.

Review, at least annually, the company's EEO policy and affirmative action obligations under these specifications with all employees having any responsibility for hiring, assignment, layoff, termination, or other employment decisions including specific review of these items with on-site supervisory personnel such as Superintendents, General Forepersons, etc., prior to the initiation of construction work at any job site. A written record shall be made and maintained identifying the time and place of these meetings, persons attending, subject matter discussed, and disposition of the subject matter.

Disseminate the Contractor's EEO policy externally by including it in any advertising in the news media, specifically including minority and female news media, and providing written notification to and discussing the Contractor's EEO policy with other Contractor's and Subcontractors with whom the Contractor does or anticipates doing business.

Direct its recruitment efforts, both orally and written to minority, female and community organizations, to schools with minority and female students and to minority and female recruitment and training organizations serving the Contractor's recruitment area and employment needs. Not later than one month prior to the date for the acceptance of applications for apprenticeship or other training by any recruitment source, the Contractor shall send written notification to organizations such as the above describing the openings, screenings, procedures, and test to be used in the selection process.

Encourage present minority and female employees to recruit other minority persons and women and, where reasonable, provide after school, summer and vacation employment to minority and female youth, both on the site and in other areas of a Contractor's workforce.

Validate all tests and other selection requirements.

Conduct, at least annually, an inventory and evaluation at least of all minority and female personnel for promotional opportunities and encourage these employees to seek or to prepare for, through appropriate training, etc., such opportunities.

Ensure that seniority practices, job classifications, work assignments and other personnel practices, do not have a discriminatory effect by continually monitoring all personnel and employment related activities to ensure that the EEO policy and the Contractor's obligations under these specifications are being carried out.

Ensure that all facilities and company activities are non segregated except that separate or single-user toilet and necessary changing facilities shall be provided to assure privacy between the sexes.

Document and maintain a record of all solicitations of offers for subcontracts from minority and female construction Contractor's and suppliers, including circulation of solicitations to minority and female Contractor associations and other business associations.

Conduct a review, at least annually, of all supervisors' adherence to and performance under the Contractor's EEO policies and affirmative action obligations.

C. Goals for Employment of Women and Minorities Per Executive Order 11246, craft tradesperson goals are 6.9% women and .5% minorities employed. However, goals may be adjusted upward at the mutual agreement of the Contractor and the Department. Calculation of these percentages shall not include On-the-Job Training Program trainees, and shall not include clerical or field clerk position employees.

For a more complete presentation of requirements for such Goals, see the federally required document "Goals for Employment of Females and Minorities" set forth in the next 6 pages below.

Start of GOALS FOR EMPLOYMENT OF FEMALES AND MINORITIES
Federally Required Contract Document

§60-4.2 Solicitations

- (d) The following notice shall be included in, and shall be part of, all solicitations for offers and bids on all Federal and federally assisted construction contracts or subcontracts in excess of \$10,000 to be performed in geographical areas designated by the Director pursuant to §60-4.6 of this part (see 41 CFR 60-4.2(a)):

Notice of Requirement for Affirmative Action to Ensure Equal Opportunity (Executive Order 11246)

1. The Offeror's or bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Specifications" set forth herein.
2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate work force in each trade on all construction work in the covered area, are as follows:

<u>Goals for female participation in each trade</u>	6.9%

Goals for minority participation for each trade

Maine

001 Bangor, ME	0.8%

Non-SMSA Counties (Aroostook, Hancock, Penobscot, Piscataquis, Waldo, Washington)

002 Portland-Lewiston, ME

SMSA Counties: 4243 Lewiston-Auburn, ME (Androscoggin)	0.5%

6403 Portland, ME (Cumberland, Sagadahoc)	0.6%

Non-SMSA Counties:
(Franklin, Kennebec, Knox, Lincoln, Oxford, Somerset, York)

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor also is subject to the goals for both its federally involved and non federally involved construction.

The contractor's compliance with the Executive Order and the regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be in violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The Contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within 10 working days of award of any construction subcontract in excess of \$10,000 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address and telephone number of the subcontractor, employer identification number of the subcontractor, estimated dollar amount of the subcontract; estimated started and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed.

4. As used in this Notice, and in the Contract resulting from this solicitation, the "covered area" is (insert description of the geographical areas where the contract is to be performed giving the state, county and city, if any).

STANDARD FEDERAL EQUAL EMPLOYMENT OPPORTUNITY CONSTRUCTION CONTRACT SPECIFICATIONS (EXECUTIVE ORDER 11246)

1. As used in these specifications:
 - a. "Covered area" means the geographical area described in the solicitation from which this contract resulted;
 - b. "Director" means Director, Office of Federal Contract Compliance Programs, United States Department of Labor, or any person to whom the Director delegates authority;
 - c. "Employer identification number" means the Federal Social Security number used on the Employer's Quarterly Federal Tax Return, U.S. Treasury Department form 941;
 - d. "Minority" includes:

- (i) Black (all persons having origins in any of the Black African racial groups not of Hispanic origin);
 - (ii) Hispanic (all persons of Mexican, Puerto Rican, Cuban, Central or South American or other Spanish Culture or origin, regardless of race);
 - (iii) Asian and Pacific Islander (all persons having origins in any of the original peoples of the Far East, Southeast Asia, the Indian Subcontinent, or the Pacific Islands); and
 - (iv) American Indian or Alaskan Native (all persons having origins in any of the original peoples of the North America and maintaining identifiable tribal affiliations through membership and participation or community identification).
2. Whenever the Contractor, or any subcontractor at any tier, subcontracts a portion of the work involving any construction trade, it shall physically include in each subcontract in excess of \$10,000 the provisions of these specifications and the Notice which contains the applicable goals for minority and female participation and which is set forth in the solicitations from which this contract resulted.
3. If the contractor, is participating (pursuant to 41 CFR 60-4.5) in a Hometown Plan approved by the U.S. Department of Labor in the covered area either individually or through an association, its affirmative action obligations on all work in the Plan area (including goals and timetables) shall be in accordance with that Plan for those trades which have unions participating in the Plan. Contractors must be able to demonstrate their participation in and compliance with the provisions of any such Hometown Plan. Each Contractor or Subcontractor participating in an approved Plan is individually required to comply with its obligations under the EEO clause, and to make a good faith effort to achieve each goal under the Plan in each trade in which it has employees. The overall good faith performance by other Contractors for Subcontractors toward a goal in an approved Plan does not excuse any covered Contractor's or Subcontractor's failure to take good faith efforts to achieve the Plan goals and timetables.
4. The Contractor shall implement the specific affirmative action standards provided in paragraphs 7 a. through p. of these specifications. The goals set forth in the solicitation from which this contract resulted are expressed as percentages of the total hours of employment and training of minority and female utilization the Contractor should reasonably be able to achieve in each construction trade in which it has employees in contractors performing construction work in geographical areas where they do not have a Federal or federally assisted construction contract shall apply the minority and female goals established for the geographical areas where the work is being performed. Goals are published periodically in the Federal Register in notice form and such notices may be obtained from any Office of Federal Contract Compliance Programs office or from Federal procurement contracting officers. The Contractor is expected to make substantially uniform progress in meeting its goals in each craft during the period specific.
5. Neither the provisions of any collective bargaining agreement, nor the failure by a union with whom the Contractor has a collective bargaining agreement, to refer either minorities or women shall excuse the Contractor's obligations under these specifications, Executive Order 11246, or the regulations promulgated pursuant, thereto.

6. In order for the non working training hours of apprentices and trainees to be counted in meeting the goals, such apprentices and trainees must be employed by the Contractor during the training period, and the Contractor must have made a commitment to employ the apprentices and trainees at the completion of their training, subject to the availability of employment opportunities. Trainees must be trained pursuant to training programs approved by the U.S. Department of Labor.
7. The Contractor shall take specific affirmative actions to ensure equal employment opportunity. The evaluation of the Contractor's compliance with these specifications shall be based upon its effort to achieve maximum results from its actions. The Contractor shall document these efforts fully, and shall implement affirmative action steps at least as expensive as the following:
 - a. Ensure and maintain a working environment free of harassment, intimidation, coercion at all sites, and in all facilities at which the Contractor's employees are assigned to work. The Contractor, when possible, will assign two or more women to each construction project. The Contractor shall specifically ensure that all foremen, superintendents, and other on-site supervisory personnel are aware of and carry out the Contractor's obligation to maintain such a working environment, with specific attention to minority or female individuals working at such sites or in such facilities.
 - b. Establish and maintain a current list of minority and female recruitment sources provide written notification to minority and female recruitment sources and to community organizations when the Contractor or its unions have employment opportunities available, and maintain a record of the organization's responses.
 - c. Maintain a current file of the names, addresses and telephone numbers of each minority and female off-the-street applicant and minority or female referral from a union, a recruitment sources or community organization and of what action was taken with respect to each such individual. If such individual was sent to the union hiring hall for referral and was not referred back to the Contractor by the union or, if referred, not employed by the Contractor, this shall be documented in the file with the reason therefore, along with whatever additional actions the Contractor may have taken.
 - d. Provide immediate written notification to the Director when the union or unions with which the Contractor has a collective bargaining agreement has not referred to the Contractor a minority person or woman sent by the Contractor, or when the Contractor has other information that the union referral process has impeded the Contractor's efforts to meet its obligations.
 - e. Develop on-the-job training opportunities and/or participate in training programs for the area which expressly include minorities and women, including upgrading programs and apprenticeship and trainee programs relevant to the Contractor's employment needs, especially those programs funded or approved by the Department of Labor. The Contractor shall provide notice of these programs to the sources complied under 7b above.

- f. Disseminate the Contractor's EEO policy by providing notice of the policy to unions and training programs and requesting their cooperation in assisting the Contractor in meeting its EEO obligations; by including in any policy manual and collective bargaining agreement; by publicizing it in the company newspaper, annual report, etc.; by specific review of the policy with all management personnel and with all minority and female employees at least once a year; and by posting the company EEO policy on bulletin boards accessible to all employees at each location where construction work is performed.
- g. Review, at least annually, the company's EEO policy and affirmative action obligations under these specifications with all employees having any responsibility for hiring, assignment, layoff, termination or other employment decisions including specific review of these items with on-site supervisory personnel such as Superintendents, General Foremen, etc., prior to the initiation of construction work at any job site. A written record shall be made and maintained identifying the time and place of these meetings, persons attending, subject matter discussed, and disposition of the subject matter.
- h. Disseminate the Contractor's EEO policy externally by including it in any advertising in the news media, specifically including minority and female news media, and providing written notification to and discussing the Contractor's EEO policy with other Contractors and Subcontractors with whom the Contractor does or anticipates doing business.
- i. Direct its recruitment, efforts, both oral and written, to minority, female and community organizations, to schools with minority and female students and to minority and female recruitment and training organizations serving the Contractor's recruitment area and employment needs. Not later than one month other training by any recruitment source, the Contractor shall send written notification to organizations such as the above, describing prior to the date for the acceptance of applications for apprenticeship or the openings, screening procedures, and tests to be used in the selection process.
- j. Encourage present minority and female employees to recruit other minority persons and women and, where reasonable, provide after school, summer and vacation employment to minority and female youth both on site and in other areas of a Contractor's work force.
- k. Validate all tests and other selection requirements where there is an obligation to do so under 41 CFR Part 60-3.
- l. Conduct, at least annually, an inventory and evaluation at least of all minority and female personnel for promotional opportunities and encourage these employees to seek or to prepare for, through appropriate training, etc., such opportunities.
- m. Ensure that seniority practices, job classifications, work assignments and other personnel practices, do not have a discriminatory effect by continually monitoring all personnel and employment related activities to ensure that the EEO policy and the Contractor's obligations under these specifications are being carried out.

- n. Ensure that all facilities and company activities are non segregated except that separate or single-user toilet and necessary changing facilities shall be provided to assure privacy between the sexes.
 - o. Document and maintain a record of all solicitations of offers for subcontracts from minority and female construction contractors and suppliers, including circulation of solicitation to minority and female contractor associations and other business associations.
 - p. Conduct a review, at least annually, of all supervisor's adherence to and performance under the Contractor's EEO policies and affirmative action obligations.
8. Contractors are encouraged to participate in voluntary associations which assist in fulfilling one or more of their affirmative action obligations (7 a through p.). The efforts of a contractor association, joint contractor-union, contractor-community, or other similar group of which the contractor is a member and participant, may be asserted as fulfilling any one or more of its obligations under 7 a through p. of these specifications provided that the contractor actively participates in the group, makes every effort to assure that the group has a positive impact on the employment of minorities and women in the industry, ensures that the concrete benefits of the program and reflected in the Contractor's minority and female work force participation, makes a good faith effort to meet its individual goals and timetables, and can provide access to documentation which demonstrates the effectiveness of actions take on behalf of the Contractor. The obligation to comply, however, is the Contractor's and failure of such a group to fulfill an obligation shall not be a defense for the Contractor's noncompliance.
9. A single goal for minorities and a separate single goal for women have been established. The Contractor, however, is required to provide equal employment opportunity and to take affirmative action for all minority groups, both male and female, and all women, both minority and non-minority. Consequently, the Contractor may be in violation of the Executive Order if a particular group is employed in a substantially disparate manner (for example, specific minority group of women is underutilized.)
10. The Contractor shall not use the goals and timetables or affirmative action even though the Contractor has achieved its goals for women generally, the Contractor may be in violation of the Executive Order if standards to discriminate against any person because of race, color, religion, sex, or national origin.
11. The Contractor shall not enter into any Subcontract with any person or firm debarred from Government contracts pursuant to Executive Order 11246.
12. The Contractor shall carry out such sanctions and penalties for violation of these specifications and of the Equal Opportunity Clause, including suspension, termination and cancellation of existing subcontracts as may be imposed or ordered pursuant to Executive Order 11246, as amended, and its implementation regulations by the Office of Federal Contract Compliance Programs. Any Contractor who fails to carry out such sanctions and penalties shall be in violation of these specifications and Executive Order 11246, as amended.

13. The Contractor, in fulfilling its obligations under these specifications, shall implement specific affirmative action steps, at least as extensive as those standards prescribed in paragraph 7 of these specifications, so as to achieve maximum results from its efforts to ensure equal employment opportunity. If the Contractor fails to comply with the requirements of the Executive Order, the implementing regulations, or these specifications, the Director shall proceed in accordance with 41 CFR 60-4.6.
14. The Contractor shall designate a responsible official to monitor all employment related activity to ensure that the company EEO policy is being carried out, to submit reports relating to the provisions hereof as may be required by the Government and to keep records. Records shall at least include for each employee the name, address, telephone numbers, construction trade, union affiliation if any, employee identification number when assigned, social security number, race, sex, status (e.g. mechanic, apprentice, trainee, helper, or laborer), dates of changes in status, hours worked per week in the indicated trade, rate of pay, and location at which the work was performed. Records be maintained in an easily understandable and retrievable form; however, to the degree that existing records satisfy this requirement, contractors shall not be required to maintain separate records.
15. Nothing herein provided shall be construed as a limitation upon the application of other laws which establish different standards of compliance or upon the application of requirements for the hiring of local or other area residents (e.g., those under the Public Works Employment Act of 1977 and the Community Development Block Grant Program).

End of GOALS FOR EMPLOYMENT OF FEMALES AND MINORITIES
Federally Required Contract Document

D. Section '**D Disadvantaged Business Enterprise (DBE) Requirements**' is removed in its entirety. The DBE material is in:

Section 105.10 EQUAL OPPORTUNITY AND CIVIL RIGHTS.

SECTION 3 - OTHER FEDERAL REQUIREMENTS

Unless expressly otherwise provided in the Bid Documents, the provisions contained in this Section 3 of this "Federal Contract Provisions Supplement" are hereby incorporated into the Bid Documents and Contract.

A. Buy America

If the cost of products purchased for permanent use in this project which are manufactured of steel, iron or the application of any coating to products of these materials exceeds 0.1 percent of the contract amount, or \$2,500.00, whichever is greater, the products shall have been manufactured and the coating applied in the United States. The coating materials are not subject to this clause, only the application of the coating. In computing that amount, only the cost of the product and coating application cost will be included.

Ore, for the manufacture of steel or iron, may be from outside the United States; however, all other manufacturing processes of steel or iron must be in the United States to qualify as having been manufactured in the United States.

United States includes the 50 United States and any place subject to the jurisdiction thereof.

Products of steel include, but are not limited to, such products as structural steel, piles, guardrail, steel culverts, reinforcing steel, structural plate and steel supports for signs, luminaries and signals.

Products of iron include, but are not limited to, such products as cast iron grates.

Application of coatings include, but are not limited to, such applications as epoxy, galvanized and paint.

To assure compliance with this section, the Contractor shall submit a certification letter on its letterhead to the Department stating the following:

“This is to certify that products made of steel, iron or the application of any coating to products of these materials whose costs are in excess of \$2,500.00 or 0.1 percent of the original contract amount, whichever is greater, were manufactured and the coating, if one was required, was applied in the United States.”

B. Materials

a. Convict Produced Materials References: 23 U.S.C. 114(b)(2), 23 CFR 635.417

Applicability: FHWA's prohibition against the use of convict material only applies to Federal-aid highways. Materials produced after July 1, 1991, by convict labor may only be incorporated in a Federal-aid highway construction project if: 1) such materials have been produced by convicts who are on parole, supervised release, or probation from a prison; or 2) such material has been produced in a qualified prison facility, e.g., prison industry, with the amount produced during any 12-month period, for use in Federal-aid projects, not exceeding the amount produced, for such use, during the 12-month period ending July 1, 1987.

Materials obtained from prison facilities (e.g., prison industries) are subject to the same requirements for Federal-aid participation that are imposed upon materials acquired from other sources. Materials manufactured or produced by convict labor will be given no preferential treatment.

The preferred method of obtaining materials for a project is through normal contracting procedures which require the contractor to furnish all materials to be incorporated in the work. The contractor selects the source, public or private, from which the materials are to be obtained (23 CFR 635.407). Prison industries are prohibited from bidding on projects directly (23 CFR 635.112e), but may act as material supplier to construction contractors.

Prison materials may also be approved as State-furnished material. However, since public agencies may not bid in competition with private firms, direct acquisition of materials from a

prison industry for use as State-furnished material is subject to a public interest finding with the Division Administrator's concurrence (23 CFR 635.407d). Selection of materials produced by convict labor as State-furnished materials for mandatory use should be cleared prior to the submittal of the Plans Specifications & Estimates (PS&E).

b. Patented/Proprietary Products References: 23 U.S.C. 112, 23 CFR 635.411

FHWA will not participate, directly or indirectly, in payment for any premium or royalty on any patented or proprietary material, specification, or process specifically set forth in the plans and specifications for a project, unless:

- the item is purchased or obtained through competitive bidding with equally suitable unpatented items,
- the STA certifies either that the proprietary or patented item is essential for synchronization with the existing highway facilities or that no equally suitable alternative exists, or
- the item is used for research or for a special type of construction on relatively short sections of road for experimental purposes. States should follow FHWA's procedures for "Construction Projects Incorporating Experimental Features" ([expermnt.htm](#)) for the submittal of work plans and evaluations.

The primary purpose of the policy is to have competition in selection of materials and allow for development of new materials and products. The policy further permits materials and products that are judged equal may be bid under generic specifications. If only patented or proprietary products are acceptable, they shall be bid as alternatives with all, or at least a reasonable number of, acceptable materials or products listed; and the Division Administrator may approve a single source if it can be found that its utilization is in the public interest.

Trade names are generally the key to identifying patented or proprietary materials. Trade name examples include 3M, Corten, etc. Generally, products identified by their brand or trade name are not to be specified without an "or equal" phrase, and, if trade names are used, all, or at least a reasonable number of acceptable "equal" materials or products should be listed. The licensing of several suppliers to produce a product does not change the fact that it is a single product and should not be specified to the exclusion of other equally suitable products.

c. State Preference References: 23 U.S.C. 112, 23 CFR 635.409

Materials produced within Maine shall not be favored to the exclusion of comparable materials produced outside of Maine. State preference clauses give particular advantage to the designated source and thus restrict competition. Therefore, State preference provisions shall not be used on any Federal-aid construction projects.

This policy also applies to State preference actions against materials of foreign origin, except as otherwise permitted by Federal law. Thus, States cannot give preference to in-State material sources over foreign material sources. Under the Buy America provisions, the States are

permitted to expand the Buy America restrictions provided that the STA is legally authorized under State law to impose more stringent requirements.

d. State Owned/Furnished/Designated Materials References: 23 U.S.C. 112, 23 CFR 635.407

Current FHWA policy requires that the contractor must furnish all materials to be incorporated in the work, and the contractor shall be permitted to select the sources from which the materials are to be obtained. Exceptions to this requirement may be made when there is a definite finding, by MaineDOT and concurred in by Federal Highway Administration's (FHWA) Division Administrator, that it is in the public interest to require the contractor to use materials furnished by the MaineDOT or from sources designated by MaineDOT. The exception policy can best be understood by separating State-furnished materials into the categories of manufactured materials and local natural materials.

Manufactured Materials When the use of State-furnished manufactured materials is approved based on a public interest finding, such use must be made mandatory. The optional use of State-furnished manufactured materials is in violation of our policy prohibiting public agencies from competing with private firms. Manufactured materials to be furnished by MaineDOT must be acquired through competitive bidding, unless there is a public interest finding for another method, and concurred in by FHWA's Division Administrator.

Local Natural Materials When MaineDOT owns or controls a local natural materials source such as a borrow pit or a stockpile of salvaged pavement material, etc., the materials may be designated for either optional or mandatory use; however, mandatory use will require a public interest finding (PIF) and FHWA's Division Administrator's concurrence.

In order to permit prospective bidders to properly prepare their bids, the location, cost, and any conditions to be met for obtaining materials that are made available to the contractor shall be stated in the bidding documents.

Mandatory Disposal Sites Normally, the disposal site for surplus excavated materials is to be of the contractor's choosing; although, an optional site(s) may be shown in the contract provisions. A mandatory site shall be specified when there is a finding by MaineDOT, with the concurrence of the Division Administrator, that such placement is the most economical or that the environment would be substantially enhanced without excessive cost. Discussion of the mandatory use of a disposal site in the environmental document may serve as the basis for the public interest finding.

Summarizing FHWA policy for the mandatory use of borrow or disposal sites:

- mandatory use of either requires a public interest finding and FHWA's Division Administrator's concurrence,
- mandatory use of either may be based on environmental consideration where the environment will be substantially enhanced without excessive additional cost, and
- where the use is based on environmental considerations, the discussion in the environmental document may be used as the basis for the public interest finding.

Factors to justify a public interest finding should include such items as cost effectiveness, system integrity, and local shortages of material.

C. Standard FHWA Contract Provisions - FHWA 1273

Unless expressly otherwise provided in the Bid Documents, the following “Required Contract Provisions, Federal Aid Construction Contracts”, FHWA-1273, are hereby incorporated into the Bid Documents and Contract.

Cargo Preference Act : Contractor and Subcontractor Clauses. “Use of United States-flag vessels: The contractor agrees—“(1) To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels.”(2) To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, ‘on-board’ commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (1) of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590.”(3) To insert the substance of the provisions of this clause in all subcontracts issued pursuant to this contract.”(Reorganization Plans No. 21 of 1950 (64 Stat. 1273) and No. 7 of 1961 (75 Stat. 840) as amended by Pub. L. 91-469 (84 Stat. 1036) and Department of Commerce Organization Order 10-8 (38 FR 19707, July 23, 1973)) [42 FR 57126, Nov. 1, 1977]

The Cargo Preference Act requirements apply to materials or equipment that are acquired for a specific Federal-aid highway project. In general, the requirements are not applicable to goods or materials that come into inventories independent of an FHWA funded-contract. For example, the requirements would not apply to shipments of Portland cement, asphalt cement, or aggregates, as industry suppliers and contractors use these materials to replenish existing inventories. In general, most of the materials used for highway construction originate from existing inventories and are not acquired solely for a specific Federal-aid project. However, if materials or equipment are acquired solely for a Federal-aid project, then the Cargo Preference Act requirements apply.”

Start of FHWA 1273 REQUIRED CONTRACT PROVISIONS
FEDERAL-AID CONSTRUCTION CONTRACTS (As revised through May 1, 2012)

FHWA-1273 -- Revised May 1, 2012

**REQUIRED CONTRACT PROVISIONS
FEDERAL-AID CONSTRUCTION CONTRACTS**

- I. General
- II. Nondiscrimination
- III. Nonsegregated Facilities
- IV. Davis-Bacon and Related Act Provisions
- V. Contract Work Hours and Safety Standards Act Provisions
- VI. Subletting or Assigning the Contract
- VII. Safety: Accident Prevention
- VIII. False Statements Concerning Highway Projects
- IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
- X. Compliance with Governmentwide Suspension and Debarment Requirements
- XI. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment,

termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding \$10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.

b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

- a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.
- b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.
- c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability.

The following procedures shall be followed:

- a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.
- b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.
- c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.
- d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women.

Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even

though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurance Required by 49 CFR 26.13(b):

a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.

b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on [Form FHWA-1391](#). The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH-1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b. (1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

- (i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and
- (ii) The classification is utilized in the area by the construction industry; and
- (iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act),

daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

b. (1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g. , the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at <http://www.dol.gov/esa/whd/forms/wh347instr.htm> or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency..

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the “Statement of Compliance” required by paragraph 3.b.(2) of this section.

(4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a

different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

6. Subcontracts. The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility.

a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.

3. Withholding for unpaid wages and liquidated damages. The FHWA or the contacting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.

4. Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term “perform work with its own organization” refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:

- (1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
- (2) the prime contractor remains responsible for the quality of the work of the leased employees;
- (3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
- (4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.
2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1. Instructions for Certification – First Tier Participants:

- a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.
- b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.
- c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. Instructions for Certification - Lower Tier Participants:

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

**Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--
Lower Tier Participants:**

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

**ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR
APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL
ACCESS ROAD CONTRACTS**

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

End of FHWA 1273

The United States Department of Transportation (USDOT)

FHWA STANDARD TITLE VI/NONDISCRIMINATION ASSURANCES

DOT Order No. 1050.2A

The Maine Department of Transportation (herein referred to as the "Recipient"), **HEREBY AGREES THAT**, as a condition to receiving any Federal financial assistance from the U.S. Department of Transportation (DOT), through The Federal Highway Administration (FHWA), is subject to and will comply with the following:

Statutory/Regulatory Authorities

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d *et seq.*, 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin);
- 49 C.F.R. Part 21 (entitled *Nondiscrimination In Federally-Assisted Programs Of The Department Of Transportation—Effectuation Of Title VI Of The Civil Rights Act Of 1964*);
- 28 C.F.R. section 50.3 (U.S. Department of Justice Guidelines for Enforcement of Title VI of the Civil Rights Act of 1964);

FHWA may include additional Statutory/Regulatory Authorities here.

The preceding statutory and regulatory cites hereinafter are referred to as the "Acts" and "Regulations," respectively.

General Assurances

In accordance with the Acts, the Regulations, and other pertinent directives, circulars, policy, memoranda, and/or guidance, the Recipient hereby gives assurance that it will promptly take any measures necessary to ensure that:

No person in the United States shall, on the grounds of race, color, or national origin, be excluded from participation in, be denied the benefits of, or be otherwise subjected to discrimination under any program or activity," for which the Recipient receives Federal financial assistance from DOT, including FHWA..

The Civil Rights Restoration Act of 1987 clarified the original intent of Congress, with respect to Title VI and other Nondiscrimination requirements (The Age Discrimination Act of 1975, and Section 504 of the Rehabilitation Act of 1973), by restoring the broad, institutional-wide scope and coverage of these nondiscrimination statutes and requirements to include all programs and activities of the Recipient, so long as any portion of the program is Federally assisted.

FHWA may include additional General Assurances in this section, or reference an addendum here.

Specific Assurances

More specifically, and without limiting the above general Assurance, the Recipient agrees with and gives the following Assurances with respect to its federally assisted programs:

1. The Recipient agrees that each "activity," "facility," or "program," as defined in §§ 21.23 (b) and 21.23 (e) of 49 C.F.R. § 21 will be (with regard to an "activity") facilitated, or will be (with regard to a "facility") operated, or will be (with regard to a "program") conducted in compliance with all requirements imposed by, or pursuant to the Acts and the Regulations.
2. The Recipient will insert the following notification in all solicitations for bids, Requests For Proposals for work, or material subject to the Acts and the Regulations made in connection with all Federal Highway Programs and, in adapted form, in all proposals for negotiated agreements regardless of funding source:

The (Agency), in accordance with the provisions of Title VI of the Civil Rights Act of 1964 (78 Stat. 252, 42 U.S.C. §§ 2000d to 2000d-4) and the Regulations, hereby notifies all bidders that it will affirmatively insure that any contract entered into pursuant to this advertisement, disadvantaged business enterprises will be afforded full opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award.

3. The Recipient will insert the clauses of Appendix A and E of this Assurance in every contract or agreement subject to the Acts and the Regulations.
4. The Recipient will insert the clauses of Appendix B of this Assurance, as a covenant running with the land, in any deed from the United States effecting or recording a transfer of real property, structures, use, or improvements thereon or interest therein to a Recipient.
5. That where the Recipient receives Federal financial assistance to construct a facility, or part of a facility, the Assurance will extend to the entire facility and facilities operated in connection therewith.
6. That where the Recipient receives Federal financial assistance in the form, or for the acquisition of real property or an interest in real property, the Assurance will extend to rights to space on, over, or under such property.
7. That the Recipient will include the clauses set forth in Appendix C and Appendix D of this Assurance, as a covenant running with the land, in any future deeds, leases, licenses, permits, or similar instruments entered into by the Recipient with other parties:
 - a. for the subsequent transfer of real property acquired or improved under the applicable activity, project, or program; and
 - b. for the construction or use of, or access to, space on, over, or under real property acquired or improved under the applicable activity, project, or program.
8. That this Assurance obligates the Recipient for the period during which Federal financial assistance is extended to the program, except where the Federal financial assistance is to provide, or is in the form of, personal property, or real property, or interest therein, or structures or improvements thereon, in which case the Assurance obligates the Recipient, or any transferee for the longer of the following periods:

- a. the period during which the property is used for a purpose for which the Federal financial assistance is extended, or for another purpose involving the provision of similar services or benefits; or
 - b. the period during which the Recipient retains ownership or possession of the property.
9. The Recipient will provide for such methods of administration for the program as are found by the Secretary of Transportation or the official to whom he/she delegates specific authority to give reasonable guarantee that it, other recipients, sub-recipients, sub-grantees, contractors, subcontractors, consultants, transferees, successors in interest, and other participants of Federal financial assistance under such program will comply with all requirements imposed or pursuant to the Acts, the Regulations, and this Assurance.
10. The Recipient agrees that the United States has a right to seek judicial enforcement with regard to any matter arising under the Acts, the Regulations, and this Assurance.

FHWA may include additional Specific Assurances in this section.

By signing this ASSURANCE, Maine Department of Transportation also agrees to comply (and require any subrecipients, sub-grantees, contractors, successors, transferees, and/or assignees to comply) with all applicable provisions governing the FHWA access to records, accounts, documents, information, facilities, and staff. You also recognize that you must comply with any program or compliance reviews, and/or complaint investigations conducted by FHWA. You must keep records, reports, and submit the material for review upon request to FHWA, or their designees in a timely, complete, and accurate way. Additionally, you must comply with all other reporting, data collection, and evaluation requirements, as prescribed by law or detailed in program guidance.

Maine Department of Transportation gives this ASSURANCE in consideration of and for obtaining any Federal grants, loans, contracts, agreements, property, and/or discounts, or other Federal-aid and Federal financial assistance extended after the date hereof to the recipients by the U.S. Department of Transportation. This ASSURANCE is binding on Maine Department of Transportation, other recipients, sub-recipients, sub-grantees, contractors, subcontractors and their subcontractors', transferees, successors in interest, and any other participants in it programs. . The person(s) signing below is authorized to sign this ASSURANCE on behalf of the Recipient.

Name of Recipient: Maine Department of Transportation

A handwritten signature in blue ink, appearing to read "D. Bernhardt", is written over a horizontal line.

David Bernhardt, Commissioner

DATED: 9/18/14

APPENDIX A

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the “contractor”) agrees as follows:

1. **Compliance with Regulations:** The contractor (hereinafter includes consultants) will comply with the Acts and the Regulations relative to Nondiscrimination in Federally-assisted programs of the U.S. Department of Transportation, **Federal Highway Administration**, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.
2. **Nondiscrimination:** The contractor, with regard to the work performed by it during the contract, will not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The contractor will not participate directly or indirectly in the discrimination prohibited by the Acts and the Regulations as set forth in Appendix E, including employment practices when the contract covers any activity, project, or program set forth in Appendix B of 49 CFR Part 21.
3. **Solicitations for Subcontracts, Including Procurements of Materials and Equipment:** In all solicitations, either by competitive bidding, or negotiation made by the contractor for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the contractor of the contractor’s obligations under this contract and the Acts and the Regulations relative to Non-discrimination on the grounds of race, color, or national origin.
4. **Information and Reports:** The contractor will provide all information and reports required by the Acts, the Regulations and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information, and its facilities as may be determined by the Recipient or the **Federal Highway Administration**, to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the contractor will so certify to the Recipient or the **Federal Highway Administration**, as appropriate, and will set forth what efforts it has made to obtain the information.
5. **Sanctions for Noncompliance:** In the event of a contractor’s noncompliance with the Non-discrimination provisions of this contract, the Recipient will impose such contract sanctions as it or the **Federal Highway Administration**, may determine to be appropriate, including, but not limited to:
 - a. withholding payments to the contractor under the contract until the contractor complies; and/or
 - b. cancelling, terminating, or suspending a contract, in whole or in part.

Incorporation of Provisions: The contractor will include the provisions of paragraphs one through six in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and directives issued pursuant thereto. The contractor will take action with respect to any subcontract or procurement as the Recipient or the **Federal Highway Administration**, may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the contractor becomes involved in, or is threatened with litigation by a subcontractor, or supplier because of such direction, the contractor may request the Recipient to enter into any litigation to protect the interests of the Recipient. In addition, the contractor may request the United States to enter into the litigation to protect the interests of the United States.

(APPENDIX C TO MAINEDOT TITLE VI ASSURANCE)

FEDERAL HIGHWAY ADMINISTRATION ASSISTED PROGRAMS

The following clauses shall be included in all deeds, licenses, leases, permits, or similar instruments entered into

by the Maine Department of Transportation pursuant to the provisions of Assurance 7(a).

The (grantee, licensee, lessee, permittee, etc., as appropriate) for herself/himself, his/her heirs, personal representatives, successors in interest, and assigns, as a part of the consideration hereof, does hereby covenant and agree [in the case of deeds and leases add "as a covenant running with the land"] that in the event facilities are constructed, maintained, or otherwise operated on the said property described in this (deed, license, lease, permit, etc.) for a purpose for which a Department of Transportation program or activity is extended or for another purpose involving the provision of similar services or benefits, the (grantee, licensee lessee, permittee, etc.) shall maintain and operate such facilities and services in compliance with all other requirements imposed pursuant to Title 49, Code of Federal Regulations, Department of Transportation, Subtitle A, Office of the Secretary, Part 21, Nondiscrimination of Federally-Assisted Programs of the Department of Transportation - Effectuation of Title VI of the Civil Rights Act of 1964, and as said Regulations may be amended.

[Include in licenses, leases, permits, etc.]*

That in the event of breach of any of the above nondiscrimination covenants, Maine Department of Transportation shall have the right to terminate the [license, lease, permit, etc.] and to re-enter and repossess said land and the facilities thereon, and hold the same as if said [licenses, lease, permit, etc.] had never been made or issued.

[Include in deeds]*

That in the event of breach of any of the above nondiscrimination covenants, Maine Department of Transportation shall have the right to re-enter said lands and facilities thereon, and the above described lands and facilities shall thereupon revert to and vest in and become the absolute property of Maine Department of Transportation and its assigns.

The following shall be included in all deeds, licenses, leases, permits, or similar agreements entered into by Maine Department of Transportation pursuant to the provisions of Assurance 7(b).

The (grantee, licensee, lessee, permittee, etc., as appropriate) for herself/himself, his/her personal representatives, successors in interest, and assigns, as a part of the consideration hereof, does hereby covenant and agree (in case of deeds, and leases add "as a covenant running with the land") that (1) no person on the grounds of race, color, or national origin shall be excluded from participation in, be denied the benefits of, or be otherwise subjected to discrimination in the use of said facilities, (2) that in the construction of any improvements on, over or under such land and the furnishing services thereon, no person on the grounds of race, color, or national origin shall be excluded from the participation in, be denied the benefits of, or be otherwise subjected to discrimination, and (3) that the (grantee, licensee, lessee, permittee, etc.) shall use the premises in compliance with all other requirements imposed by or pursuant to Title 49, Code of Federal Regulations, Department of Transportation, Subtitle A, Office of the Secretary, Part 21, Nondiscrimination in Federally-Assisted Programs of the Department of Transportation - Effectuation of Title VI of the Civil Rights Act of 1964, and as said Regulations may be amended.

[Include in licenses, leases, permits, etc.]*

That in the event of breach of any of the above nondiscrimination covenants, Maine Department of Transportation shall have the right to terminate the [license, lease, permit, etc.] and to re-enter and repossess said land and the facilities thereon, and hold the same as if said [license, lease, permit, etc.] had never been made or issued.

[Include in deeds]*

That in the event of breach of any of the above nondiscrimination covenants, Maine Department of Transportation shall have the right to re-enter said land and facilities thereon, and the above described lands and facilities shall thereupon revert to and vest in and become the absolute property of Maine Department of Transportation and its assigns.

* Reverter clause and related language to be used only when it is determined that such a clause is necessary in order to effectuate the purpose of Title VI of the Civil Rights Act of 1964.

APPENDIX D

CLAUSES FOR CONSTRUCTION/USE/ACCESS TO REAL PROPERTY ACQUIRED UNDER THE ACTIVITY, FACILITY OR PROGRAM

The following clauses will be included in deeds, licenses, permits, or similar instruments/agreements entered into by The Maine Department of Transportation pursuant to the provisions of Assurance 7(b):

- A. The (grantee, licensee, permittee, etc., as appropriate) for himself/herself, his/her heirs, personal representatives, successors in interest, and assigns, as a part of the consideration hereof, does hereby covenant and agree (in the case of deeds and leases add, “as a covenant running with the land”) that (1) no person on the ground of race, color, or national origin, will be excluded from participation in, denied the benefits of, or be otherwise subjected to discrimination in the use of said facilities, (2) that in the construction of any improvements on, over, or under such land, and the furnishing of services thereon, no person on the ground of race, color, or national origin, will be excluded from participation in, denied the benefits of, or otherwise be subjected to discriminations, (3) that the (grantee, licensees, lessee, permittee, etc.) will use the premises in compliance with all other requirements imposed by or pursuant to the Acts and Regulations, as amended, set forth in this Assurance.
- B. With respect to (licenses, leases, permits, etc.), in the event of breach of any of the above Non-discrimination covenants, (**The Maine Department of Transportation**) will have the right to terminate the (license, permit, etc., as appropriate) and to enter or re-enter and repossess said land and the facilities thereon, and hold the same as if said (license, permit, etc., as appropriate) had never been made or issued.*
- C. With respect to deeds, in the event of breach of any of the above Non-discrimination covenants, (**The Maine Department of Transportation**) will there upon revert to and vest in and become the absolute property of (**The Maine Department of Transportation**) and its assigns.*

(*Reverter clause and related language to be used only when it is determined that such a clause is necessary to make clear the purpose of Title VI.)

APPENDIX E

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the “contractor”) agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

Pertinent Non-Discrimination Authorities:

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. §2000d *et seq.*, 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21.
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. §4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. §324 *et seq.*), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. §794 *et seq.*), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. §6101 *et seq.*), (prohibits discrimination on the basis of age);
- Airport and Airway Improvement Act of 1982, (49 U.S.C. §471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (Broadened the scope, coverage and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975 and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms “programs or activities” to include all of the programs or activities of the Federal-aid recipients, sub-recipients and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibit discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§12131-12189) as implemented by Department of Transportation regulations at 49 C.F.R. Parts 37 and 38;
- The Federal Aviation Administration’s Non-discrimination statute (49 U.S.C. §47123) (prohibits discrimination on the basis of race, color, national origin and sex);
- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which ensures discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of limited English proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);
- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating of sex in education programs or activities (20 U.S.C. 1681 *et seq.*).



DEPARTMENT OF THE ARMY
NEW ENGLAND DISTRICT, CORPS OF ENGINEERS
696 VIRGINIA ROAD
CONCORD, MASSACHUSETTS 01742-2751

REPLY TO
ATTENTION OF

MAINE GENERAL PERMIT (GP)
AUTHORIZATION LETTER AND SCREENING SUMMARY

ENVIRONMENTAL OFFICE
MAINE DEPARTMENT OF TRANSPORTATION
16 STATE HOUSE STATION
AUGUSTA, MAINE 04333

CORPS PERMIT # NAE-2017-02750
CORPS GP ID# 17-654
STATE ID# PBR

DESCRIPTION OF WORK:

Place temporary and permanent fill below the ordinary high water line of the Little Androscoggin River and in adjacent freshwater wetlands at Paris, Maine in order to replace the existing deteriorated Route 117 bridge. This work will result in approximately 800 s.f. of temporary and 950 s.f. of permanent stream bed impact, 335 s.f. of permanent wetland impact, and 2,300 s.f. of rubble removal. This work is shown on the attached plans entitled "MDOT WIN 22618.00, Paris-Billings Bridge #2979, Bridge Improvements" in two sheets sheets
Project Description Continued on Page 2

LAT/LONG COORDINATES : 44.22236° N -70.50953° W USGS QUAD: NORWAY, ME

I. CORPS DETERMINATION:

Based on our review of the information you provided, we have determined that your project will have only minimal individual and cumulative impacts on waters and wetlands of the United States. Your work is therefore authorized by the U.S. Army Corps of Engineers under the enclosed Federal Permit, the Maine General Permit (GP). Accordingly, we do not plan to take any further action on this project.

You must perform the activity authorized herein in compliance with all the terms and conditions of the GP [including any attached Additional Conditions and any conditions placed on the State 401 Water Quality Certification including any required mitigation]. Please review the enclosed GP carefully, including the GP conditions beginning on page 5, to familiarize yourself with its contents. You are responsible for complying with all of the GP requirements; therefore you should be certain that whoever does the work fully understands all of the conditions. You may wish to discuss the conditions of this authorization with your contractor to ensure the contractor can accomplish the work in a manner that conforms to all requirements.

If you change the plans or construction methods for work within our jurisdiction, please contact us immediately to discuss modification of this authorization. This office must approve any changes before you undertake them.

Condition 38 of the GP (page 16) provides one year for completion of work that has commenced or is under contract to commence prior to the expiration of the GP on October 13, 2020. You will need to apply for reauthorization for any work within Corps jurisdiction that is not completed by October 13, 2021.

This authorization presumes the work shown on your plans noted above is in waters of the U.S. Should you desire to appeal our jurisdiction, please submit a request for an approved jurisdictional determination in writing to the undersigned.

No work may be started unless and until all other required local, State and Federal licenses and permits have been obtained. This includes but is not limited to a Flood Hazard Development Permit issued by the town if necessary.

II. STATE ACTIONS: PENDING [☒], ISSUED [☐], DENIED [☐] DATE _____

APPLICATION TYPE: PBR: ☒ , TIER 1: ☐ , TIER 2: ☐ , TIER 3: ☐ , LURC: ☐ DMR LEASE: ☐ NA: ☐

III. FEDERAL ACTIONS:


JOINT PROCESSING MEETING: 11/16/17 LEVEL OF REVIEW: CATEGORY 1: ☐ CATEGORY 2: ☒


AUTHORITY (Based on a review of plans and/or State/Federal applications): SEC 10 ☐ , 404 ☒ 10/404 ☐ , 103 ☐

EXCLUSIONS: The exclusionary criteria identified in the general permit do not apply to this project.

FEDERAL RESOURCE AGENCY OBJECTIONS: EPA NO , USF&WS NO , NMFS NO

If you have any questions on this matter, please contact my staff at 207-623-8367 at our Manchester, Maine Project Office. In order for us to better serve you, we would appreciate your completing our Customer Service Survey located at http://corpsmapu.usace.army.mil/cm_apex/f?p=136:4:0


JAY L. CLEMENT
SENIOR PROJECT MANAGER
MAINE PROJECT OFFICE


FOR FRANK J. DEL GIUDICE
CHIEF, PERMITS & ENFORCEMENT BRANCH
REGULATORY DIVISION

DATE 12/6/17



**US Army Corps
of Engineers®**
New England District

Project Description Continued from Page 1


Dated "10/25/17" and "BILLINGS BRIDGE OVER LITTLE ANDROSCOGGIN RIVER, PARIS, OXFORD COUNTY" in three sheets dated "4-7-17".

**PLEASE NOTE THE FOLLOWING CONDITIONS FOR
DEPARTMENT OF THE ARMY
GENERAL PERMIT
NO. NAE-2017-02750**

1. This authorization requires you to 1) notify us before beginning work so we may inspect the project, and 2) submit a Compliance Certification Form. You must complete and return the enclosed Work Start Notification Form(s) to this office at least two weeks before the anticipated starting date. You must complete and return the enclosed Compliance Certification Form within one month following the completion of the authorized work and any required mitigation (but not mitigation monitoring, which requires separate submittals).
2. The permittee shall assure that a copy of this permit is at the work site whenever work is being performed and that all personnel performing work at the site of the work authorized by this permit are fully aware of the terms and conditions of the permit. This permit, including its drawings and any appendices and other attachments, shall be made a part of any and all contracts and sub-contracts for work which affects areas of Corps of Engineers' jurisdiction at the site of the work authorized by this permit. This shall be done by including the entire permit in the specifications for the work. If the permit is issued after construction specifications but before receipt of bids or quotes, the entire permit shall be included as an addendum to the specifications. The term "entire permit" includes permit amendments. Although the permittee may assign various aspects of the work to different contractors or sub-contractors, all contractors and sub-contractors shall be obligated by contract to comply with all environmental protection provisions of the entire permit, and no contract or sub-contract shall require or allow unauthorized work in areas of Corps of Engineers jurisdiction.
3. Adequate sedimentation and erosion control devices, such as geotextile silt fences or other devices capable of filtering the fines involved, shall be installed and properly maintained to minimize impacts during construction. These devices must be removed upon completion of work and stabilization of disturbed areas. The sediment collected by these devices must also be removed and placed upland, in a manner that will prevent its later erosion and transport to a waterway or wetland.
4. All exposed soils resulting from the construction will be promptly seeded and mulched in order to achieve vegetative stabilization.
5. All areas of temporary fill shall be restored to their original contour and character upon completion of the project.
6. In water work shall be conducted between July 15 and September 30 in order to minimize potential impacts to fisheries and local water quality.
7. All rubble removed from the site will be disposed of in an upland, non-wetland location.

Section 3: Project Location Map

70°32'0"W 70°31'30"W 70°31'0"W 70°30'30"W 70°30'0"W 70°29'30"W 70°29'0"W

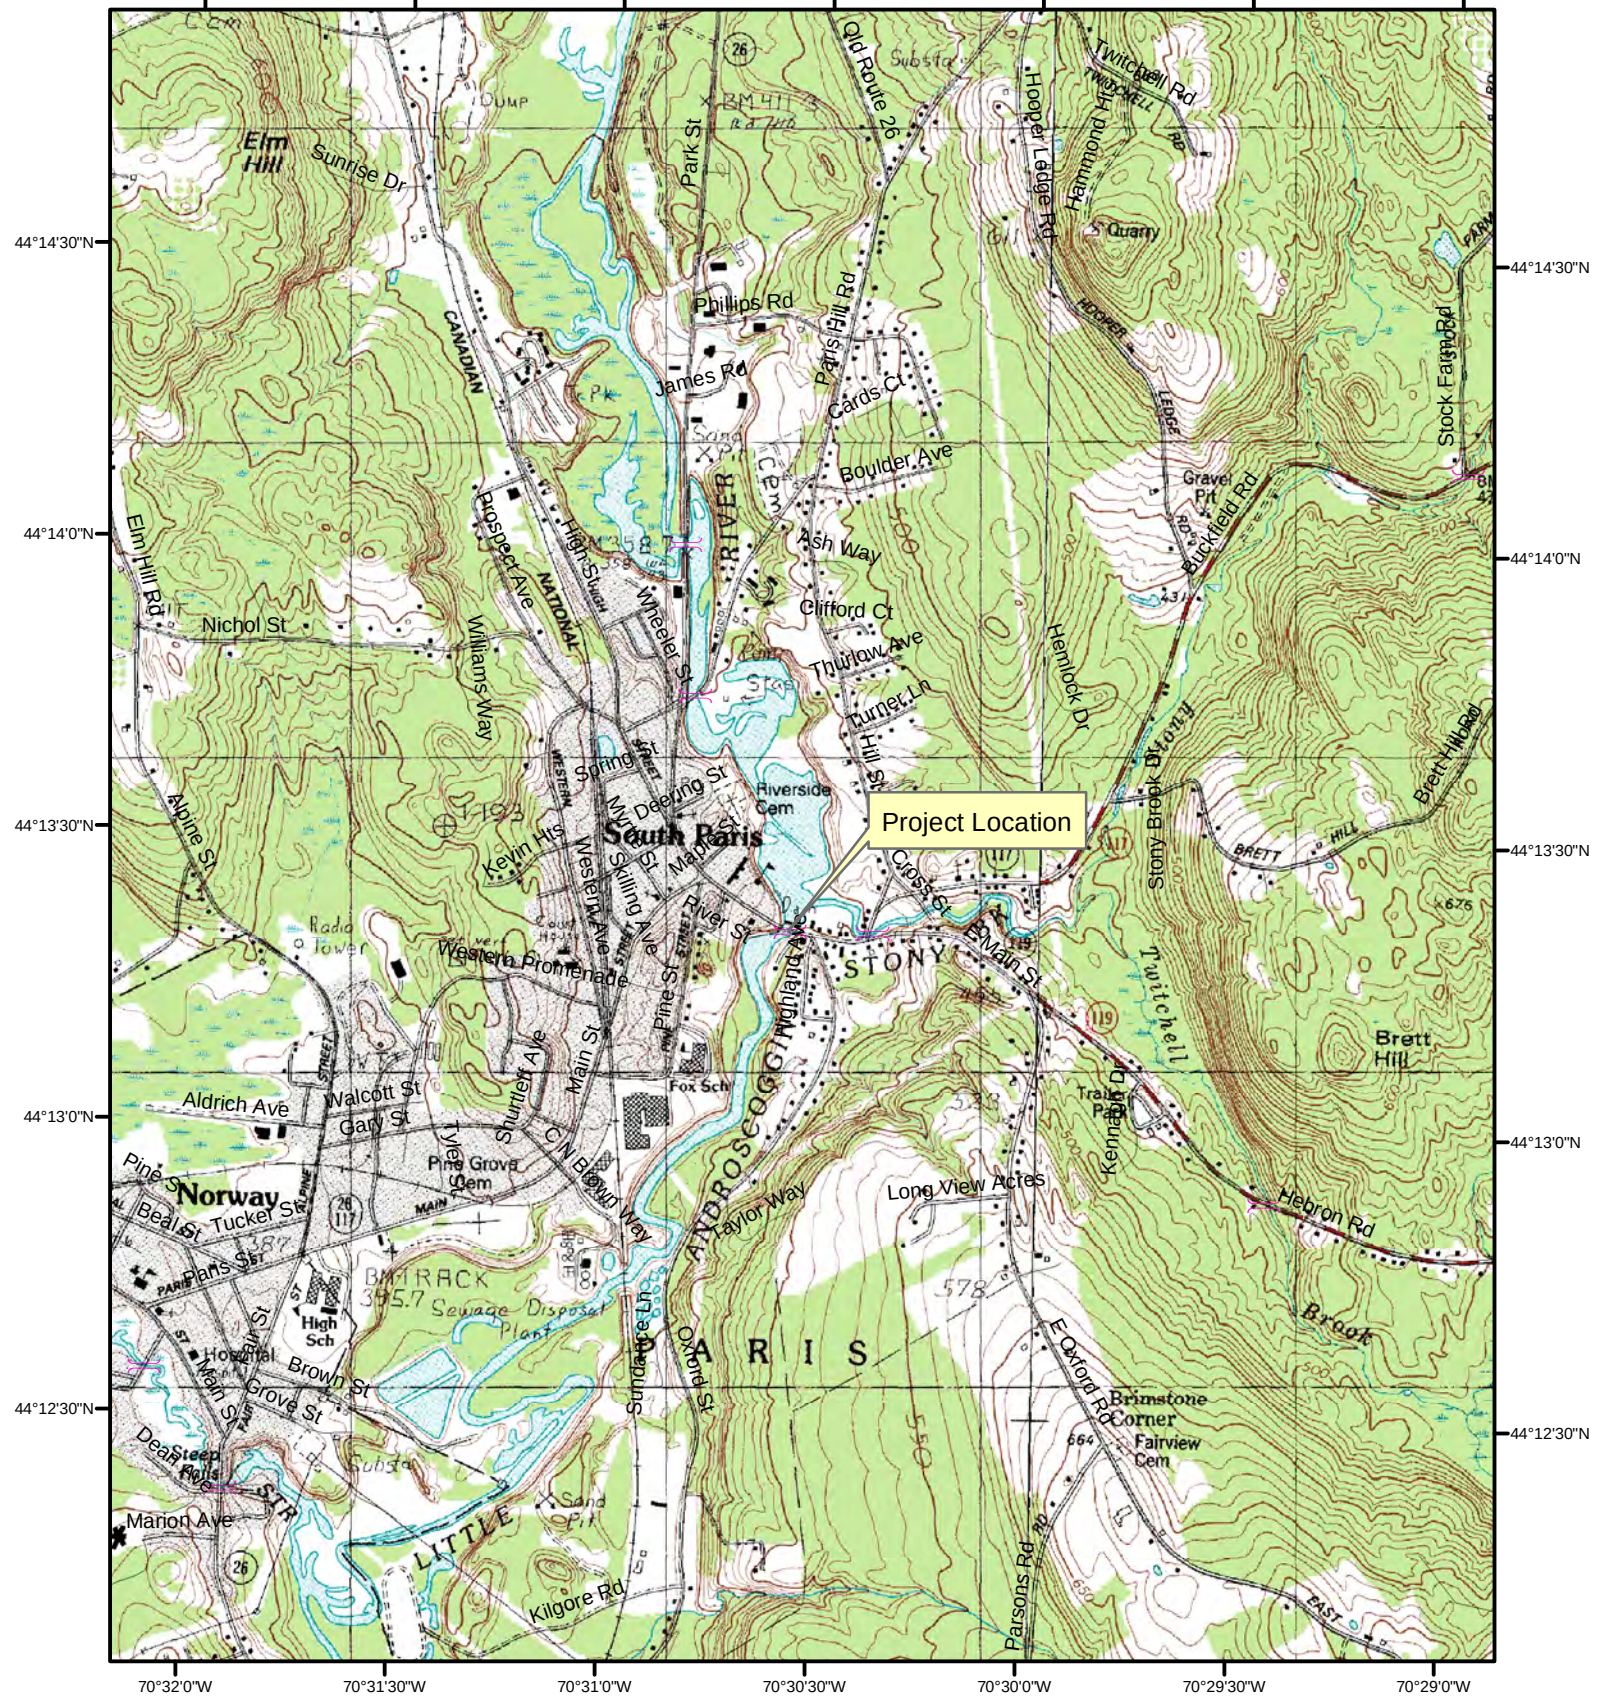


-70.50953
44.22236

0 335 670 1,340 2,010 2,680
Feet

MDOT WIN 22618.00
Paris- Billings Bridge #2979
Bridge Improvements



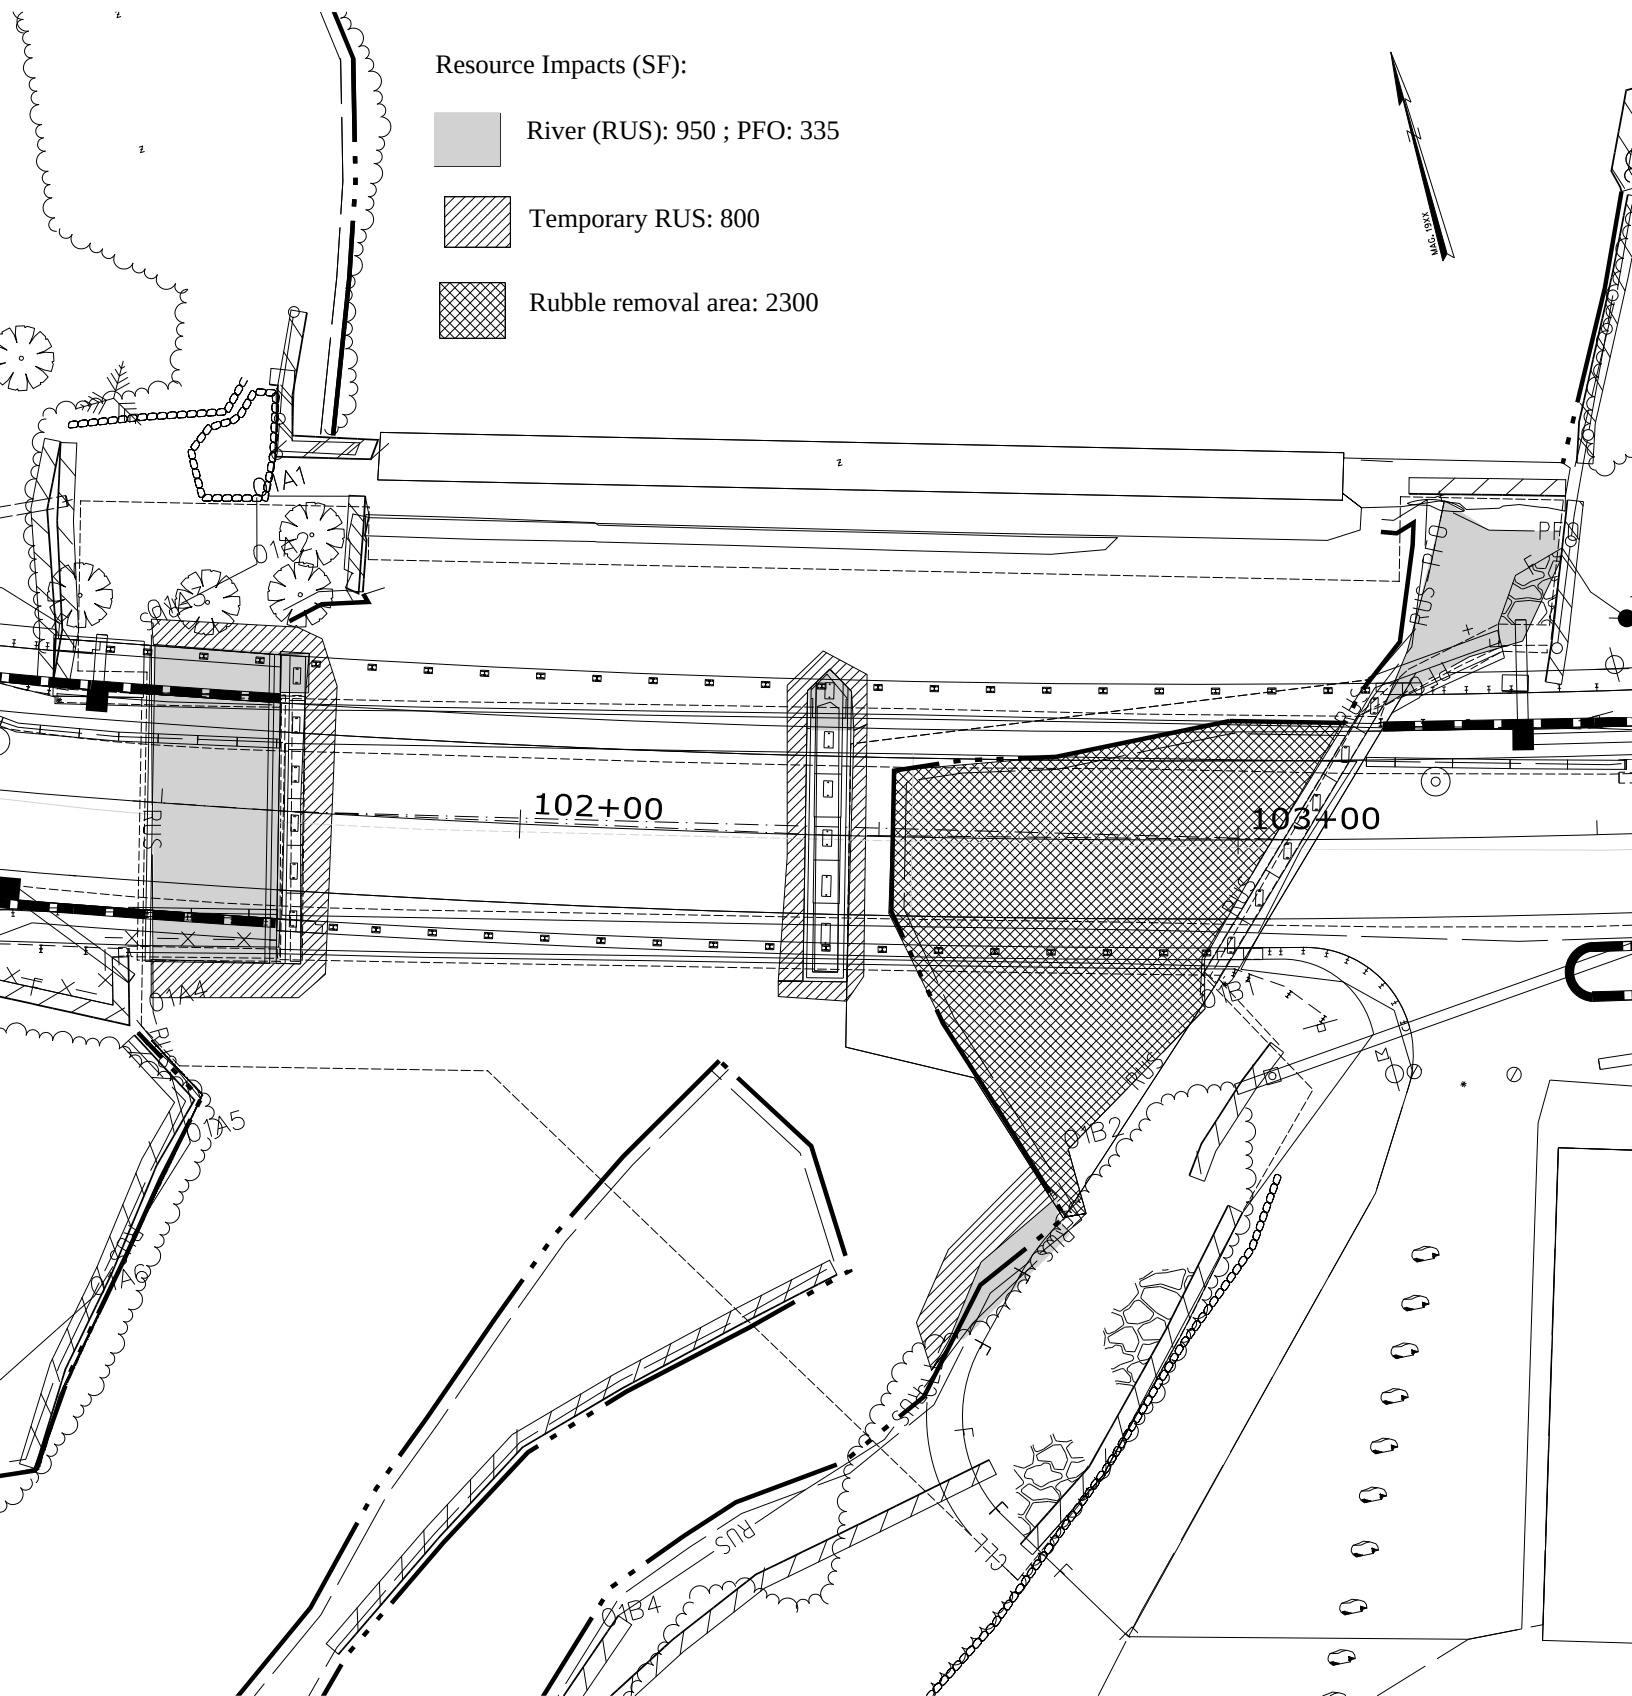

MDOT WIN 22618.00
 Paris- Billings Bridge #2979
 Bridge Improvements
 PLANS-10/25/17





Date:4/6/2017

Username: kwentworth

Division: Structures

Filename: ... \BRIDGE\MSTA\003_typ.dgn

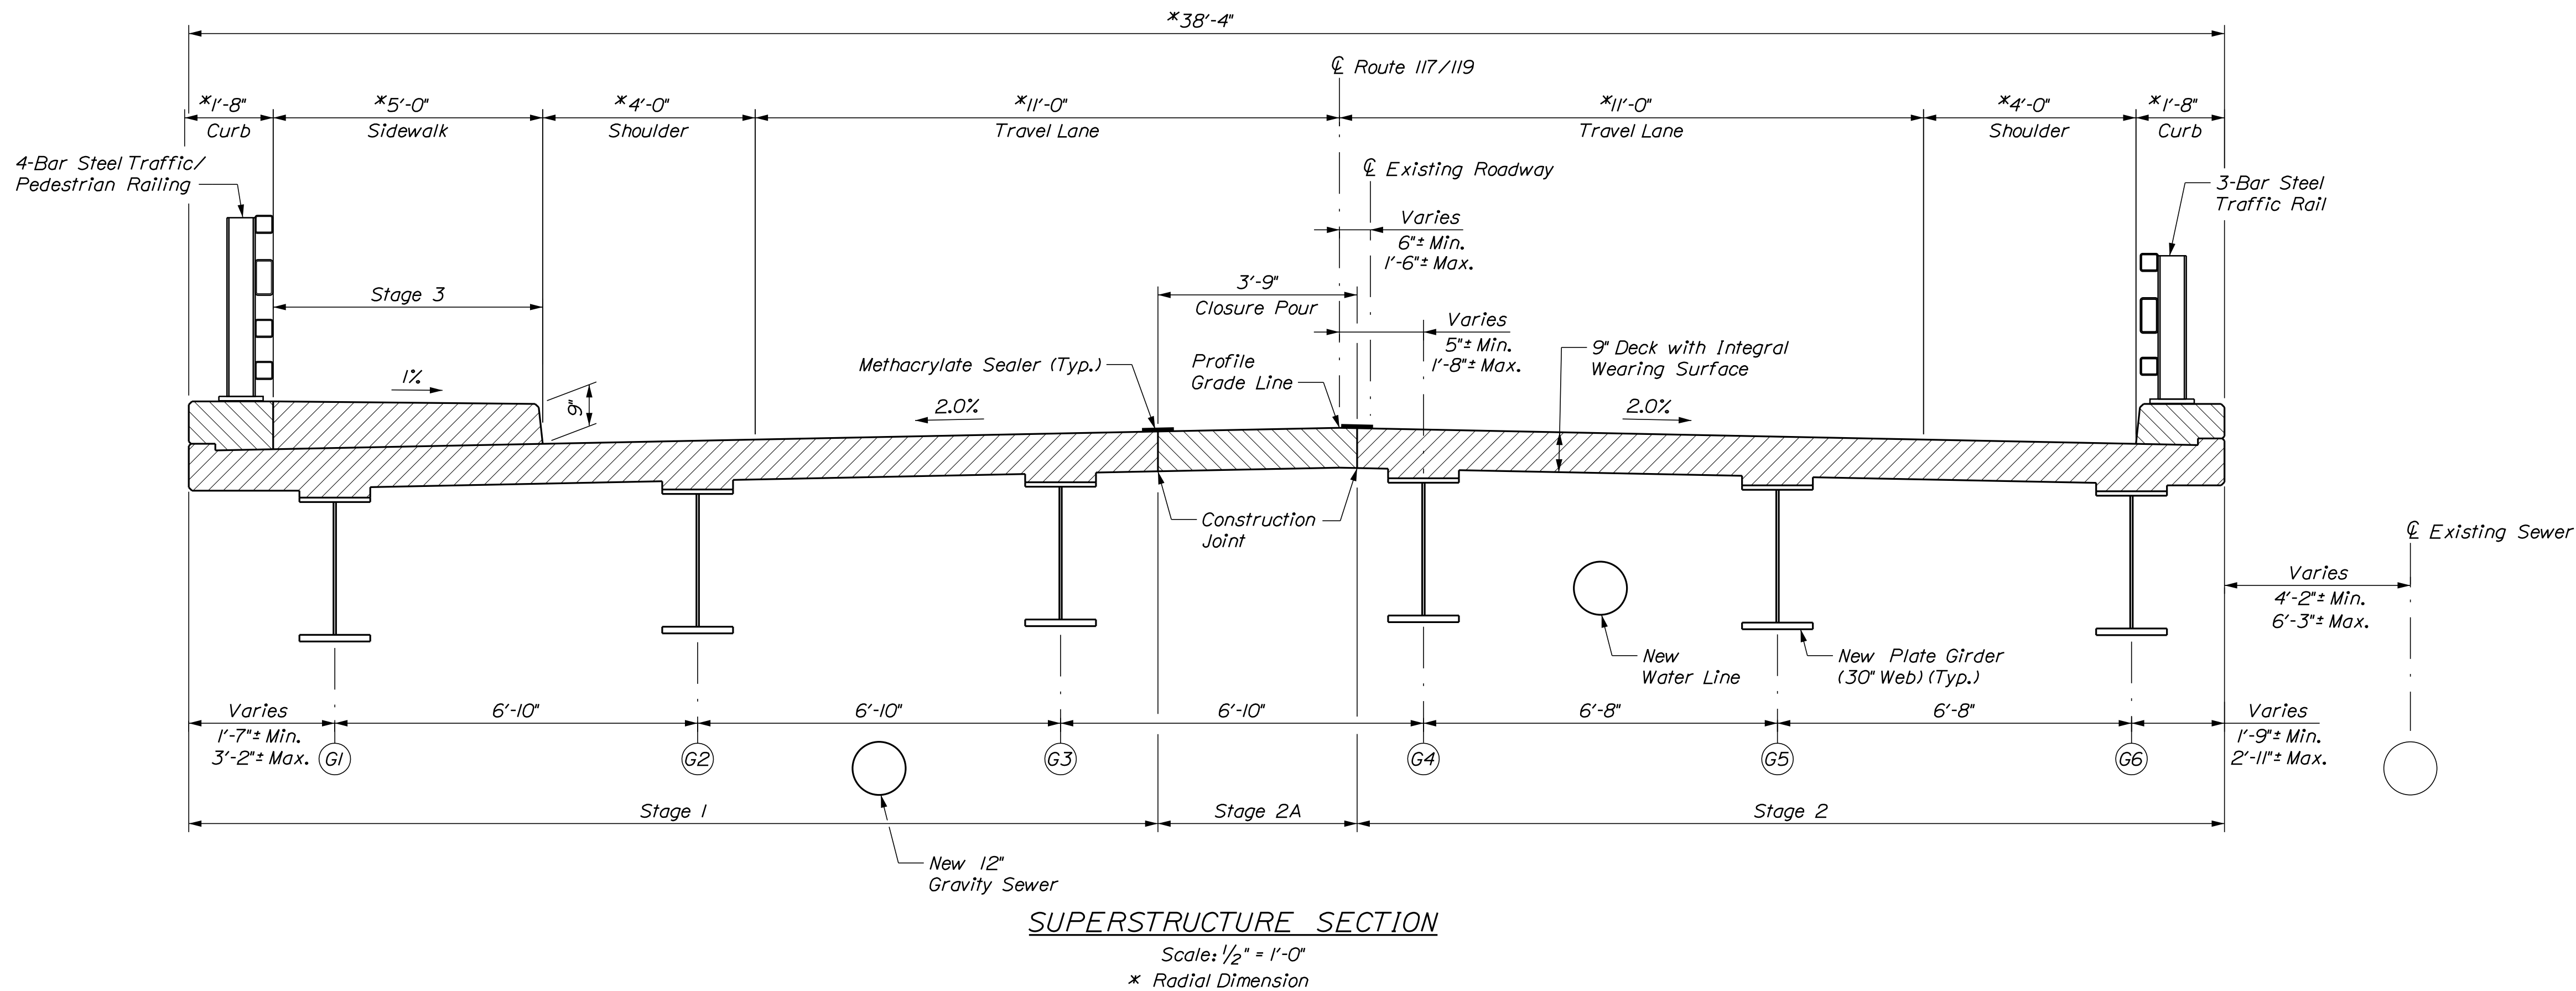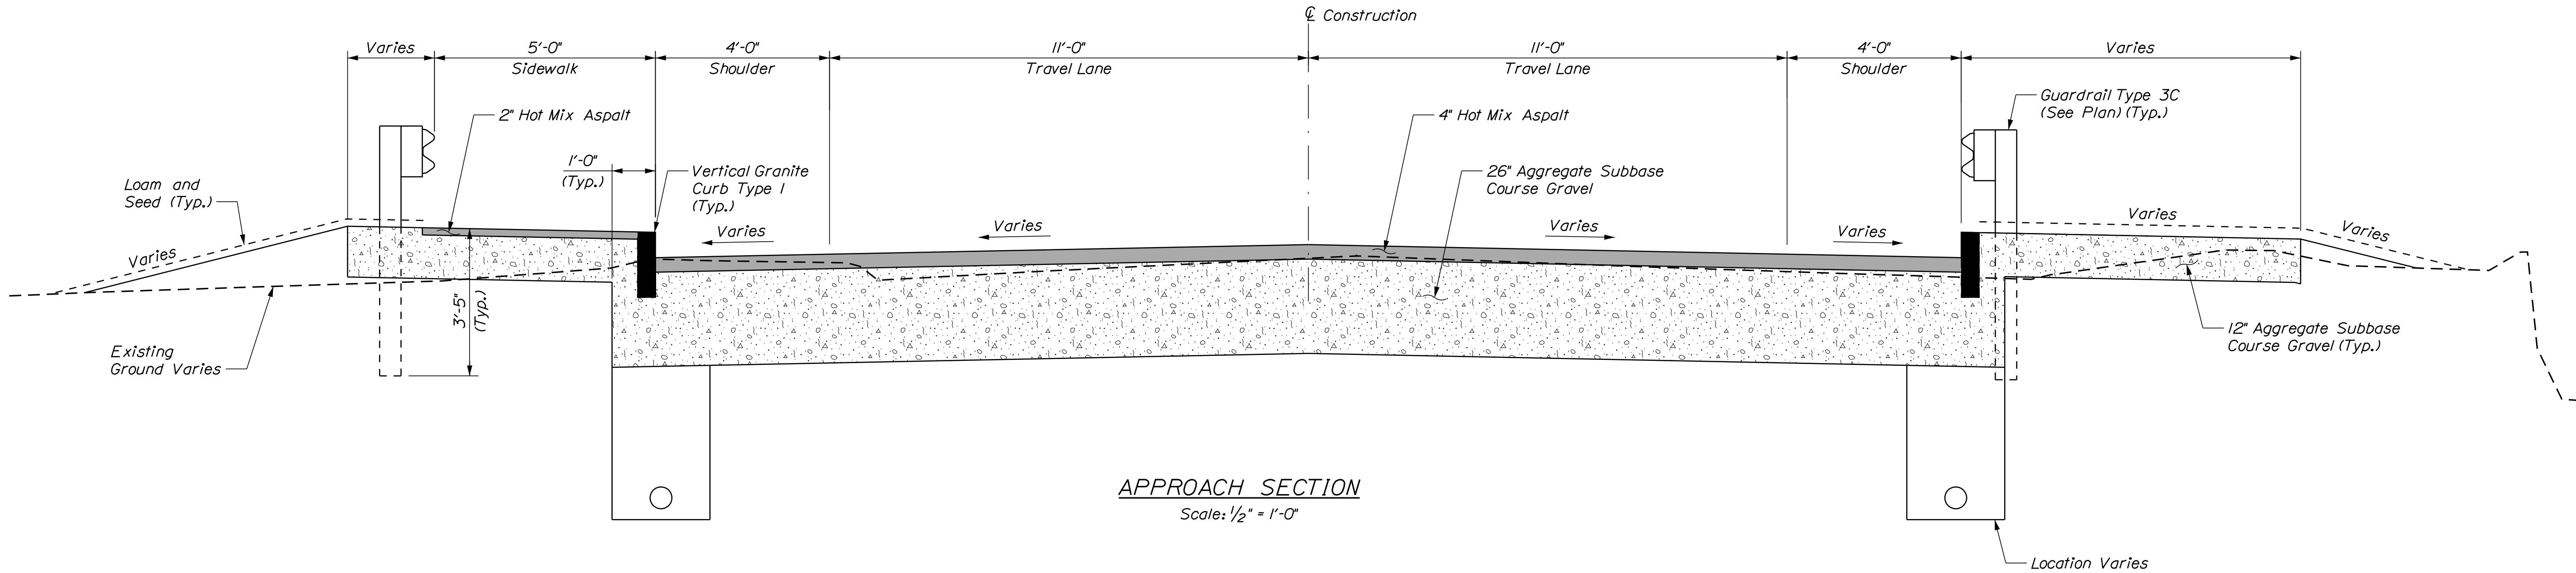

Note:

1. Proposed sewer and water utility locations shown are approximate.

STATE OF MAINE
DEPARTMENT OF TRANSPORTATION
PROJECT NO. STP-2261(800)
BRIDGE NO. 2979
WIN
022618.00
BRIDGE PLANS



PROJ. MANAGER	DATE	BY
DESIGN-DETAILED JCM	4-7-17	BJM
CHECKED-REVIEWED LSC	4-7-17	SMH
DESIGN-DETAILED		
REVISIONS 1		
REVISIONS 2		
REVISIONS 3		
REVISIONS 4		
FIELD CHANGES		

BILLINGS BRIDGE OVER
LITTLE ANDROSCOGGIN RIVER
PARIS
OXFORD COUNTY

TYPICAL SECTIONS

SHEET NUMBER
3
OF 4

PRELIMINARY PLANS

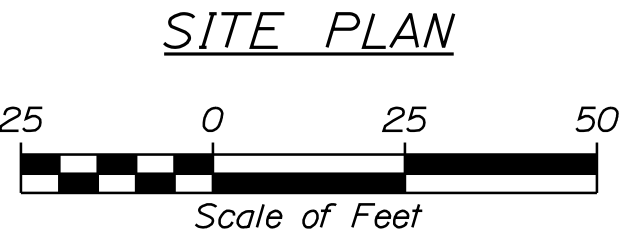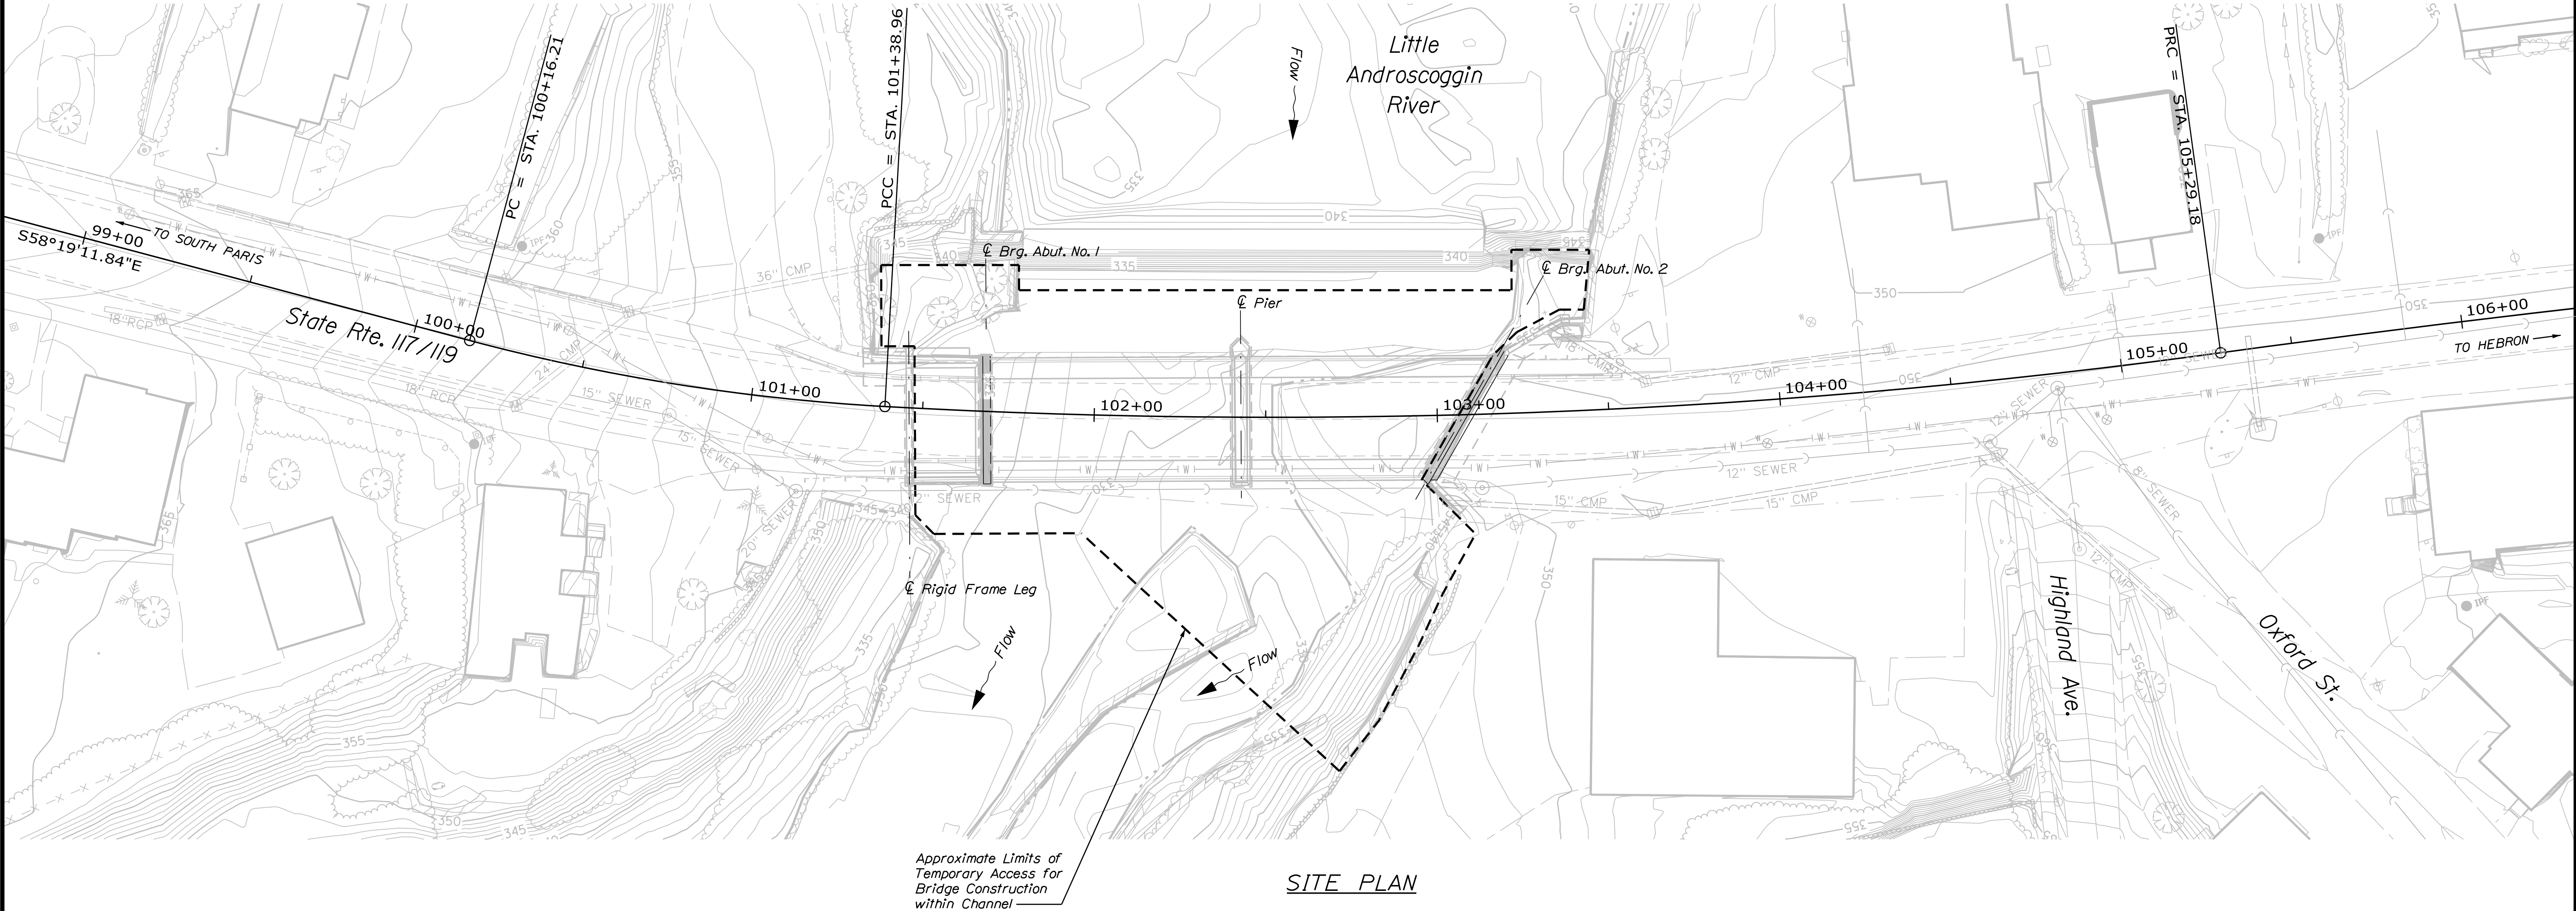

PRELIMINARY PLANS

STATE OF MAINE
DEPARTMENT OF TRANSPORTATION

PROJECT NO. STP-2261(800)

BRIDGE NO. 2979WIN022618.00BRIDGE PLANS

PROJ. MANAGER	BY	DATE
DESIGN-DETAILED JCM	B/M	4-7-17
CHECKED-REVIEWED LSC	SMH	4-7-17
DESIGN-DETAILED		
REVISIONS 1		
REVISIONS 2		
REVISIONS 3		
REVISIONS 4		
FIELD CHANGES		

BILLINGS BRIDGE OVER
LITTLE ANDROSCOGGIN RIVER
PARIS
OXFORD COUNTY

SITE PLAN
AND BRIDGE ACCESS

SHEET NUMBER

4

OF 4



**US Army Corps
of Engineers ®**
New England District

**GENERAL PERMIT
WORK-START NOTIFICATION FORM**
(Minimum Notice: Two weeks before work begins)

* MAIL TO: U.S. Army Corps of Engineers, New England District
* Permits and Enforcement Branch
* Regulatory Division
* 696 Virginia Road
* Concord, Massachusetts 01742-2751

Corps of Engineers Permit No. NAE-2017-02750 was issued to the Maine Dept. of Transportation on December 5, 2017. This work is located in the Little Androscoggin River and in adjacent freshwater wetlands at Paris, Maine. The permit authorized the permittee to place temporary and permanent fill in order to replace the existing deteriorated Route 117 bridge. This work will result in approximately 800 s.f. of temporary and 950 s.f. of permanent stream bed impact, 335 s.f. of permanent wetland impact, and 2,300 s.f. of rubble removal.

MaineDOT WIN 22618.00

The people (e.g., contractor) listed below will do the work, and they understand the permit's conditions and limitations.

PLEASE PRINT OR TYPE

Name of Person/Firm: _____

Business Address: _____

Telephone Numbers: () _____ () _____

Proposed Work Dates: **Start:** _____ **Finish:** _____

Permittee/Agent Signature: _____ **Date:** _____


Printed Name: _____ **Title:** _____

Date Permit Issued: _____ **Date Permit Expires:** _____

FOR USE BY THE CORPS OF ENGINEERS

PM: Clement **Submittals Required:** No

Inspection Recommendation: Inspect as convenient



**US Army Corps
of Engineers®**
New England District

(Minimum Notice: Permittee must sign and return notification
within one month of the completion of work.)

COMPLIANCE CERTIFICATION FORM

Permit Number: NAE-2017-02750

Project Manager Clement

Name of Permittee: Maine Dept. of Transportation

Permit Issuance Date: 12/5/17

MaineDOT WIN 22618.00

Please sign this certification and return it to the following address upon completion of the activity and any mitigation required by the permit. You must submit this after the mitigation is complete, but not the mitigation monitoring, which requires separate submittals.

* MAIL TO: U.S. Army Corps of Engineers, New England District *
* Permits and Enforcement Branch C *
* Regulatory Division *
* 696 Virginia Road *
* Concord, Massachusetts 01742-2751 *

Please note that your permitted activity is subject to a compliance inspection by an U.S. Army Corps of Engineers representative. If you fail to comply with this permit you are subject to permit suspension, modification, or revocation.

I hereby certify that the work authorized by the above referenced permit was completed in accordance with the terms and conditions of the above referenced permit, and any required mitigation was completed in accordance with the permit conditions.

Signature of Permittee

Date

Printed Name

Date of Work Completion

() _____
Telephone Number

() _____
Telephone Number

**DEPARTMENT OF THE ARMY
GENERAL PERMIT FOR
THE STATE OF MAINE**

The New England District of the U.S. Army Corps of Engineers (Corps) hereby issues a General Permit (GP) for activities subject to Corps jurisdiction in waters of the U.S. within the boundaries of the State of Maine. This GP is issued in accordance with Corps regulations at 33 CFR 320 - 332 [see 33 CFR 325.2(e)(2)]. This GP authorizes activity-specific categories of work that are similar in nature and cause no more than minimal individual and cumulative adverse environmental impacts. Refer to Page 2 for the list of activities and Appendix A for activity specific conditions of eligibility in inland and tidal waters.

I. GENERAL CRITERIA

1. In order for activities to qualify for this GP, they must meet the GP's terms and eligibility criteria (Pages 1-4), General Conditions (GC) (Pages 5 - 20), and Appendix A - Definition of Categories.
2. Under this GP, projects may qualify for the following:
 - Category 1: Category 1 Self-Verification Notification Form is required (SVNF - see Appendix B).
 - Category 2: Application to and written approval from the Corps is required (Pre-Construction Notification (PCN)). No work may proceed until written approval from the Corps is received.

If your project is ineligible for Category 1, it may qualify for Category 2 or an Individual Permit and you must submit an application (see Page 3). The thresholds for activities eligible for Categories 1 and 2 are defined in Appendix A. This GP does not affect the Corps Individual Permit review process or activities exempt from Corps regulation.

3. Prospective permittees need to read:
 - a. Section II to determine if the activity requires Corps authorization.
 - b. Sections III and IV to determine if the activity may be eligible for authorization under this GP, specifically whether it is eligible for Self-Verification (SV) or whether Pre-Construction Notification (PCN) is required.
4. Permittees must ensure compliance with all applicable General Conditions in Section IV. The Corps will consider unauthorized any activity requiring Corps authorization if that activity is under construction or completed and does not comply with all of the terms and conditions.
5. Project proponents are encouraged to contact the Corps with questions at any time. Pre-application meetings (see 33 CFR 325.1(b)), whether arranged by the Corps or requested by permit applicants, are encouraged to facilitate the review of projects. Pre-application meetings and/or site visits can help streamline the permit process by alerting the applicant to potentially time-consuming concerns that are likely to arise during the evaluation of their project (e.g., avoidance, minimization and compensatory mitigation requirements, historic properties, endangered species, essential fish habitat, and dredging contaminated sediments).

II. CORPS JURISDICTION/ACTIVITIES COVERED

1. Permits are required from the Corps of Engineers for the following work:

a. The construction of any structure in, over or under any navigable water of the United States (U.S.)¹, the excavating or dredging from or depositing of material in such waters, or the accomplishment of any other work affecting the course, location, condition, or capacity of such waters. The Corps regulates these activities under Section 10 of the Rivers and Harbors Act of 1899. See 33 CFR 322;

b. The discharge of dredged or fill material and certain discharges associated with excavation into waters of the U.S. (e.g. sidecasting). The Corps regulates these activities under Section 404 of the Clean Water Act (CWA). See 33 CFR 323; and

c. The transportation of dredged material for the purpose of disposal in the ocean. The Corps regulates these activities under Section 103 of the Marine Protection, Research and Sanctuaries Act. See 33 CFR 324.

2. Related laws:

33 CFR 320.3 includes a list of related laws, including: Section 401 of the CWA, Section 402 of the CWA, Section 307(c) of the Coastal Zone Management (CZM) Act of 1972, The National Historic Preservation Act of 1966, the Endangered Species Act, the Fish and Wildlife Act of 1956, the Marine Mammal Protection Act of 1972, Magnuson-Stevens Act, and Section 7(a) of the Wild and Scenic Rivers Act.

3. An activity listed below may be authorized by this GP only if that activity and the permittee satisfy all of the GP's terms and conditions. Any activity not specifically listed below may still be eligible for the GP; applicants are advised to contact the Corps for a specific eligibility determination. Category 1 and Category 2 eligibility criteria for each activity in both Inland and Tidal waters can be found in Appendix A.

1. Repair, Replacement, Expansion, and Maintenance of Authorized Structures and Fills
2. Moorings
3. Structures, Floats and Lifts
4. Aids to Navigation, and Temporary Recreational Structures
5. Dredging, Disposal of Dredged Material, Beach Nourishment, and Rock Removal and Relocation
6. Discharges of Dredged or Fill Material Incidental to the Construction of Bridges
7. Bank and Shoreline Stabilization
8. Residential, Commercial, Industrial, and Institutional Developments, and Recreational Facilities
9. Utility Line Activities
10. Linear Transportation Projects
11. Mining Activities
12. Boat Ramps and Marine Railways
13. Land and Water-Based Renewable Energy Generation Facilities and Hydropower Projects
14. Reshaping Existing Drainage Ditches and Mosquito Management
15. Oil Spill and Hazardous Material Cleanup
16. Cleanup of Hazardous and Toxic Waste
17. Scientific Measurement Devices
18. Survey Activities
19. Agricultural Activities
20. Fish and Wildlife Harvesting, Enhancement, and Attraction Devices
21. Habitat Restoration, Establishment and Enhancement Activities
22. Previously Authorized Activities
23. Stream & Wetland Crossings
24. Aquaculture

Note: Multiple activities may be authorized in the same GP, e.g. a recreational pier (#3) with an associated mooring (#2) or a windpower facility (#13) with an associated transmission line (#9).

¹ Defined in Appendix F, Definitions and at 33 CFR 328.
Section II

III. PROCEDURES

1. State Approvals. Applicants are responsible for applying for and obtaining any of the required state or local approvals. Federal and state jurisdictions may differ in some instances. State permits may be required for specific projects regardless of the general permit category.

In order for authorizations under this GP to be valid, when any of the following state approvals or statutorily-required reviews is also required, the approvals must be obtained prior to the commencement of work in Corps jurisdiction.

- Maine Department of Environmental Protection (DEP): Natural Resources Protection Act (NRPA) permit, including permit-by-rule (PBR) and general permit authorizations; Site Location of Development Act permit; Maine Waterway Development and Conservation Act permit; and Maine Hazardous Waste, Septage, and Solid Waste Management Act license.
- Maine Department of Conservation, Agriculture & Forestry: Land Use Planning Commission (LUPC) permit.
- Maine Department of Marine Resources: Aquaculture Leases.
- Maine Department of Conservation, Bureau of Parks and Lands, Submerged Lands: Submerged Lands Lease.

NOTE: This GP may also be used to authorize projects that are not regulated by the State of Maine (e.g., certain seasonal floats or moorings).

2. How to Obtain/Apply for Authorization.

a. Category 1 (Self-Verification): Self-Verification Notification Form (SVNF) required. The SVNF is required for all SV eligible work in Maine unless otherwise stated in Appendix A. Activities that are eligible for SV are authorized under this GP and may commence without written verification from the Corps provided the prospective permittee has:

i. Confirmed that the activity will meet the terms and conditions of Category 1. Consultation with the Corps and/or other relevant federal and state agencies may be necessary to ensure compliance with the applicable general conditions (GCs) and related federal laws such as the National Historic Preservation Act (see GC 6), the Endangered Species Act (GC 8) and the Wild and Scenic Rivers Act (GC 9). Prospective permittees are encouraged to contact the Corps with SV eligibility questions. Activities not meeting the SV criteria must submit a PCN to the Corps.

ii. Submitted the SVNF (see GC 27 and Appendix B) to the Corps. **NOTE: A copy of a state permit application form may be an acceptable surrogate for the SVNF. Whichever form chosen needs to include a location map, plans, and an Official Species List for federally listed threatened or endangered species (Reference Appendix D).**

b. Category 2 (Pre-Construction Notification (PCN)): Application to and written verification from the Corps is required before work can proceed. For activities that do not qualify for SV or where otherwise required by the terms of the GP, the permittee must submit a PCN and obtain a written permit before starting work in Corps jurisdiction.

i. The Corps will coordinate review of all activities requiring PCN with federal and state agencies and federally recognized tribes, as appropriate. To be eligible and subsequently authorized, an activity must result in no more than minimal individual and cumulative effects on the aquatic environment as determined by the Corps in accordance with the criteria listed within this GP. This may require project modifications involving avoidance, minimization, or compensatory mitigation for unavoidable impacts to ensure that the net adverse effects of a project are no more than minimal.

ii. The Corps will attempt to issue a written eligibility determination within the state's review period. Regardless, work eligible for Category 2 may not proceed before Corps written approval is received.

c. All applicants for Category 2 projects must:

- i. Apply directly to the Corps using the state application form or the Corps application form (ENG Form 4345²), and apply directly to the state (DEP, LUPC, BPL or DMR) as applicable using the appropriate state form, if the work is regulated by the Corps and the state; or
- ii. Apply directly to the Corps using the Corps application form (ENG Form 4345²) if the work is regulated by the Corps but not the state (DEP, LUPC, BPL or DMR).
- iii. Provide application information (see “Information Typically Required” in Appendix C) to help ensure the application is complete and to speed project review.
- iv. Obtain an Official Species List of federally threatened or endangered species in the project area (GC 8).
- v. Submit a copy of their application materials to the Maine Historic Preservation Commission (MHPC) and all five Indian tribes listed at Appendix E, at the same time, or before, they apply to the Corps, to be reviewed for the presence of historic, archaeological or tribal resources in the permit area that the proposed work may affect. Submittals to the Corps shall include information to indicate that this has been done (a copy of the applicant’s cover letter to MHPC and tribes or a copy of the MHPC and tribal response letters is acceptable).

d. Work that is not regulated by the State of Maine, but is subject to Corps jurisdiction, may still be eligible for authorization under this GP.

e. **Emergency Situations:** 33 CFR 325.2(e)4 states that an “emergency” is a situation which would result in an unacceptable hazard to life, a significant loss of property, or an immediate, unforeseen, and significant economic hardship if corrective action requiring a permit is not undertaken within a time period less than the normal time needed to process the application under standard procedures.” Emergency work is subject to the same terms and conditions of this GP as non-emergency work, and similarly, must qualify for authorization under the GP; otherwise an IP is required. The Corps will work with all applicable agencies to expedite verification according to established procedures in emergency situations.

3. Individual Permits. Projects that are not authorized by this GP require an Individual Permit (IP) (33 CFR 325.5) and proponents must submit an application directly to the Corps. This GP does not affect the Corps IP review process or activities exempt from Corps regulation. For general information and application form, see the Corps website or contact the Corps (see Appendix E). The Corps encourages applicants to apply concurrently for a Corps IP and applicable state permits.

The Corps retains discretionary authority on a case-by-case basis to elevate a GP eligible project to an IP based on concerns for the aquatic environment or for any other factor of the public interest [33 CFR 320.4(a)]. Whenever the Corps notifies an applicant that an IP is required, no work in Corps jurisdiction may be conducted until the Corps issues the required authorization in writing indicating that work may proceed.

4. Enforcement/Non-Compliance. Work performed without the required Corps of Engineers permits is subject to administrative, civil, and criminal penalties. The Corps will evaluate unauthorized activities for enforcement action under 33 CFR 326.

The Corps will consider unauthorized any activity requiring Corps authorization if that activity is under construction or completed and does not comply with all of the terms and conditions of a GP or an IP. The Corps may elect to suspend enforcement proceedings if the permittee modifies his project to comply with a GP.

After considering whether a violation was knowing or intentional, and other indications of the need for a penalty, the Corps can elect to terminate an enforcement proceeding with an after-the- fact authorization under a GP, if all terms and conditions of the GP have been satisfied, either before or after the activity has been accomplished.

² Located at www.nae.usace.army.mil/missions/regulatory under “Forms & Publications.”
Section III

IV. GENERAL CONDITIONS

To qualify for GP authorization, the prospective permittee must comply with the following general conditions, as applicable.

1. Other Permits
2. Federal Jurisdictional Boundaries
3. Minimal Direct, Secondary, and Cumulative Impacts
4. Mitigation (Avoidance, Minimization, and Compensatory Mitigation)
5. Single and Complete Projects
6. Historic Properties
7. Corps Projects and Property
8. Federal Threatened and Endangered Species
9. Wild and Scenic Rivers
10. Navigation
11. Federal Liability
12. Utility Line Installation and Removal
13. Heavy Equipment in Wetlands or Mudflats
14. Temporary Fill
15. Restoration of Special Aquatic Sites (including wetland areas).
16. Soil Erosion, Sediment and Turbidity Controls
17. Time of Year Windows/Restrictions.
18. Aquatic Life Movements & Management of Water Flows
19. Water Quality and Coastal Zone Management
20. Floodplains and Floodways
21. Storage of Seasonal Structures
22. Spawning, Breeding, and Migratory Areas
23. Vernal Pools
24. Invasive and Other Unacceptable Species
25. Programmatic Agreements
26. Permit On-Site
27. Self-Verification Notification Form (SVNF)
28. Inspections
29. Maintenance
30. Property Rights
31. Transfer of GP Verifications
32. Modification, Suspension, and Revocation
33. Special Conditions
34. False or Incomplete Information
35. Abandonment
36. Enforcement Cases
37. Duration of Authorization
38. Previously Authorized Activities
39. Discretionary Authority
40. St. John/St. Croix Rivers.
41. National Lands
42. Essential Fish Habitat (EFH)
43. Work Site Restoration
44. Bank Stabilization
45. Stream Work & Crossings and Wetland Crossings

1. **Other Permits.** Permittees must obtain other federal, state, or local authorizations required by law. Applicants are responsible for applying for and obtaining all required state or local approvals. This includes, but is not limited to, the project proponent obtaining a Flood Hazard Development Permit issued by the town, if necessary. Inquiries may be directed to the municipality or to the Maine Floodplain Management Coordinator at (207) 287-8063. See <http://www.maine.gov/dacf/flood/>

2. Federal Jurisdictional Boundaries

a. Applicability of this GP shall be evaluated with reference to federal jurisdictional boundaries. Applicants are responsible for ensuring that the boundaries used satisfy the federal criteria defined at 33 CFR 328 "Waters of the U.S." and 33 CFR 329 "Navigable Waters of the U.S."

NOTE: Waters of the U.S. include the subcategories "navigable waters of the U.S." and "wetlands."

b. For Category 1 projects, proponents are not required to delineate the waters of the U.S. that they plan to impact, but must approximate the square footage of impacts in order to determine the review category (1 or 2 or Individual Permit). For projects filling <15,000 square feet (SF) of waters of the U.S. that do not qualify for Category 1 (e.g., vernal pool, secondary or endangered species impacts, etc.) and therefore require an application to the Corps (PCN), and for those filling ≥15,000 SF, applicants shall delineate all waters of the U.S. that will be filled (direct impacts) in accordance with the Corps of Engineers Wetlands Delineation Manual and the most recent regional supplement (see Appendix C). In addition, applicants shall approximately identify all waters of the U.S. on the property and *known* waters adjacent to the property in order for the Corps to evaluate secondary impacts. The waters of the U.S. shall be clearly shown on the project plans submitted with the application. This includes all waters of the U.S. in areas under DEP or LUPC jurisdiction regardless of whether they're shown on LUPC zoning maps.

c. On a case-by-case basis, the Corps may modify/refine the above delineation and identification requirements for waters of the U.S. See www.nae.usace.army.mil/missions/regulatory >> Jurisdictional Limits and Wetlands for more information on delineating jurisdictional areas.

3. Minimal Direct, Secondary, and Cumulative Effects³

a. Projects authorized by this GP shall have no more than minimal direct, secondary and cumulative adverse environmental impacts. Category 2 applicants should provide information on secondary and cumulative impacts as stated in Appendix C. Compensatory mitigation may be required to offset unavoidable impacts (see GC 4) and to ensure that they are no more than minimal. Compensatory mitigation requirements will be determined on a case-by-case basis.

b. Secondary impacts to waterway and/or wetland areas, (e.g., areas drained, flooded, cleared, excavated or fragmented) shall be added to the total fill area when determining whether the project qualifies for Category 1 or 2. Direct, secondary and cumulative impacts are defined at Appendix A, Endnote 2 and Appendix F.

c. Site clearing, grading and construction activities in the upland habitat surrounding vernal pools ("Vernal Pool Management Areas") are secondary impacts. See GC 23 for avoidance and minimization requirements and recommendations.

d. Bank stabilization activities in tidal waters are provided at Appendix A, Page 30. Direct impacts in tidal waters from contiguous bank stabilization projects in excess of 200 linear feet (Applicant or Applicant + Abutters combined) must undergo Category 2 review.

4. Mitigation (Avoidance, Minimization, and Compensatory Mitigation)

a. Discharges of dredged or fill material into waters of the U.S., including wetlands, shall be avoided and minimized to the maximum extent practicable through consideration of alternatives. The Corps may require compensatory mitigation of unavoidable direct and secondary impacts associated with Category 2 projects on a case-by-case basis.

b. Applicants proposing work in jurisdictional waters should consider riparian/forested buffers for stormwater management and low impact development (LID) best management practices (BMPs) to reduce

³ Direct, secondary and cumulative effects are defined at Appendix F, Definitions and Acronyms.
Section IV

impervious cover and manage stormwater to minimize secondary impacts to aquatic resources to the maximum extent practicable.⁴

c. Compensatory mitigation⁵ for effects to waters of the U.S., including direct, secondary and temporal⁶, may be required for permanent impacts that exceed the SV area limits, and may be required for temporary impacts that exceed the SV area limits, to offset unavoidable impacts which remain after all appropriate and practicable avoidance and minimization has been achieved and to ensure that the adverse effects to the aquatic environment are no more than minimal. Proactive restoration projects or temporary impact work with no lasting secondary effects may generally be excluded from this requirement. Refer to Appendix G.

5. Single and Complete Projects⁷

a. This GP shall not be used to piecemeal work and shall be applied to single and complete projects. When determining the review category in Appendix A (Category 1 or 2) for a single and complete project, proponents must include any permanent historic fill placed since October 1995 that is associated with that project and all currently proposed temporary and permanent impact areas.

b. A single and complete project must have independent utility⁷.

c. Unless the Corps determines the activity has independent utility:

i. This GP shall not be used for any activity that is part of an overall project for which an Individual Permit is required.

ii. All components of a single project and/or all planned phases of a multi-phased project (e.g., subdivisions should include all work such as roads, utilities, and lot development) shall be treated together as constituting one single and complete project.

d. For linear projects, such as power lines or pipelines with multiple crossings, the single and complete project is all crossings of a single water of the U.S. (i.e., single waterbody) at a specific location. For linear projects crossing a single waterbody several times at separate and distant locations, each crossing is considered a single and complete project. However, individual channels in a braided stream or river, or individual arms of a large, irregularly-shaped wetland or lake, etc., are not separate waterbodies and crossings of such features cannot be considered separately. If any crossing requires a Category 2 activity, then the entire linear project shall be reviewed as one project under Category 2.

6. Historic Properties

a. No undertaking shall cause effects (defined at 33 CFR 325 Appendix C and 36 CFR 800) on properties listed on, determined to be eligible for listing on, or potentially eligible for listing on the National Register of Historic Places⁸, including previously unknown historic properties within the permit area, unless the Corps or another Federal action agency has satisfied the consultation requirements of Section 106 of the National Historic Preservation Act (NHPA). The State Historic Preservation Officer (SHPO), Tribal Historic Preservation Officer (THPO) and the National Register of Historic Places can assist with locating information on: i) previously identified historic properties; and ii) areas with potential for the presence of historic resources, which may require identification and evaluation by qualified historic preservation and/or archaeological consultants in consultation with the Corps and the SHPO and/or THPO(s).

⁴ See: www.nae.usace.army.mil/missions/regulatory >> State General Permit >> Permit Resources >> Mitigation for this additional information: a) "Wetland BMP Manual - Techniques for Avoidance & Minimization," b) riparian/forested buffer BMPs, and c) LID BMPs. LID BMPs include, but are not limited to: replacing curbs and gutters with swales; using an open space design for subdivisions; using permeable, pervious or porous pavements; constructing bio-retention systems; and/or, adding a green roof or rain garden.

⁵ Compensatory mitigation projects provided to offset losses of aquatic resources must comply with the applicable provisions of 33 CFR 332. See also the New England District Compensatory Mitigation Guidance at www.nae.usace.army.mil/regulatory >> Mitigation.

⁶ Temporal loss: The time lag between the loss of aquatic resource functions caused by the permitted impacts and the replacement of aquatic resource functions at the compensatory mitigation site(s) (33 CFR 332.2).

⁷ Single and Complete Project and Independent Utility are defined in Appendix F - Definitions.

⁸ The majority of historic properties are not listed on the National Register of Historic Places and may require identification and evaluation by qualified historic preservation and/or archaeological consultants in consultation with the Corps and the SHPO and/or THPO(s).

b. For activities eligible for SV, proponents must ensure and document that the activity will not cause effects as stated in 6(a). Proponents must submit a PCN if the authorized activity may cause effects as stated in 6(a) as soon as possible to ensure that the Corps is aware of any potential effects of the permitted activity on any historic property to ensure all Section 106 requirements are met.

c. All PCNs shall: i) show notification to the SHPO and applicable THPO(s)⁹ for their identification of historic properties, ii) state which historic properties may be affected by the proposed work or include a vicinity map indicating the location of the historic properties or the potential for the presence of historic properties, and iii) include any available documentation from the SHPO or THPO(s) indicating that there are or are not historic properties affected. Starting consultation early in project planning can save proponents time and money.

d. If you discover any previously unknown historic, cultural or archeological remains and artifacts while accomplishing the activity authorized by this permit, you must immediately notify the district engineer of what you have found, and to the maximum extent practicable, avoid construction activities that may affect the remains and artifacts until the required coordination has been completed. The district engineer will initiate the Federal, Tribal and state coordination required to determine if the items or remains warrant a recovery effort or if the site is eligible for listing in the National Register of Historic Places.

7. Corps Projects and Property

a. In addition to any authorization under this GP, proponents must contact the Corps Real Estate Division at (978) 318-8585 for work occurring on or potentially affecting Corps properties and/or Corps-controlled easements to initiate reviews and determine what real estate instruments are necessary to perform work. Permittees may not commence work on Corps properties and/or Corps-controlled easements until they have received any required Corps real estate documents evidencing site-specific permission to work.

b. Any proposed temporary or permanent alteration, or modification or use, including occupation, of a federal project (including but not limited to a levee, dike, floodwall, channel, anchorage, breakwater, seawall, bulkhead, jetty, wharf, pier or other work built but not necessarily owned by the United States), which would obstruct or impair the usefulness of the federal project in any manner, and/or would involve changes to the authorized federal project's scope, purpose, and/or functioning that go beyond minor modifications required for normal operations and maintenance, is not eligible for SV and requires review and approval by the Corps pursuant to 33 USC 408. Where Section 408 is applicable, a decision on a Department of the Army general permit application will not be rendered prior to the decision on a Section 408 request.

c. Any structure or work within any Corps Federal Navigation Project (FNP) or its buffer zone¹⁰, shall be subject to removal at the owner's expense prior to any future Corps dredging or the performance of periodic hydrographic surveys. See GC 10 for more requirements related to FNPs.

8. Federal Threatened and Endangered Species

a. No activity is authorized which: i) is likely to directly or indirectly jeopardize the continued existence of a threatened or endangered species or a species proposed for such designation, as identified under the Federal Endangered Species Act (ESA), or which will directly or indirectly destroy or adversely modify the critical habitat of such species; ii) "may affect" a listed species or critical habitat, unless Section 7 consultation addressing the effects of the proposed activity has been completed; or iii) violates the ESA.

b. **All applicants must request an Official Species List from the US Fish & Wildlife Service and must include the list in the Corps permit application. To request an Official Species List, refer to the instructions in Appendix D.**

c. **For federally listed species in tidal waters, applicants should contact the National Marine Fisheries Service at: <http://www.greateratlantic.fisheries.noaa.gov/protected/section7/>**

⁹ Appendix E, 3(a)&(b). Historic Resources, provides contact information and each tribe's "area of concern."

¹⁰ See Appendix H for a list of FNPs. The buffer zone is equal to three times the authorized depth of the FNP.

d. A PCN is required if a threatened or endangered species, a species proposed for listing as threatened or endangered, or designated or proposed critical habitat (all hereinafter referred to as “listed species or habitat”), as identified under the ESA, is present in the action area¹¹.

e. Federal agencies should follow their own procedures for complying with the requirements of the ESA but should coordinate that consultation with the Corps as well.

9. Wild and Scenic Rivers.¹² Any activity that occurs in the designated main stem of, within 0.25 mile up or downstream of the designated main stem of, or in tributaries within .25 miles of the designated main stem of a National Wild and Scenic River, or in “bordering and contiguous wetlands” (see Appendix A, Endnote 1) that are adjacent to the designated main stem of a National Wild and Scenic River, or that has the potential to alter flows within a river within the National Wild and Scenic River System, is not eligible for Category 1 regardless of size of the impacts. This condition applies to both designated Wild and Scenic Rivers and rivers officially designated by Congress as study rivers for possible inclusion while such rivers are in an official study status. National Wild and Scenic Rivers System segments for Maine as of October 2015 include: Allagash River beginning at Telos Dam continuing to Allagash checkpoint at Eliza Hole Rapids, approximately 3 miles upstream of the confluence with the St. John River (length = 92 miles); and 11.25 miles of the York River, in the State of Maine, from its headwaters at York Pond to the mouth of the river at York Harbor, plus its tributaries (currently under study).

10. Navigation

a. Any structure or work that extends closer to the horizontal limits of any Corps Federal Navigation Project (see Appendix H) than a distance of three times the project’s authorized depth shall be subject to removal at the owner’s expense prior to any future Corps dredging or the performance of periodic hydrographic surveys. This is applicable to Category 1 and 2. Reference Appendix A, Page 28 (Moorings) and Page 29 (Structures, Floats & Lifts).

b. There shall be no unreasonable interference with navigation by the existence or use of the activity authorized herein, and no attempt shall be made by the permittee to prevent the full and free use by the public of all navigable waters at or adjacent to the activity authorized herein.

c. The permittee understands and agrees that if future U.S. operations require the removal, relocation, or other alteration of the structure or work herein authorized, or if, in the opinion of the Secretary of the Army or his authorized representative, said structure or work shall cause unreasonable obstruction to the free navigation of the navigable waters, the permittee will be required, upon due notice from the Corps, to remove, relocate, or alter the structural work or obstructions caused thereby, without expense to the U.S. No claim shall be made against the U.S. on account of any such removal or alteration.

d. A PCN is required for all work in, over or under an FNP or its buffer zone unless otherwise indicated in Appendix A. (Reference Appendix A, Endnote 13, Page 36)

11. Federal Liability. In issuing this permit, the Federal Government does not assume any liability for the following: (a) damages to the permitted project or uses thereof as a result of other permitted or unpermitted activities or from natural causes; (b) damages to the permitted project or uses thereof as a result of current or future activities undertaken by or on behalf of the U.S. in the public interest; (c) damages to persons, property, or to other permitted or unpermitted activities or structures caused by the activity authorized by this permit; (d) design or construction deficiencies associated with the permitted work; (e) damage claims associated with any future modification, suspension, or revocation of this permit.

12. Utility Line Installation and Removal

a. Subsurface utility lines shall remain subsurface. If it is necessary to discharge dredged or filled material not previously authorized in order to keep such utility lines buried or restore them to their original subsurface condition, a PCN and written verification from the Corps may be required (e.g., in the case of side

¹¹ The “Endangered Species Consultation Handbook – Procedures for Conducting Consultation and Conference Activities Under Section 7 of the ESA,” defines action area as “all areas to be affected directly or indirectly by the Federal action and not merely the immediate area involved in the action. [50 CFR 402.02].”

¹² Additional information can be found at: <http://www.rivers.gov>.

casting into wetlands from utility trenches). Certain repair, replacement or maintenance activities may be eligible for Category 1 – refer to Appendix A.

b. Subsurface utility lines must be installed at a sufficient depth to avoid damage from anchors, dredging, etc., and to prevent exposure from erosion and stream adjustment. In accordance with Corps New England District Regulation NEDER 1110-1-9 (www.nae.usace.army.mil/missions/regulatory >> [Useful Links and Documents](#)), as an absolute minimum, the bottom cover associated with the initial installation of utility lines under navigable waters and navigation channels shall be 48 inches in soil or 24 inches in rock excavation in competent rock unless specified in a written determination. These minimum bottom cover requirements for pipelines and cables shall be measured from the maximum depth of dredging to the top of the utility. The maximum depth of dredging, in waterways having existing FNP's, is generally considered to be the authorized project depth plus any allowance for advanced maintenance and the allowable overdepth for dredging tolerances. In waterways that do not have existing FNP's, this depth should be taken as two feet below the existing bottom or maximum depth of proposed dredging, as applicable.

c. Aerial utility lines that cross navigable waters must meet minimum clearances. See 33CFR322.5(i).

d. For horizontal directional drilling work, returns of drilling fluids to the surface (i.e., frac-outs) are not authorized and require restoration to the maximum extent practicable in accordance with the terms and conditions of this GP. The permittee and its contractor shall have onsite and shall implement the procedures detailed in a frac-out contingency plan for monitoring drilling operations and for the immediate containment, control and recovery/removal of drilling fluids released into the environment should a discharge of material occur during drilling operations.

e. Within the context of any new installations, any abandoned or inactive utility lines should be removed and faulty lines (e.g., leaking hazardous substances, petroleum products, etc.) should be removed or repaired to the extent practicable. A PCN and written verification from the Corps is required if they are to remain in place, e.g., to protect sensitive areas or ensure safety.

f. No work shall drain a water of the U.S. by providing a conduit for water on or below the surface. Trench plugs installed along pipelines may be effective.

13. Heavy Equipment in Wetlands or Mudflats. Operating heavy equipment other than fixed equipment (drill rigs, fixed cranes, etc.) within wetlands shall be minimized, and such equipment shall not be stored, maintained or repaired in wetlands, to the maximum extent practicable. Where construction requires heavy equipment operation in wetlands, the equipment shall either have low ground pressure (typically <3 psi), or it shall be placed on swamp/construction/timber mats (herein referred to as "construction mats" and defined at Appendix A, Endnote 4) that are adequate to support the equipment in such a way as to minimize disturbance of wetland soil and vegetation. Construction mats are to be placed in the wetland from the upland or from equipment positioned on swamp mats if working within a wetland. Dragging construction mats into position is prohibited. Other support structures that are capable of safely supporting equipment may be used with written Corps authorization (Category 2 authorization or Individual Permit). Similarly, the permittee may request written authorization from the Corps to waive use of mats during frozen, dry or other conditions. An adequate supply of spill containment equipment shall be maintained on site. Construction mats should be managed in accordance with the Construction Mat BMPs at www.nae.usace.army.mil/missions/regulatory >> State General Permits >> Permit Resources.

14. Temporary Fill. Temporary fill that qualifies for Category 1 (e.g., <15,000 SF of combined temporary and permanent fill associated with the single and complete project) or is authorized in writing under Category 2, shall adhere to the following:

a. All temporary fill and disturbed soils shall be stabilized to prevent its eroding into waters of the U.S. where it is not authorized. Work shall include phased or staged development to ensure only areas under active development are exposed and to allow for stabilization practices as soon as practicable, typically within three calendar days after disturbance. Accelerated stabilization (the providing of temporary or permanent cover by the end of the work day to prevent erosion) shall be employed as necessary. Temporary fill must be placed in a manner that will prevent it from being eroded by expected high flows.

b. Unconfined temporary fill authorized for discharge into waters of the U.S. (e.g., temporary stream crossings) shall consist of material that minimizes impacts to water quality (e.g. washed stone, stone, etc.).

c. Appropriate measures must be taken to maintain normal downstream flows and minimize flooding to the maximum extent practicable when temporary structures, work, and discharges of dredged or fill material, including cofferdams, are necessary for construction activities, access fills, or dewatering of construction sites. Place materials in a location and manner that does not adversely impact surface or subsurface water flow into or out of the wetland. Temporary fill authorized for discharge into wetlands shall be placed on geotextile fabric or other appropriate material laid on the pre-construction wetland grade where practicable to minimize impacts and to facilitate restoration to the original grade. Construction mats are excluded from this requirement.

d. Temporary fill, construction mats and corduroy roads shall be entirely removed as soon as they are no longer needed to construct the authorized work. Temporary fill shall be placed in its original location or disposed of at an upland site and suitably contained to prevent its subsequent erosion into waters of the U.S. To qualify for Category 1, temporary fill placed during the: i.) growing season must be removed before the beginning of the next growing season; and ii.) non-growing season may remain throughout the following growing season, but must be removed before the beginning of the next growing season.

e. Temporary fill, construction mats and corduroy roads are considered temporary only if they are removed as soon as they are no longer needed to construct the authorized work.

f. Construction debris and/or deteriorated materials shall not be located in waters of the U.S.

15. Restoration of Special Aquatic Sites (Including Wetland Areas)

a. Temporary fills must be removed in their entirety and the affected areas restored to their pre-construction condition, function and elevation. Restoration shall typically commence no later than the completion of construction.

b. For excavated areas, "restored to pre-construction condition, function and elevation" means careful removal of existing soil and vegetation, separate topsoil and subsoil stockpiling, soil protection, and replacement back to the original location such that the original soil layering and vegetation schemes are approximately the same, unless otherwise authorized. Plan for natural settling that will occur (the initial post-restoration elevation of the backfilled areas should be above the desired final grade as topsoil may settle by 33% to 50%), minimize compaction, and ensure that topsoil is void of gravel and subsoil. A minimum of 4 inches of topsoil should be at the surface after the soil has settled. Wetland areas temporarily disturbed shall be stabilized (e.g., seeded or planted). Seed mixes and vegetation shall include only plant species native to New England and shall not include any species listed as "Invasive and Other Unacceptable Plant Species" in the "New England District Compensatory Mitigation Guidance" (see GC 24 and refer to Appendix G). This list may be updated periodically.

c. Limit compaction to the minimum needed to promote a successful seedbed; avoid a 'fluffy' seedbed, which is susceptible to erosion until the plants get established, and a compacted topsoil layer, which is counter-productive and will lead to greater erosion susceptibility down the road. Test soils for compaction. A soil probe, auger, or shovel should be able to retrieve samples of post-restoration profile. Equipment refusal shall be considered a failure of restoration, in which case the soil should be restored through deep-ripping and/or de-compaction, or other appropriate methods, and wetland hydrology must be maintained. See the BMPs at www.nae.usace.army.mil/missions/regulatory >> State General Permits >> Permit Resources >> Restoration.

d. In areas of authorized temporary disturbance, cut woody vegetation (trees, shrubs, etc.) shall be cut at or above ground level and not uprooted in order to prevent disruption to the wetland soil structure and to allow stump sprouts to revegetate the work area, unless otherwise authorized.

e. Trenches shall be constructed or backfilled so that the trench does not drain waters of the U.S. (e.g., materials or methods that create a French drain effect).

16. Soil Erosion, Sediment and Turbidity Controls

a. Adequate sedimentation and erosion control management measures, practices and devices, such as phased construction, installation of sediment control barriers (i.e. silt fence, vegetated filter strips, geotextile silt fences, erosion control mixes, hay bales or other devices) downhill of all exposed areas, retention of existing vegetated buffers, application of temporary mulching during construction, and permanent seeding and stabilization shall be installed and properly maintained to reduce erosion and retain sediment on-site during and after construction. They shall be capable of preventing erosion; of collecting sediment, suspended and floating materials; and of filtering fine sediment.

- b. Temporary sediment control barriers shall be removed upon completion of work, but not until all disturbed areas are permanently stabilized. The sediment collected by these sediment barriers shall be removed and placed at an upland location and stabilized to prevent its later erosion into a waterway or wetland.
- c. All exposed soil and other fills shall be permanently stabilized at the earliest practicable date .

17. Time of Year Work Windows/Restrictions. For activities where work is authorized in streams and tidal waters that causes turbidity or sediment re-suspension or other construction related disturbances, work must be conducted during the following TOY work windows (not during the TOY restrictions) unless otherwise authorized by the Corps under Category 2 review:

	<u>TOY Restriction</u> (no work)	<u>TOY Work Window</u> (work allowed)
Non-tidal waters	Oct. 01 through Jul. 14	Jul. 15 through Sep. 30
Tidal waters	Apr. 10 through Nov. 07	Nov. 08 through Apr. 09

Alternate windows authorized under Category 2 may include species specific windows recommended by the Maine Dept. of Marine Resources and/or Maine Dept. of Inland Fisheries & Wildlife.

18. Aquatic Life Movements & Management of Water Flows

- a. No activity may substantially disrupt the necessary life cycle movements of those species of aquatic life indigenous to the waterbody, including those species that normally migrate through the area, unless the activity's primary purpose is to impound water. Unless otherwise stated, activities impounding water in a stream require a PCN to ensure impacts to aquatic life species are avoided and minimized. All permanent and temporary crossings of waterbodies (e.g., streams, wetlands) shall be:
 - i. Suitably culverted, bridged, or otherwise designed and constructed to maintain low flows to sustain the movement of those aquatic species; and
 - ii. Properly aligned and constructed to prevent bank erosion or streambed scour both adjacent to and inside the culvert. Permanent and temporary crossings of wetlands shall be suitably culverted, spanned or bridged in such a manner as to preserve hydraulic and ecological connectivity between the wetlands on either side of the road.
- b. To avoid adverse impacts on aquatic organisms, the low flow channel/thalweg shall remain unobstructed during periods of low flow, except when it is necessary to perform the authorized work.
- c. To the maximum extent practicable, the pre-construction course, condition, capacity, and location of open waters must be maintained for each activity, including stream channelization and storm water management activities. The activity must be constructed to withstand expected high flows. The activity must not restrict or impede the passage of normal or high flows, unless the primary purpose of the activity is to impound water or manage high flows. The activity may alter the preconstruction course, condition, capacity, and location of open waters if it benefits the aquatic environment (e.g., stream restoration or relocation activities).

19. Water Quality and Coastal Zone Management

- a. Applicants must satisfy any conditions imposed by the state and EPA, where applicable, in their CWA § 401 Water Quality Certifications (WQC) for this GP, or in any Individual § 401 WQC. See Appendix E for state-specific contact information and to determine if any action is required to obtain a 401 WQC. The Corps may require additional water quality management measures to ensure that the authorized activity does not cause or contribute to a violation of water quality standards. All projects authorized by this GP shall be designed, constructed and operated to minimize or eliminate the discharge of pollutants.
- b. Applicants must satisfy any additional conditions imposed by the state in their Coastal Zone Management (CZM) Act consistency concurrences for this GP, or in any Individual CZM consistency concurrences. The Corps may require additional measures to ensure that the authorized activity is consistent with state coastal zone management requirements.

20. Floodplains and Floodways

- a. Appropriate measures must be taken to minimize flooding to the maximum extent practicable.
- b. Activities within 100-Year Floodplains must comply with applicable Federal Emergency Management Agency (FEMA)-approved state and/or local floodplain management permitting requirements. Proponents may need to coordinate with FEMA and apply for a formal change to the flood insurance study products or forward a set of project plans and relevant technical documentation in a digital format to the Risk

Analysis Branch Chief, Mitigation Division, FEMA, Region 1, 99 High Street, Boston, Massachusetts 02110. Applicants should provide a copy of any documentation to the Corps along with the PCN.

c. Proponents may have to obtain a Flood Hazard Development Permit issued by the town. Inquiries may be directed to the municipality or to the Maine Floodplain Management Coordinator at (207) 287-8063. See <http://www.maine.gov/dacf/flood/>

21. Storage of Seasonal Structures. Seasonal or recreational structures such as pier sections, floats, aquaculture structures, etc. that are removed from the waterway for a portion of the year (often referred to as seasonal structures) shall be stored in an upland location landward of mean high water (MHW) or ordinary high water (OHW) and not in wetlands, tidal wetlands, their substrate or on mudflats. These seasonal structures may be stored on the fixed, pile-supported portion of the structure that is waterward of MHW or OHW. Seasonal storage of structures in navigable waters, e.g., in a protected cove on a mooring, requires Corps approval and local harbormaster approval.

22. Spawning, Breeding, and Migratory Areas

a. Jurisdictional activities and impacts such as excavations, discharges of dredged or fill material, and/or suspended sediment producing activities in jurisdictional waters that provide value as fish migratory areas, fish and shellfish spawning or nursery areas, or amphibian and migratory bird breeding areas, during spawning or breeding seasons shall be avoided and minimized to the maximum extent practicable.

b. Jurisdictional activities in waters of the United States that provide value as breeding areas for migratory birds must be avoided to the maximum extent practicable. The permittee is responsible for obtaining any “take” permits required under the USFWS’s regulations governing compliance with the Migratory Bird Treaty Act or the Bald and Golden Eagle Protection Act. The permittee should contact the appropriate local office of the USFWS to determine if such “take” permits are required for a particular activity (See Appendix E).

23. Vernal Pools

a. Only vernal pools that meet the current definition of waters of the U.S. are regulated by the Corps.

b. Direct and indirect adverse effects to all vernal pools (VPs), including their envelopes and critical terrestrial habitats (VP Management Areas¹³), shall be avoided and minimized to the maximum extent practicable. Site clearing, grading, and construction activities associated with a regulated activity in the VP Management Area may cause these adverse effects to the VP.

c. The State of Maine has specific protections for vernal pools.¹⁴

d. When any regulated activities occur within 750 feet of a vernal pool, the following management practices must be followed for all work within any VP Management Area (750’ of a VP’s edge) *in order to qualify for Category I*:

- i. No disturbance within the VP Depression or VP Envelope (area within 100 feet of the VP Depression’s edge)¹⁵;
- ii. Maintain a minimum of 75% of the Critical Terrestrial Habitat (area within 100-750 feet of the VP Depression’s edge) as unfragmented forest with at least a partly-closed canopy of overstory trees to provide shade, deep litter and woody debris;
- iii. Maintain or restore forest corridors connecting wetlands and significant vernal pools;
- iv. Minimize forest floor disturbance; and
- v. Maintain native understory vegetation and downed woody debris.

¹³ The Corps VP Management Area, which includes the VP and a 750’ radius from the VP’s edge, is defined at Appendix A, Endnote 5.

¹⁴ Appendix G, 10(a)-(d) provides links to the state’s Significant Wildlife Habitat regulations and references that provide impact minimization measures to reference when designing projects.

¹⁵ The no disturbance requirement in the VP envelope [see (b)(i)(1)], and (b)(i)(2), do not apply to temporary impacts associated with construction mats in previously disturbed areas of existing utility project (e.g., transmission lines, gas pipelines) or linear transportation project (e.g., roads, highways, railways, trails, airport runways and taxiways) right-of-ways provided there is a Vegetation Management Plan that avoids, minimizes and mitigates impacts to aquatic resources.

vi. Cape Cod style-curbings or no curbings options shall be used on new roads to facilitate amphibian passage. (Reference Appendix G)

e. A PCN is required for any regulated activity within 750' of a vernal pool when all work within the VP Management Area does not comply with the Category 1 requirements in (d) above. Information on directional buffers in accordance with the VP Directional Buffer Guidance document may be provided in order to demonstrate minimal impact and avoid compensation requirements (Reference Appendix G). Conservation of the un-impacted area within the VP Management Area will often be required.

f. GC 2 requires applicants to delineate or approximately identify on the project plans all waters of the U.S., which contain vernal pools.

g. GC 23(b-d) do not apply to projects that are within a municipality and meet the provisions of a Corps-approved VP Special Area Management Plan (VP SAMP) and are otherwise eligible for self-verification.

24. Invasive and Other Unacceptable Species¹⁶

a. The introduction or spread of invasive or other unacceptable plant or animal species on the project site or areas adjacent to the project site caused by the site work shall be avoided to the maximum extent practicable. For example, construction mats and equipment shall be thoroughly cleaned and free of vegetation and soil before and after use. The introduction or spread of invasive plant or animal species on the project site caused by the site work shall be controlled.

b. No cultivars, invasive or other unacceptable plant species may be used for any mitigation, bioengineering, vegetative bank stabilization or any other work authorized by this GP. However, non-native species and cultivars may be used when it is appropriate and specified in a written verification, such as using *Secale cereale* (Annual Rye) to quickly stabilize a site. All PCNs should explain the reason for using non-native species or cultivars.

25. Programmatic Consultations or Agreements. The Corps requirements to comply with Section 106 of the NHPA, Section 7 of the Endangered Species Act or Essential Fish Habitat conservation under the Magnuson-Stevens Act may be satisfied by a Programmatic Agreement with the Corps, New England District or another federal action agency. Any Corps, New England District Programmatic Agreements will be available on our website.

26. Permit On Site. The permittee shall ensure that a copy of this GP and any accompanying authorization letter with attached plans are at the site of the work authorized by this GP whenever work is being performed and that all construction personnel performing work which may affect waters of the U.S. are aware of its terms and conditions. The entire permit authorization shall be made a part of any and all contracts and subcontracts for work that affects areas of Corps jurisdiction at the site of the work authorized by this GP. This shall be achieved by including the entire permit authorization in the specifications for work. The term "entire permit authorization" means this entire GP and the authorization letter (including its drawings, plans, appendices and other attachments) and also includes permit modifications. If the authorization letter is issued after the construction specifications, but before receipt of bids or quotes, the entire permit authorization shall be included as an addendum to the specifications. If the authorization letter is issued after receipt of bids or quotes, the entire permit authorization shall be included in the contract or subcontract. Although the permittee may assign various aspects of the work to different contractors or subcontractors, all contractors and subcontractors shall be obligated by contract to comply with all environmental protection provisions contained within the entire GP authorization, and no contract or subcontract shall require or allow unauthorized work in areas of Corps jurisdiction.

¹⁶ For the purposes of this GP, plant species that are considered invasive and unacceptable are provided in Appendix G "Invasive and other Unacceptable Plant Species" of our document "Compensatory Mitigation Guidance" at www.nae.usace.army.mil/missions/regulatory >> Mitigation. Chapter 4(e) Planting is also particularly relevant. The June 2009 "Corps of Engineers Invasive Species Policy" provides policy, goals and objectives and is located at www.nae.usace.army.mil/missions/regulatory >> Invasive Species. Additional information can be found at: www.eddmaps.org/ipane.

27. Self-Verification Notification Form (SVNF). Permittees must complete and submit the SVNF provided at Appendix B to the Corps for work authorized by this GP unless otherwise noted in Appendix A. **NOTE: A copy of a state permit application form may be an acceptable surrogate for the SVNF provided either form used also include plans and an Official Species List of federally listed threatened or endangered species.**

28. Inspections. The permittee shall allow the Corps to inspect the authorized activity at any time deemed necessary to ensure that it is being or has been accomplished in accordance with the terms and conditions of this GP and any written verification. The Corps may also require post-construction engineering drawings for completed work, post-dredging survey drawings for any dredging work, or other post-construction reports. To facilitate these inspections, the permittee shall complete and return to the Corps the following forms:

- For Category 1/Self-Verification: The SVNF (see Appendix B).
- For Category 2/PCN: The a) Work-Start Notification Form and b) Compliance Certification Form, when either is provided with the authorization letter.

29. Maintenance

a. Any authorized structure or fill shall be properly maintained, including maintenance to ensure public safety and compliance with applicable general conditions and activity-specific conditions to a written verification.

b. The requirement in (a) above does not include maintenance of dredging projects. Each maintenance dredging event exceeding the self-verification limits requires a new PCN unless an unexpired, written PCN or other Corps authorization specifies that the permittee may “dredge and maintain” an area for a particular time period. Self-verification or PCN maintenance dredging includes only those areas and depths previously authorized and actually dredged. Maintenance dredging with ocean or open water disposal will always require a PCN and at least Category 2 review.

c. Some maintenance activities may not be subject to regulation under Section 404 in accordance with 33 CFR 323.4(a)(2). Refer to Appendix A, Endnote 7.

30. Property Rights. This GP does not convey any property rights, either in real estate or material, or any exclusive privileges, nor does it authorize any injury to property or invasion of rights or any infringement of federal, state, or local laws or regulations.

31. Transfer of GP Verifications. When the structures or work authorized by this GP are still in existence at the time the property is transferred, the terms and conditions of this GP, including any special conditions, will continue to be binding on the entity or individual who received the GP authorizations, as well as the new owner(s) of the property. If the permittee sells the property associated with a GP verification, the permittee may transfer the GP verification to the new owner by submitting a letter to the Corps (see Appendix E for address) to validate the transfer. A copy of the GP verification must be attached to the letter, and *the letter must contain the new owner’s contact information and the following statement and signature:*

“When the structures or work authorized by this GP are still in existence at the time the property is transferred, the terms and conditions of this GP, including any special conditions, will continue to be binding on the new owner(s) of the property. To validate the transfer of this GP and the associated liabilities associated with compliance with its terms and conditions, have the transferee sign and date below.”

(Transferee)

(Date)

32. Modification, Suspension, and Revocation. Any work authorized under this GP by self-verification or PCN may be either modified, suspended, or revoked, in whole or in part, pursuant to the policies and procedures of 33 CFR 325.7. Any such action shall not be the basis for any claim for damages against the U.S.

33. Special Conditions. The Corps may independently, or at the request of the federal resource agencies, impose other special conditions on a project authorized pursuant to this GP that are determined necessary to minimize adverse navigational and/or environmental effects or based on any other factor of the public interest. Failure to comply with all terms and conditions of the authorization, including special conditions, constitutes a permit violation and may subject the permittee to criminal, civil or administrative penalties and/or an ordered restoration.

34. False or Incomplete Information. If the Corps makes a determination regarding the eligibility of a project under this GP and subsequently discovers that it has relied on false, incomplete or inaccurate information provided by the permittee, the Corps may determine that the GP authorization is not valid; modify, suspend or revoke the authorization; and the U.S. Government may institute legal proceedings.

35. Abandonment. If the permittee decides to abandon the activity authorized under this GP, unless such abandonment is merely the transfer of property to a third party, he/she may be required to restore the area to the satisfaction of the Corps.

36. Enforcement cases. This GP does not apply to any existing or proposed activity in Corps jurisdiction associated with an ongoing Corps or EPA enforcement action, until such time as the enforcement action is resolved or the Corps or EPA, as appropriate, determines that the activity may proceed independently without compromising the enforcement action.

37. Duration of Authorization. This GP expires on October 12, 2020. Activities authorized under this GP that have commenced (i.e., are under construction) or are under contract to commence before this GP expires will have until October 12, 2021 to complete the activity under the terms and conditions of the current GP.

38. Previously Authorized Activities.

a. Projects that have received authorization (Category 1 or 2) from the Corps and that were completed under the previous PGPs, nationwide permits, regional general permits or letters of permission, shall remain authorized.

b. Activities authorized pursuant to 33 CFR Part 330.3 ("Activities occurring before certain dates") are not affected by this GP.

c. Any work not commenced nor completed that was authorized in a written letter from the Corps under the GP in effect between October 12, 2010 and October 12, 2015 remains authorized subject to the terms and general conditions of this GP along with any special conditions in the authorizing written letter. Exception – if previously authorized work is not commenced and a new federally listed threatened or endangered species could be affected, the Corps must consult with the Service(s) prior to re-authorizing the work under this GP. Requests for re-authorization must include an updated Official Species list. To request an Official Species List, refer to the instructions in Appendix D.

39. Discretionary Authority. Notwithstanding compliance with the terms and conditions of this permit, the Corps retains discretionary authority to require Category 2 or Individual Permit review based on concerns for the aquatic environment or for any other factor of the public interest [33 CFR 320.4(a)]. This authority is invoked on a case-by-case basis whenever the Corps determines that the potential consequences of the proposal warrant a higher level of review based on the concerns stated above. This authority may be invoked for projects that may contribute to cumulative environmental impacts that are more than minimal or if there is a special resource or concern associated with a particular project that is not already covered by the remaining conditions of the GP and that warrants greater review. Whenever the Corps notifies an applicant that an Individual Permit may be required, the project is not authorized under this GP and no work may be conducted until an Individual Permit is obtained or until the Corps notifies the applicant that further review has demonstrated that the work may proceed under this GP.

40. St. John/St. Croix Rivers. Work within the Saint John and Saint Croix River basins that requires approval of the International Joint Commission is not eligible for Category 1 and a PCN to the Corps is required if any temporary or permanent use, obstruction or diversion of international boundary waters could affect the natural

flow or levels of waters on the Canadian side of the line; or if any construction or maintenance of remedial works, protective works, dams, or other obstructions in waters downstream from boundary waters could raise the natural level of water on the Canadian side of the boundary.

41. National Lands. Activities that impinge upon the value of any National Wildlife Refuge, National Forest, National Marine Sanctuary, National Park or any other area administered by the National Park Service, U.S. Fish and Wildlife Service (USFWS) or U.S. Forest Service are not eligible for Category 1 and require a PCN.

42. Essential Fish Habitat (EFH). Any work in the following rivers and streams, including all tributaries to the extent that they are currently or were historically accessible for salmon migration, shall not be authorized under Category 1 of the GP and must be screened for potential impacts to EFH (see Appendix G for more information).

Androscoggin River	Aroostook River	Boyden River	Dennys River
Ducktrap River	East Machias River	Hobart Stream	Kennebec River
Machias River	Narraguagus River	Orland River	Passagassawaukeag River
Patten Stream	Penobscot River	Pleasant River	Presumpscot River
Saco River	Sheepscot River	St. Croix River	Tunk Stream
			Union River

The above does not apply to the following activities which may qualify for Category 1 work:

- Exploratory drilling and borings for bridges.
- Moorings (see Appendix A, Page 28 for Category 1 thresholds and requirements)
- Structures, floats & lifts (see Appendix A, Page 29 for Category 1 thresholds and requirements)
- Other activities specified in a programmatic agreement with NMFS.

43. Work Site Restoration

a. Wetland areas where permanent disturbance is not authorized shall be restored to their original condition and elevation, which under no circumstances shall be higher than the pre-construction elevation. Original condition means careful protection and/or removal of existing soil and vegetation, and replacement back to the original location such that the original soil layering and vegetation schemes are approximately the same, unless otherwise authorized.

b. Upon completion of construction, all disturbed wetland areas (the disturbance of these areas must be authorized) shall be properly stabilized. Any seed mix shall contain only plant species native to New England and shall not contain any species listed in the "Invasive and Other Unacceptable Plant Species" Appendix in the "New England District Compensatory Mitigation Guidance" (see GC 24 and refer to Appendix G). This list may be updated periodically.

c. In areas of authorized temporary disturbance, if trees are cut they shall be cut at ground level and not uprooted in order to prevent disruption to the wetland soil structure and to allow stump sprouts to revegetate the work area, unless otherwise authorized.

44. Bank Stabilization

a. Projects involving construction or reconstruction/maintenance of bank stabilization structures within Corps jurisdiction shall be designed to minimize environmental effects, effects to neighboring properties, scour, etc. to the maximum extent practicable.

b. Project proponents must design and construct bank stabilization projects using this sequential minimization process: avoidance of aquatic resource impacts, diversion of overland flow, vegetative stabilization, stone-sloped surfaces, and walls/bulkheads. Vertical walls/bulkheads shall only be used in situations where reflected wave energy can be tolerated.

c. Inland Water bank stabilization activities necessary for erosion prevention must meet all of the following criteria: i) No material is placed in excess of the minimum needed for erosion protection; ii) The activity is no more than 500 feet in total length along the bank(s); iii) The activity will not exceed an average of one cubic yard per running foot placed along the bank below the plane of the ordinary high water mark; iv) Structures angled steeper than 1H:1V and any material other than angular or sub-angular stone or fiber roll revetments require at least a Category 2 review; v) The activity does not involve discharges of dredged or fill

Section IV

material into special aquatic sites; vi) No material is of the type, or is placed in any location, or in any manner, to impair surface water flow into or out of any water of the U.S.; vii) No material is placed in a manner that will be eroded by normal or expected high flows (properly anchored trees and treetops may be used in low energy areas); and viii) The activity is not a stream channelization activity.

d. Bank stabilization activities in tidal waters are provided at Appendix A, Page 30 & 31. Direct impacts in tidal waters from contiguous bank stabilization projects in excess of 200 linear feet (Applicant or Applicant + Abutters combined) must undergo Category 2 review.

45. Stream Work and Crossings & Wetland Crossings

Notes:

a. For *Stream Work and Crossings* below, conditions (a) and (b) apply to Inland Waters and Wetlands (see Appendix A, Page 1 for definition) and Navigable Waters (see Appendix A, Page 27 for definition). Conditions (c)-(l) below only apply to Inland Waters and Wetlands that are streams. All new and replacement crossings in Navigable Waters require an application to the Corps and at least a Category 2 review.

b. In-stream work in a watershed occupied by listed Atlantic salmon, Atlantic sturgeon, or shortnose sturgeon [see GC 8(b)] and some stream work such as crossings on EFH waters (see GC 42) is not eligible for Category 1.

c. “High-Quality Stream Segments” are shown at www.maine.gov/dep/gis/datamaps and may be useful in evaluating impacts to fisheries. GIS shape files are under “Other Google Earth Interactive Maps” and PDFs by county are under “DEP GIS Maps.” See Appendix E for more state contact information.

Conditions for Stream Work and Crossings:

a. All permanent crossings of rivers, streams, brooks, etc. (hereon referred to as “streams”) shall be suitably culverted, bridged, or otherwise designed to i) withstand and to prevent the restriction of high flows to qualify for Category 1, and ii) not obstruct the movement of or not substantially disrupt the necessary life-cycle movements of those species of aquatic life indigenous to the waterbody, including those species that normally migrate through the area, beyond the actual duration of construction unless the activity’s primary purpose is to impound water to qualify for Category 1 or 2. (NOTE: Areas of fill and/or cofferdams must be included in total waterway/wetlands impacts to determine applicability of this GP).

b. Any work that temporarily or permanently impacts upstream or downstream flood conditions, or permanently impacts wetlands in excess of Category 1 thresholds, must be reviewed at least under Category 2. See the documents referenced in Appendix G, 8(c) and (d) for guidance.

c. New Stream Crossings. For new stream crossings to qualify for Category 1:

i. Must ensure compliance with GC 45(a) and GC 45(b) above.

ii. Shall be designed and constructed in accordance with the Corps General Stream Crossing

Standards provided on Page 19 and the stream simulation document listed at Appendix G, 8(a).

d. Replacement Stream Crossings. For replacement stream crossings to qualify for Category 1:

i. Must ensure compliance with GC 45(a) and GC 45(b) above.

ii. Shall be designed and constructed in accordance with the Corps General Stream Crossing

Standards provided on Page 19 and the stream simulation document listed at Appendix G, 8(a).

e. Culvert Extensions. Culvert extensions on culverts that do not meet the Corps General Stream Crossing Standards do not qualify for Category 1 and require an application to the Corps and at least Category 2 review.

f. Temporary Stream Crossings.

Note: The General Stream Crossing Standards don’t apply to temporary stream crossings.

i. Temporary stream crossings or cofferdams shall be used for equipment access across streams [see Appendix G, 8(e)]. Note: Areas of fill and/or cofferdams must be included in total waterway/wetlands impacts to determine the review category in Appendix A.

ii. Temporary stream crossings shall be removed within 180 days to qualify for Category 1.

iii. Temporary stream crossings that are not spans¹⁷ (typically culverts) must be designed in accordance with 1-6 below to qualify for Category 1. Category 2 applications should include information demonstrating 2-6 below:

1. Installed and removed during the low flow period specified in GC 45(l) below.
2. Placed on geotextile fabric or other material where practicable to ensure restoration to the original grade. Soil may not be used to construct or stabilize these structures and rock must be large enough to allow for easy removal without disrupting the streambed.
3. Designed and maintained to withstand and pass high flows. Water height should be no higher than the top of the culvert's inlet. A minimum culvert diameter of two feet is required to pass debris. Culverts must be aligned to prevent bank erosion or streambed scour.
4. Equipped with energy dissipating devices installed downstream if necessary to prevent scour.
5. Designed and maintained to prevent soil from entering the waterbody.
6. Removed upon the completion of work. Impacts to the streambed or banks requires restoration to their original condition using stream simulation methods¹⁸.

g. Slip Lining. Work using slip lining (retrofitting an existing culvert by inserting a smaller diameter pipe), invert lining, or resulting in decreased diameter, does not qualify for Category 1, either as new work or maintenance activities.

h. Work in Flowing Waters. To qualify for Category 1, no unconfined fill [see GC 14(b)] or excavation in flowing waters is allowed. To accomplish this:

i. Bank stabilization work below ordinary high water (OHW) shall utilize erosion controls such as inflatable cofferdams, jersey barrier, silt screen, turbidity curtain, etc. where practicable to prevent sediment input to the stream and to minimize turbidity and sedimentation impacts for sensitive life stages. Bank stabilization above OHW must utilize erosion controls.

ii. Management techniques such as temporary flume pipes, culverts, cofferdams, etc. must be used to maintain normal flows within the stream boundary's confines, or water diversions may be used immediately up and downstream of the work footprint (see Appendix A, Endnote 6) or work must be performed in the dry under no flow conditions, or under very low flow conditions following the practices in GC 45(a).

i. Minimization. In order to make the Category 2 review process more efficient and result in a faster decision, new and replacement stream crossings should be designed using the least intrusive and environmentally damaging method following this sequential minimization process: 1) spans with no stream impacts, 2) spans with stream impacts, and 3) embedded culverts with stream simulation or low-slope design.

j. Maintenance Requirements. The permittee shall maintain the work authorized herein in good condition and in conformance with the terms and general conditions of this permit to facilitate aquatic life passage as stated in GC 45(a). Culverts that develop "hanging" inlets or outlets, result in bed washout, or a stream that doesn't match the characteristics of the substrate in the natural stream channel such as mobility, slope, stability confinement will require maintenance or repair to comply with this GC. This does not apply to GC 45(f) above.

k. Maintenance and Replacement Information. An existing stream crossing must be authorized and in compliance with all conditions of its authorization(s) to qualify for maintenance not subject to regulation. See Appendix A, Endnote 7. A non-serviceable crossing is not eligible for maintenance and is therefore considered as a replacement crossing [see GC 45(d)].

l. Work Window. For projects that otherwise meet the terms of Category 1, in-stream construction work shall be conducted during the low flow period July 15 – September 30 in any year. Projects that are not to be conducted during that time period are ineligible for Category 1 and shall be screened pursuant to Category 2, regardless of the waterway and wetland fill and/or impact area.

Corps General Stream Crossing Standards (required for Category 1; recommended for Category 2):

- a. Culverts must be embedded:

¹⁷ For the purposes of this GP, spans are bridges, three-sided box culverts, open-bottom culverts or arches that span the stream with footings landward of bankfull width.

¹⁸ Design and construction shall be in accordance with the stream simulation document listed at Appendix G, 8(a).

- ≥ 2 feet for box culverts and other culverts with smooth internal walls,
- ≥ 1 foot for corrugated pipe arches
- ≥ 1 foot and at least 25 percent for corrugated round pipe culverts

b. **For new crossings**, spans¹⁷ are required to avoid or cause minimal disruption to the streambed and to meet the requirements of General Condition 45(a) and 45(b). Footings and abutments must be landward of 1.2 times bankfull width. To the greatest extent practicable, work in the stream shall be minimized, and design and construction shall allow the streambed's natural structure and integrity to remain intact. Any fill or excavation of the streambed below bankfull width other than footings, support pilings, or work specified in 45(h)ii requires Category 2 review and, unless demonstrated otherwise, stream simulation¹⁸ to establish substrate and banks in the span structure and work area as specified in (d) and (e) below.

c. **For replacement crossings**, spans¹⁷ are required to meet the requirements of General Condition 45(a) and 45(b). Footings and abutments shall be landward of 1.2 times bankfull width. Unless demonstrated otherwise, stream simulation¹⁸ is required to establish substrate and banks in the span structure and work area as specified in (d) and (e) below.

d. Crossings must have a natural bottom substrate within the structure matching the characteristics of the substrate in the natural stream channel and the banks (mobility, slope, stability, confinement, grain and rock size) at the time of construction and over time as the structure has had the opportunity to pass significant flood events. To allow terrestrial passage for wildlife and prevent undermining the footings, crossings shall have a bank on both sides of the stream matching the horizontal profile of the existing stream and banks¹⁸. Note: Installation of substrate material within smaller culverts may not be safe or practicable. In these cases, it may be necessary to allow for natural deposition and bed development unless alternative methods are identified.

e. Crossings must be designed and constructed¹⁸ with appropriate bed forms and streambed characteristics so that water depths and velocities are comparable to those found in the natural channel at a variety of flows. In order to provide appropriate water depths and velocities at a variety of flows and especially low flows, it is usually necessary to reconstruct the streambed or preserve the natural channel within the structure. Otherwise, the width of the structure needed to accommodate higher flows will create conditions that are too shallow at low flows. The grain and rock size, and arrangement of streambed materials within the structure should be in accordance with (d) above. Flows could go subsurface within the structure if only large material is used without smaller material filling the voids.


Conditions for Wetland Crossings:

a. All temporary and permanent crossings of wetlands shall be suitably culverted, bridged, or otherwise designed to: i) Withstand and prevent the restriction of high flows, ii) Not obstruct the movement of or not substantially disrupt the necessary life-cycle movements of those species of aquatic life indigenous to the wetland, including those species that normally migrate through the area, beyond the actual duration of construction unless the activity's primary purpose is to impound water. See Appendix E for the Maine DEP's crossing standards.

b. To qualify for Category 1, new and replacement wetland crossings that are permanent shall be culverted, spanned or bridged in such a manner as to preserve hydraulic and ecological connectivity, at its present level, between the wetlands on either side of the road. To meet this requirement, we recommend that culverts, spans or bridges be placed at least every 50 feet with an opening at least 2 feet high and 3 feet wide at ground level where practicable. Closed bottom culverts shall be embedded at least 6 inches with a natural bottom.

c. In the case of non-compliance, the permittee shall take necessary measures to correct wetland damage due to lack of hydraulic and ecological connectivity.

d. Any work that results in flooding, results in impacts to wetlands on either side of the wetland crossing in excess of Category 1 thresholds, or impacts wetland drainage from the upgradient side of the wetland crossing does not qualify for Category 1.



Robert J. Desista
Deputy Chief, Regulatory Division
For DISTRICT ENGINEER

DATE

10/13/15

APPENDIX A: DEFINITION OF CATEGORIES

APPENDIX A: DEFINITION OF CATEGORIES		
A. INLAND WATERS AND WETLANDS	Inland Waters and Wetlands: Waters that are regulated under Section 404 of the Clean Water Act, including rivers, streams, lakes, ponds and wetlands, and <i>excluding Section 10 Navigable Waters of the U.S. (tidal and freshwater)</i> . The jurisdictional limits are the ordinary high water (OHW) mark in the absence of adjacent wetlands, beyond the OHW mark to the limit of adjacent wetlands when adjacent wetlands are present, and the wetland limit when only wetlands are present. For the purposes of this GP and designated activities, fill placed in the area between the mean high water (MHW) and the high tide line (HTL), and in the bordering and contiguous wetlands ¹ to tidal waters are reviewed in the Navigable Waters section. (See B. Navigable Waters on page 27 below.) Projects not meeting Category 1 require an application for review as a Category 2 or Individual Permit project. All Category 1 and 2 projects must comply with all of this GP's applicable terms (Pages 1 – 4) and General Conditions (Pages 5–20).	
ACTIVITY	CATEGORY 1 Self-Verification Eligible (<i>SVNF Required</i>)	CATEGORY 2 (<i>PCN Required</i>)
1. Repair, Replacement, and Expansion, and Maintenance of Authorized Structures and Fills	Repair or maintenance of existing, currently serviceable, authorized fills with no expansion or change in use: • Conditions of the original authorization apply. • Minor deviations in fill design allowed.⁷ • The repair, rehabilitation, or replacement of those structures or fills destroyed or damaged by storms, floods, fire or other discrete events is authorized, provided the repair, rehabilitation, or replacement is commenced, or is under contract to commence, within two years of the date of their destruction or damage. • No effect on federally listed endangered or threatened species or critical habitat.	Replacement of non-serviceable fills, or repair/maintenance of serviceable fill, with expansion <3 acres, or with a change in use.
2. Moorings	NA – moorings in non-navigable inland waters are not subject to Corps jurisdiction. Note: Moorings placed in freshwater navigable waters are reviewed in the Navigable Waters section. (See B. Navigable Waters on Page 28 below.)	NA
3. Structures, Floats & Lifts	For solid fill or crib supported structures on inland waters, <15,000 square feet (SF) of waterway and/or wetland fill, associated secondary impacts ² , and temporary fills. • No effect on federally listed endangered or threatened species or critical habitat. • Note: Temporary or permanent structures placed in freshwater navigable waters are reviewed in the Navigable Waters section. (See B. Navigable Waters on page 29 below.	1. Work not eligible for Category 1 2. ≥15,000 SF to <3 acres of inland waterway and/or wetland fill and associated secondary impacts (e.g., areas drained, flooded, fragmented, or excavated).
4. Aids to Navigation and Temporary Recreational Structures	NA - this activity in non-navigable inland waters is not subject to Corps jurisdiction. Note: Aids to Navigation and other structures placed in freshwater navigable waters are reviewed in the Navigable Waters section. (See B. Navigable Waters on page 30 below.)	NA

5. Dredging, Disposal of Dredged Material, Beach Nourishment, and Rock Removal and Relocation	1. For regulated discharges associated with excavation, and disposal <15,000 SF inland waterway and/or wetland impacts. 2. The activity does not occur in navigable waters of the U.S. 3. Stream channelization, relocation or loss of streambed including impoundments or discharge of tailings into streams does not occur. 4. No effect on federally listed endangered or threatened species or critical habitat.	1. Work not eligible for Category 1 2. ≥15,000 SF to <3 acres of inland waters.
6. Discharges of Dredged or Fill Material Incidental to the Construction of Bridges	NA - For discharges incidental to the construction of bridges in inland waters of the U.S. refer to Activity 23 (Stream and Wetland Crossings) and GC 45. Note: Discharges of Dredged or Fill Material Incidental to the Construction of Bridges in freshwater navigable waters are reviewed in the Navigable Waters section. (See B. Navigable Waters on page 30 below.)	NA
7. Bank and Shoreline Stabilization	Inland bank stabilization <500 FT long and ≤1 CY of fill per linear foot below OHW, provided: • ≤1 cubic yard of fill per linear foot placed along the bank waterward of ordinary high water. • Work complies with the GCs (GC 44 in particular), including: ◦ No structures angled steeper than 1H:1V allowed. Only rough-faced stone or fiber roll revetments allowed. ◦ No in-stream work involving fill or excavation in flowing waters (see GC 45(h)). • In-water work limited to Jul 15 – Sep 30. • No work in vernal pools⁵ or SAS³. • No effect on federally listed endangered or threatened species or critical habitat.	Work not eligible for Category 1
8. Residential, Commercial, Industrial, and Institutional Developments, and Recreational Facilities	1. <15,000 SF of inland waterway and/or wetland fill and associated secondary impacts² (e.g., areas drained, flooded, fragmented, mechanically cleared or excavated). Fill area includes all temporary and permanent fill, and regulated discharges associated with excavation. Construction mats are considered as fill. [See GC 14] <u>Provided:</u> • Historic fill + proposed impact area <15,000 SF complies with GC 5, Single and Complete Projects. • No work in special aquatic sites (SAS)⁴ other than wetlands. • No effect on federally listed endangered or threatened species or critical habitat. 2. For work in Vernal Pool (VP) Management Areas (includes VPs)⁵: • See GC 23 and Appendix C for VP delineation requirements.	1. Work not eligible for Category 1. 2. ≥15,000 SF to <3 acres of inland waterway and/or wetland fill and associated secondary impacts (e.g., areas drained, flooded, fragmented, or excavated). Fill area includes all temporary and permanent fill (including mats), and regulated discharges associated with excavation. 3. <i>Mechanical clearing without grubbing or other soil disturbance >3 acres as a secondary impact may still be eligible for Category 2 at the discretion of the Corps.</i> See GC 2 and Appendix C for wetland delineation requirements.

9. Utility Line Activities	• See GC 23 to determine if work qualifies for Category 1 or 2. • See Appendix G for VP documents providing mitigation guidance. 1. <15,000 SF of inland waterway and/or wetland fill, associated secondary impacts², and temporary fills. 2. The activity does not occur in, over, or under navigable waters of the U.S. 3. Intake structures that are dry hydrants used exclusively for firefighting activities with no stream impoundments. 4. There is no permanent change in pre-construction contours in waters of the U.S. 5. Material resulting from trench excavation is temporarily side cast into waters of the U.S. for ≤3 months and is placed in such a manner that it is not dispersed by currents or other forces. 6. The utility line is placed within and does not run a) parallel to, or b) along a streambed. 7. Stream channelization, relocation or loss of streambed including impoundments does not occur. 8. No effect on federally listed endangered or threatened species or critical habitat. 9. There is no discharge in SAS other than non-tidal wetlands. 10. Construction mats⁴ of any area necessary to conduct activities that were previously authorized, authorized under Category 1, or not subject to regulation (see Endnote 7). Authorized construction mats must be in place for <3 months, removed immediately upon work completion, and the wetlands must be restored (see GC 43). 11. Stream crossings must comply with GC 17.	1. Work not eligible for Category 1 2. ≥15,000 SF to <3 acres of inland waterway and/or wetland fill and associated secondary impacts (e.g., areas drained, flooded, fragmented, or excavated). Fill area includes all temporary and permanent fill (including mats), and regulated discharges associated with excavation. 3. <i>Mechanical clearing without grubbing or other soil disturbance >3 acres as a secondary impact may still be eligible for Category 2 at the discretion of the Corps.</i>
10. Linear Transportation Projects (not including stream crossings) For stream crossings, refer to Activity 23	1. <15,000 SF of inland waterway and/or wetland fill associated secondary impacts (e.g., areas drained, flooded, fragmented, mechanically cleared or excavated). Fill area includes all temporary and permanent fill, and regulated discharges associated with excavation. Construction mats are considered fill. (See GC 14.) Provided: • Historic fill + proposed impact area <15,000 SF and complies with GC 5 single and complete projects. • No work in special aquatic sites (SAS) other than wetlands. 2. Construction mats⁴ of any area necessary to conduct activities that were previously authorized, authorized under Category 1, or not subject to regulation (see Endnote 7). Authorized construction mats must be in place for <3 months, removed immediately upon work completion, and the wetlands must be restored (see GC 43). 3. No effect on federally listed endangered or threatened species or critical habitat.	1. ≥15,000 SF to <3 acres of inland waterway and/or wetland fill and associated secondary impacts (e.g., areas drained, flooded, fragmented, or excavated). Fill area includes all temporary and permanent fill (including mats), and regulated discharges associated with excavation. 2. <i>Mechanical clearing without grubbing or other soil disturbance >3 acres as a secondary impact may still be eligible for Category 2 at the discretion of the Corps.</i>

11. Mining Activities	1. <15,000 SF of inland waterway and/or wetland fill, associated secondary impacts, and temporary impacts. 2. The activity does not occur in navigable waters of the U.S. 3. Stream channelization, relocation or loss of streambed including impoundments or discharge of tailings into streams does not occur. 4. No effect on federally listed endangered or threatened species or critical habitat.	1. Work not eligible for Category 1. 2. ≥15,000 SF to <3 acres of inland waterway and/or wetland fill and associated secondary impacts (e.g., areas drained, flooded, fragmented, or excavated). Fill area includes all temporary and permanent fill (including mats), and regulated discharges associated with excavation.
12. Boat Ramps	1. <15,000 SF of inland waterway and/or wetland fill, associated secondary impacts, and temporary impacts. 2. No effect on federally listed endangered or threatened species or critical habitat.	1. Work not eligible for Category 1 2. >15,000 SF and < 3 acres of impact.
13. Land and Water-Based Renewable Energy Generation Facilities and Hydropower Projects	<i>For land-based facilities:</i> 1. <15,000 SF of inland waterway and/or wetland fill, associated secondary impacts, and temporary impacts. 2. Stream channelization, relocation or loss of streambed including impoundments does not occur. 3. No effect on federally listed endangered or threatened species or critical habitat. <i>For water-based facilities and hydropower projects:</i> No new facilities are eligible.	<i>For land-based activities:</i> 1. Work not eligible for Category 1. 2. >15,000 SF and < 3 acres impact. 3. <i>Mechanical clearing without grubbing or other soil disturbance >3 acres as a secondary impact may still be eligible for Category 2 at the discretion of the Corps.</i> <i>For water-based facilities and hydropower projects:</i> > 3 acres of impact will require an IP.
14. Reshaping Existing Drainage Ditches & Mosquito Management	Not Applicable	Not Applicable
15. Oil Spill and Hazardous Material Cleanup	Jurisdictional activities required for the containment and cleanup of oil and hazardous substances that are subject to the National Oil and Hazardous Substances Pollution Contingency Plan (40 CFR 300) provided that the work is done in accordance with the Spill Control and Countermeasure Plan required by 40 CFR 112.3 or any existing state contingency plan and provided that the Regional Response Team (if one exists in the area) concurs with the proposed containment and cleanup action. SAS³ must typically be restored in place at the same elevation. <i>Note: SVN/F or a surrogate state reporting form may be submitted after the fact.</i>	Work not eligible for Category 1

16. Cleanup of Hazardous and toxic waste	Specific jurisdictional activities to effect the containment, stabilization, or removal of hazardous or toxic waste materials, including court ordered remedial action plans or related settlements, which are performed, ordered or sponsored by a government agency with established legal or regulatory authority. SAS should be restored in place at the same elevation. • <15,000 SF of inland waterway and/or wetland fill, associated secondary impacts, and temporary impacts. • No stream channelization, relocation or loss of streambed occurs. • The project does not involve establishing new disposal sites or expanding existing sites used for the disposal of hazardous or toxic waste. • No effect on federally listed endangered or threatened species or critical habitat.	Work not eligible for Category 1
17. Scientific Measurements Devices	1. Scientific measurement devices whose purpose is to measure and record scientific data, such as staff gages, water recording devices, water quality testing and improvement devices, and similar structures. This excludes any biological sampling devices. Structures may not restrict or concentrate movement of aquatic organisms. 2. No effect on federally listed endangered or threatened species or critical habitat.	Work not eligible for Category 1
18. Survey Activities	1. Jurisdictional survey activities, such as core sampling, seismic exploratory operations, plugging of seismic shot holes and other exploratory-type bore holes, exploratory trenching, soil surveys, sampling, and historic resources surveys (but not recovery). Exploratory trenches must be restored in accordance with GC 43. The construction of temporary pads is authorized provided the discharge doesn't exceed 25 CY. This doesn't authorize permanent structures or the drilling and the discharge of excavated material from test wells for oil and gas exploration (the plugging of such wells is authorized). 2. No effect on federally listed endangered or threatened species or critical habitat.	Work not eligible for Category 1
19. Agricultural Activities	1. For those activities subject to Corps jurisdiction¹⁶, <15,000 SF of inland waterway and/or wetland fill, associated secondary impacts, and temporary impacts. 2. No stream channelization, relocation, loss of streambed, or farm ponds in streams. 3. No effect on federally listed endangered or threatened species or critical habitat.	1. ≥15,000 SF to <3 acres of inland waterway and/or wetland fill and associated secondary impacts (e.g., areas drained, flooded, fragmented, or excavated). Fill area includes all temporary and permanent fill (including mats), and regulated discharges associated with excavation. 2. > 3 acres of impact will require an IP.

20. Fish and Wildlife Harvesting, Enhancement and Attraction Devices and Activities	NA - this activity in non-navigable inland waters, if not involving a discharge of dredged or fill material, is not subject to Corps jurisdiction. Note: Related structures placed in freshwater navigable waters (e.g. the upper Penobscot or Kennebec Rivers) are reviewed in the Navigable Waters section. (See B. Navigable Waters on Page 33 below.)	Not Applicable
21. Habitat Restoration, Establishment and Enhancement Activities	1. <15,000 SF of inland waterway and/or wetland fill, associated secondary impacts, and temporary impacts. 2. The activity is supported in writing by a local, state, or non-Corps Federal environmental agency. Water impoundments require PCN. 3. No conversion of i) a stream to wetland or vice versa, wetland to a pond or uplands, and ii) one wetland type to another. 4. No dam removal. 5. No effect on federally listed endangered or threatened species or critical habitat.	1. Work not eligible for Category 1 2. Aquatic habitat restoration, establishment, and enhancement of wetlands and riparian areas and the restoration and enhancement of streams and other open waters with impacts of any area $\geq 15,000$ SF, provided those activities result in net increase in overall aquatic resource functions and services.⁸
22. Previously Authorized Activities	Any work not commenced nor completed that was authorized in a written letter from the Corps under the GP in effect between October 12, 2010 and October 12, 2015. The terms and general conditions of this GP apply along with any special conditions in the written authorization.	
23. Stream & Wetland Crossings	1. River, stream and brook work and crossings: • Must comply with GC 45 in particular, including: - o No slip lining [see GC 45 (g)]. - o No in-stream work involving fill or excavation in flowing waters [see GC 45(h)]. - o In-stream work limited to Jul 15 – Sep 30 [see GC 45 (I)]. • No work in riffles and pools³. • No stream relocations. • No dams or dikes⁶. • No effect on federally listed endangered or threatened species or critical habitat. • <15,000 SF of inland waterway and/or wetland fill, associated secondary impacts, and temporary impacts. 2. Wetland crossings must comply with the particularly relevant GC 45.	Work not eligible for Category 1
24. Aquaculture (freshwater)	For land based installations, <15,000 SF of inland waterway and/or wetland fill, associated secondary impacts, and temporary impacts. • In-stream/in-water work limited to Jul 15 – Sep 30. • No effect on federally listed endangered or threatened species or critical habitat. Note: Related structures placed in freshwater navigable waters are reviewed in the Navigable Waters section. (See B. Navigable Waters, below.)	Work not eligible for Category 1

B. NAVIGABLE WATERS	Navigable Waters of the United States: Waters that are subject to the ebb and flow of the tide and/or the tidal and non-tidal portions of the Federally designated navigable waters (the Penobscot River, Kennebec River, and Lake Umbagog) (Section 10 Rivers and Harbors Act of 1899). The jurisdictional limits are the mean high water (MHW) line in tidal waters and the ordinary high water (OHW) mark in non-tidal portions of the federally designated navigable rivers. For the purposes of this GP, fill placed in the area between the mean high water (MHW) and the high tide line (HTL), and in the bordering and contiguous wetlands¹ to tidal waters are also reviewed in this Navigable Waters section. Projects not meeting Category 1 require an application for review as a Category 2 or Individual Permit project. All Category 1 and 2 projects must comply with all of this GP's applicable terms (Pages 1 - 4) and General Conditions (Pages 5 - 20).
ACTIVITY	CATEGORY 1 Self-Verification Eligible (SVNF Required)
1. Repair, Replacement, and Expansion of Maintenance of Authorized (or grandfathered) Structures and Fills	1. Repair, replacement in-kind, or maintenance⁷ of existing, currently serviceable⁷, authorized structures or fills: • All work is to be conducted in-the-dry, during low water. • Conditions of the original authorization apply. • No substantial expansion or change in use. • No new fill in SAS³. • Must be rebuilt in same footprint, however minor deviations in structure design allowed⁷. • The repair, rehabilitation, or replacement of those structures or fills destroyed or damaged by storms, floods, fire or other discrete events is authorized, provided the repair, rehabilitation, or replacement is commenced, or is under contract to commence, within two years of the date of their destruction or damage. CATEGORY 2 (PCN Required) 1. Replacement of non-serviceable structures and fills or repair/maintenance of serviceable structures or fills, with fill, replacement or expansion <1 acre, or with a change in use. 2. <1 acre temporary or permanent fill, excavation and/or secondary impacts. Fill area includes all temporary and permanent waterway fills, provided: • Temporary or permanent fill in eelgrass¹⁴ <1000 SF. • Permanent fill in SAS (excluding eelgrass¹⁴) <4300 SF. 3. Standard Pile Driving Conditions. Work involving piles shall adhere to one of the four methods below: • Piles installed in-the-dry during low water or in-water between Nov. 8th - Apr. 9th, or • Must be drilled and pinned to ledge, or • Vibratory hammers used to install any size and quantity of wood, concrete or steel piles, or • Impact hammers limited to one hammer and <50 piles installed/day with the following: wood piles of any size, concrete piles ≤18-inches diameter, steel piles <12-inches diameter if the hammer is ≤3000 lbs and a wood cushion is used between the hammer and steel pile, and • For the methods above: ◦ In-water noise levels shall not exceed >187dB cSEL re 1μPa or 206dB peak re 1μPa at a distance >10m from the pile being installed, and ◦ In-water noise levels >150dB peak re 1μPa shall not exceed 12 consecutive hours on any given day and a 12 hour recovery period (i.e., in-water noise below 150dB peak re 1μPa) must be provided between work days. • Existing derelict, degraded or abandoned piles in the project area that are affected by project activities should be removed and properly disposed of in an upland location landward of MHW or OHW and not in wetlands, tidal wetlands, their substrate or inudflats.

2. Moorings	1. Private, non-commercial, non-rental, single-boat moorings, provided: • Authorized by the local harbormaster/town. • Not associated with any boating facility.¹¹ • Boat or mooring not located in a Federal Navigation Project or buffer zone¹² other than in a Federal Anchorage¹². Moorings in a Federal Anchorage not associated with a boating facility¹¹ and are not for rent. • No interference with navigation. • No new moorings located in SAS³. Prior to installation of moorings, a site-specific eelgrass survey should be conducted to document that eelgrass is not present. • When existing, authorized moorings in SAS³ are going to be replaced, they should be replaced with low impact mooring technology that prevents mooring chains from resting or dragging on the bottom substrate at all tides and helical anchors, or equivalent SAS protection systems where practicable. 2. Minor relocation of previously authorized moorings, provided: • Authorized by the local harbormaster/town. • Not located in SAS³ • No interference with navigation. • Cannot be relocated into a Federal Navigation Project¹² other than a Federal Anchorage¹² Note: Cat 1 eligible moorings do not require SVNf.	1. Moorings associated with an existing boating facility¹¹. An eelgrass¹⁴ survey may be required. 2. Moorings that don't meet the terms in Category 1 and don't require an Individual Permit. This includes private moorings with no harbormaster or means of local approval. 3. Moorings located such that they, and/or vessels docked or moored at them, are within the buffer zone of the horizontal limits¹³ of a Federal Channel¹². (See Appendix H.) The buffer zone is equal to 3 times the authorized depth of that channel. 4. An IP is required for moorings within the horizontal limits¹¹, or with moored vessels that extend, into the horizontal limits of a Federal Navigation Project¹², except those in Federal Anchorages¹². <i>For 1-4 above, siting of new individual moorings in SAS³, including eelgrass¹⁴, should be avoided to the maximum extent practicable. If SAS³ cannot be avoided, plans should show elastic mooring systems that prevent mooring chains from resting or dragging on the bottom substrate at all tides and helical anchors, or equivalent SAS protection systems, where practicable. For moorings that appear to impact SAS, the Corps may require an eelgrass survey.</i>
3. Structures, Floats and Lifts	1. Reconfiguration of existing authorized structures shall occur in-the-dry during low water. 2. Minor relocation of previously authorized floats or moored floats/lobster cars, provided: • Authorized by the local harbormaster/town. • Not located in SAS³. • No interference with navigation. • Cannot be relocated into a Federal Navigation Project¹² other than a Federal Anchorage¹².	1. New structures or floats, including floatways/skidways, built to access waterway (seasonal and permanent). Includes both pile supported and crib supported structures. 2. Expansions to existing boating facilities¹¹ • Pile-supported structures <400 SF, with attached floats totaling ≤200 SF. • Bottom anchored floats ≤200 SF. • Structures are ≤4' wide and have at least a 1:1 height:width ratio¹¹. • Floats supported a minimum of 18" above the substrate during all tides. • Structures & floats not located within 25' of any eelgrass⁸. • Moored vessels not positioned over SAS³. • The Corps may require a letter of no objection from the abutter if

		<i>structure is to be within 25 feet of the property line.</i> • <i>No structure extends across >25% of the waterway width at mean low water.</i> • <i>Not located within the buffer zone of the horizontal limits¹³ of a Corps Federal Navigation Project (FNP) (App. F). The buffer zone is equal to three times the authorized depth of that FNP.</i> 3. An Individual Permit is required for structures or floats, including floatways/skidways, located such that they and/or vessels docked or moored at them are within the horizontal limits¹³ of a Corps Federal Navigation Project¹² (see App. H). 4. An Individual Permit is required for structures & floats associated with a new or previously unauthorized boating facility¹¹. 5. Standard Pile Driving Conditions. Work involving piles shall adhere to one of the four methods below: • Piles installed in-the-dry during low water or in-water between Nov. 8th - Apr. 9th, or • Must be drilled and pinned to ledge, or • Vibratory hammers used to install any size and quantity of wood, concrete or steel piles, or • Impact hammers limited to one hammer and <50 piles installed/day with the following: wood piles of any size, concrete piles ≤18-inches diameter, steel piles <12-inches diameter if the hammer is ≤3000 lbs and a wood cushion is used between the hammer and steel pile, and • For the methods above: ○ In-water noise levels shall not exceed >187dB cSEL re 1μPa or 206dB peak re 1μPa at a distance >10m from the pile being installed, and ○ In-water noise levels >150dB peak re 1μPa shall not exceed 12 consecutive hours on any given day and a 12 hour recovery period (i.e., in-water noise below 150dB peak re 1μPa) must be provided between work days. • Existing derelict, degraded or abandoned piles in the project area that are affected by project activities should be removed and properly disposed of in an upland location landward of MHW or OHW and not in wetlands, tidal wetlands, their substrate or mudflats.

4. Aids to Navigation and Temporary Recreational Structures	1. Temporary buoys, markers, floats, etc. for recreational use during specific events, provided they are removed within 30 days after use is discontinued. 2. The placement of aids to navigation and regulatory markers which are approved by and installed in accordance with the requirements of the U.S. Coast Guard. (See 33 CFR 66, Chapter I, subchapter C).” <i>Note: Cat 1 eligible aids to navigation and regulatory markers do not require SVN.</i>	Work not eligible for Category 1
5. Dredging, Disposal of Dredged Material, Beach Nourishment, and Rock Removal and Relocation	1. Maintenance dredging¹⁰ for navigational purposes <1,000 CY with upland disposal. Includes return water from upland contained disposal area, provided: • Proper siltation controls are used. • Dredging & disposal operation limited to Nov. 8 – Apr. 9. • No impact to SAS³. • No dredging in intertidal areas. • No dredging within 100’ of shellfish beds. • No dredging in areas designated as Critical Habitat for Atlantic salmon [see GC 8(b) & (c)]. • For dredging in tidal waters outside of Atlantic salmon critical habitat, applicants must contact NMFS (see GC 8) to ensure no impacts to listed species such as shortnose sturgeon, Atlantic sururgeon, and listed sturgeon critical habitat. • Project proponents must contact the USFWS for work on coastal beaches to ensure no impacts to piping plovers, roseate terns, rufa red knot, or their habitat [see GC 8(c)]. • No underwater blasting. 2. Maintenance dredging is not eligible for Category 1 if conducted in tidal portions of the Penobscot river upstream of a line extending from Turner point in Castine to Moose Point (formerly Squaw Point) on Cape Jellison in Stockton Springs or in tidal portions of the Kennebec or Androscoggin Rivers upstream of a line extending from Doubling point in Arrowsic to Hospital Point in West Bath.	1. Maintenance dredging¹⁰ ≥1,000 CY, new dredging <25,000 CY, or projects not meeting Category 1. Includes return water from upland contained disposal areas. Disposal includes: • Upland. • Beach nourishment (above mean high water) of any area provided the dredging’s primary purpose is navigation or the sand is from an upland source. • Open water & confined aquatic disposal, if Corps finds the material suitable. 2. Beach nourishment associated with dredging when the primary purpose is not navigation requires at least a Category 2 review. 3. Maintenance or new dredging¹⁰ and/or disposal in or affecting a SAS³ requires an Individual Permit.

6. Discharges of Dredged or Fill Material Incidental to the Construction of Bridges	1. Discharges of dredged or fill material incidental to the construction of bridges across navigable waters of the U.S., including cofferdams, abutments, foundation seals, piers, and temporary construction and access fills provided the U.S. Coast Guard authorizes such discharges as part of the bridge permit or appropriate approval. 2. Causeways and approach fills are not included in this category and require Category 2 or Individual Permit authorization.	<1 acre temporary or permanent fill, excavation and/or secondary impacts (e.g., areas drained, flooded, fragmented or mechanically cleared). Fill area includes all temporary and permanent waterway fills, provided: • Temporary or permanent fill in eelgrass¹⁴ <1000 SF. • Permanent fill in SAS (excluding eelgrass¹⁴) <4300 SF.
7. Bank and Shoreline Stabilization	1. Bank stabilization projects <200 linear feet provided: • ≤1 cubic yard of fill per linear foot placed along the bank waterward of high tide line. No fill or equipment will occur in SAS³. • Work conducted in the intertidal zone must be conducted in-the-dry during low water. • No structures angled steeper than 1H:1V and only rough-faced stone or fiber roll revetments allowed. • No driving of piles or sheeting. 2. Bank stabilization projects in excess of 200 linear feet (Applicant or Applicant + Abutters combined) must undergo Category 2 review.	1. Work not eligible for Category 1. 2. <1 acre temporary or permanent fill, excavation and/or secondary impacts (e.g., areas drained, flooded, fragmented or mechanically cleared). Fill area includes all temporary and permanent waterway fills, provided: • Temporary or permanent fill in eelgrass¹⁴ <1000 SF. • Permanent fill in SAS (excluding eelgrass¹⁴) <4300 SF.
8. Residential, Commercial, Industrial, and Institutional Developments, and Recreational Facilities	Not Eligible	1. <1 acre temporary or permanent fill, excavation and/or secondary impacts (e.g., areas drained, flooded, fragmented or mechanically cleared). Fill area includes all temporary and permanent waterway fills, provided: • Temporary or permanent fill in eelgrass¹⁴ <1000 SF. • Permanent fill in SAS (excluding eelgrass¹⁴) <4300 SF. 2. Conversions of previously authorized pile supported buildings over navigable waters to residences, offices, or other non-water dependent uses require at least a Category 2 review. 3. Floating house boats or businesses on floats require Category 2 review.
9. Utility Line Activities	1. Repair or maintenance of existing, currently serviceable, authorized utilities with no expansion or change in use: • Conditions of the original authorization apply. • Trenching or filling is confined to the existing footprint. • In water work conducted between Nov 8 and Apr 9. • No new impact to SAS. 3. <u>New work</u> in, over, or under navigable waters requires a PCN and Category 2 review. 4. Except for aerial utility lines, work is not eligible for Category 1 if	1. New or replacement installations or work not otherwise eligible for Category 1. 2. <1 acre temporary or permanent fill, excavation and/or secondary impacts (e.g., areas drained, flooded, fragmented or mechanically cleared). Fill area includes all temporary and permanent waterway fills, provided: • Temporary or permanent fill in eelgrass¹⁴ <1000 SF. • Permanent fill in SAS (excluding eelgrass¹⁴) <4300 SF. 3. Particularly relevant is GC12

	conducted in tidal portions of the Penobscot river upstream of a line extending from Turner point in Castine to Moose Point (formerly Squaw Point) on Cape Jellison in Stockton Springs or in tidal portions of the Kennebec or Androscoggin Rivers upstream of a line extending from Doubling point in Arrowsic to Hospital Point in West Bath.	
10. Linear Transportation Projects (Not Including Stream Crossings)	Not eligible	<1 acre temporary or permanent fill, excavation and/or secondary impacts (e.g., areas drained, flooded, fragmented or mechanically cleared). Fill area includes all temporary and permanent waterway fills, provided: • Temporary or permanent fill in eelgrass¹⁴ <1000 SF. • Permanent fill in SAS (excluding eelgrass¹⁴) <4300 SF.
11. Mining Activities	Not Eligible	Not Eligible
12. Boat Ramps and Marine Railways	1. No new impact to SAS 2. Marine railway and boat ramp work not eligible for maintenance⁷ (i.e. not currently serviceable⁷) may be replaced "in-kind" with minor deviations⁷ provided: • Work is in the intertidal zone. • No fill expansion below high tide line. • Work conducted in-the-dry during low water. 3. No new boat ramps or marine railways.	1. Work not eligible for Category 1 2. <1 acre temporary or permanent fill, excavation and/or secondary impacts (e.g., areas drained, flooded, fragmented or mechanically cleared). Fill area includes all temporary and permanent waterway fills, provided: • Temporary or permanent fill in eelgrass¹⁴ <1000 SF. • Permanent fill in SAS (excluding eelgrass¹⁴) <4300 SF.
13. Land and Water-Based Renewable Energy Generation Facilities and Hydropower Projects	Not Eligible	1. <1 acre temporary or permanent fill, excavation and/or secondary impacts (e.g., areas drained, flooded, fragmented or mechanically cleared). Fill area includes all temporary and permanent waterway fills, provided: • Temporary or permanent fill in eelgrass¹⁴ <1000 SF. • Permanent fill in SAS (excluding eelgrass¹⁴) <4300 SF. 2. No new impoundments.
14. Reshaping Existing Drainage Ditches and Mosquito Management	1. ≤500 linear feet of drainage ditch will be modified. The reshaping of the ditch cannot increase drainage capacity beyond the original as-built capacity nor can it expand the area drained by the ditch as originally constructed (i.e., the capacity of the ditch must be the same as originally constructed and it cannot drain additional wetlands or other waters of the U.S.). 2. No new ditches or relocation of drainage ditches constructed in waters of the U.S.; the location of the centerline of the reshaped drainage ditch must be approximately the same as the location of the centerline of the original drainage ditch.	1. Work not eligible for Category 1 2. <1 acre temporary or permanent fill, excavation and/or secondary impacts (e.g., areas drained, flooded, fragmented or mechanically cleared). Fill area includes all temporary and permanent waterway fills, provided: • Temporary or permanent fill in eelgrass¹⁴ <1000 SF. • Permanent fill in SAS (excluding eelgrass¹⁴) <4300 SF.

	3. No effect on federally listed endangered or threatened species or critical habitat	
15. Oil Spill and Hazardous Material Cleanup	Jurisdictional activities required for the containment and cleanup of oil and hazardous substances that are subject to the National Oil and Hazardous Substances Pollution Contingency Plan (40 CFR 300) provided that the work is done in accordance with the Spill Control and Countermeasure Plan required by 40 CFR 112.3 and any existing state contingency plan and provided that the Regional Response Team (if one exists in the area) concurs with the proposed containment and cleanup action. SAS³ must typically be restored in place at the same elevation. <i>Note: SVNF or a surrogate state reporting form may be submitted after the fact. No SVNF is required for Category 1 eligible containment booms.</i>	Work not eligible for Category 1
16. Cleanup of Hazardous and Toxic Waste	Not eligible - except for booms placed for hazardous and toxic waste containment and absorption and prevention which are eligible for SV. <i>Note: No SVNF is required for Category 1 eligible containment booms.</i>	Specific jurisdictional activities with impacts of any area required to affect the containment, stabilization, or removal of hazardous or toxic waste materials that are performed, ordered, or sponsored by a government agency with established legal or regulatory authority. Wetlands and other SAS must typically be restored in place at the same elevation to qualify.
17. Scientific Measurement Devices	Scientific measurement devices whose purpose is to measure and record scientific data, such as staff gages, water recording devices, water quality testing and improvement devices, and similar structures. Structures may not restrict or concentrate movement of aquatic organisms; no activity results in a hazard to navigation; and no activity requiring underwater blasting.	1. Work not eligible for Category 1 2. <1 acre temporary or permanent fill, excavation and/or secondary impacts (e.g., areas drained, flooded, fragmented or mechanically cleared). Fill area includes all temporary and permanent waterway fills, provided: • Temporary or permanent fill in eelgrass¹⁴ <1000 SF. • Permanent fill in SAS (excluding eelgrass¹⁴) <4300 SF.
18. Survey Activities	Jurisdictional survey activities such as exploratory drilling, surveying and sampling activities, excluding any biological sampling devices. Does not include any activity requiring underwater blasting, seismic exploratory operations, or oil and gas exploration and fill for roads or construction pads. No activity may result in a hazard to navigation.	1. Work not eligible for Category 1 2. <1 acre temporary or permanent fill, excavation and/or secondary impacts (e.g., areas drained, flooded, fragmented or mechanically cleared). Fill area includes all temporary and permanent waterway fills, provided: • Temporary or permanent fill in eelgrass¹⁴ <1000 SF. • Permanent fill in SAS (excluding eelgrass¹⁴) <4300 SF.
19. Agricultural Activities	Not Eligible	Not Eligible

20. Fish & Wildlife Harvesting, Enhancement and Attraction Devices and Activities (Not Aquaculture)	Fish and wildlife harvesting, enhancement, and attraction devices and activities such as pound nets, crab traps, crab dredging, eel pots, lobster traps, and clam and oyster digging, and small fish attraction devices such as open water fish concentrators (sea kites, etc.). This does not authorize artificial reefs or impoundments and semi-impoundments of waters of the U.S. for the culture or holding of motile species such as lobster, or the use of covered oyster trays or clam racks. No activity that may result in a hazard to navigation. <i>Note: A SVNFI is not required for these Category 1 eligible devices and activities.</i>	1. Work not eligible for Category 1. 2. Impoundments or semi-impoundments of waters of the U.S. for the culture or holding of motile species such as lobster and new fish weirs with an impounded area $\leq \frac{1}{2}$ acre. For Aquaculture operations, refer to Activity 24.
21. Habitat Restoration, Establishment and Enhancement Activities	1. Culch placement in tidal waters is eligible for SV provided there are no salt marsh or vegetated shallow impacts. 2. SAS planting and transplanting ≤ 100 SF in tidal waters; 3. No artificial or living reefs. 4. The activity is authorized in writing by a local, state, or non-Corps federal environmental agency. Water impoundments require PCN. 5. No conversion of i) a stream to wetland or vice versa, wetland to a pond or uplands, and ii) one wetland type to another. 6. No dam removal. 7. Shellfish habitat enhancement such as brushing the flats is eligible for Category 1, but not the use of netting which requires Category 2 review.	1. Work not eligible for Category 1. 2. Aquatic habitat restoration, establishment and enhancement provided those activities are proactive and result in net increases in aquatic resource functions and services.⁸
22. Previously Authorized Activities	Any work not commenced nor completed that was authorized in a written letter from the Corps under the GP in effect between October 12, 2010 and October 12, 2015. The terms and general conditions of this GP apply along with any special conditions in the written authorization.	
23. Stream & Wetland Crossings	Not Eligible	All temporary or permanent crossings of tidal navigable waters or adjacent tidal wetlands not eligible as maintenance require a PCN. GC 45 applies
24. Aquaculture	Not Eligible	Shellfish & finfish aquaculture (with the exception of Atlantic salmon and any other salmonid, or other federally listed endangered or threatened species), or other aquaculture facilities with no more than minimal individual and cumulative impacts to environmental resources or navigation. This is inclusive but not limited to cages, nets, bags, racks, long lines, fences, posts, poles, predator screening, etc. Aquaculture guidelines are provided at: www.maine.gov/dmr/aquaculture/index.htm.

Endnotes/Definitions

¹**Bordering and Contiguous Wetlands:** A bordering wetland is immediately next to its adjacent waterbody and may lie at, or below, the ordinary high water mark (mean high water in navigable waters) of that waterbody and is directly influenced by its hydrologic regime. Contiguous wetlands extend landward from their adjacent waterbody to a point where a natural or manmade discontinuity exists. Contiguous wetlands include bordering wetlands as well as wetlands that are situated immediately above the ordinary high water mark and above the normal hydrologic influence of their adjacent waterbody. Note, with respect to the federally designated navigable rivers, the wetlands bordering and contiguous to the tidally influenced portions of those rivers are reviewed under "II. Navigable Waters."

² **Direct, Secondary, and Cumulative Impacts/Effects:**

Direct Impacts: The immediate loss of aquatic ecosystem within the footprint of the fill.

Secondary Impacts: These are effects on an aquatic ecosystem that are associated with a discharge of dredged or fill materials, but do not result from the actual placement of the dredged or fill material. Information about secondary effects on aquatic ecosystems shall be considered prior to the time final section 404 action is taken by permitting authorities. Some examples of secondary effects on an aquatic ecosystem are a) fluctuating water levels in all impoundment and downstream associated with the operation of a dam, b) septic tank leaching and surface runoff from residential or commercial developments on fill, and c) leachate and runoff from a sanitary landfill located in waters of the U.S. Put another way, secondary effects are those impacts outside the footprint of the fill that arise from and are associated with the discharge of dredged or fill material, including the operation of an activity or facility associated with the discharge. Examples may include habitat fragmentation; interruption of travel corridors for wildlife (for example, for amphibians that migrate to and from seasonal or vernal pools used as breeding habitat); hydrologic regime changes; and impacts from operation and maintenance activities for constructed facilities; such as noise/lighting, storm water runoff, and road kill of wetland dependent wildlife. Using the directions contained in the guidelines, we consider the circumstances of a proposed discharge and the project of which it is a part to evaluate the scope, extent, severity, and permanence of direct, secondary, and cumulative adverse effects upon the aquatic ecosystem.

Cumulative Impacts: The extent of past, present, and foreseeable developments in the area may be an important consideration in evaluating the significance of a particular project's impacts. Although the impacts associated with a particular discharge may be minor, the cumulative effect of numerous similar discharges can result in a large impact. Cumulative impacts should be estimated only to the extent that they are reasonable and practical.

³**Special Aquatic Sites:** Includes wetlands and saltmarsh, mudflats, riffles and pools, and vegetated shallows (predominantly comprised of eelgrass in Maine).

⁴**Construction Mats:** Constructions, swamp and timber mats (herein referred to as "construction mats") are generic terms used to describe structures that distribute equipment weight to prevent wetland damage while facilitating passage and providing work platforms for workers and equipment. They are comprised of sheets or mats made from a variety of materials in various sizes. A timber mat consists of large timbers bolted or cabled together. Corduroy roads, which are not considered to be construction mats, are cut trees and/or saplings with the crowns and branches removed, and the trunks lined up next to one another. Corduroy roads are typically installed as permanent structures. Like construction mats, they are considered as fill whether they're installed temporarily or permanently.

⁵**Vernal Pools:** A vernal pool, also referred to as a seasonal forest pool, is a temporary to semi-permanent body of water occurring in a shallow depression that typically fills during the spring or fall and may dry during the summer. Vernal pools have no permanent inlet or outlet and no viable populations of predatory fish. A vernal pool may provide the primary breeding habitat for wood frogs (*Rana sylvatica*), spotted salamanders (*Ambystoma maculatum*), blue-spotted salamanders (*Ambystoma laterale*), and fairy shrimp (*Eubranchipus* sp.), as well as valuable habitat for other plants and wildlife, including several rare, threatened, and endangered species. A vernal pool intentionally created for the purposes of compensatory mitigation is included in this definition. For the purposes of this GP, the presence of any of the following species in any life stage in any abundance level/quantity would designate the waterbody as a vernal pool: fairy shrimp, blue spotted salamanders, spotted salamanders or wood frogs. The Corps may determine during a Category 2 review that a waterbody should not be regulated as a VP based on available evidence. For the purposes of this GP, the VP Management Areas are the: Vernal Pool Depression (includes the vernal pool depression up to the spring or fall high water mark, and includes any vegetation growing within the depression), Vernal Pool Envelope (area within 100 FT of the VP Depression's edge) and Critical Terrestrial Habitat (area within 100-750 FT of the Vernal Pool Depression's edge). [*Note: Critical Terrestrial Habitat is defined as 100 -750 FT on page 243 of the document "Science and Conservation of Vernal Pools in Northeastern North America." Calhoun and deMaynadier, 2008, which is referenced in Appendix G, page 3, Paragraph 10(b).

⁶ **Water Diversions:** Water diversions are activities such as bypass pumping or water withdrawals. Temporary flume pipes, culverts or cofferdams where normal flows are maintained within the stream boundary's confines aren't water diversions. "Normal flows" are defined as no change in flow from pre-project conditions.

⁷ **Maintenance:** a) The repair, rehabilitation, or replacement of any previously authorized, currently serviceable structure or fill, or of any currently serviceable structure or fill authorized by 33 CFR 323.4(a)(2), or in accordance with the Category 1 or 2 thresholds in Appendix A. "Activities occurring before certain dates," provided that the structure or fill is not to be put to uses differing from those uses specified or contemplated for it in the original permit or the most recently authorized modification.

- Minor deviations in the structure's configuration or filled area, including those due to changes in materials, construction techniques, or current construction codes or safety standards that are necessary to make repair, rehabilitation, or replacement are authorized.
- Currently serviceable means useable as is or with some maintenance, but not so degraded as to essentially require reconstruction.
- No seaward expansion for bulkheads or any other fill activity is considered Category 1 maintenance.
- Only structures or fills that were previously authorized and are in compliance with the terms and condition of the original authorization can be maintained as a non-regulated activity under 33 CFR 323.4(a)(2), or in accordance with the Category 1 or 2 thresholds in Appendix A.

b) The state's maintenance provisions may differ from the Corps and may require reporting and written authorization from the state.

c) Contact the Corps to determine whether stream crossing replacements require a written application to the Corps for at least a Category 2 review.

d) Exempted Maintenance. In accordance with 33 CFR 323.4(a)(2), any discharge of dredged or fill material that may result from any of the following activities is not prohibited by or otherwise subject to regulation under Section 404 of the CWA: "Maintenance, including emergency reconstruction of recently damaged parts, of currently serviceable structures such as dikes, dams, levees, groins, riprap, breakwaters, causeways, bridge abutments or approaches, and transportation structures. Maintenance does not include any modification that changes the character, scope, or size of the original fill design."

⁸ **Aquatic Habitat Restoration, Establishment and Enhancement:** The Corps will decide if a project qualifies and must determine in consultation with federal and state agencies that the net effects are beneficial. The Corps may refer to Nationwide Permit 27 published in the 3/12/07 Federal Register. Activities authorized here may include, but are not limited to: the removal of accumulated sediments; the installation, removal, and maintenance of small water control structures, dikes, and berms; the installation of current deflectors; the enhancement, restoration, or establishment of riffle and pool stream structure; the placement of in-stream habitat structures; modifications of the stream bed and/or banks to restore or establish stream meanders; the backfilling of artificial channels and drainage ditches; the removal of existing drainage structures; the construction of small nesting islands in inland waters; the construction of open water areas; the construction of native shellfish species habitat over unvegetated bottom for the purpose of habitat protection or restoration in tidal waters; shellfish seeding; activities needed to reestablish vegetation, including plowing or discing for seed bed preparation and the planting of appropriate wetland species; mechanized land clearing to remove non-native invasive, exotic, or nuisance vegetation; and other related activities. Only native plant species should be planted at the site.

⁹ **Brushing the Flats:** The placement of tree boughs, wooden lath structure, or small-mesh fencing on mudflats to enhance recruitment of soft-shell clams (*Mya arenaria*).

¹⁰ **Maintenance Dredging:** This includes only those areas and depths previously authorized by the Corps and dredged. The Corps may require proof of authorization. Maintenance dredging typically refers to the routine removal of sediment to maintain the design depths of serviceable navigation channels, harbors, basins, marinas, boat launches, and port facilities. Maintenance dredging is conducted for navigational purposes and does not include any expansion of the previously dredged area or depth. The Corps may review a maintenance dredging activity as new dredging if sufficient time has elapsed to allow for the colonization of SAS, shellfish, etc.

¹¹ **Boating Facilities:** Facilities that provide for a fee, rent, or sell mooring space, such as marinas, yacht clubs, boat clubs, boat yards, town facilities, dockminiums, etc.

¹² **Federal Navigation Projects (FNPs):** FNPs are comprised of Federal Channels and Federal Anchorages. See Appendix F for their location and contact the Corps for more information. "Horizontal Limits" is the outer edge of an FNP. "Buffer Zone" is equal to three times the authorized depth of that channel.

¹³ **Horizontal Limits:** The outer edge of a Federal Navigation Project (FNP). See Appendix F and contact the Corps for information on FNP's.

¹⁴ **Elgrass (*Zostera marina*):** A type of rooted aquatic vegetation that exists in intertidal and shallow subtidal areas known as vegetated shallows. See www.nono.noaa.gov/hcd/ for eelgrass survey guidance. Note: Eelgrass surveys should be conducted between May and October unless otherwise directed.

¹⁵ **Structures:** The height of structures shall at all points be equal to or exceed the width of the deck. For the purpose of this definition, height shall be measured from the marsh substrate to the bottom of the longitudinal support beam.

¹⁶ **Agricultural Activities:** The Clean Water Act exempts certain discharges associated with normal farming, ranching, and forestry activities such as plowing, cultivating, minor drainage, and harvesting for the production of food, fiber, and forest products, or upland soil and water conservation practices (Section 404(f)(1)(A)). Applicants are strongly advised to contact the Corps for a determination of whether their activity is exempt or requires a permit.



Appendix B: Self-Verification Notification Form
(for all tidal and non-tidal projects in Maine subject to Corps jurisdiction)

**US Army Corps
of Engineers®**
New England District

At least two weeks before work commences, complete **all** fields (write "none" if applicable) below or use the fillable form at www.nae.usace.army.mil/missions/regulatory.aspx. Send this form, a location map, any project plans, and an Official Species List (See GC 8) to the address noted below; fax to (207) 623-8206; or email to jay.l.clement@usace.army.mil. The two-week lead time is not required for emergency situations (see page 4 for definition). Please call (207) 623-8367 with questions.

Maine Project Office
U.S. Army Corps of Engineers
New England District
675 Western Avenue #3
Manchester, Maine 04351

State Permit Number: _____
Date of State Permit: _____
State Project Manager: _____

Permittee: _____
Address, City, State & Zip: _____
Phone(s) and Email: _____

Contractor: _____
Address, City, State & Zip: _____
Phone(s) and Email: _____

Consultant/Engineer/Designer: _____
Address, City, State & Zip: _____
Phone(s) and Email: _____

Wetland/Vernal Pool Consultant: _____
Address, City, State & Zip: _____
Phone(s) and Email: _____

Project Location/Description: _____
Address, City, State & Zip: _____
Latitude/Longitude Coordinates: _____ Tax Map/Lot: _____
Waterway Name: _____
Work Description: _____

Provide any prior Corps permit numbers: _____
Proposed Work Dates: Start: _____ Finish: _____

Area of wetland impact: _____ SF (leave blank if work involves structures & no fill in Navigable Waters)
Area of waterway impact: _____ SF (leave blank if work involves structures & no fill in Navigable Waters)
Area of compensatory mitigation provided: _____ SF

Work will be done under the following Appendix A categories (circle all that apply):

- I. Inland Waters and wetlands: 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
II. Navigable Waters: 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24

Your name/signature below, as permittee, indicates that you accept and agree to comply with the terms, eligibility criteria, and general conditions of Category 1 of the Maine General Permit.

Permittee Printed Name: _____

Permittee Signature: _____ Date: _____



**US Army Corps
of Engineers®**
New England District

Appendix C: Content of Pre-Construction Notification

In addition to the following required information, the applicant must provide additional information as the Corps deems essential to make a public interest determination including, where applicable, a determination of compliance with the Section 404(b)(1) guidelines or ocean dumping criteria. Such additional information may include environmental data and information on alternate methods and sites as may be necessary for the preparation of the required environmental documentation. For a more comprehensive checklist, go to www.nae.usace.army.mil/missions/regulatory >> Forms >> Application and Plan Guideline Checklist. Please check with the Corps for project-specific requirements.

Information required for all projects:

- ☐ Corps application form ([ENG Form 4345](#)) or appropriate state application form (see Appendix E). Forms may need to be supplemented to include the information noted below.
- ☐ Proof of notification to the SHPO and the appropriate THPOs (see Appendix E).
- ☐ Official Species List for any federally listed endangered or threatened species (Instructions at Appendix D)
- ☐ Drawings, sketches, or plans (detailed engineering plans and specifications are not required) that are legible, reproducible (color is encouraged, but features must be distinguishable in black and white), no larger than 11"x17", with bar scale. Wetland area impact sheets should have the highest resolution possible to show work within Corps jurisdiction (do not just reduce project overview or cut large-scale plan into quadrant sheets). Provide locus map and a plan overview of the entire property with a key index to the individual impact sheets. A locus map on a section of color USGS topographic map is encouraged. Digital submissions are encouraged.
- ☐ Include:
 - ☐ All direct, secondary, permanent and temporary effects the project would cause, including the anticipated amount of impacts to waters of the U.S. expected to result from the activity, in acres, linear feet, or other appropriate unit of measure.
 - ☐ Any historic permanent fill associated with each single and complete project.
 - ☐ Cross-section views of all wetland and waterway fill areas and wetland replication areas.
 - ☐ Delineation of all wetlands, other special aquatic sites (vegetated shallows, saltmarsh, mudflats, riffles and pools, coral reefs, and sanctuaries and refuges), and other waters, such as lakes and ponds, and perennial, intermittent, and ephemeral streams, on the project site. Use Federal delineation methods and include Corps wetland delineation data sheets (see GC 2).
 - ☐ MLW and MHW elevations in tidal waters. Show the HTL elevations when fill is involved. Show OHW elevation in lakes and non-tidal streams.
 - ☐ Existing and proposed conditions.
 - ☐ For vegetated shallow and eelgrass survey guidance, see www.nae.usace.army.mil/missions/regulatory >> Jurisdictional Limits and Wetlands >> Submerged Aquatic Vegetation Survey Guidance for the New England Region.
 - ☐ Show all known VPs on the project site. See GC 23 for vernal pool identification requirements.
- ☐ Volume, type, and source of fill material to be discharged into waters and wetlands, including the area(s) (in square feet or acres) of fill in wetlands, below OHW in inland waters and below the HTL

in coastal waters.

- ☐ An Official Species List of federally “listed species or critical habitat” present in the action area (see GC 8).
- ☐ A restoration plan showing how all temporary fills and structures will be removed and the area restored to pre-project conditions (see GC 43).

Information that may be required:

- ☐ Photographs of wetland/waterway to be impacted. Photos at low tide are preferred for work in tidal waters.
- ☐ For drawings, sketches, or plans:
 - ☐ The vertical datum for all coastal projects must be in U.S. survey feet and referenced to MLLW and current tidal epochs, with a reference chart showing conversion factor to NAVD88; do not use local datum. See [>> Forms and Publications >> Vertical Datum - FEMA \(Jul 2007\)](http://www.nae.usace.army.mil/missions/regulatory);
 - ☐ The horizontal state plane coordinates shall be in U.S. survey feet and based on the appropriate state plane coordinate system.
- ☐ For the construction of a filled area or pile or float-supported platform, the use of, and specific structures to be erected on, the fill or platform.
- ☐ For the discharge of dredged or fill material into waters of the U.S. or the transportation of dredged material for the purpose of disposing of it in ocean waters, the source of the material; the purpose of the discharge, a description of the type, composition and quantity of the material; the method of transportation and disposal of the material; and the location of the disposal site.
- ☐ For the discharge of dredged or fill material into waters of the U.S., include a statement describing how impacts to waters of the U.S. are to be avoided and minimized. Include either a statement describing how impacts to waters of the U.S. are to be compensated for or a statement explaining why compensatory mitigation should not be required for the proposed impacts.
- ☐ Purpose and need for the proposed activity;
- ☐ Limits and coordinates of any Federal Navigation Project in the vicinity of the project area.
- ☐ Limits and coordinates of any proposed mooring field, reconfiguration zone or aquaculture activity. Provide coordinates for all corners;
- ☐ Schedule of construction/activity;
- ☐ Names and addresses of adjoining property owners;
- ☐ Location and dimensions of adjacent structures;
- ☐ List of authorizations required by other Federal, interstate, state, or local agencies for the work, including all approvals received or denials already made.
- ☐ Identification and description of potential impacts to Essential Fish Habitat (defined at VI. Definitions and Acronyms).
- ☐ Identification of potential discharges of pollutants to waters, including potential impacts to impaired waters, in the project area (see GC 19).
- ☐ Invasive Species Control Plan (see GC 24). For sample control plans, see [>> Invasive Species](http://www.nae.usace.army.mil/missions/regulatory).
- ☐ Wildlife Action Plan (WAP) maps. Contact Maine Inland Fisheries & Wildlife (Appendix E) or on line at http://www.maine.gov/ifw/wildlife/conservation/action_plan.html

Information for dredging projects that may be required:

- ☐ Sediment testing, including physical (e.g., grain-size analysis), chemical and biological testing. For projects proposing open water disposal, applicants are encouraged to contact the Corps as early as possible regarding sampling and testing protocols. Sampling and testing of sediments without such

contact should not occur and if done, would be at the applicant's risk.

- ☐ The area in square feet and volume of material to be dredged below mean high water.
- ☐ Existing and proposed water depths.
- ☐ Type of dredging equipment to be used.
- ☐ Nature of material (e.g., silty sand).
- ☐ Any existing sediment grain size and bulk sediment chemistry data for the proposed or any nearby projects.
- ☐ Information on the location and nature of municipal or industrial discharges and occurrence of any contaminant spills in or near the project area.
- ☐ Shellfish survey.
- ☐ Location of the disposal site (include locus sheet).
- ☐ Identification and description of any potential impacts to Essential Fish Habitat.
- ☐ Delineation of submerged aquatic vegetation (e.g., eelgrass beds).

Information for aquaculture projects that may be required:

- ☐ Maine Aquaculture guidelines and joint Corps/Maine DMR applications may be found at:
www.maine.gov/dmr/aquaculture/index.htm.
- ☐ In addition to the information required above, applications must also include:
 - ☐ Whether canopy predator nets are being used.

Appendix D: Instruction for USFWS iPac Project Builder/Official Species List

NOTE: These instructions are subject to change by the USFWS. Users should check this GP's Corps webpage for the latest instructions or click [here](#).

In your internet browser go to <http://ecos.fws.gov/ipac/>

1. Click on get started.
2. Click on enter project location.
3. Search or zoom to your project location. (You can enter an address and then zoom in with your mouse).
4. Define your area. (Select the polygon tool and click around the boundary of your project.) or (Use the draw a line tool for linear projects)

Note: You can change/select the map from Streets to Satellite or Topo in the lower left corner of the map.

5. Click finished drawing then click confirm and select continue.

6. On the next page under Tasks (lower left), select Request an official species list. The pane will open. Select "request official species list" again.

7. A new page will open. Fill in the project information blanks with the project name, brief description, project type, lead agency, and contact information. Be sure to check the box to verify this is a legitimate project. Click on Submit Official Species List Request.

8. You will be sent an e-mail with instructions to complete the request by clicking on the link provided.

9. The site will open Official Species List Request Completed. Under the Maine Ecological Services Field Office address you will see "Official Species List Document". Click on that link and your document will open. Save and or print a copy and **include the entire report with your application.**

Note, you will receive a second e-mail with the same information. You can save the link in the event you need to return to the IPaC site for an updated list.

If a period of time has passed since your initial "Official Species List" identifier number was generated, you may choose to generate an "UPDATED SPECIES LIST". To do this, return to the IPaC homepage at <http://ecos.fws.gov/ipac> site. In the middle of the page, click the purple "Need an updated species list" link.

On the request an "Updated Official Species List" page, complete the information in the boxes provided. You will need the project specific official consultation code generated and stated on the original official list as well as the email address entered with the original submission.

Click "Request Updated Species List". Print, or save.

Appendix E: Contacts and Tribal Areas of Interest

1. Federal

U.S. Army Corps of Engineers
Maine Project Office
675 Western Avenue #3
Manchester, ME 04351
(207) 623-8367 (phone); (207) 623-8206 (fax)

U.S. Environmental Protection Agency
5 Post Office Square
Suite 100 (OEP05-2)
Boston, MA 02109-3912
(617) 918-1589 (phone)

U.S. Fish and Wildlife Service
Maine Field Office
17 Godfrey Drive, Suite 2
Orono, ME 04473
(207) 866-3344 (phone); (207) 866-3351 (fax)
(Federal endangered species)

National Marine Fisheries Service
Maine Field Office
17 Godfrey Drive Suite 1
Orono, ME 04473
(207) 866-7379 (phone); (207) 866-7342 (fax)
(Federal endangered species)

Federal Emergency Management Agency
99 High St.
Boston, MA 02110
(877) 336-2734 (phone)
(Flood Plain Management)

National Marine Fisheries Service
55 Great Republic Drive
Gloucester, MA 01930
(978) 281-9102 (phone); (978) 281-9301 (fax)
(Federal endangered species & EFH)

National Park Service
North Atlantic Region
15 State Street
Boston, MA 02109
(617) 223-5203 (phone)
(Wild and Scenic Rivers)

Commander (dpb)
First Coast Guard District
One South Street - Battery Bldg
New York, NY 10004-1466
(212) 668-7021 (phone); (212) 668-7967 (fax)
(bridge permits)

2. State of Maine

a. Department of Environmental Protection *(State permits & Water Quality Certifications)*

Division of Land Resource Regulation
Bureau of Land and Water Quality
17 State House Station
Augusta, Maine 04333
(207) 287-7688 (phone)

Southern Maine Regional Office
312 Canco Road
Portland, Maine 04103
(201) 822-6300 (phone)

Eastern Maine Regional Office
106 Hogan Road
Bangor, Maine 04401
(207) 941-4570 (phone)

Northern Maine Regional Office
1235 Central Drive - Skyway Park
Presque Isle, Maine 04769
(207) 764-0477 (phone)

b. Department of Agriculture, Conservation and Forestry

i. Maine Land Use Planning Commission (LUPC) (*State permits & Water Quality
Certifications in the unorganized areas of the State*)

Augusta Office
22 State House Station
Augusta, Maine 04333-0022
(207) 287-2631 (phone); (207) 287-7439 (fax)

Greenville Regional Office
43 Lakeview Drive
P.O. Box 1107
Greenville, Maine 04441
(207) 695-2466 (phone); (207) 695-2380 (fax)

Rangely Regional Office
133 Fyfe Road
PO Box 307
West Farmington, ME 04992
(207) 670-7493 (phone); (207) 287-7439 (fax)

Downeast Regional Office
106 Hogan Rd, Suite 8
Dorothea Dix Complex
Bangor, Maine 04401
(207) 941-4052 (phone); (207) 941-4222 (fax)

Ashland Regional Office
45 Radar Road
Ashland, ME 04732-3600
(207) 435-7963 (phone); (207) 435-7184 (fax)

East Millinocket Regional Office
191 Main Street
East Millinocket, ME 04430
(207) 746-2244 (phone); (207) 746-2243 (fax)

ii. Maine Coastal Program

Department of Agriculture, Conservation and Forestry
Bureau of Resource Information and Land Use Planning
17 Elkins Lane {physical address}
State House Station 93
Augusta, Maine 04333-0038
(207) 287-2801 (phone); (207) 287-2353 (fax)
(*CZM consistency determinations*)

iii. Division of Parks and Public Lands

22 State House Station
Augusta, Maine 04333
(207) 287-3061 (phone); (207) 287-6170 (fax)
(*submerged lands leases*)

c. Department of Marine Resources

P.O. Box 8
West Boothbay Harbor, Maine 04575
(207) 633-9500 (phone); (207) 624-6024 (fax)
(*aquaculture leases*)

3. Historic Properties

a. State Historic Preservation Officer (SHPO)

Mr. Kirk F. Mohny, Director

Maine Historic Preservation Commission (MHPC)
65 State House Station
Augusta, Maine 04333-0065
(207) 287-2132 (phone); (207) 287-2335 (fax)
Area of concern: The entire State of Maine

b. Tribal Historic Preservation Officers (THPOs)

Note: The area of concern for each tribe is the entire State of Maine

THPO & Environmental Planner
Houlton Band of Maliseet Indians
88 Bell Road
Littleton, Maine 04730
(207) 532-4273, x215 (phone)
(207) 532-6883 (fax)
envplanner@maliseets.com
ogs1@maliseets.com

THPO
Passamaquoddy Tribe of Indians
Pleasant Point Reservation
P.O. Box 343
Perry, Maine 04667
(207) 853-2600 (phone); (207) 853-6039 (fax)
soctomah@gmail.com

THPO
Passamaquoddy Tribe of Indians
Indian Township Reservation
P.O. Box 301
Princeton, Maine 04668
(207) 796-2301 (phone)
(207) 796-5256 (fax); soctomah@gmail.com

THPO
Aroostook Band of Micmacs
7 Northern Road
Presque Isle, Maine 04769
(207) 764-1972 (phone); (207) 764-7667 (fax)
jpictou@mimca-nsn.gov

THPO
Penobscot Nation
Cultural and Historic Preservation Dept.
12 Wabanaki Way
Indian Island, Maine 04468
(207) 817-7471 (phone)
chris.sockalexis@penobscotnation.org

4. Organizational Websites (Note – Subject to Change):

U.S. Army Corps of Engineers, N.E. District
U.S. Army Corps of Engineers, Headquarters
U.S. Environmental Protection Agency
National Marine Fisheries Service
U.S. Fish and Wildlife Service
National Park Service
Maine Department of Environmental Protection
Maine Department of Agriculture,
Conservation and Forestry
Maine Land Use Planning Commission
Maine Department of Marine Resources
State of Maine - Aquaculture Guidelines

www.nae.usace.army.mil/missions/regulatory.aspx
See above link>>Useful Links>>Federal Agency Links
www.epa.gov/owow/wetlands
www.nmfs.noaa.gov
www.fws.gov/mainefieldoffice
www.nps.gov/rivers/index.html
www.maine.gov/dep
www.maine.gov/acf/index.shtml
www.maine.gov/doc/lupc/commission/offices.shtml
www.maine.gov/dmr/index.htm
www.maine.gov/dmr/aquaculture/index.htm

Appendix F: Definitions

Definitions

Attendant Features: Occurring with or as a result of; accompanying.

Biodegradable: A material that decomposes into elements found in nature within a reasonably short period of time and will not leave a residue of plastic or a petroleum derivative in the environment after degradation. Examples of biodegradable materials include jute, sisal, cotton, straw, burlap, coconut husk fiber (coir) or excelsior. In contrast, degradable plastics break down into plastic fragments that remain in the environment after degradation.

Boating facilities: These provide, rent or sell mooring space, such as marinas, yacht clubs, boat yards, dockminiums, town facilities, land/home owners, etc. Not classified as boating facilities are piers shared between two abutting properties or town mooring fields that charge an equitable user fee based on the actual costs incurred.

Brushing the Flats: The placement of tree boughs, wooden lath structure, or small-mesh fencing on mudflats, or any bottom disturbance (e.g., discing, plowing, raking, etc.), to enhance recruitment of shellfish.

Buffer Zone: The buffer zone of an FNP is equal to three times the authorized depth of the FNP.

Construction mats: Constructions, swamp and timber mats (herein referred to as “construction mats”) are generic terms used to describe structures that distribute equipment weight to prevent wetland damage while facilitating passage and providing work platforms for workers and equipment. They are comprised of sheets or mats made from a variety of materials in various sizes. A timber mat consists of large timbers bolted or cabled together. Corduroy roads, which are not considered to be construction mats, are cut trees and/or saplings with the crowns and branches removed, and the trunks lined up next to one another. Corduroy roads are typically installed as permanent structures. Like construction mats, they are considered as fill whether they are installed temporarily or permanently

Cumulative effects: See “Direct, secondary, and cumulative effects.”

Direct, secondary, and cumulative effects:

Direct Effects: The loss of aquatic ecosystem within the footprint of the discharge of dredged or fill material. Direct effects are caused by the action and occur at the same time and place.

Secondary Effects: These are effects on an aquatic ecosystem that are associated with a discharge of dredged or fill materials, but do not result from the actual placement of the dredged or fill material. Information about secondary effects on aquatic ecosystems shall be considered prior to the time final Section 404 action is taken by permitting authorities. Some examples of secondary effects on an aquatic ecosystem are a) aquatic areas drained, flooded, fragmented, or mechanically cleared; b) fluctuating water levels in all impoundment and downstream associated with the operation of a dam, c) septic tank leaching and surface runoff from residential or commercial developments on fill, and d) leachate and runoff from a sanitary landfill located in waters of the U.S. See 40 CFR 230.11(h).

Cumulative Effects: The changes in an aquatic ecosystem that are attributable to the collective effect of a number of individual 1) discharges of dredged or fill material, or 2) structures. Although the impact of a particular discharge may constitute a minor change in itself, the cumulative effect of numerous such piecemeal changes can result in a major impairment of the water resources and interfere with the productivity and water quality of existing aquatic ecosystems. See 40 CFR 230(g).

Dredging:

Maintenance Dredging: Includes areas and depths previously authorized by the Corps and dredged. The Corps may require proof of authorization. Maintenance dredging typically refers to the routine removal of accumulated sediment from channel beds to maintain the design depths of navigation channels, harbors, marinas, boat launches and port facilities. Routine maintenance dredging is conducted regularly for navigational purposes (typically at least once every ten years) and does not include any expansion of the previously dredged area or depth. The Corps may review a maintenance dredging activity as new dredging if sufficient time has elapsed to allow for the colonization of SAS,

shellfish, etc. The main characteristics of maintenance dredging projects are variable quantities of material; soft, uncompacted soil; contaminant content possible; thin layers of material; occurring in navigation channels and harbors; repetitive activity

New Dredging: Dredging of an area or to a depth that has never been authorized by the Corps or dredged.

Dredged material & discharge of dredged material: These are defined at 323.2(c) and (d). The term dredged material means material that is excavated or dredged from waters of the U.S.

Essential Fish Habitat (EFH): This is broadly defined to include those waters and substrate necessary to fish for spawning, breeding, feeding, or growth to maturity.

Fill material & discharge of fill material: These are defined at 323.2(e) and (f). The term fill material is defined as material placed in waters of the U.S. where the material has the effect of either replacing any portion of a water of the U.S. with dry land or changing the bottom elevation of any portion of a water of the U.S.

Federal anchorages, Federal channels and Federal turning basin: Refer to Appendix H for those in Maine

Federal navigation projects (FNPs): These areas are maintained by the Corps; authorized, constructed and maintained on the premise that they will be accessible and available to all on equal terms; and are comprised of Federal Anchorages, Federal Channels and Federal Turning Basins. The buffer zone is equal to three times the authorized depth of a FNP. More information on the following FNPs is provided at www.nae.usace.army.mil/missions/navigation.aspx >> Navigation Projects.

Flume: An open artificial water channel, in the form of a gravity chute, that leads water from a diversion dam or weir completely aside a natural flow. A flume can be used to measure the rate of flow.

Frac out: During normal drilling operations, drilling fluid travels up the borehole into a pit. When the borehole becomes obstructed or the pressure becomes too great inside the borehole, the ground fractures and fluid escapes to the surface.

Independent utility: A test to determine what constitutes a single and complete non-linear project in the Corps regulatory program. A project is considered to have independent utility if it would be constructed absent the construction of other projects in the project area. Portions of a multi-phase project that depend upon other phases of the project do not have independent utility. Phases of a project that would be constructed even if the other phases were not built can be considered as separate single and complete projects with independent utility.

Individual Permit: A Department of the Army authorization that is issued following a case-by-case evaluation of a specific structure or work in accordance with the procedures of 33 CFR 322, or a specific project involving the proposed discharge(s) in accordance with the procedures of 33 CFR 323, and in accordance with the procedures of 33 CFR 325 and a determination that the proposed discharge is in the public interest pursuant to 33 CFR 320.

Maintenance: Regulations on maintenance are provided at 33 CFR 323.4. The following definitions are applicable:

Minor deviations: Deviations in the structure's configuration or filled area, including those due to changes in materials, construction techniques, or current construction codes or safety standards, which are necessary to make repair, rehabilitation, or replacement are permitted, provided the adverse environmental effects resulting from such repair, rehabilitation, or replacement are minimal.

Currently serviceable: Useable as is or with some maintenance, but not so degraded as to essentially require reconstruction.

Marina reconfiguration zone: A Corps-authorized area in which permittees may rearrange pile-supported structures and floats without additional authorizations. A reconfiguration zone does not grant exclusive privileges to an area or an increase in structure or float area.

Navigable waters of the U.S.: See Waters of the U.S. below.

Overall project: See "single and complete linear project" below.

Practicable: Available and capable of being done after taking into consideration cost, existing technology, and logistics in light of overall project purposes.

Permanent impacts: Permanent impacts means waters of the U.S. that are permanently affected by filling, flooding, excavation, or drainage because of the regulated activity. Permanent impacts include permanent discharges of dredged or fill material that change an aquatic area to dry land, increase the bottom elevation of a waterbody, or change the use of a waterbody. Temporary impacts include waters of the U.S. that are temporarily filled, flooded, excavated, drained or mechanically cleared because of the regulated activity.

Pre-construction notification (PCN): A request submitted by the project proponent to the Corps for confirmation that a particular activity is authorized by this GP. The request may be a permit application, letter, or similar document that includes information about the proposed work and its anticipated environmental effects. Pre-construction notification may be required by the terms and conditions of these GPs. A PCN may be voluntarily submitted in cases where PCN is not required and the project proponent wants confirmation that the activity is authorized under this GP.

Secondary effects: See “Direct, secondary, and cumulative effects.”

Single and complete linear project: A linear project is a project constructed for the purpose of getting people, goods, or services from a point of origin to a terminal point, which often involves multiple crossings of one or more waterbodies at separate and distant locations. The term “single and complete project” is defined as that portion of the total linear project proposed or accomplished by one owner/developer or partnership or other association of owners/developers that includes all crossings of a single water of the U.S. (i.e., a single waterbody) at a specific location. For linear projects crossing a single or multiple waterbodies several times at separate and distant locations, each crossing is considered a single and complete project for the purposes of this GP. However, individual channels in a braided stream or river, or individual arms of a large, irregularly shaped wetland or lake, etc., are not separate waterbodies, and crossings of such features cannot be considered separately.

The overall project, for purposes of this GP, includes all regulated activities that are reasonably related and necessary to accomplish the project purpose.

Single and complete non-linear project: For non-linear projects, the term “single and complete project” is defined at 33 CFR 330.2(i) as the total project proposed or accomplished by one owner/developer or partnership or other association of owners/developers. For non-linear projects, the single and complete project must have independent utility (see definition).

Special aquatic sites: These include inland and saltmarsh wetlands, mud flats, vegetated shallows, sanctuaries and refuges, coral reefs, and riffle and pool complexes. These are defined at 40 CFR 230 Subpart E.

Stream channelization: The manipulation of a stream’s course, condition, capacity, or location that causes more than minimal interruption of normal stream processes. A channelized stream remains a water of the United States.

Temporary impacts: See permanent impacts above.

Utility line: Any pipe or pipeline for the transportation of any gaseous, liquid, liquescent, or slurry substance, for any purpose, and any cable, line, or wire for the transmission for any purpose of electrical energy, telephone, and telegraph messages, and radio and television communication. The term ‘utility line’ does not include activities that drain a water of the U.S., such as drainage tile or French drains, but it does apply to pipes conveying drainage from another area.

Vegetated shallows: Permanently inundated areas that under normal circumstances support communities of rooted aquatic vegetation, such as eelgrass and widgeon grass (*Ruppia maritima*) in marine systems (doesn’t include salt marsh) as well as a number of freshwater species in rivers and lakes. Note: These areas are also commonly referred to as submerged aquatic vegetation (SAV).

Vernal pools (VPs): For the purposes of this GP, VPs are depressional wetland basins that typically go dry in most years and may contain inlets or outlets, typically of intermittent flow. Vernal pools range in both size and depth depending upon landscape position and parent material(s). Pools usually

support one or more of the following obligate indicator species: wood frog, spotted salamander, blue-spotted salamander, marbled salamander, Jefferson's salamander and fairy shrimp. However, they should preclude sustainable populations of predatory fish.

VP areas are:

- Depression (includes the VP depression up to the spring or fall high water mark, and includes any vegetation growing within the depression),
- Envelope (area within 100 feet of the VP depression's edge), and
- Critical terrestrial habitat (area within 100-750 feet of the VP depression's edge).

Note: See footnote to GC 23. The Corps may determine during the PCN review that a waterbody should not be designated as a VP based on available evidence.

Water diversions: Water diversions are activities such as bypass pumping (e.g., "dam and pump") or water withdrawals. Temporary flume pipes, culverts or cofferdams where normal flows are maintained within the stream boundary's confines aren't water diversions. "Normal flows" are defined as no change in flow from pre-project conditions.

Weir: A barrier across a river designed to alter the flow characteristics. In most cases, weirs take the form of a barrier, smaller than most conventional dams, across a river that causes water to pool behind the structure (not unlike a dam) and allows water to flow over the top. Weirs are commonly used to alter the flow regime of the river, prevent flooding, measure discharge and help render a river navigable.

Waters of the U.S. & Waters of the United States (U.S.): The term waters of the U.S. and all other terms relating to the geographic scope of jurisdiction are defined at 33 CFR 328. Also see Section 502(7) of the Federal CWA [33 USC 1352(7)]. Waters of the U.S. include jurisdictional wetlands. Not all waters and wetlands are jurisdictional. Contact the Corps with any questions regarding jurisdiction.

Navigable waters: Refer to 33 CFR 329. These waters include the following federally designated navigable waters in New England. This list represents only those waterbodies for which affirmative determinations have been made; absence from this list should not be taken as an indication that the waterbody is not navigable:

ME: All tidal waters; Kennebec River to Moosehead Lake; Penobscot River to the confluence of the East and West Branch at Medway, Maine; Lake Umbagog within the State of Maine.

Appendix G: Additional References

1. GC 2: Federal Jurisdictional Boundaries.

(a) Corps Wetlands Delineation Manual, regional supplements, and Corps Wetland Delineation Data Sheets: www.nae.usace.army.mil/missions/regulatory and then “Wetlands and Jurisdictional Limits.”

(b) The USFWS publishes the 1988 National List of Plant Species that Occur in Wetlands (www.nwi.fws.gov).

The Natural Resources Conservation Service (NRCS) publishes the current hydric soil definition, criteria and lists: <http://soils.usda.gov/use/hydric>. For the Field Indicators for Identifying Hydric Soils in N.E., see www.neiwpcc.org/hydricsoils.asp.

2. GC 5: Single and Complete Project.

Single and complete project means the total project proposed or accomplished by one owner/developer or partnership or other association of owners/developers. For example, if construction of a residential development affects several different areas of a headwater or isolated water, or several different headwaters or isolated waters, the cumulative total of all filled areas should be the basis for deciding whether or not the project will be covered by Category 1 or 2.

The *Independent utility* test is used to determine what constitutes a single and complete project in the Corps regulatory program. A project is considered to have independent utility if it would be constructed absent the construction of other projects in the project area. Portions of a multi-phase project that depend upon other phases of the project do not have independent utility. Phases of a project that would be constructed even if the other phases were not built can be considered as separate single and complete projects with independent utility.

3. GC 8: Threatened and Endangered Species.

(a) The following NMFS site must be referenced to ensure that listed species or critical habitat are not present in the action area [GC 8(b)] or to provide information on federally-listed species or habitat [GC 8(e)]: www.nero.noaa.gov/prot_res/esp/ListE&Tspec.pdf. Contact the USFWS for information to check for the presence of listed species (see Appendix D for contact information & procedures).

(b) The Endangered Species Act Consultation Handbook – Procedures for Conducting Section 7 Consultations and Conferences, defines action area as “all areas to be affected directly or indirectly by the federal action and not merely the immediate area involved in the action. [50 CFR 402.02].”

4. GC 42: Essential Fish Habitat.

As part of the GP screening process, the Corps may coordinate with NMFS in accordance with the 1996 amendments to the Magnuson-Stevens Fishery Conservation and Management Act to protect and conserve the habitat of marine, estuarine and anadromous finfish, mollusks, and crustaceans. This habitat is termed “Essential Fish Habitat (EFH)”, and is broadly defined to include “those waters and substrate necessary to fish for spawning, breeding, feeding, or growth to maturity.” There are EFH waters throughout inland and coastal waters in Maine. For additional information, see the EFH regulations 50 CFR 600 at www.nero.noaa.gov/hcd including the “Guide for EFH Descriptions” at www.nero.noaa.gov/hcd/list.htm. Additional information on the location of EFH can be obtained from NMFS (see Appendix D for contact information).

5. GC 4: Avoidance, Minimization and Compensatory Mitigation.

(a) See www.nae.usace.army.mil/missions/regulatory and then “Mitigation” to view the April 10, 2008 “Final Compensatory Mitigation Rule” (33 CFR 332) and related documents. The Q&A document states: “In order to reduce risk and uncertainty and help ensure that the required compensation is provided, the rule establishes a preference hierarchy for mitigation options. The most preferred option

is mitigation bank credits, which are usually in place before the activity is permitted. In-lieu fee program credits are second in the preference hierarchy, because they may involve larger, more ecologically valuable compensatory mitigation projects as compared to permittee-responsible mitigation. Permittee-responsible mitigation is the third option, with three possible circumstances: (1) conducted under a watershed approach, (2) on-site and in kind, and (3) off-site/out-of-kind.

(b) Compensatory mitigation may take the form of wetland preservation, restoration, enhancement, creation, and/or in lieu fee (ILF) for inclusion into the Natural Resources Mitigation Fund for projects in DEP and LURC territories. Avoidance of wetland impacts will reduce the ILF dollar total for applicants. The ILF compensation program was established to provide applicants with a flexible compensation option over and above traditional permittee responsible compensation projects. See the Maine ILF Agreement at www.nae.usace.army.mil/missions/regulatory, “Mitigation” and then “Maine,” or www.maine.gov/dep/blwq/docstand/nrpa/ILF_and_NRCP/index.htm.

6. GCs 24, 15, and 43: Invasive Species.

(a) Information on what are considered “invasive species” is provided in our “Compensatory Mitigation Guidance” document at www.nae.usace.army.mil/missions/regulatory under “Mitigation.” The “Invasive Species” section has a reference to our “Invasive Species Control Plan (ISCP) Guidance” document, located at www.nae.usace.army.mil/missions/regulatory under “Invasive Species,” which provides information on preparing an ISCP.

(b) The June 2009 “Corps of Engineers Invasive Species Policy” is at www.nae.usace.army.mil/missions/regulatory under “Invasive Species” and provides policy, goals and objectives.

7. GC 44: Bank Stabilization.

This generally eliminates bodies of water where the reflected wave energy may interfere with or impact on harbors, marinas, or other developed shore areas. A revetment is sloped and is typically employed to absorb the direct impact of waves more effectively than a vertical seawall. It typically has a less adverse effect on the beach in front of it, abutting properties and wildlife. See the Corps Coastal Engineering Manual EM 1110-2-1100 at www.nae.usace.army.mil/missions/regulatory under “Useful Links and Documents” for design and construction guidance.

8. GC 45: Stream and Wetland Crossings.

(a) Projects should be designed and constructed to ensure long-term success using the most recent manual located at www.nae.usace.army.mil/missions/regulatory under “Stream and River Continuity,” currently “Stream Simulation: An Ecological Approach to Providing Passage for Aquatic Organisms at Road-Stream Crossings, by the U.S. Forest Service.” Section 5.3.3 is of particular importance. Sections 7.5.2.3 Construction Methods and 8.2.11 Stream-Simulation Bed Material Placement both show important steps in the project construction.

(b) For more information on High-Quality Stream Segments and their components see:

i. High-Quality Stream Segments are shown at www.maine.gov/dep/gis/datamaps.

ii. Class A Waters or Class AA Waters:

www.mainelegislature.org/legis/statutes/38/title38sec465.html, and

www.mainelegislature.org/legis/statutes/38/title38sec467.html.

iii. Outstanding river segments www.mainelegislature.org/legis/statutes/38/title38sec480-P.html.

(c) The Massachusetts Dam Removal and the Wetland Regulations offer guidance to evaluate the positive and negative impacts of culvert replacement, including the loss of upstream wetlands, which may be offset by the overall benefits of the river restoration. See www.nae.usace.army.mil/missions/regulatory and then “Stream and River Continuity.”

(d) The ME DOT's document "Waterway and Wildlife Crossing Policy and Design Guide for Aquatic Organism, Wildlife Habitat, and Hydrologic Connectivity," 3rd Edition, July 2008, may be used as guidance to evaluate impacts to aquatic, wildlife and surface water resources when designing, constructing, repairing and maintaining stream crossings. Note: Adherence to this DOT document does not ensure compliance with this GP. Projects must comply with the requirements of this GP including GC 45 and the Corps General Stream Crossing Standards contained therein.

www.maine.gov/mdot/environmental-office-homepage/fishpassage/3rd%20edition%20-%20merged%20final%20version%207-01-08a1.pdf.

(e) GC 45(f): The Skidder Bridge Fact Sheet at www.nae.usace.army.mil/missions/regulatory under "Stream and River Continuity" may be a useful temporary span construction method.

9. GC 45: Wetland Crossings. The Maine DEP's crossing standards are at 06-096 DEP, Chapter 305: Permits by Rule, 9 & 10) Crossings (utility lines, pipes and cables).
www.maine.gov/dep/blwq/rules/NRPA/2009/305/305_effective_2009.pdf

10. GC 23: Protection of Vernal Pools.

(a) The state's Significant Wildlife Habitat rules (Chapter 335, Section 9(C) "Habitat management standards for significant vernal pool habitat") are located at www.maine.gov/dep/blwq/docstand/nrpapage.htm#rule under "Rules."

(b) The following documents provide conservation recommendations:

i. Best Development Practices: Conserving pool-breeding amphibians in residential and commercial development in the northeastern U.S., Calhoun and Klemens, 2002. Chapter III, Management Goals and Recommendations, Pages 15 – 26, is particularly relevant. (Available for purchase at www.maineaudubon.org/resource/index.shtml and on Corps website*.)

ii. Science and Conservation of Vernal Pools in Northeastern North America, Calhoun and deMaynadier, 2008. Chapter 12, Conservation Recommendations section, Page 241, is particularly relevant. (Available for purchase via the internet. Chapter 12 is available on Corps website*.)


* www.nae.usace.army.mil/reg under "Vernal Pools."

(c) Cape Cod Curbing: For smaller roads and driveways, the most important design feature to consider is curbing. Granite curbs and some traditional curbing can act as a barrier to amphibian and hatchling turtle movements. Large numbers of salamanders have been intercepted in their migrations by curbs and catch basins. Use of Cape Cod curbs rather than traditional curbing may be one solution. Alternatively, where storm water management systems require more traditional curbing, it may be possible to design in escape ramps on either side of each catch basin. Cape Cod curbing is shown on Page 35 of the document cited in 10.b.i above. Bituminous material is not required; other materials such as granite are acceptable.

(d) The VP Directional Buffer Guidance document is located at www.nae.usace.army.mil/missions/regulatory under: 1) "State General Permits" and then "Maine," and 2) "Vernal Pools."

11. GC 29: Maintenance. River restoration projects that are designed to accommodate the natural dynamic tendencies of the fluvial system are maintained in accordance with the project's design objectives (Category 1) or the Corps authorization letter (Category 2). These projects are generally designed to support and implement channel assessment and management practices that recognize a stream's natural dynamic tendencies.

Appendix H: Federal Navigation Projects in Maine

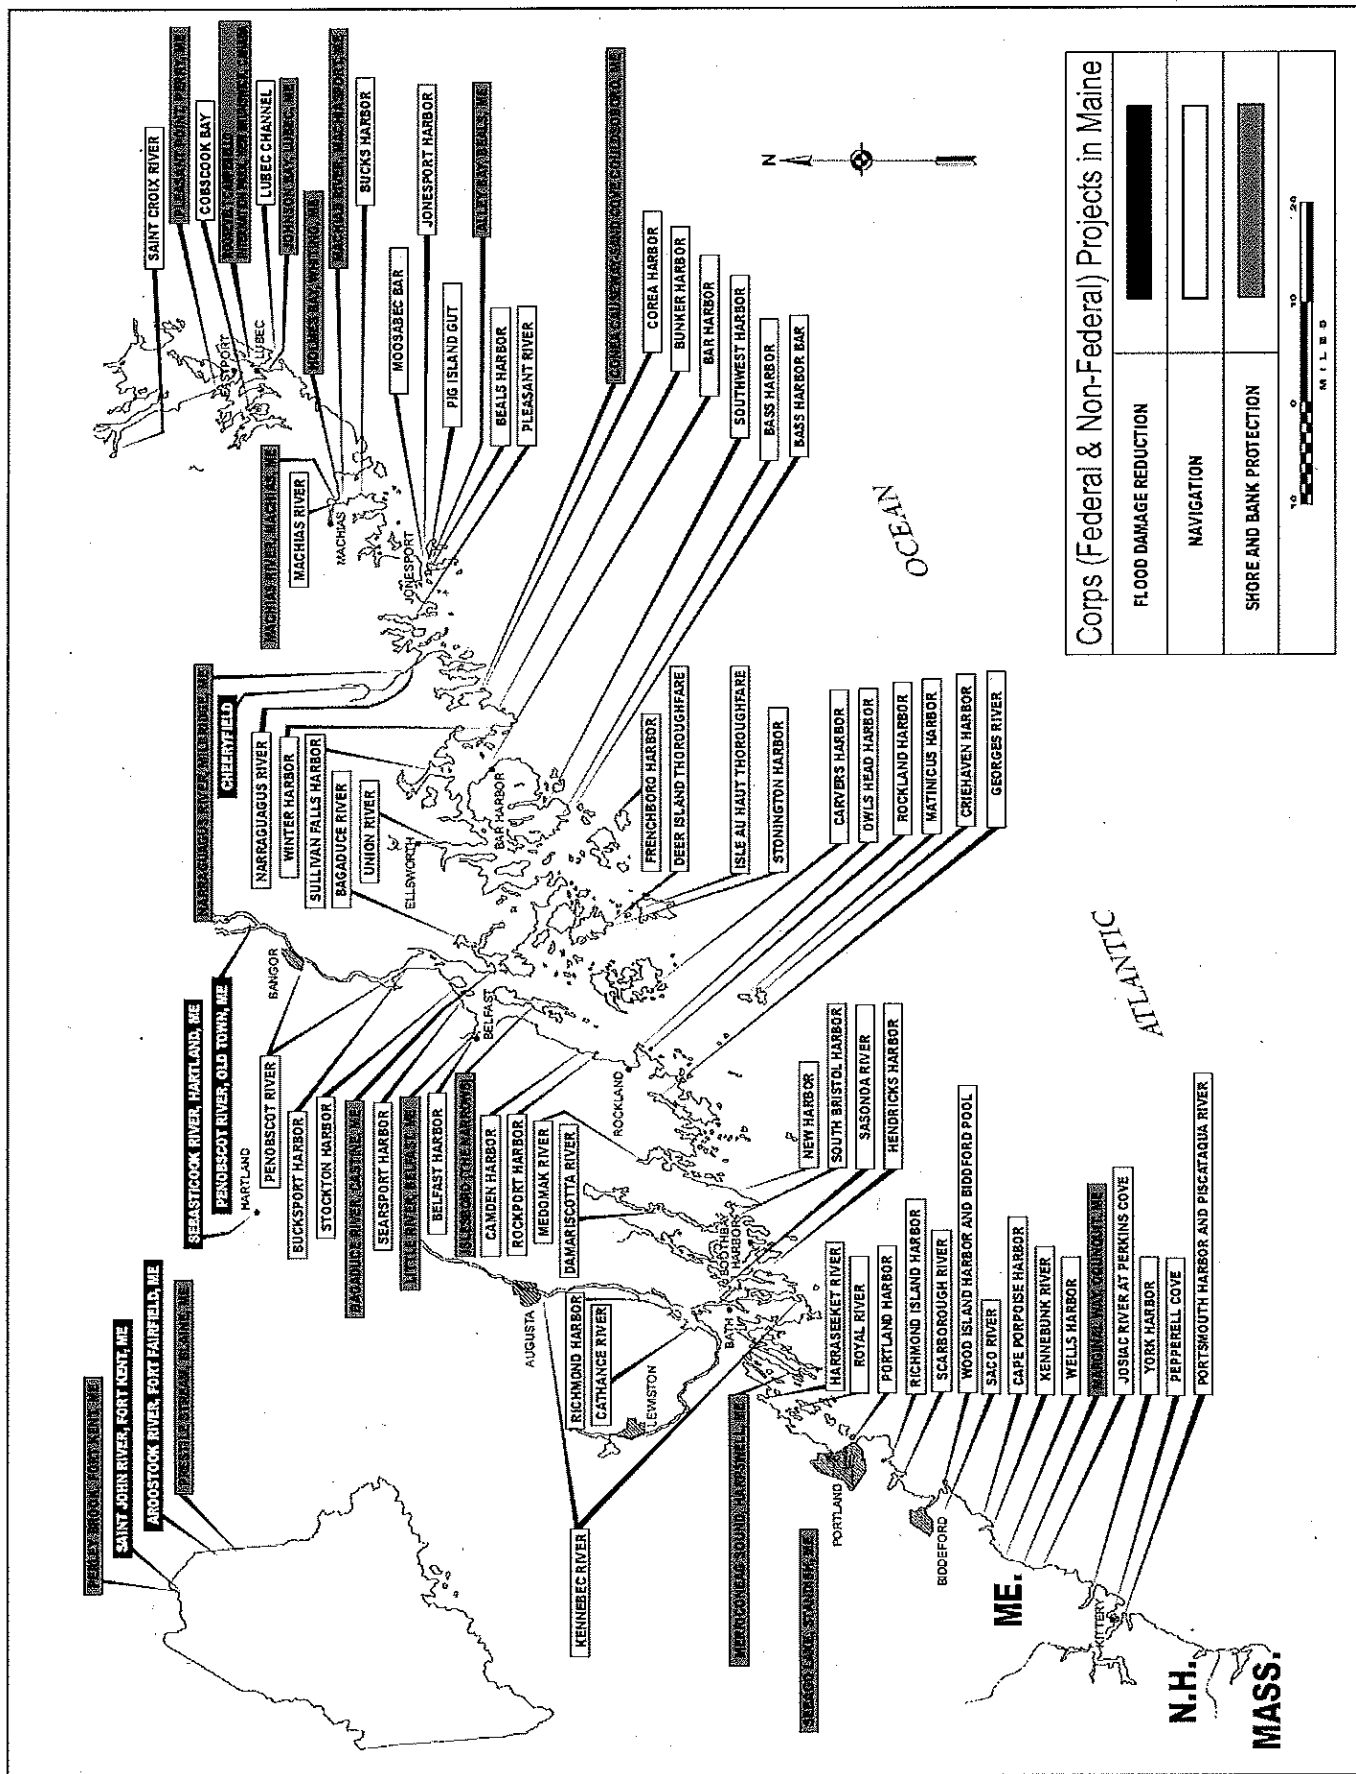



Environmental Summary Sheet

WIN: 22618.00

Date Submitted: 12/6/17

Town: Paris

CPD Team Leader: Kristen Chamberlain

ENV Field Contact: Mike Clark

NEPA Complete: Programmatic Categorical Exclusion-10/19/17

☒	Section 106 SHPO Concurrence -No Effect Section 106 Resources: None
☒	Section 4(f) and 6(f) <u>Section 4(f)</u> Review Complete -de minimus use of Billings Dam Park (permanent slope easement with temporary construction easement) <u>Section 6(f)</u> Not Applicable
☒	Maine Department of Inland Fisheries and Wildlife Essential Habitat Not Applicable Timing Window: Not Applicable
☒	Section 7 Species of Concern: Atlantic Salmon DPS -No Effect Comments/References: Project is upstream of multiple dams that prevent access to the project area for ATS. Species of Concern: Northern Long-Eared Bat-No Federal Nexus Comments/References: Streamlined 4(d) Batch Consultation completed 4/21/17.
☒	Essential Fish Habitat Project is within EFH geographic area but occurs upstream of multiple dams and is will not have an adverse effect on ATS EFH
☒	Maine Department of Conservation/Public Lands, Submerged Land Lease Not Applicable
☒	Maine Land Use Regulation Commission Not Applicable
☒	Maine Department of Environmental Protection <u>Exempt from Permitting 480-Q 2d</u>
☒	Army Corps of Engineers, Section 10 of the Rivers and Harbors Act and Section 404 of the Clean Water Act. <u>Category 2</u> -Work Start Notification Form and Compliance Certification Form must be completed by the Resident and/or ENV Field Contact and submitted to ACOE with copy to Kristen Chamberlain -In-water work window July 15-September 30 -All rubble removal removed from the site shall be disposed of in an upland location and not in a wetland or other protected natural resource. -Standard and Special Conditions Apply-See Special Provision 105.
☒	Stormwater Review N/A
☒	Special Provisions Required
	Special Provision 105-Timing of Work Restriction N/A ☐ Applicable ☒
	Special Provision 656-Minor Soil Disturbance N/A ☒ Applicable ☐
	Standard Specification 656-Erosion Control Plan N/A ☐ Applicable ☒
	Special Provision 203-Dredge Spec N/A ☐ Applicable ☒
	General Note for Hazardous Waste N/A ☐ Applicable ☒
	Special Provision 203-Hazardous Waste N/A ☒ Applicable ☐
	Special Provision 105.9 N/A ☒ Applicable ☐

*All permits and approvals based on plans/scope as of: 10/24/17