








22458.00 ADA Report


	<p>Park Street & Highland Street</p> <p><u>Left</u></p> <ul style="list-style-type: none"> • Reset 7 LF Granite Curb • Detectable warning Field • Reconstruct Bituminous Sidewalk 4 SY <p><u>Right</u></p> <ul style="list-style-type: none"> • Reset 7 LF Granite Curb • Detectable warning Field • Reconstruct Bituminous Sidewalk 6 SY
	<p>Park Street & Lisle Street</p> <p><u>Left</u></p> <ul style="list-style-type: none"> • Reset 4 LF Granite Curb, • Install 8 LF Granite Tip Down • Detectable warning Field • Reconstruct Bituminous Sidewalk 7 SY <p><u>Right (Safe Landing to Fire Station)</u></p> <ul style="list-style-type: none"> • Install 10 LF Circular Granite Curb, • Install 2 x 8 LF Granite Circular Tip Down, • Detectable warning Field • Reconstruct Bituminous Sidewalk 5.5 SY
	<p>Park Street & Broad Street</p> <p><u>Left</u></p> <ul style="list-style-type: none"> • Reset 13.5 LF Granite Curb • Install 2 x 8 LF Granite Tip Down • Detectable warning Field x 2 • Reconstruct Bituminous Sidewalk 22 SY <p><u>Right</u></p> <ul style="list-style-type: none"> • Install 16 LF Type 3 Curb • Detectable warning Field • Reconstruct Bituminous Sidewalk 10 SY <ul style="list-style-type: none"> ○ <u>Construct around the pole</u>
	<p>Park Street at station 63+50</p> <p><u>Left Construct New Pedestrian Ramp</u></p> <ul style="list-style-type: none"> • Reset 20 LF Granite Curb • Install 16 LF Granite Tip Down • Detectable warning Field • Construct Bituminous Sidewalk 16 SY <p><u>Right (Construct a New Safe Landing)</u></p> <p>See attached Appendix 1</p> <ul style="list-style-type: none"> • Install 24 LF Type 3 Curb • Detectable warning Field • Construct Bituminous Safe landing 27.22 SY

22458.00 ADA Report

	<p>Park Street & High Street</p> <p><u>Left</u></p> <ul style="list-style-type: none"> • Detectable warning Field x 2
	<p>Park Street & Union Street (Traffic Modification see construction notes)</p> <p><u>Left</u></p> <ul style="list-style-type: none"> • Reset 8 LF Granite Curb, • Install 16 LF Granite Tip Down • Detectable warning Field x 2 • Construct Bituminous Sidewalk 18 SY • Construct Concrete Sidewalk 5 SY <p><u>Right</u></p> <ul style="list-style-type: none"> • Install 8 LF Granite Tip Down • Install 49 LF Type 3 Curb • Detectable warning Field x 2 • Construct Bituminous Sidewalk 9 SY • Construct Bituminous Sidewalk and Island 9 SY. <p>See attached Appendix 2</p>
	<p>Park Street at Station 71+25</p> <p><u>Left at Camden National Bank</u></p> <ul style="list-style-type: none"> • Reset 16 LF Granite Curb • Install 16 LF Granite Tip Down • Detectable warning Field • Construct Concrete Sidewalk 16.25 SY <p><u>Right/RITE-AID</u></p> <ul style="list-style-type: none"> • Reset 14 LF Granite Curb • Install 8 LF Granite Tip Down • Detectable warning Field • Construct Bituminous Sidewalk 13 SY

22458.00 ADA Report

Appendix 1

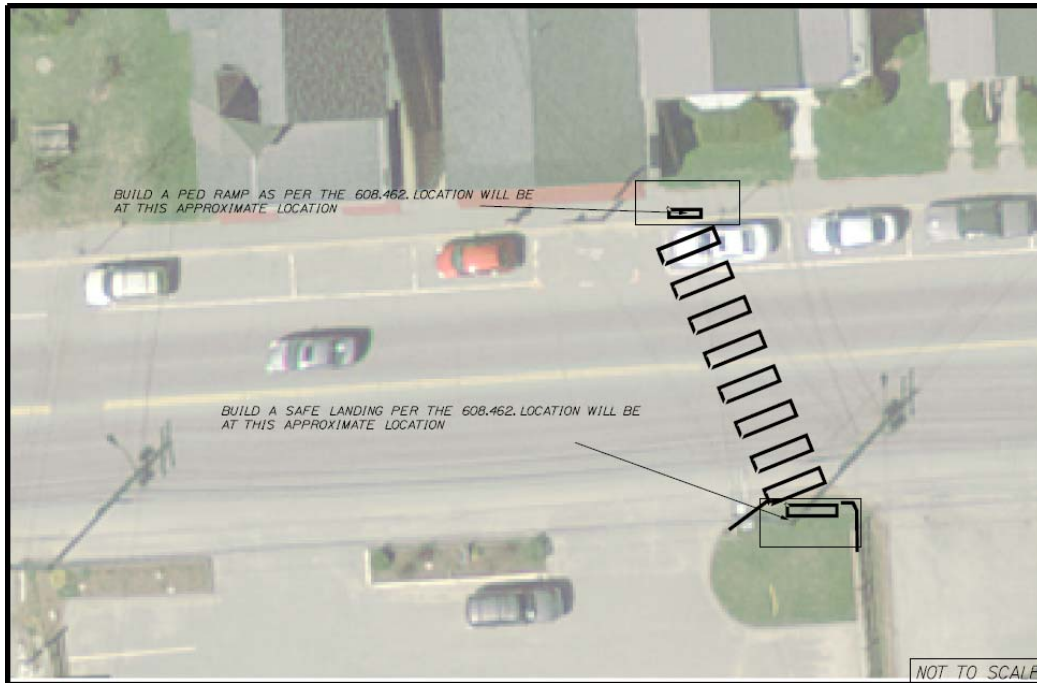

Appendix 2

