



Paul R. LePage
GOVERNOR

STATE OF MAINE
DEPARTMENT OF TRANSPORTATION
16 STATE HOUSE STATION
AUGUSTA, MAINE 04333-0016

November 22, 2011
Subject: **Sanford**
Federal Project No: STP-1724(700)X
State PIN: 017247.00
Amendment No. 3

David Bernhardt
COMMISSIONER

Dear Sir/Ms:

Make the following change to the Bid Document:

In the Bid Book (pages 4 and 5) **REMOVE** the "SCHEDULE OF ITEMS" 2 pages dated 111121 (replaced in amendment #2) and **REPLACE** with the attached new "SCHEDULE OF ITEMS" 2 pages dated 111122.

The following questions have been received:

Question: In response to answer #1 in amendment #2; please clarify the flash rate of 6 times per minute. That might appear as a stop light with such a long interval. The standard solid state wig-wag is 56 times per minute.

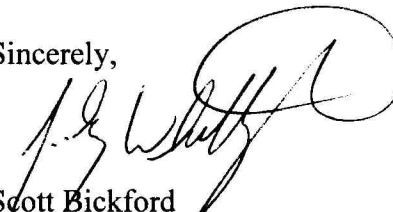
Response: The flash rate is between 50 and 60 times per minute. Answer #1 in amendment #2 should have read; "Yes, but it needs to flash 50 to 60 times per minute, needs to be solid state and not electro-mechanical."

Question: Amendment #2 states 15" opt. I changed to 18" opt I on new Schedule of Items, but not changed – pen and ink?

Response: Please see the attached new Schedule of Items.

Consider this change and information prior to submitting your bid on November 30, 2011.

Sincerely,


Scott Bickford
Contracts & Specifications Engineer



PRINTED ON RECYCLED PAPER

SCHEDULE OF ITEMS

REVISED:

CONTRACT ID: 017247.00

PROJECT(S): STP-1724(700)X

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
SECTION 0001 PROJECT ITEMS						
0010	201.23 REMOVING SINGLE TREE TOP ONLY	9.000 EA				
0020	201.24 REMOVING STUMP	9.000 EA				
0030	202.203 PAVEMENT BUTT JOINTS	40.000 SY				
0040	203.20 COMMON EXCAVATION	725.000 CY				
0050	304.10 AGGREGATE SUBBASE COURSE - GRAVEL	250.000 CY				
0060	403.210 HOT MIX ASPHALT 9.5 MM	25.000 T				
0070	403.213 HOT MIX ASPHALT 12.5 MM BASE	35.000 T				
0080	603.17 18 INCH CULVERT PIPE OPTION I	40.000 LF				
0090	610.18 STONE DITCH PROTECTION	125.000 CY				
0100	613.319 EROSION CONTROL BLANKET	100.000 SY				

SCHEDULE OF ITEMS

REVISED:

CONTRACT ID: 017247.00

PROJECT(S): STP-1724(700)X

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0110	615.071 LOAM, SEED, MULCH	750.000 SY				
0120	627.733 4" WHITE OR YELLOW PAINTED PAVEMENT MARKING LINE	350.000 LF				
0130	627.75 WHITE OR YELLOW PAVEMENT & CURB MARKING	40.000 SF				
0140	643.60 FLASHING BEACON AT:	LUMP	LUMP			
0150	645.271 REGULATORY, WARNING, CONFIRMATION AND ROUTE MARKER ASSEMBLY SIGNS, TYPE I	25.000 SF				
0160	652.39 WORK ZONE TRAFFIC CONTROL	LUMP	LUMP			
0170	659.10 MOBILIZATION	LUMP	LUMP			
	TOTAL BID					