



Paul R. LePage
GOVERNOR

STATE OF MAINE
DEPARTMENT OF TRANSPORTATION
16 STATE HOUSE STATION
AUGUSTA, MAINE 04333-0016

July 16, 2012
Subject: **Paris**
State WIN: 017536.00
Amendment No. 1

David Bernhardt
COMMISSIONER

Dear Sir/Ms:

Make the following change to the Bid Document:

In the Bid Book (pages 12 thru 16) **REMOVE** the "SCHEDULE OF ITEMS" 5 pages dated 120620 and **REPLACE** with the attached new "SCHEDULE OF ITEMS" 5 pages dated 120716.

The following questions have been received:

Question: On sheet 3, note 3 for the culvert calls out a standard waterproofing membrane but the Schedule of Values calls out a high performance membrane. Please clarify.

Response: Yes, there is a discrepancy. The material we want to utilize for this application is Item 508.13 Sheet Waterproofing Membrane. Please see the attached new Schedule of Items.

Question: How is the crushed stone and geotextile under the culvert being paid for?

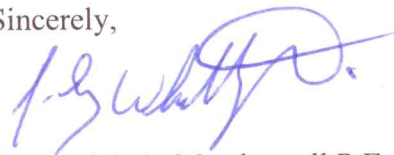
Response: Item 203.35 Crushed Stone Fill shown in the estimated quantities list.

Question: How is the fill needed for the road as shown in the cross sections being paid for?

Response: The material for the shoulders and the mainline subbase is Item 304.10 Aggregate Subbase Course - Gravel, material for the inslope fill is Item 203.20 common excavation, both listed in the estimated quantities list.

Consider this change and information prior to submitting your bid on July 18, 2012.

Sincerely,


George M. A. Macdougall P.E.
Contracts & Specifications Engineer



PRINTED ON RECYCLED PAPER

SCHEDULE OF ITEMS

CONTRACT ID: 017536.00

PROJECT(S): 017536.00

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
SECTION 0001 PROJECT ITEMS						
0010	202.203 PAVEMENT BUTT JOINTS	125.000 SY				
0020	203.20 COMMON EXCAVATION	1220.000 CY				
0030	203.24 COMMON BORROW	25.000 CY				
0040	203.25 GRANULAR BORROW	250.000 CY				
0050	203.35 CRUSHED STONE FILL	70.000 CY				
0060	206.07 STRUCTURAL ROCK EXCAVATION - DRAINAGE AND MINOR STRUCTURES	65.000 CY				
0070	304.10 AGGREGATE SUBBASE COURSE - GRAVEL	775.000 CY				
0080	403.208 HOT MIX ASPHALT 12.5 MM HMA SURFACE	220.000 T				
0090	403.209 HOT MIX ASPHALT 9.5 MM (SIDEWALKS, DRIVES, INCIDENTALS)	4.000 T				
0100	403.213 HOT MIX ASPHALT 12.5 MM BASE	230.000 T				

SCHEDULE OF ITEMS

CONTRACT ID: 017536.00

PROJECT(S): 017536.00

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0110	409.15 BITUMINOUS TACK COAT - APPLIED	60.000 G				
0120	411.10 UNTREATED AGGREGATE SURFACE COURSE (TRUCK MEASURE)	10.000 CY				
0130	508.13 SHEET WATERPROOFING MEMBRANE	LUMP	LUMP			
0140	511.07 COFFERDAM: DOWNSTREAM	LUMP	LUMP			
0150	511.07 COFFERDAM: UPSTREAM	LUMP	LUMP			
0160	526.301 TEMPORARY CONCRETE BARRIER TYPE I	LUMP	LUMP			
0170	527.303 ENERGY ABSORBING SYSTEM (ET-PLUS)	1.000 EA				
0180	534.71 PRECAST CONCRETE BOX CULVERT	LUMP	LUMP			
0190	603.16 15 INCH CULVERT PIPE OPTION I	100.000 LF				
0200	606.23 GUARDRAIL TYPE 3C - SINGLE RAIL	525.000 LF				
0210	606.231 GUARDRAIL TYPE 3C - 15 FOOT RADIUS AND LESS	25.000 LF				

SCHEDULE OF ITEMS

CONTRACT ID: 017536.00

PROJECT(S): 017536.00

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0220	606.232 GUARDRAIL TYPE 3C - OVER 15 FOOT RADIUS	25.000 LF				
0230	606.265 TERMINAL END - SINGLE RAIL - GALVANIZED STEEL	2.000 EA				
0240	606.353 REFLECTORIZED FLEXIBLE GUARDRAIL MARKER	8.000 EA				
0250	606.79 GUARDRAIL 350 FLARED TERMINAL	1.000 EA				
0260	610.08 PLAIN RIPRAP	225.000 CY				
0270	610.18 STONE DITCH PROTECTION	70.000 CY				
0280	610.210 STREAM CHANNEL ROCK	85.000 CY				
0290	610.211 STREAM CHANNEL GRAVEL	50.000 CY				
0300	613.319 EROSION CONTROL BLANKET	100.000 SY				
0310	615.07 LOAM	75.000 CY				
0320	618.1401 SEEDING METHOD NUMBER 2 - PLAN QUANTITY	8.000 UN				

SCHEDULE OF ITEMS

CONTRACT ID: 017536.00

PROJECT(S): 017536.00

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0330	619.1201 MULCH - PLAN QUANTITY	8.000 UN				
0340	619.1401 EROSION CONTROL MIX	25.000 CY				
0350	620.54 STABILIZATION GEOTEXTILE	190.000 SY				
0360	627.733 4" WHITE OR YELLOW PAINTED PAVEMENT MARKING LINE	1500.000 LF				
0370	627.76 TEMPORARY PAVEMENT MARKING LINE, WHITE OR YELLOW	LUMP	LUMP			
0380	629.05 HAND LABOR, STRAIGHT TIME	10.000 HR				
0390	631.12 ALL PURPOSE EXCAVATOR (INCLUDING OPERATOR)	10.000 HR				
0400	631.15 ROLLER, EARTH AND BASE COURSE (INCLUDING OPERATOR)	10.000 HR				
0410	631.172 TRUCK - LARGE (INCLUDING OPERATOR)	10.000 HR				
0420	652.312 TYPE III BARRICADE	4.000 EA				
0430	652.33 DRUM	30.000 EA				

MAINE DEPARTMENT OF TRANSPORTATION

PAGE: 5

SCHEDULE OF ITEMS

DATE: 120716

REVISED:

CONTRACT ID: 017536.00

PROJECT(S): 017536.00

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0440	652.34 CONE	30.000 EA				
0450	652.35 CONSTRUCTION SIGNS	815.000 SF				
0460	652.36 MAINTENANCE OF TRAFFIC CONTROL DEVICES	45.000 CD				
0470	652.38 FLAGGER	360.000 HR				
0480	652.41 PORTABLE CHANGEABLE MESSAGE SIGN	2.000 EA				
0490	656.75 TEMPORARY SOIL EROSION AND WATER POLLUTION CONTROL	LUMP	LUMP			
0500	659.10 MOBILIZATION	LUMP	LUMP			
	TOTAL BID					