



Paul R. LePage
GOVERNOR

STATE OF MAINE
DEPARTMENT OF TRANSPORTATION
16 STATE HOUSE STATION
AUGUSTA, MAINE 04333-0016

March 20, 2012
Subject: **Brewer**
Federal Project No: AC-STP-1921(200)X
State PIN: 019212.00
Amendment No. 2

David Bernhardt
COMMISSIONER

Dear Sir/Ms:

Make the following changes to the Bid Document:

In the Bid Book (pages 4 thru 6) **REMOVE** the "SCHEDULE OF ITEMS" 3 pages dated 120214 and **REPLACE** with the attached new "SCHEDULE OF ITEMS" 3 pages dated 120320.

In the Bid Book (page 21) make the following **CHANGES** to the "TITLE SHEET" in pen and ink;

1. In the center of the page **CHANGE** "BREWER" to read "**ORRINGTON – BREWER**"
2. In the center of the page **CHANGE** "PROJECT LENGTH: 0.34 MILES" to read "**PROJECT LENGTH: 0.46 MILES**"
3. In the bottom right hand corner **CHANGE** "PROJECT LOCATION" to read as follows; "**Beginning 0.12 miles south of the Orrington/Brewer town line and extending northerly 0.46 miles.**"
4. In the center left hand side of the page **CHANGE** "STA. 10+00 BEGIN PROJECT" to read "**STA. 3+66 BEGIN PROJECT**"

In the Bid Book (page 23) **REMOVE** "PROJECT STATIONING" 1 page dated 2/2/2012 and **REPLACE** with the attached new "PROJECT STATIONING" 1 page dated 3/15/2012.

In the Bid Book (page 24) **REMOVE** "PROJECT STRIPING" 1 page dated 2/2/2012 and **REPLACE** with the attached new "PROJECT STRIPING" 2 pages dated 3/15/2012.

In the Bid Book (pages 25 thru 27) **REMOVE** the "CONSTRUCTION NOTES" 3 pages dated 2/2/2012 and **REPLACE** with the attached new "CONSTRUCTION NOTES" 3 pages dated 3/14/2012.



PRINTED ON RECYCLED PAPER

Consider this change and information prior to submitting your bid on **March 28**, 2012.

Sincerely,

A handwritten signature in red ink that reads "George Macdougall". The signature is fluid and cursive, with the first name "George" and last name "Macdougall" clearly distinguishable.

George Macdougall
Acting Contracts & Specifications Engineer

SCHEDULE OF ITEMS

DATE: 120320

REVISED:

CONTRACT ID: 019212.00

PROJECT(S): AC-STP-1921(200) X

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS

SECTION 0001 HIGHWAY ITEMS

0010	202.202 REMOVING PAVEMENT SURFACE	SY	7700.000			
0020	202.203 PAVEMENT BUTT JOINTS	SY	150.000			
0030	403.208 HOT MIX ASPHALT 12.5 MM HMA SURFACE	T	800.000			
0040	403.209 HOT MIX ASPHALT 9.5 MM (SIDEWALKS, DRIVES, INCIDENTALS)	T	10.000			
0050	409.15 BITUMINOUS TACK COAT - APPLIED	G	400.000			
0060	424.3331 ASPHALT LOW MODULUS CRACK SEALER, APPLIED	LB	540.000			
0070	604.18 ADJUSTING MANHOLE OR CATCH BASIN TO GRADE	EA	1.000			
0080	606.23 GUARDRAIL TYPE 3C - SINGLE RAIL	LF	288.000			
0090	606.231 GUARDRAIL TYPE 3C - 15 FOOT RADIUS AND LESS	LF	25.000			
0100	606.265 TERMINAL END - SINGLE RAIL - GALVANIZED STEEL	EA	1.000			

SCHEDULE OF ITEMS

REVISED:

CONTRACT ID: 019212.00

PROJECT(S): AC-STP-1921(200) X

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0110	609.31 CURB TYPE 3	50.000				
		LF				
0120	627.733 4" WHITE OR YELLOW PAINTED PAVEMENT MARKING LINE	7340.000				
		LF				
0130	627.75 WHITE OR YELLOW PAVEMENT & CURB MARKING	300.000				
		SF				
0140	627.78 TEMPORARY 4 INCH PAINTED PAVEMENT MARKING LINE, WHITE OR YELLOW	2450.000				
		LF				
0150	629.05 HAND LABOR, STRAIGHT TIME	12.000				
		HR				
0160	631.12 ALL PURPOSE EXCAVATOR (INCLUDING OPERATOR)	10.000				
		HR				
0170	631.172 TRUCK - LARGE (INCLUDING OPERATOR)	10.000				
		HR				
0180	652.33 DRUM	25.000				
		EA				
0190	652.34 CONE	62.000				
		EA				
0200	652.35 CONSTRUCTION SIGNS	1250.000				
		SF				
0210	652.36 MAINTENANCE OF TRAFFIC CONTROL DEVICES	41.000				
		CD				

SCHEDULE OF ITEMS

DATE: 120320

REVISED:

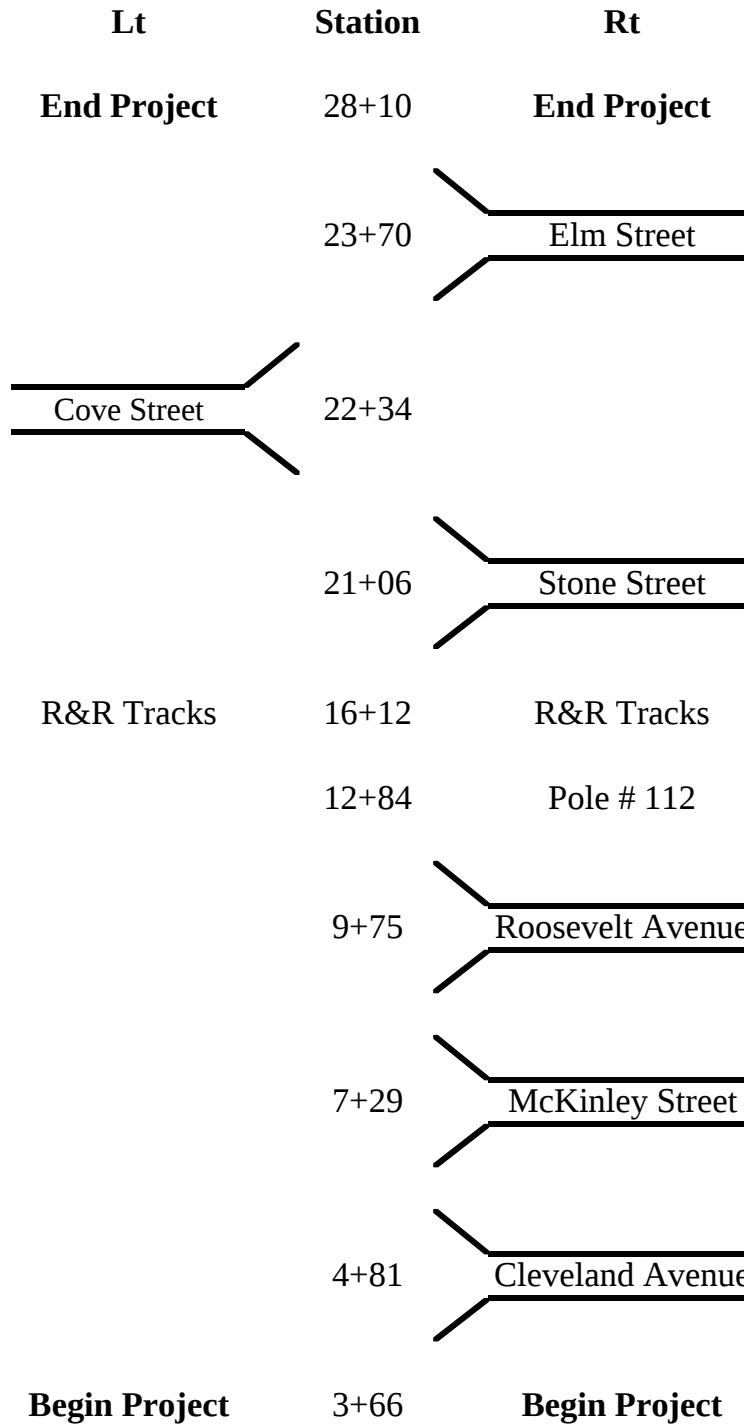
CONTRACT ID: 019212.00

PROJECT(S): AC-STP-1921(200) X








CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0220	652.38 FLAGGER	1180.000				
		HR				
0230	656.75 TEMPORARY SOIL EROSION AND WATER POLLUTION CONTROL	LUMP	LUMP			
0240	659.10 MOBILIZATION	LUMP	LUMP			
	SECTION 0001 TOTAL					
	TOTAL BID					



PROJECT STATIONING



PROJECT STRIPING

	Lt	Station	Rt	
Cove Street				
	21+84		21+84	
	20+91		20+91	
				Stone Street
	20+50		20+50	
	19+70		19+70	
Harbor Drive				
	18+77		18+77	
	16+36		16+36	
Railroad Tracks				Railroad Tracks
	16+17		16+17	
	10+04		10+04	
				Roosevelt Avenue
	9+55		9+55	
	7+52		7+52	
				McKinley Street
	7+06		7+06	
	5+00		5+00	
				Cleveland Avenue
	4+63		4+63	
Begin Project	3+66		3+66	Begin Project

PROJECT STRIPING

	Lt	Station	Rt	
End Project	28+10		28+10	End Project
	23+60		23+60	
	23+01		23+01	Elm Street
	22+83		22+83	

CONSTRUCTION NOTES

202.202 REMOVING PAVEMENT SURFACE

Station	to	Station	Description	Comments
3+66		18+60	Mainline	Avg. 25' wide
18+60		20+10	Mainline	Avg. 24.75' wide
20+10		21+60	Mainline	Avg. 28' wide
21+60		24+60	Mainline	Avg. 32.5' wide
24+60		26+10	Mainline	Avg. 30.75' wide
26+10		28+10	Mainline	Avg. 25.5' wide
9+40		9+98	Shoulders Rt.	Avg. 8' wide
20+70		21+32	Shoulders Rt.	Avg. 8' wide
22+90		24+25	Shoulders Rt.	Avg. 8' wide
26+43		28+10	Shoulders Rt.	Avg. 8' wide

202.203 PAVEMENT BUTT JOINTS

Station	to	Station	Description	Comments
4+63		5+00	Side Road Rt.	Cleveland Avenue
7+06		7+52	Side Road Rt.	Mckinley Street
9+55		9+96	Side Road Rt.	Roosevelt Avenue
20+95		21+32	Side Road Rt.	Stone Street
22+61		22+82	Paved Drive Rt.	Apron/Sidewalk
23+53		24+02	Side Road Rt.	Elm Street
27+01		27+30	Paved Drive Rt.	Apron/Sidewalk
27+64		27+80	Paved Drive Rt.	

403.208 HOT MIX ASPHALT 12.5 MM

Station	to	Station	Description	Comments
3+66		18+60	Mainline	Avg. 25' wide
18+60		20+10	Mainline	Avg. 24.75' wide
20+10		21+60	Mainline	Avg. 28' wide
21+60		24+60	Mainline	Avg. 32.5' wide
24+60		26+10	Mainline	Avg. 30.75' wide
26+10		28+10	Mainline	Avg. 25.5' wide
9+40		9+98	Shoulders Rt.	Avg. 8' wide
20+70		21+32	Shoulders Rt.	Avg. 8' wide
22+90		24+25	Shoulders Rt.	Avg. 8' wide
26+43		28+10	Shoulders Rt.	Avg. 8' wide

CONSTRUCTION NOTES

424.3331 ASPHALT LOW MODULUS CRACK SEALER, APPLIED

Note: Item is to be used for crack sealing shoulders as directed by the Resident.

604.18 ADJUST MANHOLE OR CATCH BASIN TO GRADE

Station	Side
26+93	Lt.

606.23 GUARDRAIL TYPE 3C - SINGLE RAIL

Station	to	Station	Side	Comments
27+86		30+74	Lt.	Attach to existing guardrail at 30+74.

606.231 GUARDRAIL TYPE 3C - 15 FOOT RADIUS AND LESS

Station	to	Station	Side	Comments
27+61		27+86	Lt.	Radius into existing field entrance.

606.265 TERM END- SGL RAIL- GALV STEEL

Station	Side	Qty
27+61	Lt.	1

627.733 4" WHITE OR YELLOW PAINTED PAVE MARKING LINE

Station	to	Station	Description	Comments
3+66		28+10	Yellow	Centerline
3+66		28+10	White	Edgeline

Note: This item will be placed in the same locations as item 627.78 prior to allowing traffic to travel on newly paved travel way.

CONSTRUCTION NOTES

627.75 WHITE OR YELLOW PAVEMENT AND CURB MARKING

Note: This item is to replace railroad crossing striping.

627.78 TEMP 4" PAINT PVMT MARK LINE WHITE OR YELLOW

Note: This item will be placed in the same locations as item 627.733 prior to allowing traffic to travel on milled travel way.

629.05 HAND LABOR, STRAIGHT TIME

Note: This item will be to replace mortar and bricks in damaged catchbasins and as directed by the Resident.

631.12 ALL-PURPOSE EXC (INC OPERATOR)

Note: This item will be used to remove unsuitable excess material from the edges of shoulders and placed in designated areas or disposed of.

631.172 TRUCK-LARGE (INC OPERATOR)

Note: This item will be used to remove unsuitable excess material from the edges of shoulders and placed in designated areas or disposed of.