



Paul R. LePage  
GOVERNOR

STATE OF MAINE  
DEPARTMENT OF TRANSPORTATION  
16 STATE HOUSE STATION  
AUGUSTA, MAINE 04333-0016

David Bernhardt  
COMMISSIONER

June 14, 2012  
Subject: **Garland**  
State PIN: 019334.00  
**Amendment No. 2**

Dear Sir/Ms:

The following questions have been received:

**Question:** What are the overall dimensions of the largest Box Culvert Section?

**Response:** The dimensions of each section are 7'5" long by 11'4" exterior span by 7'8" exterior rise.

**Question:** What is the weight of the largest Box Culvert section?


**Response:** Each section weighs 31,000 pounds.

**Question:** If precast head walls and toe walls are chosen, what inspection schedule and time requirements will there be?

**Response:** As per Sheet 3, both the toewalls and headwalls are required to be precast. These shall be installed and inspected in coordination with installation of the box culvert.

Consider this information prior to submitting your bid on June 20, 2012.

Sincerely,

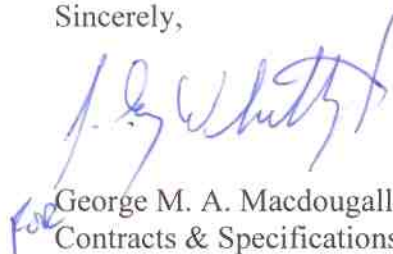

George M. A. Macdougall P.E.  
Contracts & Specifications Engineer



PRINTED ON RECYCLED PAPER