



STATE OF MAINE
DEPARTMENT OF TRANSPORTATION
16 STATE HOUSE STATION
AUGUSTA, MAINE 04333-0016

Paul R. LePage
GOVERNOR

David Bernhardt
COMMISSIONER

May 4, 2018
Subject: Large Culvert Replacement
State WIN: 021769.00
Location: **Caswell**
Amendment No. 1

Dear Sir/Ms.:

Please make the following changes to the Bid Documents:

In the Bid Book:

REMOVE pages 12 – 15, Proposal Schedule of Items, 4 pages, dated 4/6/2018, and
REPLACE with the attached, revised Proposal Schedule of Items, 4 pages, dated 5/1/2018.

REMOVE page 48, Special Provision - Section 606 – Guardrail, 1 page, dated April 9, 2018 and **REPLACE**
with the attached, revised Special Provision - Section 606 – Guardrail, 2 pages, dated April 9, 2018.

In the Plan Set:

On SHEET NUMBER 3 OF 16, ESTIMATED QUANTITIES AND GENERAL NOTES, ITEM NO.
526.301 Temporary Concrete Barrier – Type I, **CHANGE** the Quantity from “80” to read “1”. Make this
change in pen and ink.

The following question has been received:

Question: The schedule of items in the book differs from the plans.

Response: See attached, revised Schedule of Items.

Consider these changes and information prior to submitting your bid on **May 9, 2018**.

Sincerely,

George M. A. Macdougall P.E.
Contracts & Specifications Engineer



PRINTED ON RECYCLED PAPER

Maine Department of Transportation

Proposal Schedule of Items

Proposal ID: 021769.00

Project(s): 021769.00

SECTION: 1 Project Items

Alt Set ID: Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0010	203.20 COMMON EXCAVATION	150.000 CY	_____	 _____	_____	 _____
0020	203.25 GRANULAR BORROW	100.000 CY	_____	 _____	_____	 _____
0030	203.33 SPECIAL FILL	48.000 CY	_____	 _____	_____	 _____
0040	304.16 AGGREGATE BASE COURSE - TYPE C	940.000 CY	_____	 _____	_____	 _____
0050	403.208 HOT MIX ASPHALT 12.5 MM HMA SURFACE	160.000 T	_____	 _____	_____	 _____
0060	403.213 HOT MIX ASPHALT 12.5 MM BASE	310.000 T	_____	 _____	_____	 _____
0070	409.15 BITUMINOUS TACK COAT - APPLIED	110.000 G	_____	 _____	_____	 _____
0080	511.07 COFFERDAM: Downstream	LUMP SUM	_____	 LUMP SUM	_____	 _____
0090	511.07 COFFERDAM: Upstream	LUMP SUM	_____	 LUMP SUM	_____	 _____
0100	526.301 TEMPORARY CONCRETE BARRIER TYPE I	LUMP SUM	_____	 LUMP SUM	_____	 _____
0110	603.4077 96" DIAMETER POLYMER COATED STEEL PIPE	105.000 LF	_____	 _____	_____	 _____
0120	606.1301 31" W-BM GR, MID-WAY SPLICE-SGL FACED	580.000 LF	_____	 _____	_____	 _____

Maine Department of Transportation

Proposal Schedule of Items

Proposal ID: 021769.00

Project(s): 021769.00

SECTION: 1 Project Items

Alt Set ID: Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0122	606.1303 31" W-BM GR, MID-WAY SPLICE-15' RAD AND LESS	25.000 LF	_____	 _____	_____	 _____
0124	606.265 TERMINAL END - SINGLE RAIL - GALVANIZED STEEL	1.000 EA	_____	 _____	_____	 _____
0126	606.353 REFLECTORIZED FLEXIBLE GUARDRAIL MARKER	2.000 EA	_____	 _____	_____	 _____
0130	610.08 PLAIN RIPRAP	240.000 CY	_____	 _____	_____	 _____
0132	610.09 HAND LAID RIPRAP	25.000 CY	_____	 _____	_____	 _____
0140	610.210 STREAM CHANNEL ROCK	15.000 CY	_____	 _____	_____	 _____
0150	615.07 LOAM	50.000 CY	_____	 _____	_____	 _____
0160	615.10 DIRTY BORROW	25.000 CY	_____	 _____	_____	 _____
0170	618.13 SEEDING METHOD NUMBER 1	1.000 UN	_____	 _____	_____	 _____
0180	618.14 SEEDING METHOD NUMBER 2	2.000 UN	_____	 _____	_____	 _____
0190	619.12 MULCH	3.000 UN	_____	 _____	_____	 _____
0200	620.58 EROSION CONTROL GEOTEXTILE	452.000 SY	_____	 _____	_____	 _____

Maine Department of Transportation

Proposal Schedule of Items

Proposal ID: 021769.00

Project(s): 021769.00

SECTION: 1 Project Items

Alt Set ID: Alt Mbr ID:

Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0210	627.733 4" WHITE OR YELLOW PAINTED PAVEMENT MARKING LINE	450.000 LF	_____	 _____	_____	 _____
0220	629.05 HAND LABOR, STRAIGHT TIME	20.000 HR	_____	 _____	_____	 _____
0230	631.10 AIR COMPRESSOR (INCLUDING OPERATOR)	15.000 HR	_____	 _____	_____	 _____
0240	631.11 AIR TOOL (INCLUDING OPERATOR)	15.000 HR	_____	 _____	_____	 _____
0250	631.12 ALL PURPOSE EXCAVATOR (INCLUDING OPERATOR)	15.000 HR	_____	 _____	_____	 _____
0260	631.172 TRUCK - LARGE (INCLUDING OPERATOR)	15.000 HR	_____	 _____	_____	 _____
0270	631.18 CHAIN SAW RENTAL (INCLUDING OPERATOR)	15.000 HR	_____	 _____	_____	 _____
0280	639.19 FIELD OFFICE TYPE B	1.000 EA	_____	 _____	_____	 _____
0290	643.72 TEMPORARY TRAFFIC SIGNAL US. Rte.1	LUMP SUM		 LUMP SUM	_____	 _____
0300	652.312 TYPE III BARRICADE	6.000 EA	_____	 _____	_____	 _____
0310	652.33 DRUM	25.000 EA	_____	 _____	_____	 _____
0320	652.34 CONE	50.000 EA	_____	 _____	_____	 _____

Maine Department of Transportation

Proposal Schedule of Items

Proposal ID: 021769.00

Project(s): 021769.00

SECTION: 1 Project Items

Alt Set ID: Alt Mbr ID:


Contractor: _____

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0330	652.35 CONSTRUCTION SIGNS	250.000 SF	_____	 _____	_____	 _____
0340	652.36 MAINTENANCE OF TRAFFIC CONTROL DEVICES	45.000 CD	_____	 _____	_____	 _____
0350	652.38 FLAGGER	20.000 HR	_____	 _____	_____	 _____
0360	656.75 TEMPORARY SOIL EROSION AND WATER POLLUTION CONTROL	LUMP SUM		 LUMP SUM	_____	 _____
0370	659.10 MOBILIZATION	LUMP SUM		 LUMP SUM	_____	 _____
Section: 1			Total:		_____	 _____
			Total Bid:		_____	 _____

Special Provision
Section 606
Guardrail



606.09 Basis of Payment: This section shall be amended with the addition of the following:

<u>Pay Item</u>	<u>Pay Unit</u>
606.1301 31" W-Beam Guardrail - Mid-Way Splice (Steel Post, 8" Offset Blocks, Single Faced)	Linear Foot
606.1302 31" W-Beam Guardrail - Mid-Way Splice (Steel Post, 8" Offset Blocks, Double Faced)	Linear Foot
606.1303 31" W-Beam Guardrail - Mid-Way Splice (Steel Post, 8" Offset Blocks, 15' Radius and Less)	Linear Foot
606.1304 31" W-Beam Guardrail - Mid-Way Splice (Steel Post, 8" Offset Blocks, Over 15' Radius)	Linear Foot
606.1305 31" W-Beam Guardrail - Mid-Way Splice Flared Terminal (31" Height)	Each
606.1306 31" W-Beam Guardrail - Mid-Way Splice Tangent Terminal (31" Height)	Each
606.1308 Buried-in-Slope Guardrail End, Mid-Way Splice	Each

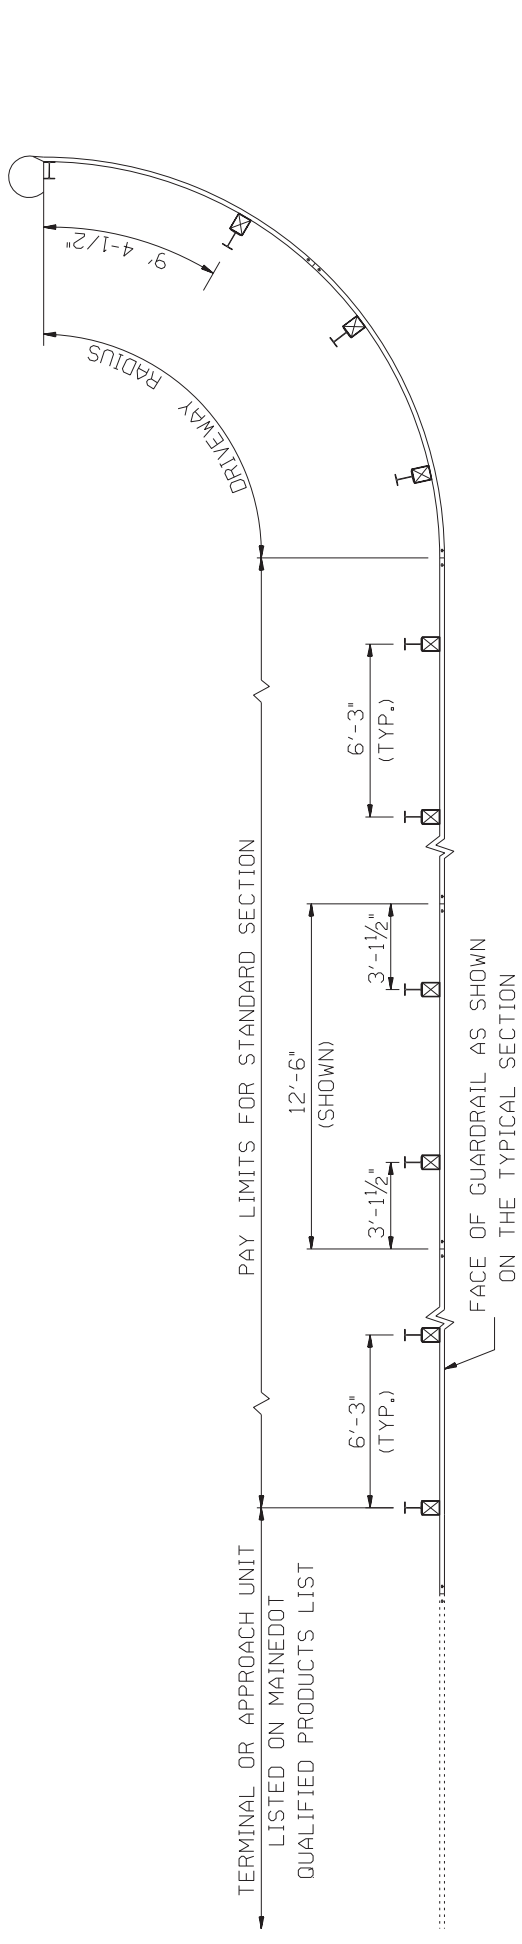

PLAN

W 6x9.0 OR W 6x8.5 STEEL POST WITH 6" x 8" WOOD OFFSET BLOCK OR OTHER 8" BLOCK LISTED ON MAINEDOT QUALIFIED PRODUCTS LIST (TYP.)

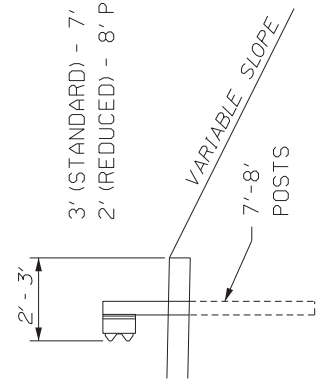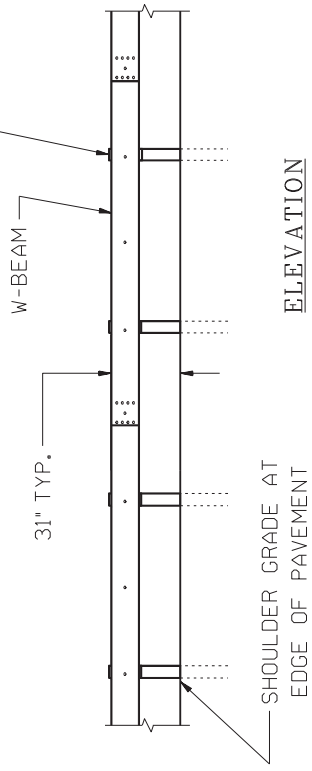

CROSS SECTION

31" W-BEAM GUARDRAIL - MID-WAY SPLICE