



STATE OF MAINE  
DEPARTMENT OF TRANSPORTATION  
16 STATE HOUSE STATION  
AUGUSTA, MAINE 04333-0016

Paul R. LePage  
GOVERNOR

David Bernhardt  
COMMISSIONER

June 26, 2018  
Subject: Supply & Delivery of  
Catch Basins  
State WINs: 021676.00 & 021809.00  
Location: **Bridgton & Oxford**  
**Amendment No. 1**

Dear Sir/Ms.:

Please make the following changes to the Bid Documents:

**REMOVE** page 37, CB #11 & CB #12, and **REPLACE** with the attached page 37A, CB #11 & CB #12.

The following question has been received:

**Question:** Catch Basin # 12; 36" ADS pipe will not fit a 4 ft. Catch Basin, and 36" ADS pipe must be deeper than 2'8" below rim elevation.

**Response:** See above changes.

Consider these changes and information prior to submitting your bid on **June 27, 2018**.

Sincerely,

A handwritten signature in blue ink that reads "George M. A. Macdougall".

George M. A. Macdougall P.E.  
Contracts & Specifications Engineer




PRINTED ON RECYCLED PAPER

Structure Number: MaineDOT CB #11  
 Diameter: 4FT  
 Sump Required: YES 2.75FT  
 Top of Concrete To  
 Rim, Minimum Adjustment:  
 Joint Sealant: -

Boots: YES  
 MaineDOT Type: B1-C Steps: NO  
 Coating: NO  
 Precast Invert: NO  
 Frame & Cover: YES 4 INCH FRAME  
 Style & Size: 2FT CASCADE

	Elevation	Pipe Size	Pipe Type
Grate	100'		
Inv Out	5' 0"	24"@70°	HDPE
Inv In 1	5' 0"	18"@310°	underdrain
Inv In 2			
Inv In 3			
Inv In 4			

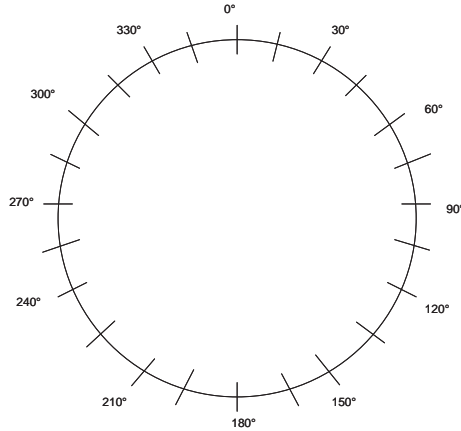

Structure Number: MaineDOT CB #12  
 Diameter: 6FT  
 Sump Required: YES 2.75FT  
 Top of Concrete To  
 Rim, Minimum Adjustment:  
 Joint Sealant: -

Boots: YES  
 MaineDOT Type: B1-C Steps: NO  
 Coating: NO  
 Precast Invert: NO  
 Frame & Cover: YES 4 INCH FRAME  
 Style & Size: 2FT CASCADE

	Elevation	Pipe Size	Pipe Type
Grate	100'		
Inv Out	3' 2"	30"@ 90°	HDPE
Inv In 1	3' 2"	30"@270°	HDPE
Inv Out 1			
Inv In 3			
Inv In 4			

