


BILL OF MATERIAL

PANEL	NO TOP CROSS BARS	NO BOTTOM CROSS BARS	NO TOP BEARING BARS	NO BOTTOM BEARING BARS	NO TOP CROSS BARS	NO BOTTOM CROSS BARS	NO TOP BEARING BARS	NO BOTTOM BEARING BARS	NO TOP CROSS BARS	NO BOTTOM CROSS BARS	NO TOP BEARING BARS	NO BOTTOM BEARING BARS
E1 ^R	30	20-7 1/2"	30	20-7 1/2"	84	4-7 1/8"	24	4-6 3/4"	18	23-10 1/2"	2	20-7 1/2"
E2 ^R	75	20-7 1/2"	76	20-7 1/2"	252	4-1"	72	4-1"	48	23-10 1/2"	2	20-7 1/2"
E3 ^R	30	20-7 1/2"	31	20-7 1/2"	84	4-1 1/8"	24	4-6 3/4"	16	23-10 1/2"	2	20-7 1/2"
E4 ^R	75	13-8 3/4"	76	13-8 3/4"	56	4-7 1/8"	16	4-6 3/4"	18	15-11"	2	13-8 3/4"
F1 ^R	75	13-8 3/4"	76	13-8 3/4"	168	4-1"	48	4-1"	48	15-11"	2	13-8 3/4"
F2 ^R	30	13-8 3/4"	31	13-8 3/4"	56	4-1 1/8"	16	4-6 3/4"	16	15-11"	2	13-8 3/4"

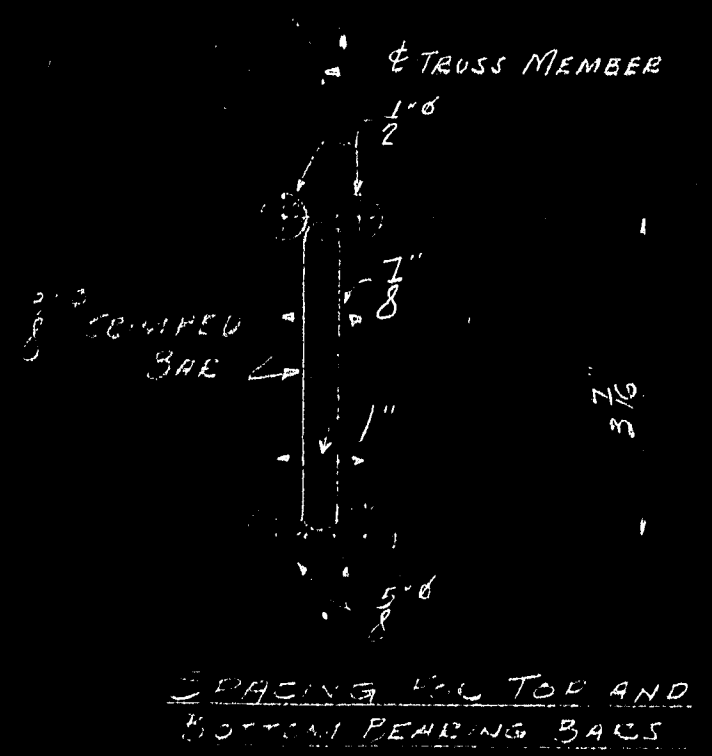

NOTE:
FOR FORM 12 SPACING SEE DWG 3031-8
FOR ALL OTHER NOTES SEE DWG 3031-1

CUSTOMER		RELiance STEEL PRODUCTS COMPANY	
THE PHOENIX BRIDGE CO PHOENIXVILLE, PENNA.		RANKIN, (PITTSBURGH DISTRICT) PA. BRIDGE DEPARTMENT	
PROJECT		PWA PROJECT ME 1010 D	
LOCATION		DEER ISLE - SEDGWICK BRIDGE - HANOVER COUNTY, VA	
CUSTOMER ORDER NO.	REFERENCE	DRAWN	APPROVED BY
7-22-38	6-23-38	6-23-38	6-23-38
CHECKED	DATE	TRACED	DATE
6-23-38	6-23-38	6-23-38	6-23-38
DWG. NO.		CONTRACT NO.	
3031-4		G 3325	

