

SECTION @ CURB
SCALE: 2" = 1'-0"
NOTE: SEE CONTRACT PLANS FOR STEEL DETAILS

SECTION @ MEDIAN
SCALE: 3" = 1'-0"
NOTE: SEE CONTRACT PLANS FOR STEEL DETAILS

TYPICAL ROADWAY SECTION
SCALE: 3" = 1'-0"

TYPICAL MEDIAN SECTION
SCALE: 3" = 1'-0"

Approved: [Signature]
FAY, SPOFFORD & THORNTON, INC.
C.E.L. 5-16-72



A. H. HARRIS & SONS, INC.
Concrete Construction Specialties

321 Ellis St. New Britain, Conn. (203) 225-1671
188 Providence St. Hyde Park, Mass. (617) 384-2234
100 Arlington Ave. Kearny, New Jersey (201) 998-8700
55 Siskier Road Latham, New York (518) 785-3276

FOR	REED & REED		
JOB	TRANSFLEX LAYOUT		
NUMBER	PROJECT # I-95-5(75)		
LOCATION	RT. 196 OVER I-95, TOPSHAM, ME.		
DRAWN BY	DJP		
CHECKED	R.S.J.		
DATE	4-26-72		
DRAWING NO.			
SHEET NO.	1 of 2		
REVISIONS			
NO.	BY	CHECKED	DATE

139:123



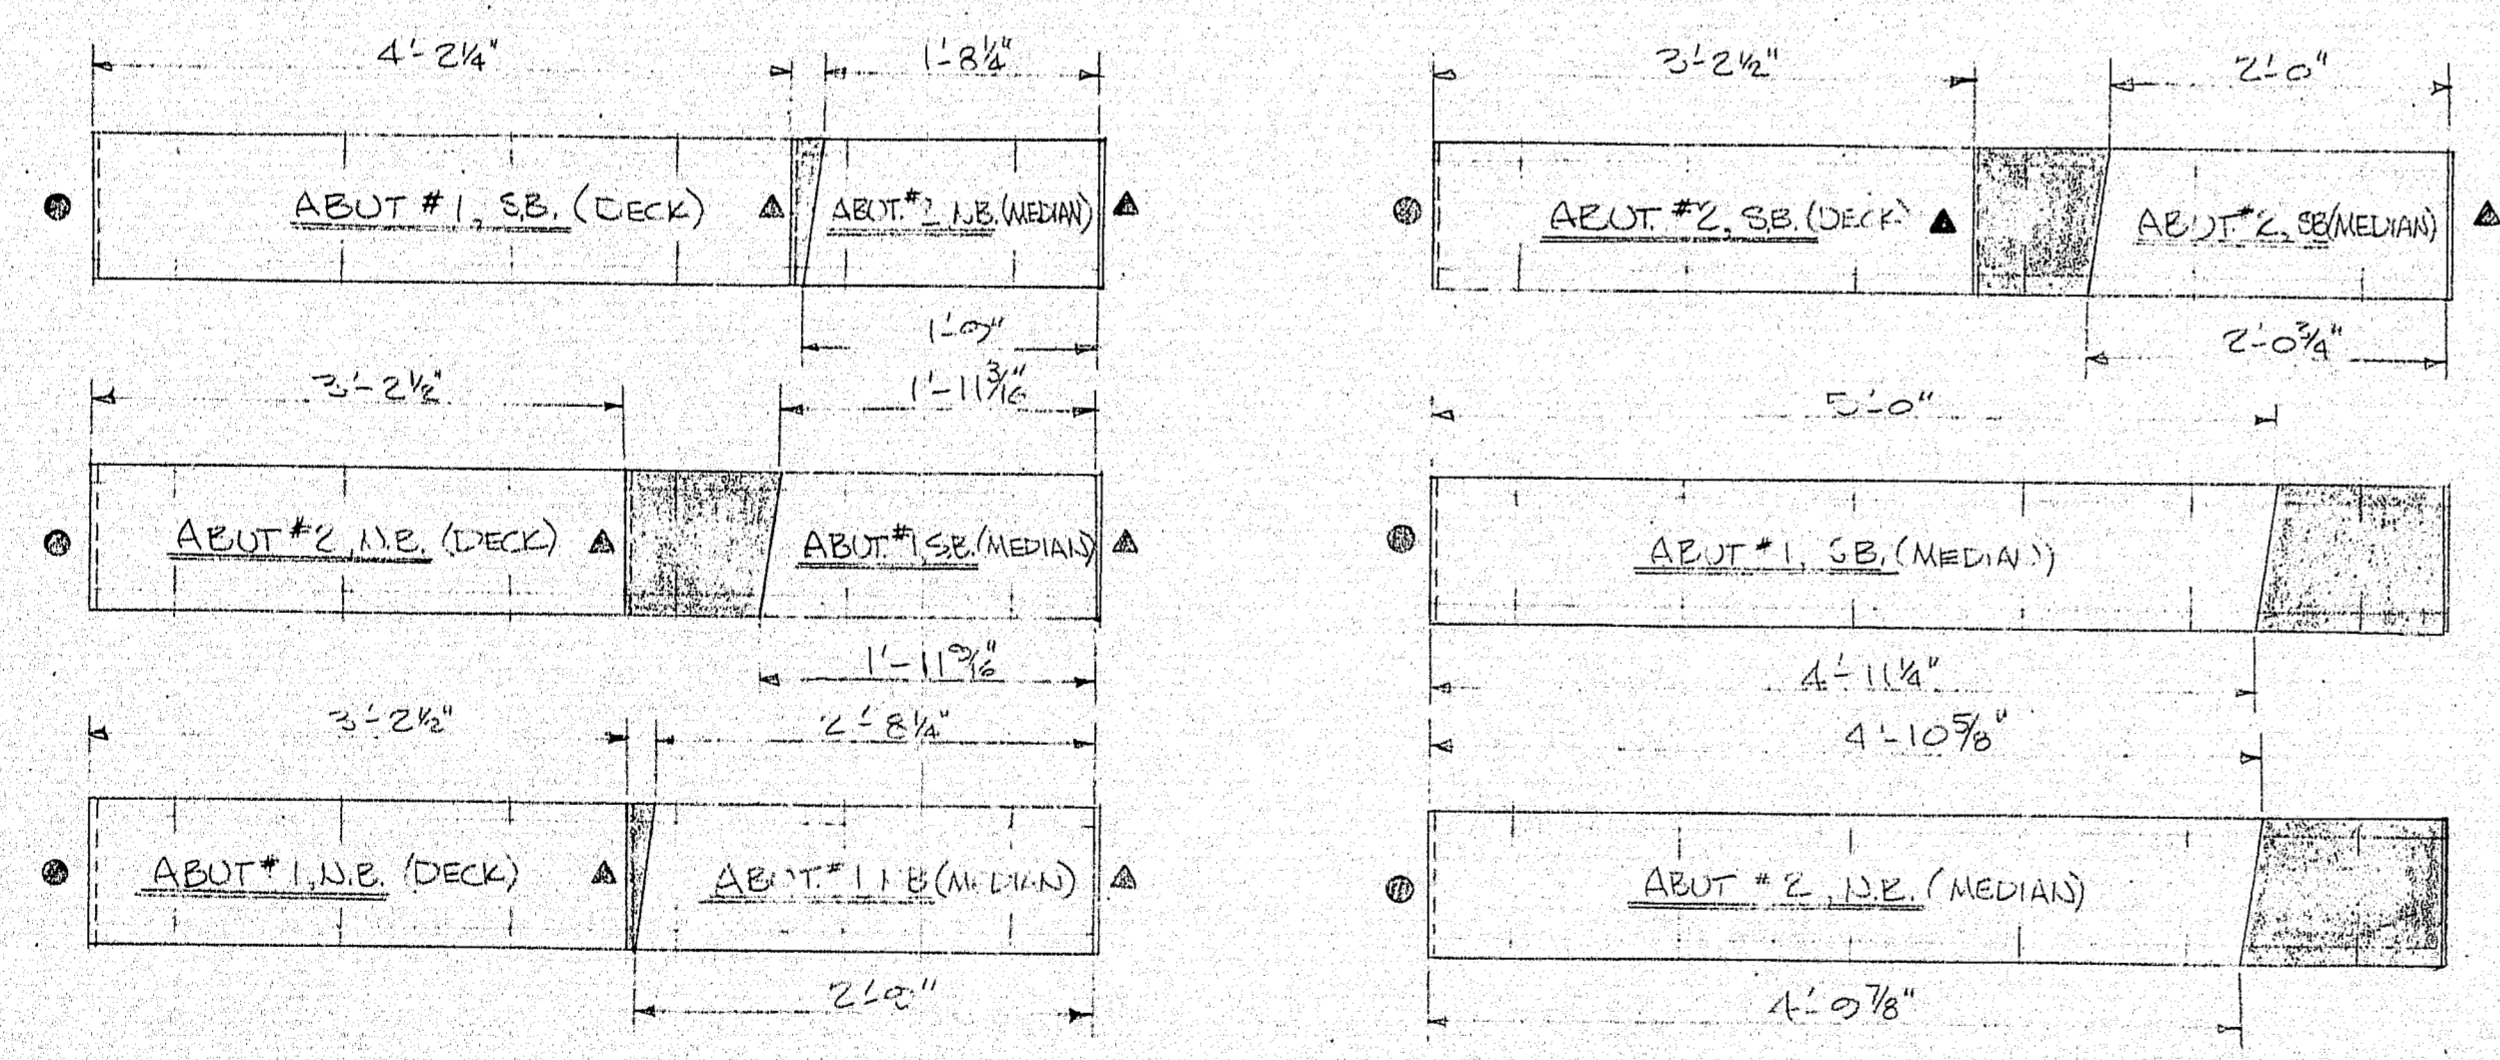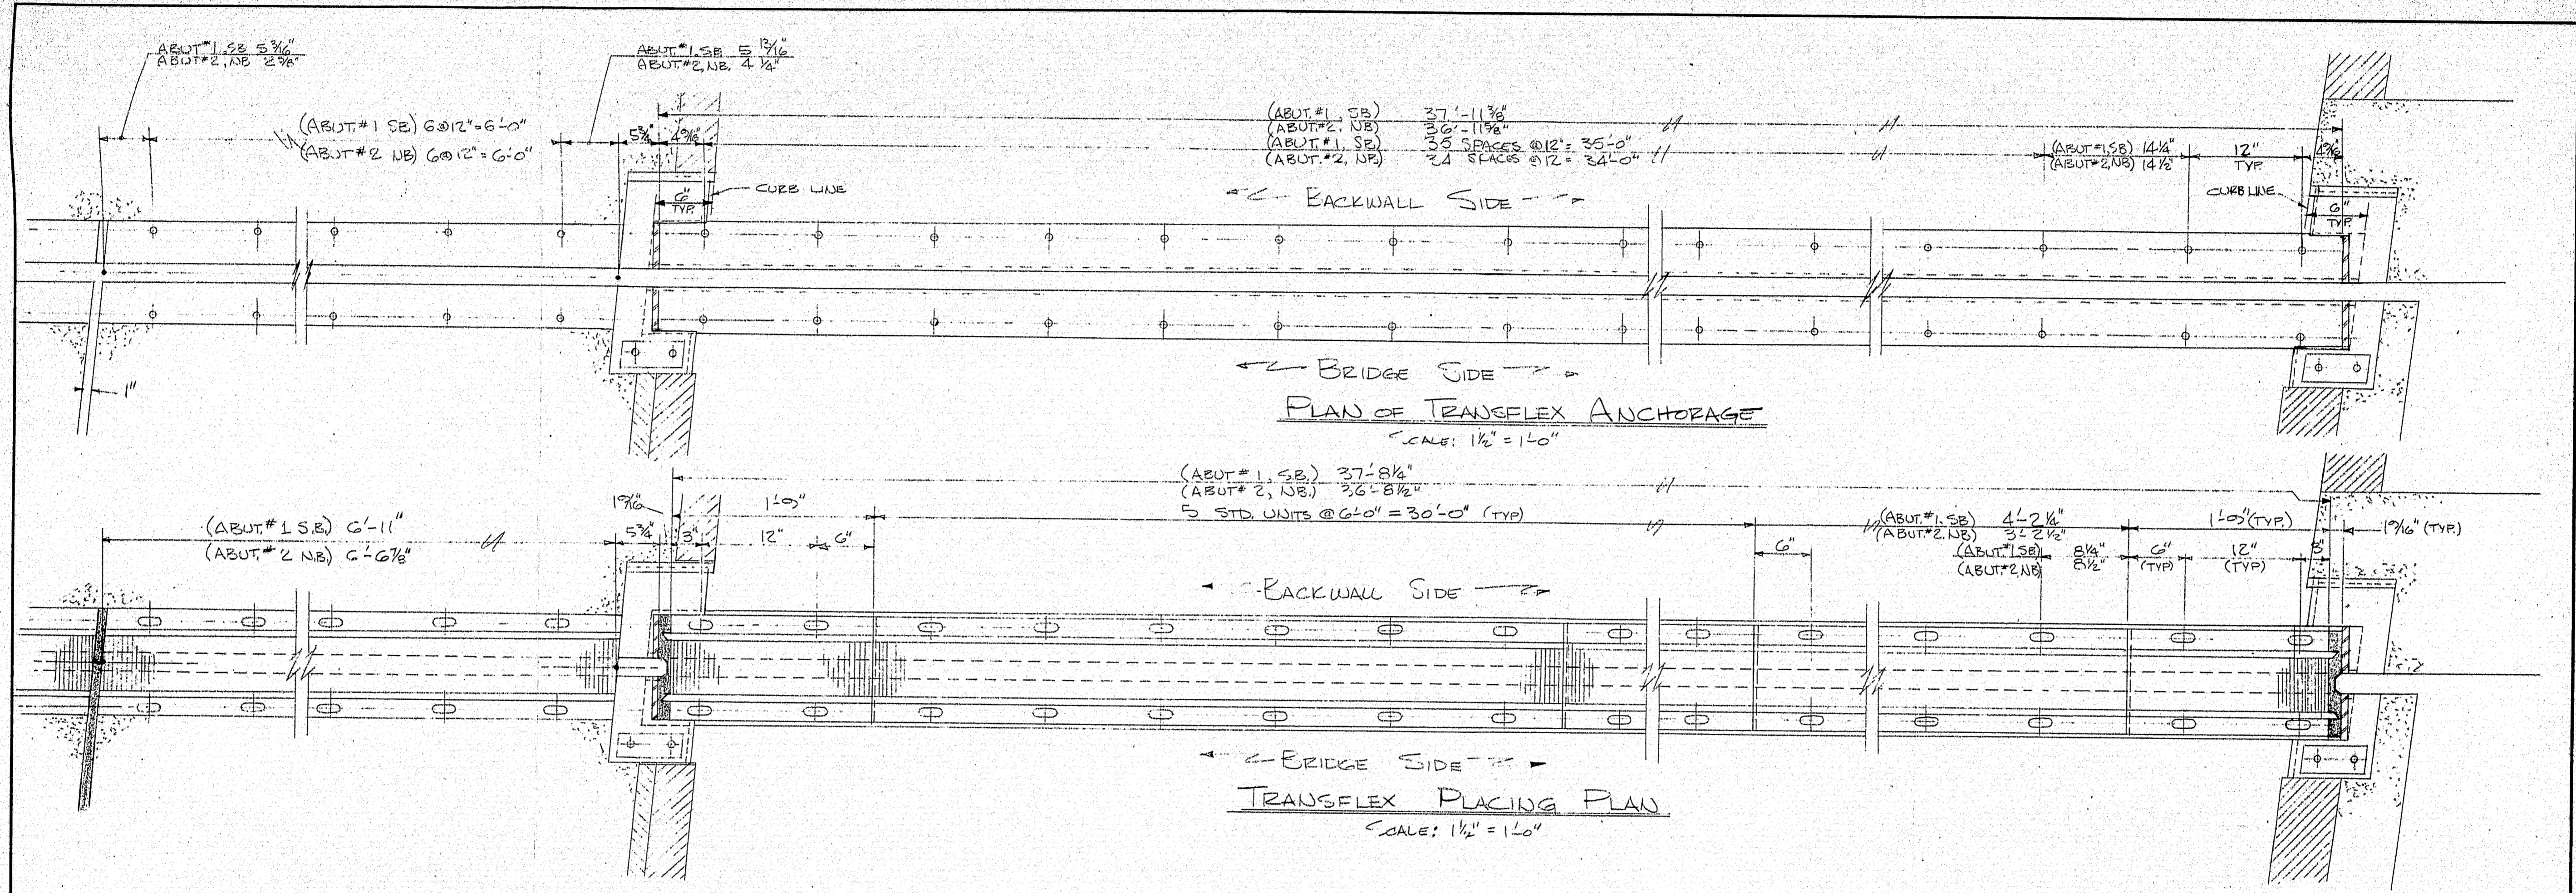

NOTE: ▲ DENOTES MALE TYP. END
● DENOTES FEMALE TYP. END

QTY.	ARTICLE
28 EA.	STD. TRANSFLEX 200-A UNITS (INCLUDES CUT PIECES)
8 EA.	30° CURB & GUTTER UNITS (TRANSFLEX)
272 EA.	"Richmond" 1/2" Ø TYPE LF INSERTS
214 EA.	1/2" Ø x 1 3/4" LONG HEX HEAD BOLTS (ALL STD)
5.8 EA.	1/2" Ø x 1 3/8" LONG "
272 EA.	1/2" Ø HEAVY SPRING LOCKWASHERS
372 EA.	1/2" Ø OVAL WASHERS
6 gal.	TF SEALANT (POURABLE)
12 gal.	" " (KNIFE GRADE)

GENERAL NOTES: CURB ARMOR TO BE FABRICATED AND SHOWN ON CONTRACT DRAWINGS.

APPROVED: [Signature]
DATE: 5-16-72



A. H. HARRIS & SONS, INC.
Concrete Construction Specialties

321 Ellis St. New Britain, Conn. (203) 225-7671
188 Providence St. Hyde Park, Mass. (617) 364-2234
100 Arlington Ave. Kearny, New Jersey (201) 998-8700
55 Sicker Road Latham, New York (518) 785-3276

FOR	REED & REED
JOB	TRANSFLEX LAYOUT
NUMBER	PROJECT # I-95-5(75)
LOCATION	RTE. 176 OVER I-95, TOPSHAM, ME
DRAWN BY	RJS
CHECKED	DJP
DATE	2/2/72
DATE	4-26-72
REP.	A. P. SHELEY
SHEET No.	2 OF 2

139:124



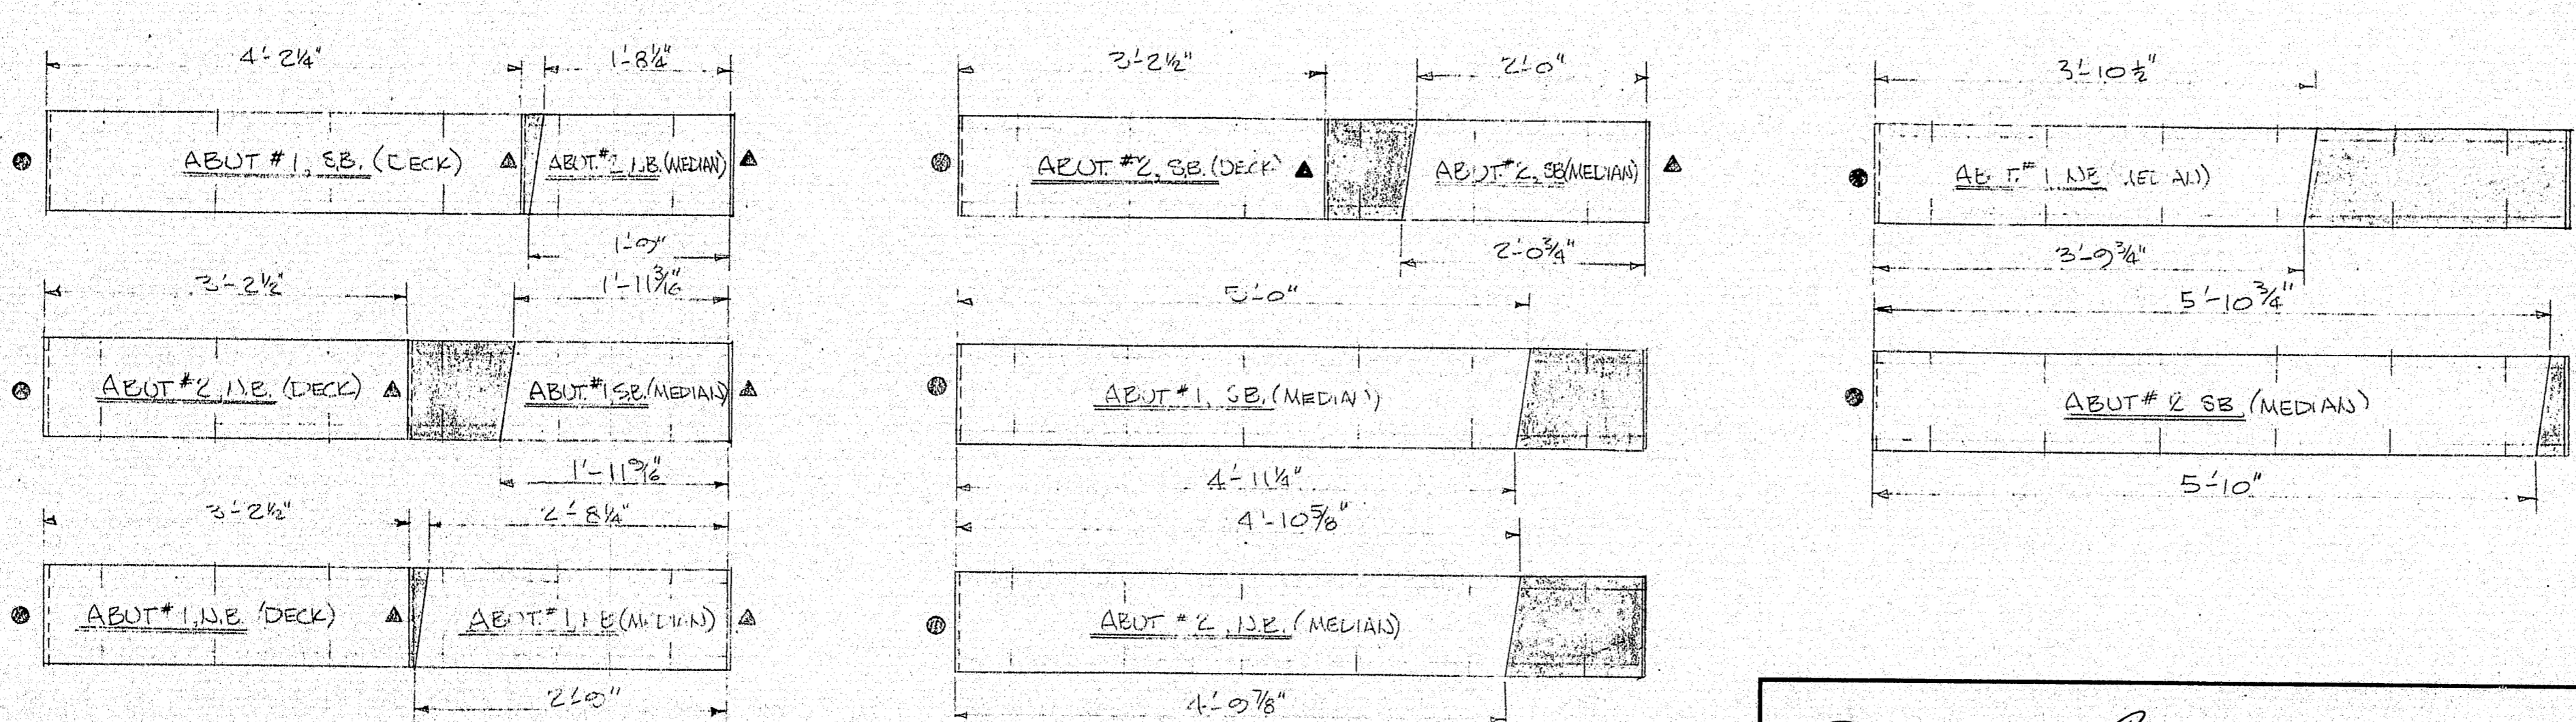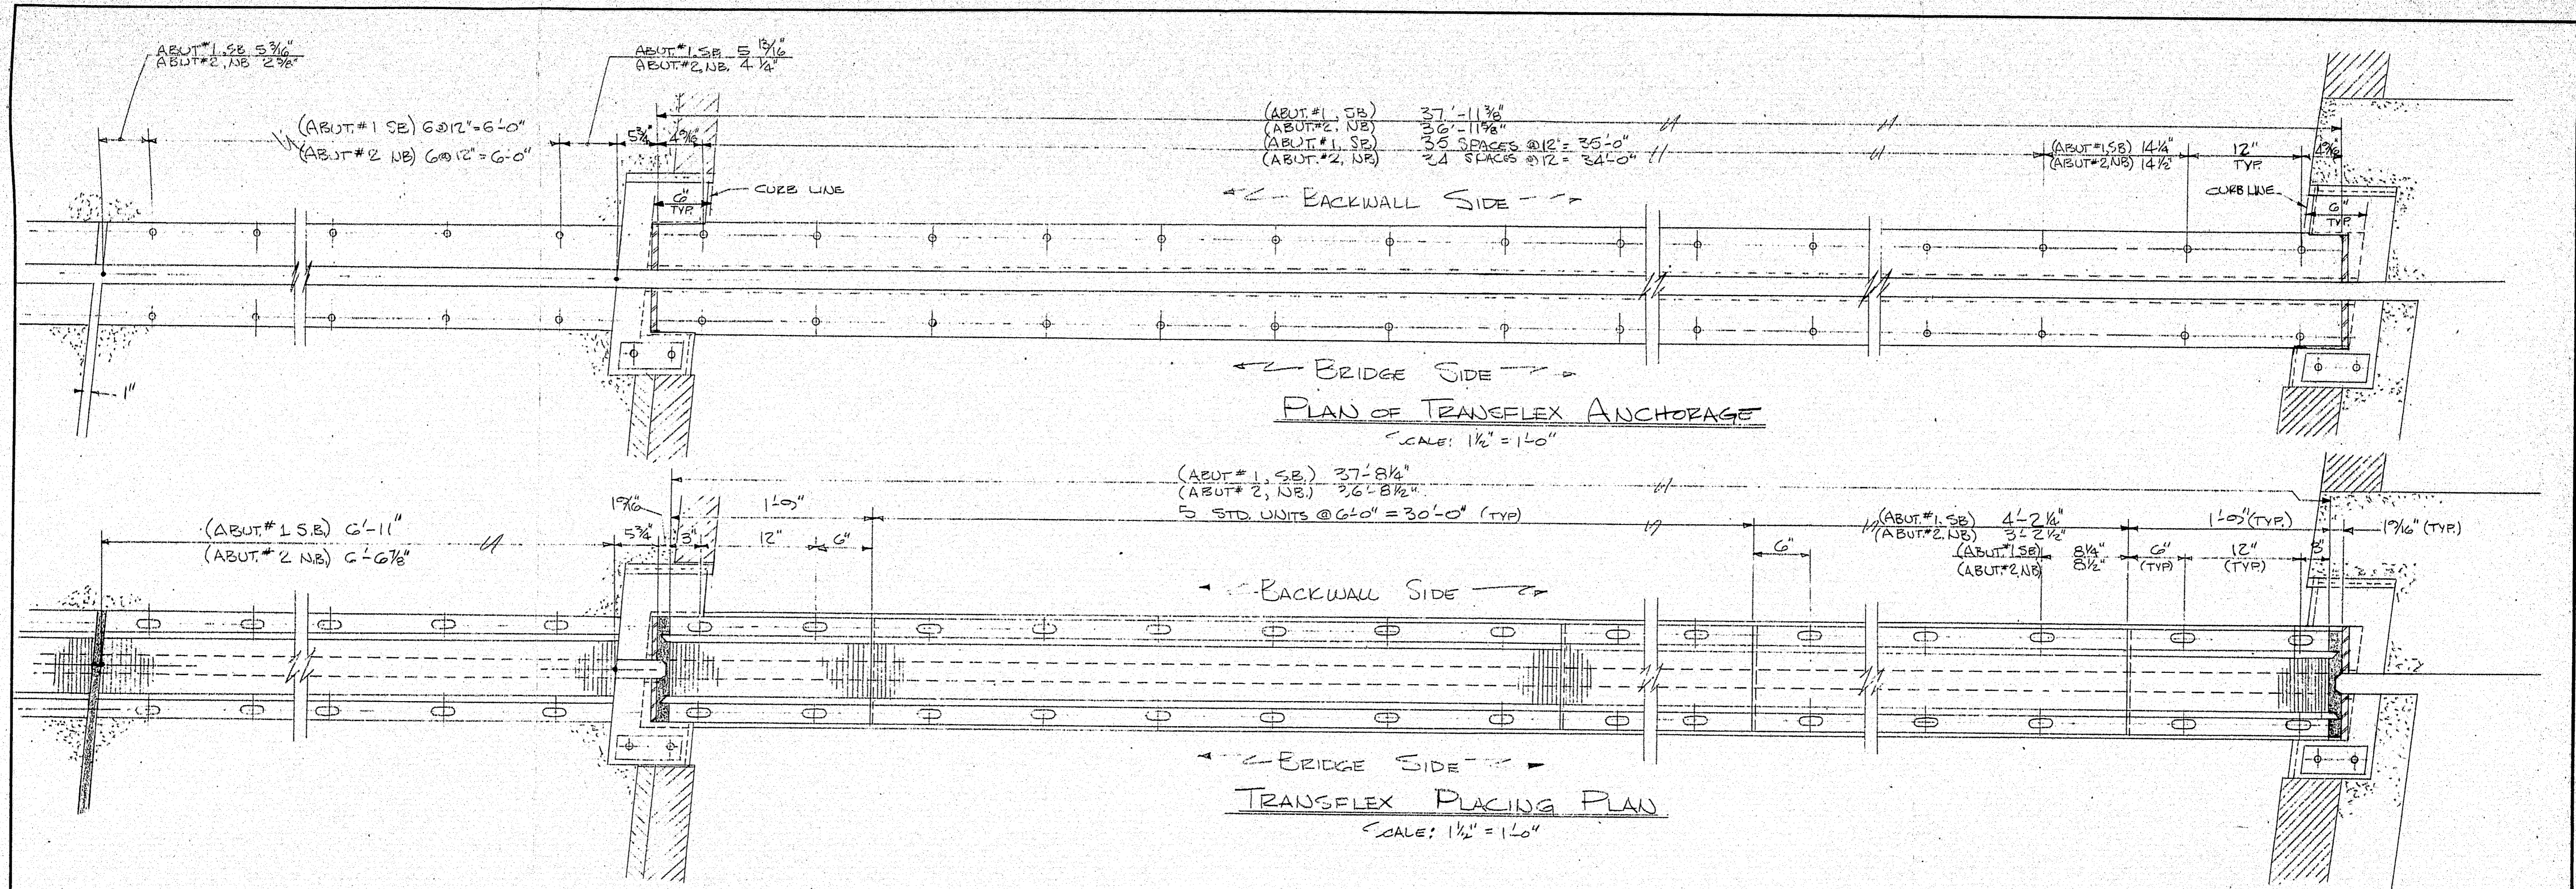

CUTTING DETAILS
 SCALE: 1" = 1'-0"
 NOTE: ▲ DENOTES MALE TYP. END
 ● DENOTES FEMALE TYP. END

QTY.	ARTICLE
28 EA.	STD. TRANSFLEX 200-A UNITS (INCLUDES CUT PIECES)
8 EA.	90° CURB & GUTTER UNITS (TRANSFLEX)
372 EA.	Richmond 1/2" TYPE LF INSERTS
314 EA.	1/2" x 1 3/4" LONG HEX HEAD BOLTS (M. STD)
58 EA.	1/2" x 1 3/4" LONG " "
372 EA.	1/2" x HEAVY SPRING LOCKWASHERS
372 EA.	1/2" x OVAL WASHERS
6 gal.	TF SEALANT (POURABLE)
12 gal.	" " (KNIFE GRADE)

GENERAL NOTES: CURB ARMOR TO BE FABRICATED AS SHOWN ON CONTRACT DRAWGS.
 Approved: [Signature]
 Prepared: [Signature]
 Checked: [Signature]
 FAY, SPITZ & HURD, INC. 4 N. 125th St. 3-16-72
 2EL

A. H. HARRIS & SONS, INC.
Concrete Construction Specialties

321 Ellis St. New Britain, Conn. (203) 225-7671
 188 Providence St. Hyde Park, Mass. (617) 364-2234
 100 Arlington Ave. Kearny, New Jersey (201) 998-6700
 55 Sicker Road Latham, New York (518) 785-3276

FOR	REED & REED
JOB	TRANSFLEX LAYOUT
NUMBER	PROJECT # I-95-5(75)
LOCATION	RT. 126 OVER I-95, TOPSHAM, ME
DRAWN BY	RJS
CHECKED	DJP
DATE	5/12/72
DATE	4-26-72
DRAWING NO.	
SHEET NO.	2 of 2
REP.	A.P. SHELLEY

139:124

