

TABLE OF CONTENTS

DIVISION 200 – EARTHWORK

Section		Detail No.
202	Pavement Butt Joint	202(01)
203	Muck Excavation and Waste Disposal	203(01)
	Slope Blankets	203(02)
	Back Slope Rounding Detail	203(03)

DIVISION 500 – STRUCTURES

501	Pipe Pile Splice	501(01-02)
	H-Pile Splice	501(03)
502	Concrete Joints	502(01)
	Concrete Approach Slab	502(02)
	Composite Concrete Superstructure Slab	502(03)
	Concrete Curb	502(04-05)
	Concrete Sidewalk on Bridges	502(06)
	Precast Concrete Deck Panels	502(07-14)
	Bridge Drains	502(15-26)
504	Diaphragms	504(01-02)
	Crossframes	504(03-06)
	Diaphragm & Crossframe Notes	504(07)
	Hand Hold Details	504(08-09)
	Drip Bar Details	504(10)
505	Shear Connectors	505(01)
507	Steel Bridge Railing	507(01-15)
	Steel Approach Railing, 2-Bar	507(16-19)
	Steel Approach Railing, 3-Bar	507(20-26)
	Steel Approach Railing	507(27)
	Barrier Mounted Steel Bridge Railing	507(28-39)
520	Expansion Device - Gland Seal	520(01-08)
	Expansion Device - Compression Seal	520(09-15)
521	Expansion Device - Finger Joint	521(01-12)
526	Portable Concrete Barrier	526(01-04B)
	Permanent Concrete Barrier	526(05-21)
	Concrete Transition Barrier	526(22-38)
	Texas Classic Rail	526(39-55)
535	Precast Superstructure	535(01-17)

DIVISION 600 – MISCELLANEOUS CONSTRUCTION

603	Concrete Box Culvert Extension Using Metal Pipe & Pipe Arches	603(01)
	Inlets	603(02)
	Concrete Inlet Endwall	603(03-06)
	Culvert Pipe	603(09)
	Concrete Pipe Ties	603(10-12)

604	Catch Basins.....	604(01)
	Catch Basin Or Manhole	604(02-03)
	Catch Basin & Manhole Tops	604(04-08)
	Catch Basin Type “F”	604(10-11)
	Catch Basin Type A-1-P & B-1-P.....	604(12-17)
	Utility Structures	604(18)
605	Underdrain.....	605(01-03)
606	Mailbox Posts.....	606(01-02)
	Guardrail	606(03-06)
	Reflectorized Beam Guardrail Delineators Details	606(07)
	Reflectorized Flexible Guardrail Marker Details.....	606(08)
	Guardrail and Curb Placement	606(10)
	Guardrail Flared Terminal Grading.....	606(11)
	Guardrail Tangent Terminal Grading.....	606(12)
	Buried In Backslope Guardrail Terminal	606(13-16)
	Midway Splice Guardrail Transition	606(17)
	Guardrail Type 3 – Single Rail Bridge Mounted	606(18-21)
	Guardrail Treatment over Buried Structures	606(22)
	Bridge Transition.....	606(23-25)
	Terminal Connector Anchorage	606(26)
607	Fencing.....	607(01-16)
608	Concrete Sidewalk.....	608(01)
	Detectable Warnings	608(02)
609	Terminal Curb	609(01)
	Curb.....	609(02-04)
	Gutter Grade Transition at Catch Basins.....	609(05)
	Vertical Bridge Curb	609(06)
	Curb Type 1.....	609(07-07A)
	Precast Concrete Transition Curb	609(08)
	Precast Concrete Vertical Curb	609(09)
	Concrete Slipform Curb	609(10)
610	Tree Wells.....	610(01)
	Stone Scour Protection	610(02-04)
620	Geotextiles.....	620(01-06)
621	B&B Tree and Shrub Planting	621(01-02)
	Container Tree/Shrub Planting.....	621(03)
626	Foundations for Traffic Signals, Highway Signing, & Lighting.....	626(01-04)
	Conduit Trench for Traffic Signals, Highway Signing, & Lighting	626(05)
	Electrical Junction Box for Traffic Signals & Lighting.....	626(06-07)
627	Pavement Markings.....	627(01-08)
634	Highway Lighting	634(01-03)
642	Concrete Step Quantities	642(01)
	Cast in Place Reinforced Concrete Steps	642(02)
643	Traffic Signals.....	643(01-10)
	ATCC Cabinet.....	643(11-13)
645	Highway Signing - Type I Signs	645(01-02)
	Highway Signing.....	645(03-05)
	Highway Signing - H-Beam Posts	645(06)


	Highway Signing - Delineators	645(07)
	Highway Signing - State of Maine Signs	645(08)
	Highway Signing - Installation of Type II Signs.....	645(09A-09C)
	Highway Signing - Overpass Mounted Sign Support	645(10-23)
652	Channelizing Devices.....	652(01-04)
	Construction Signs	652(05-06)
	Construction Traffic Control	652(07-15)

DIVISION 800 – MISCELLANEOUS DETAILS

801	Drives & Entrances	801(01-09)
	Curb Ramps.....	801(11-28)
802	Erosion Control Blankets	802(01-02)
	Hillside Diversions.....	802(03)
	Silt Fence Sediment Barrier	802(04)
	Culvert End Slope Treatment	802(05)
	Riprap Downspout.....	802(06)
	Temporary Slope Drains	802(07-08)
	Energy Dissipater – Riprap Apron	802(09)
	Energy Dissipater – Plunge Pool.....	802(10)
	Stone Check Dam.....	802(11)
	Inlet Grate Protection	802(12-13)
	Sediment Trap	802(14)
	Temporary Stream Diversion	801(15)
	Temporary Sediment Basin	802(16)
	Construction Entrance	802(17)
	Cellar Drain Connection.....	802(18)
803	Railroad Crossings	803(02-05)
	Railroad Crossings - Traffic Control Devices Applications.....	803(06)
	Railroad Crossings - Pavement Markings	803(07)
	Railroad Crossings - Signals	803(08-13)

DIVISION 200
EARTHWORK

Remove existing pavement surface to construct butt joint between existing and proposed bituminous pavements

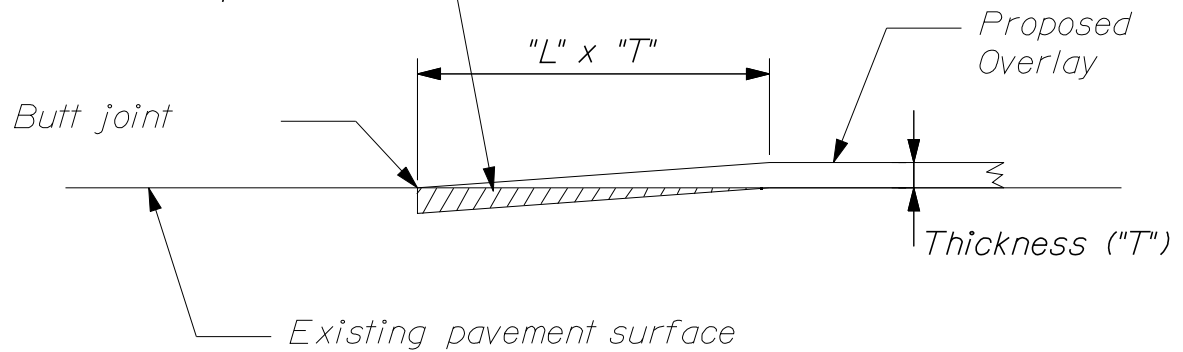

<i>Design or posted speed (miles/h):</i>	65	55	50	45	40	35	30	25
<i>"L" in feet/inch of thickness:</i>	65	55	50	45	40	35	30	25


NOTES:

- 1. The above lengths are intended for profile grades of 2% or less. When profile grades are greater than 2% "L" may be adjusted to suit field conditions when directed by the Resident.*
- 2. When constructing Butt Joints at intersections or ramps "L" shall be 15' / inch of thickness unless otherwise directed by the Resident.*
- 3. Special attention shall be paid to curb sections to assure proper drainage and that there are no flat areas. "L" may be adjusted to suit field conditions when directed by the Resident.*

**PAVEMENT OVERLAY
BUTT JOINT DETAIL (ROADWAYS)
202(01)**

NOTE:


When muck is excavated to a depth greater or less than what is shown on the plans, the lateral limits for payment shall be determined as shown or as specifically directed by the Resident.

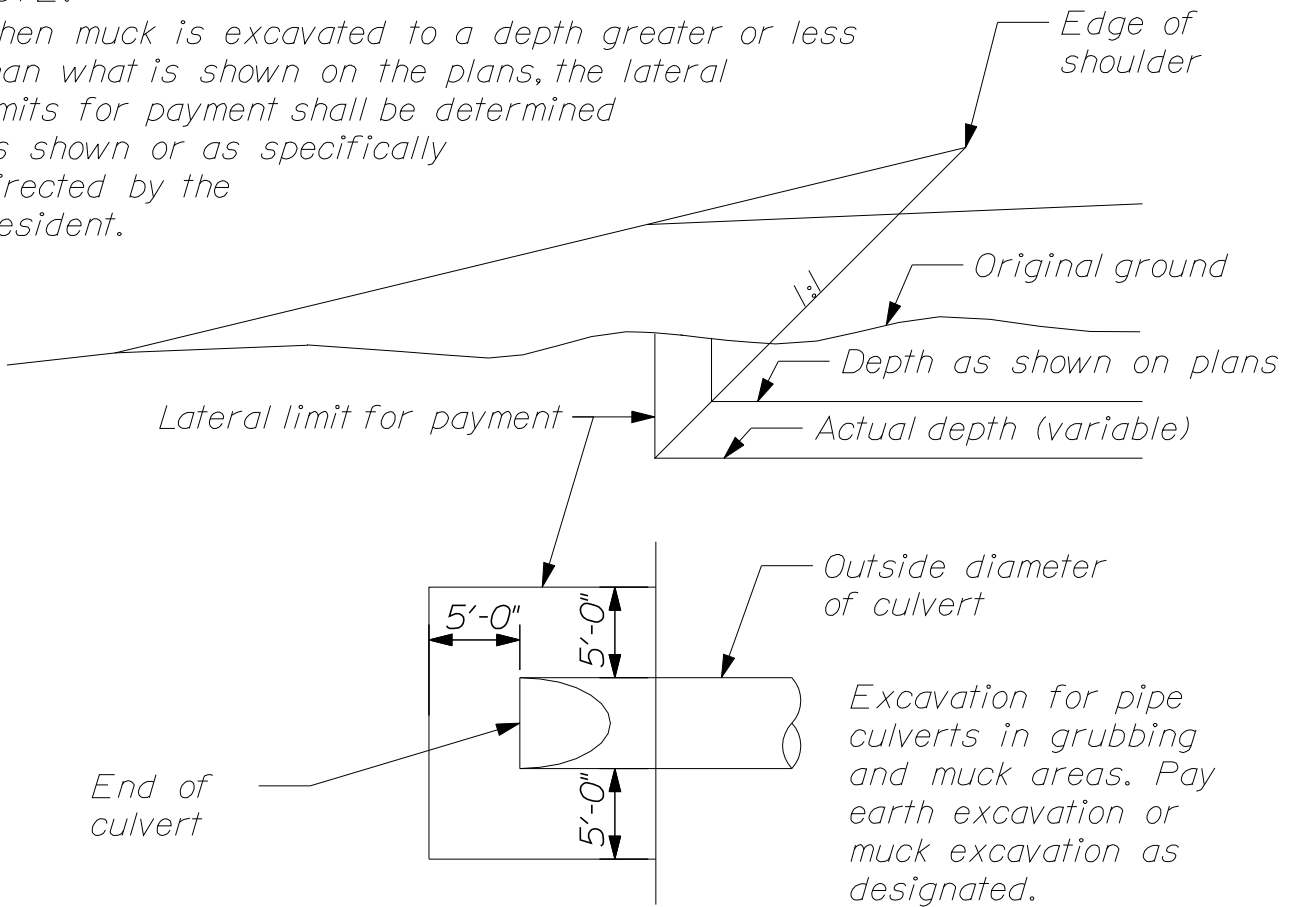


~ MUCK EXCAVATION PAY LIMITS ~

Note:


When directed by the Resident, waste material shall be used in this area except that waste shall not be placed in fills designed with slopes of 2:1 or steeper. No additional payment will be made for this work.

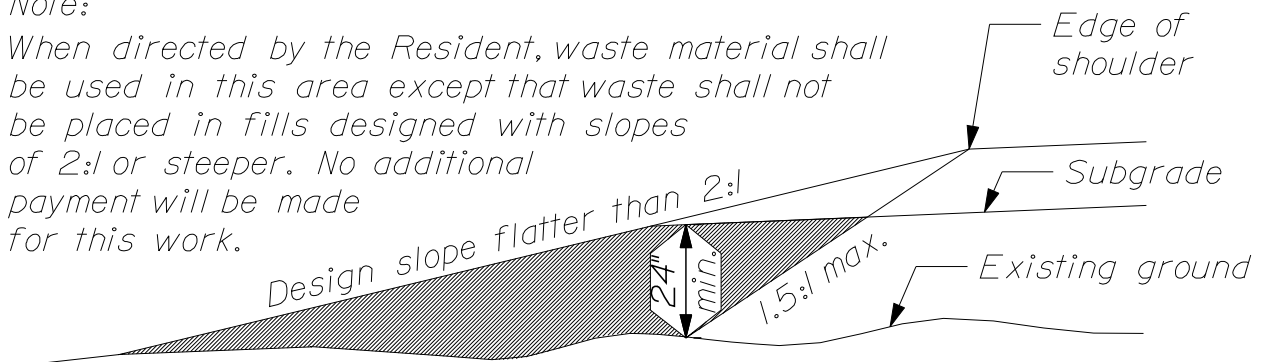

~ DISPOSAL OF WASTE MATERIALS ~
(Waste Storage Area)

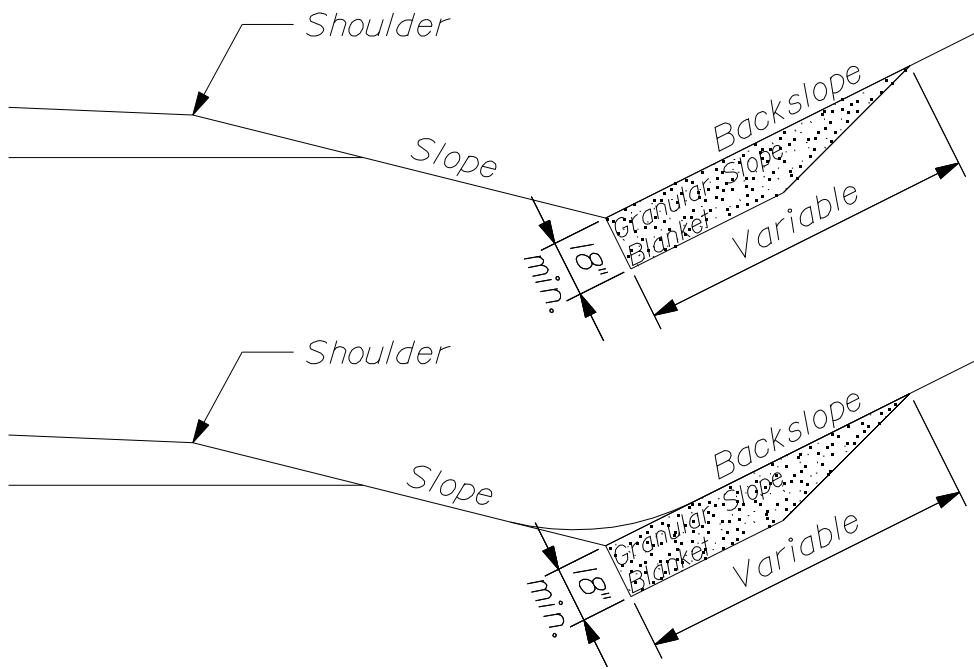


~ SLOPE BLANKET - BACKSLOPE ~

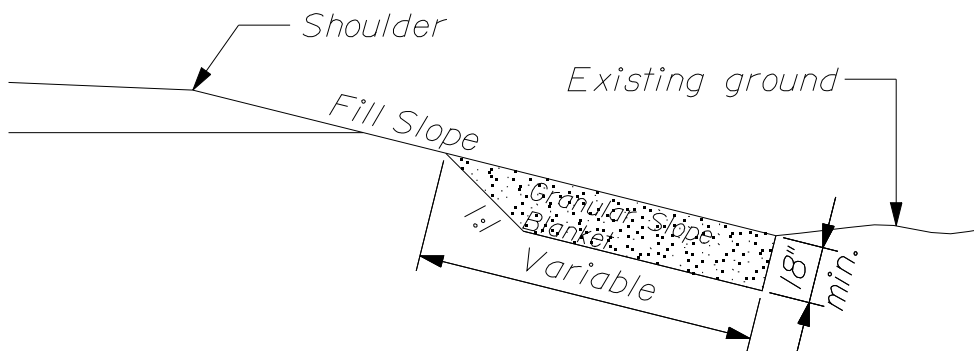

~ SLOPE BLANKET - FILL SLOPE ~

SLOPE BLANKETS
203(02)

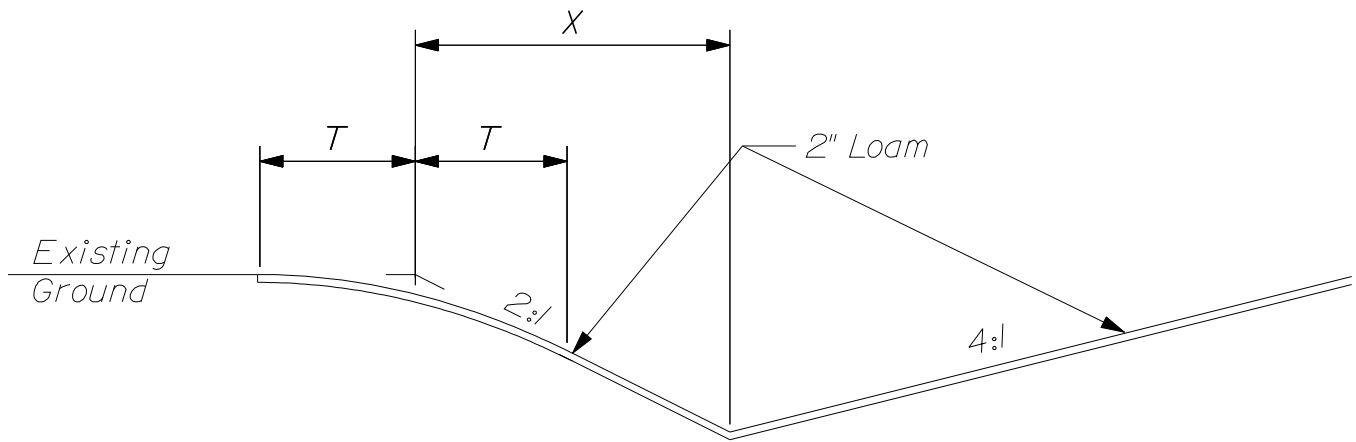

When:


$X > 5'$, Then $T = 5'$

$X \leq 5'$, Then $T = X$

This formula may be modified in the field by the Resident to avoid property damage.

BACK-SLOPE ROUNDING DETAIL
203(03)

DIVISION 500
STRUCTURES

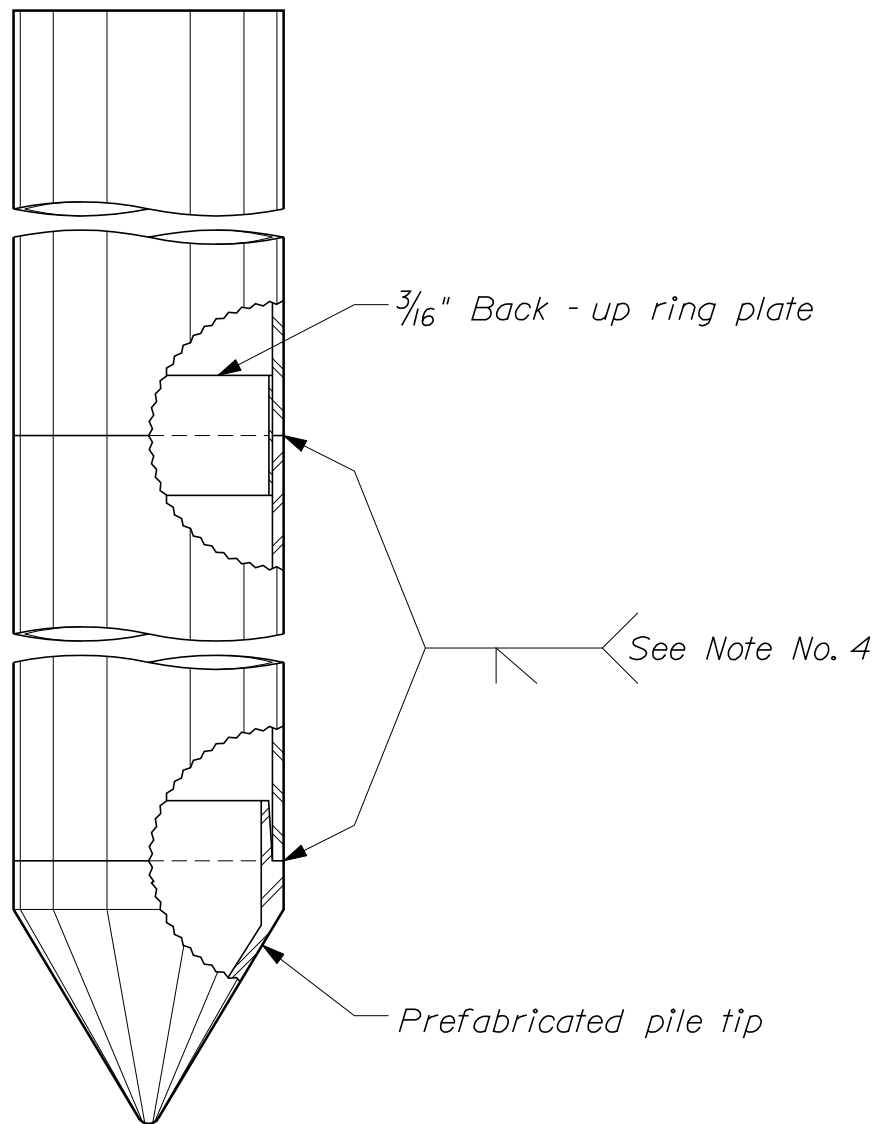

~ PIPE PILE DETAIL ~

NOTES:

1. Pile diameter and wall thickness shall be as indicated on the Design Drawings.
2. Pile tips shall be prefabricated cast steel tips with 60° conical points and internal flanges. Pile tips shall be approved by the Engineer.
3. Prefabricated internal splicer sleeves may be used if approved by the Engineer.
4. Refer to "Pipe Pile Splice" details for welding procedures.

PIPE PILES
50(01)

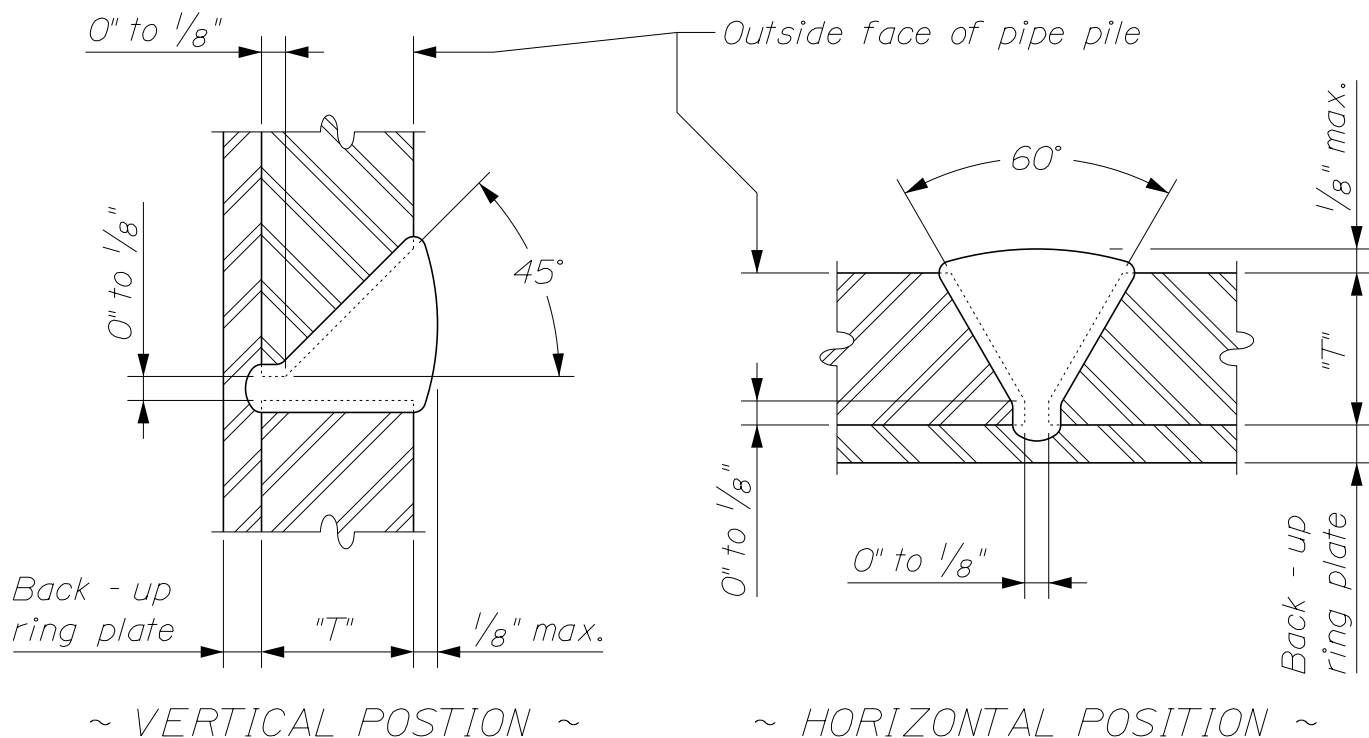


TABLE OF WELD SIZES	
Base Metal Thickness "T"	Minimum Number of Passes
$\frac{3}{8}"$, $\frac{7}{16}"$	3
$\frac{1}{2}"$, $\frac{9}{16}"$, $\frac{5}{8}"$	4
$\frac{11}{16}"$, $\frac{3}{4}"$, $\frac{13}{16}"$	5

NOTES:

1. All cutting shall be done with the use of a mechanical guide.
2. Electrodes shall be dry when used, in accordance with A.W.S. Specification D1.5, as amended by AASHTO.

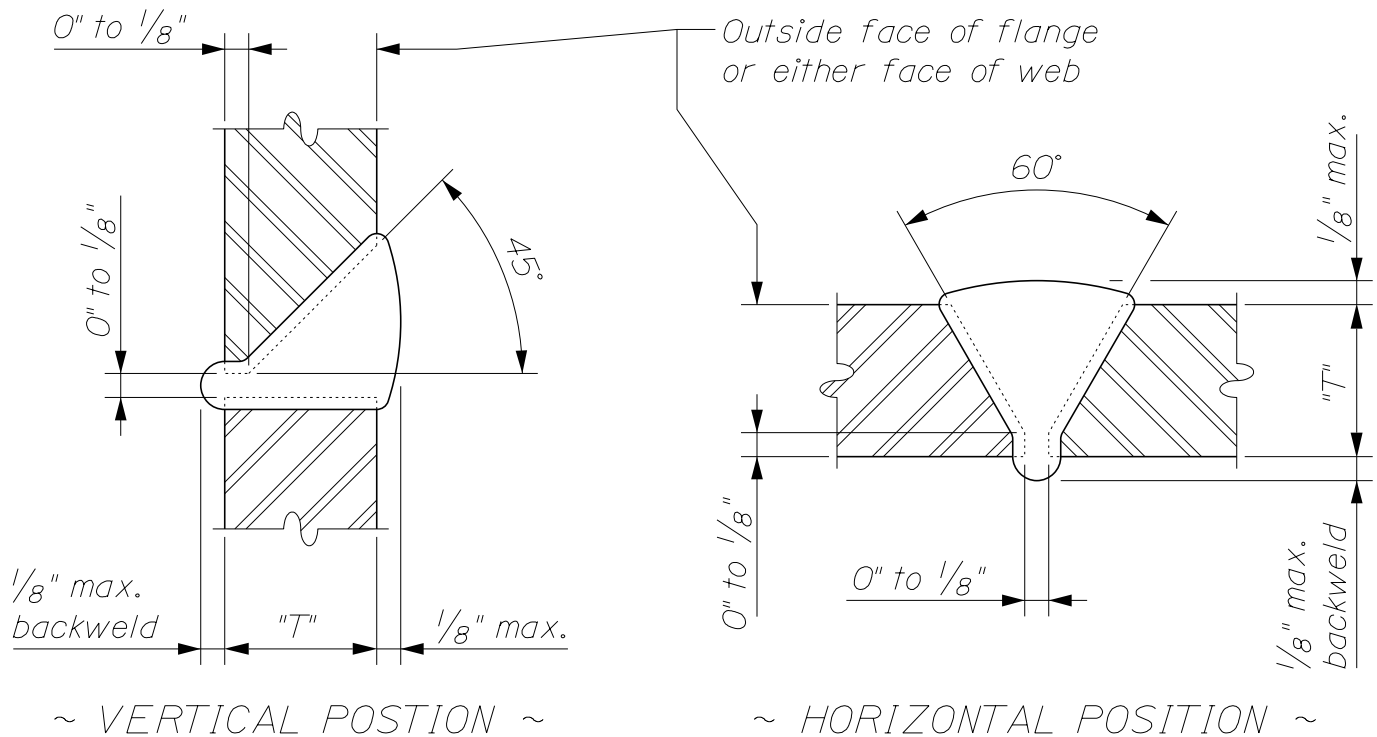


TABLE OF WELD SIZES	
Base Metal Thickness "T"	Minimum Number of Passes
3/8", 7/16"	3
1/2", 9/16", 5/8"	4
11/16", 3/4", 13/16"	5

NOTES:

1. All cutting shall be done with the use of a mechanical guide.
2. Electrodes shall be dry when used, in accordance with A.W.S. Specification DI.5, as amended by AASHTO.
3. Gouge root before welding the second side.

H - PILE SPLICE
501(03)




9"



1/4" Recess

~ JOINT COVER ~

Apply 2 layers of heavy roofing felt using plastic roofing cement, or apply 1 layer of membrane waterproofing in accordance with Section 508 of the Standard Specifications. Recess the area to be covered unless otherwise indicated on the plans. Use where PVC waterstops cannot be used and on horizontal joints where there is potential for leakage through the wall.

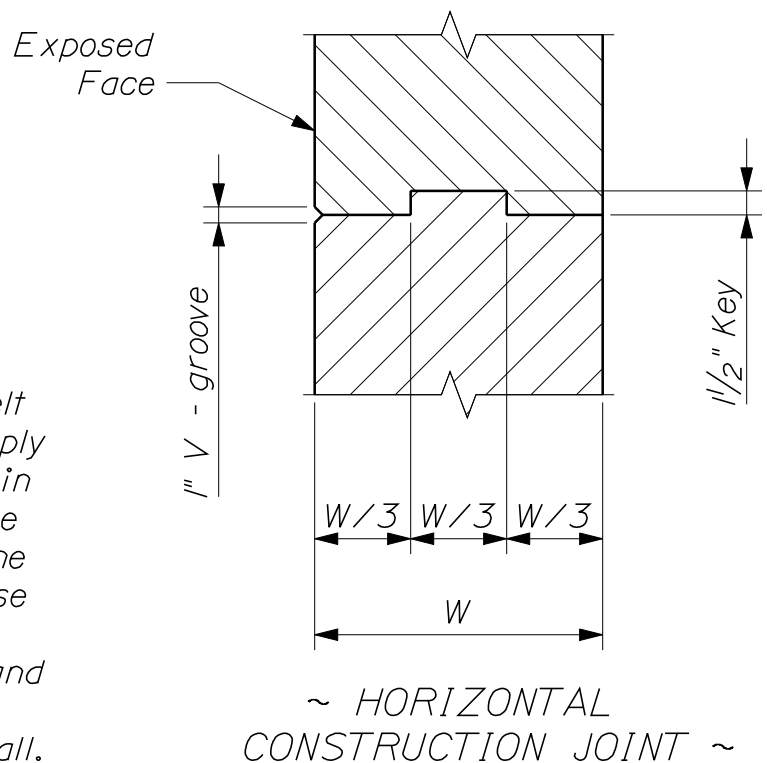


502(01)

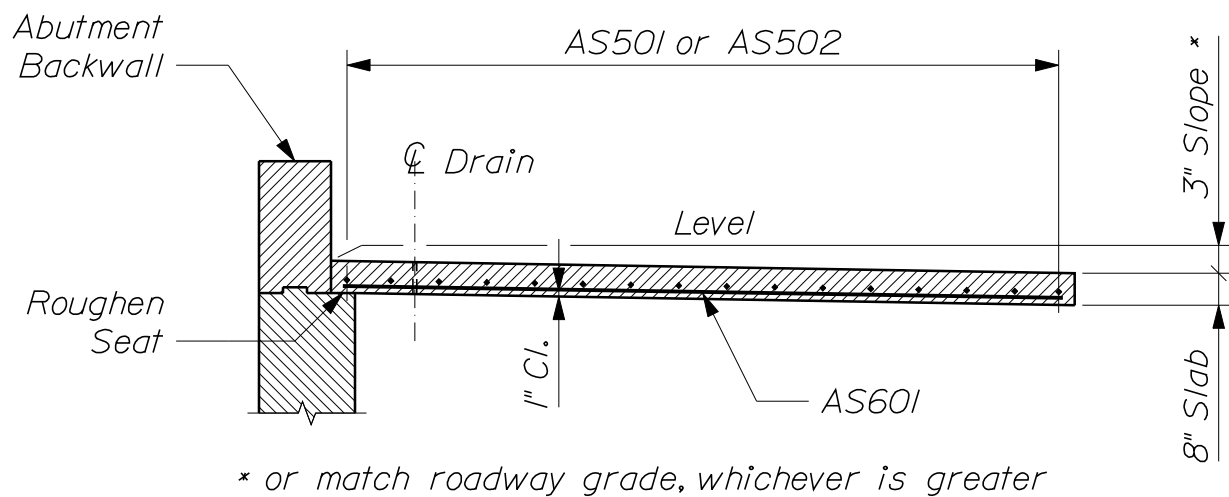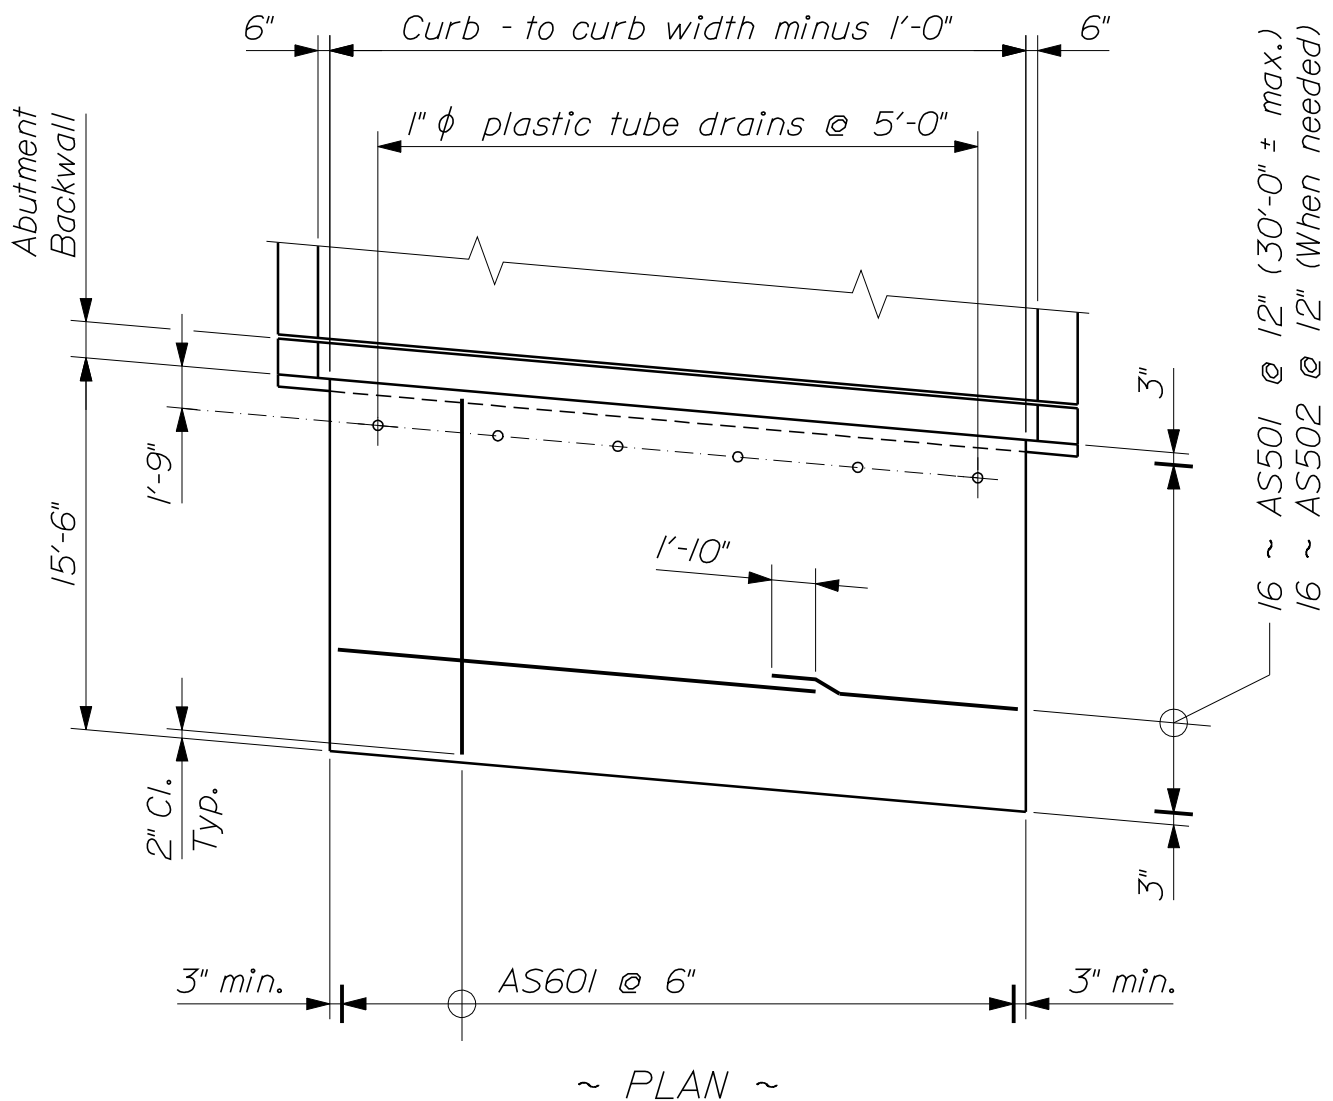

~ SECTION ~

CONCRETE APPROACH SLAB 502(02)

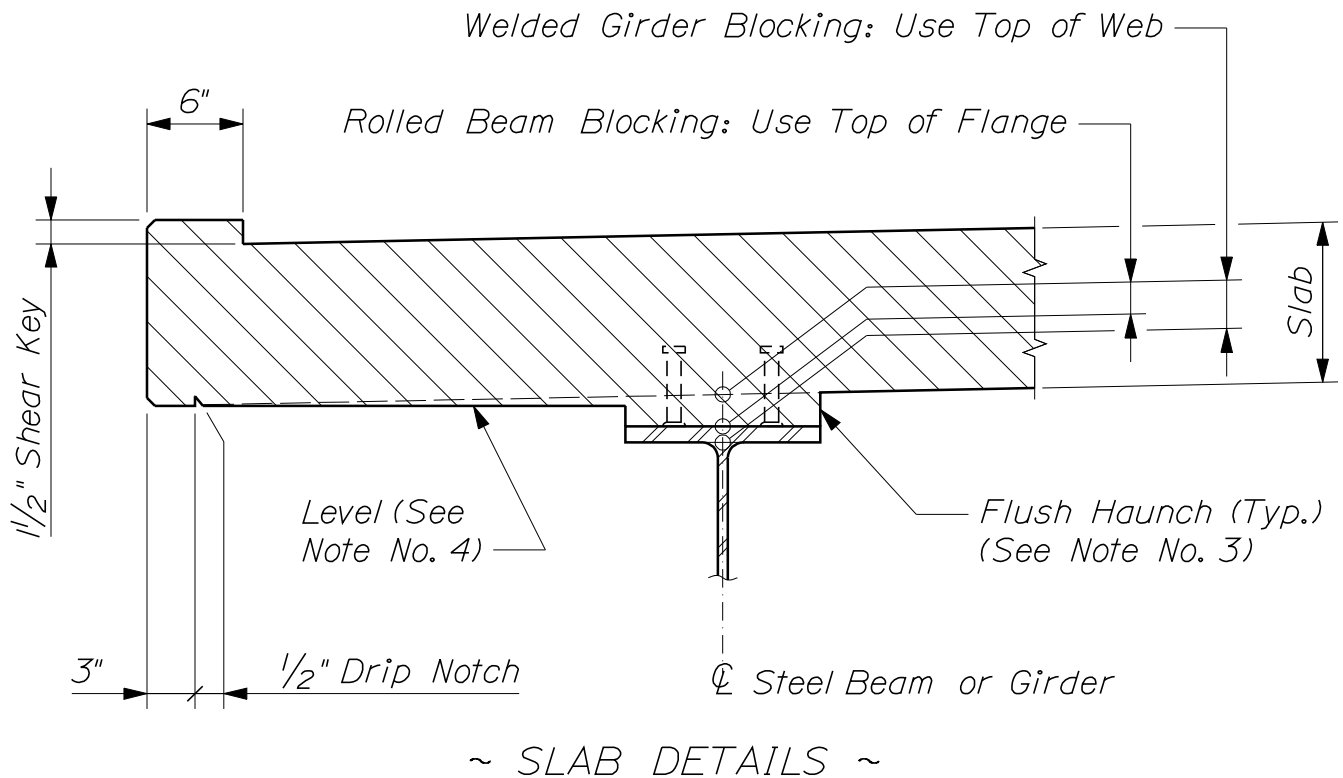


NOTES:


1. Shear key and drip notch details are typical for all superstructure designs.
2. Blocking dimensions for construction shall be determined using the "Bottom of Slab Elevations" table shown on the Design Drawings. Theoretical Blocking will be given for reference purposes only. Do not use Theoretical Blocking for setting formwork.
3. Blocking on all beams shall be formed using the flush haunch detail shown.
4. On curved superelevated structures, where the distance between the exterior beam and the fascia varies over the length of the deck, the bottom of the slab overhang shall follow the superelevation cross - slope.




502(04)

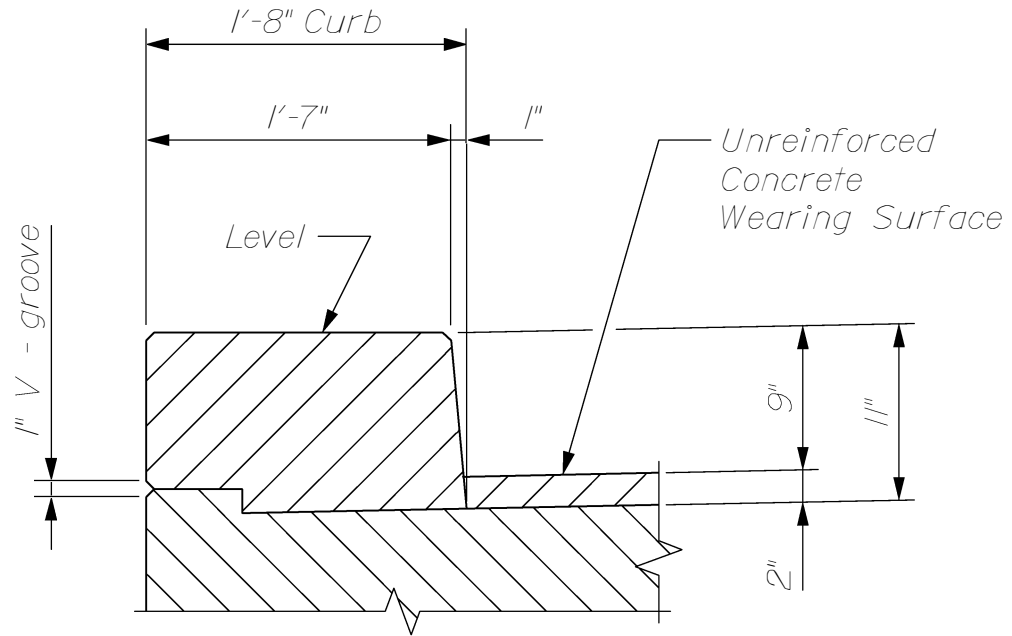


-- CURB WITH CONCRETE WEARING SURFACE --

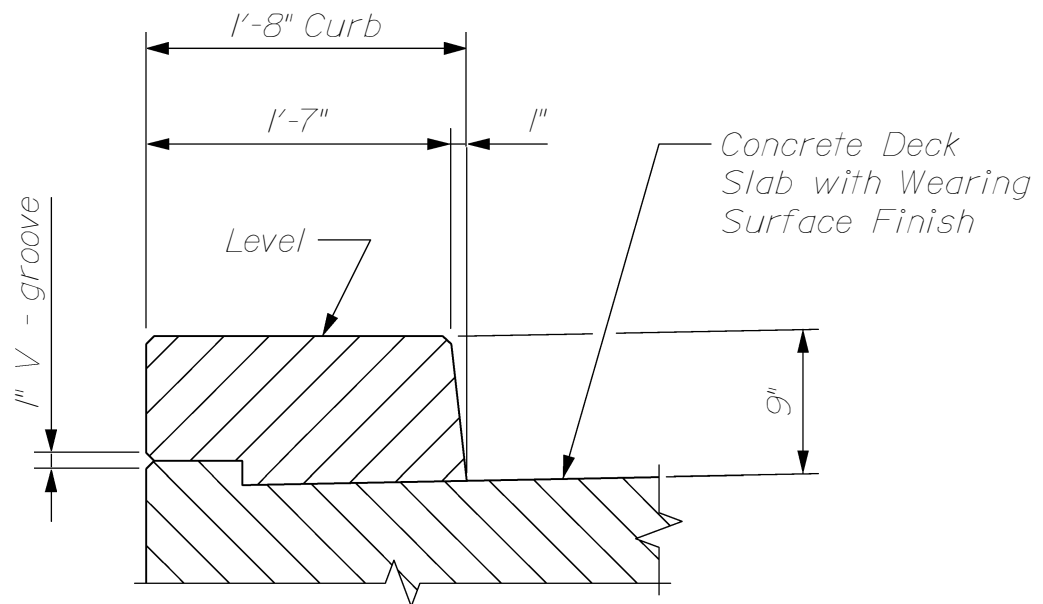

-- CURB WITH INTEGRAL WEARING SURFACE --

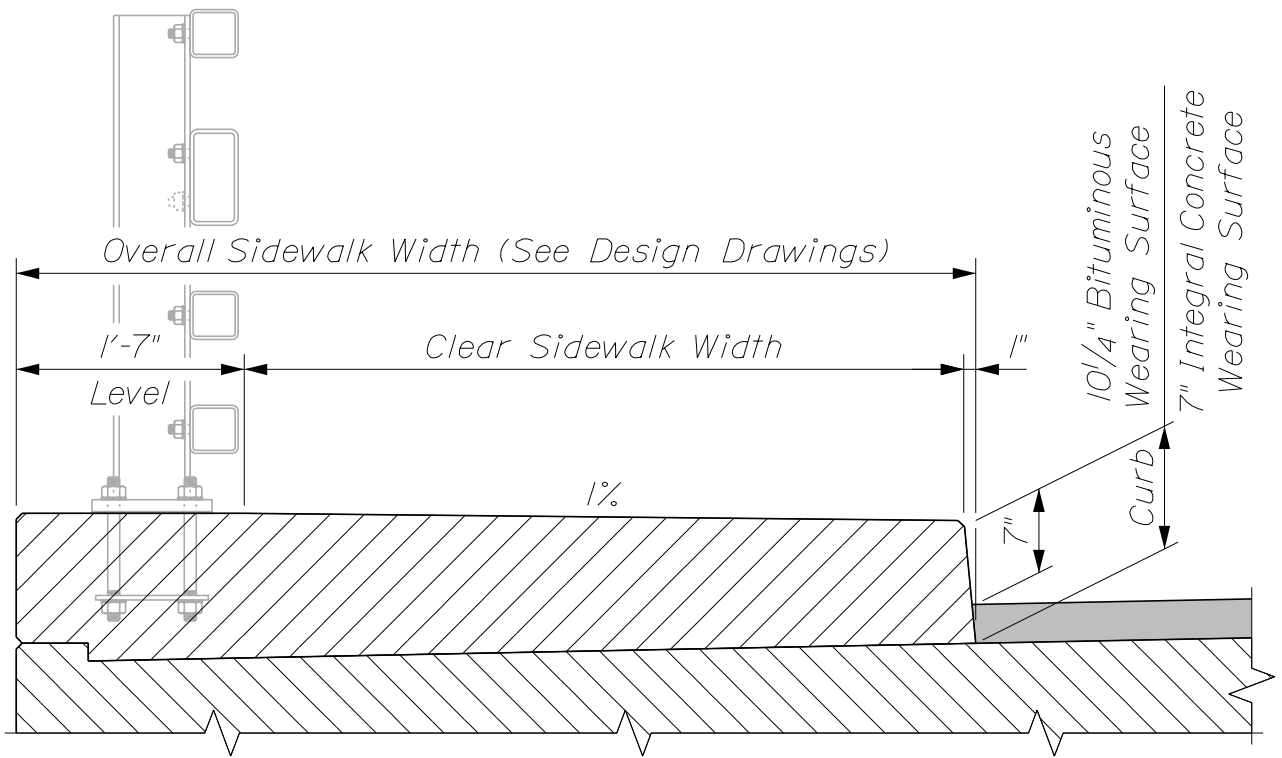


~ WITH STEEL BRIDGE RAILING ~

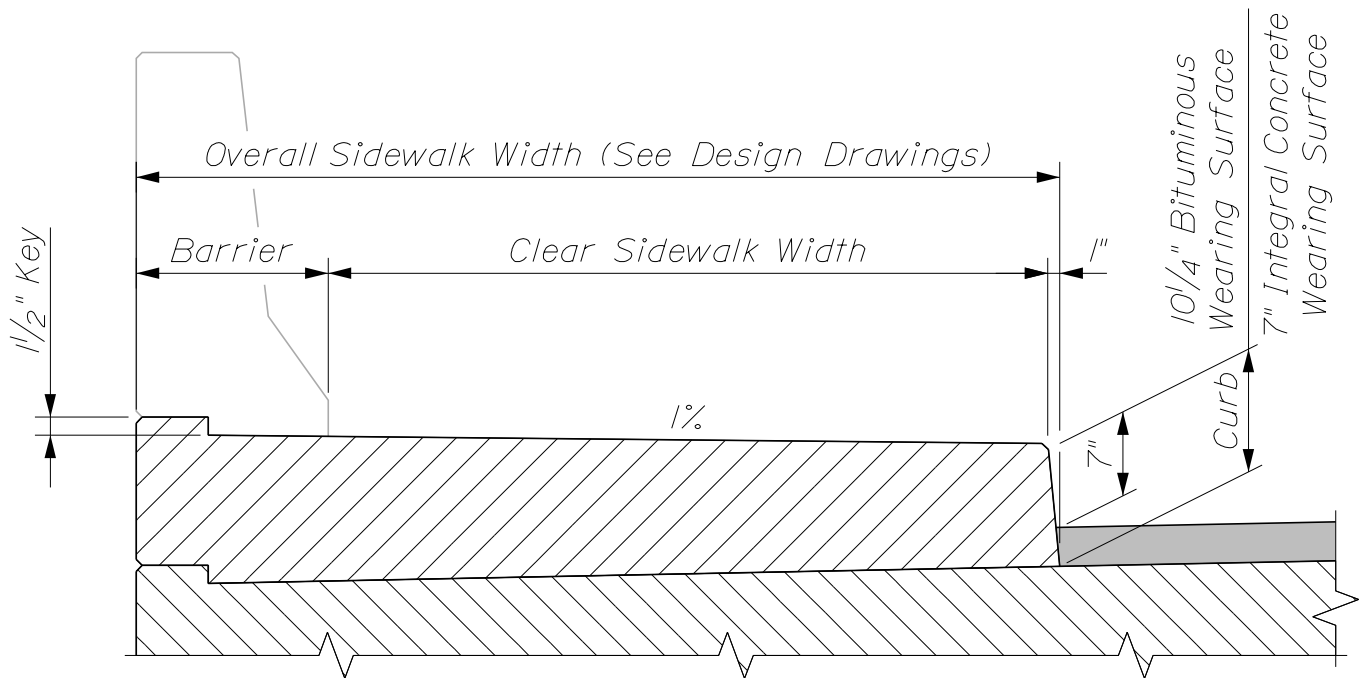




~ WITH PERMANENT CONCRETE BARRIER ~

CONCRETE SIDEWALK ON BRIDGES


502(06)

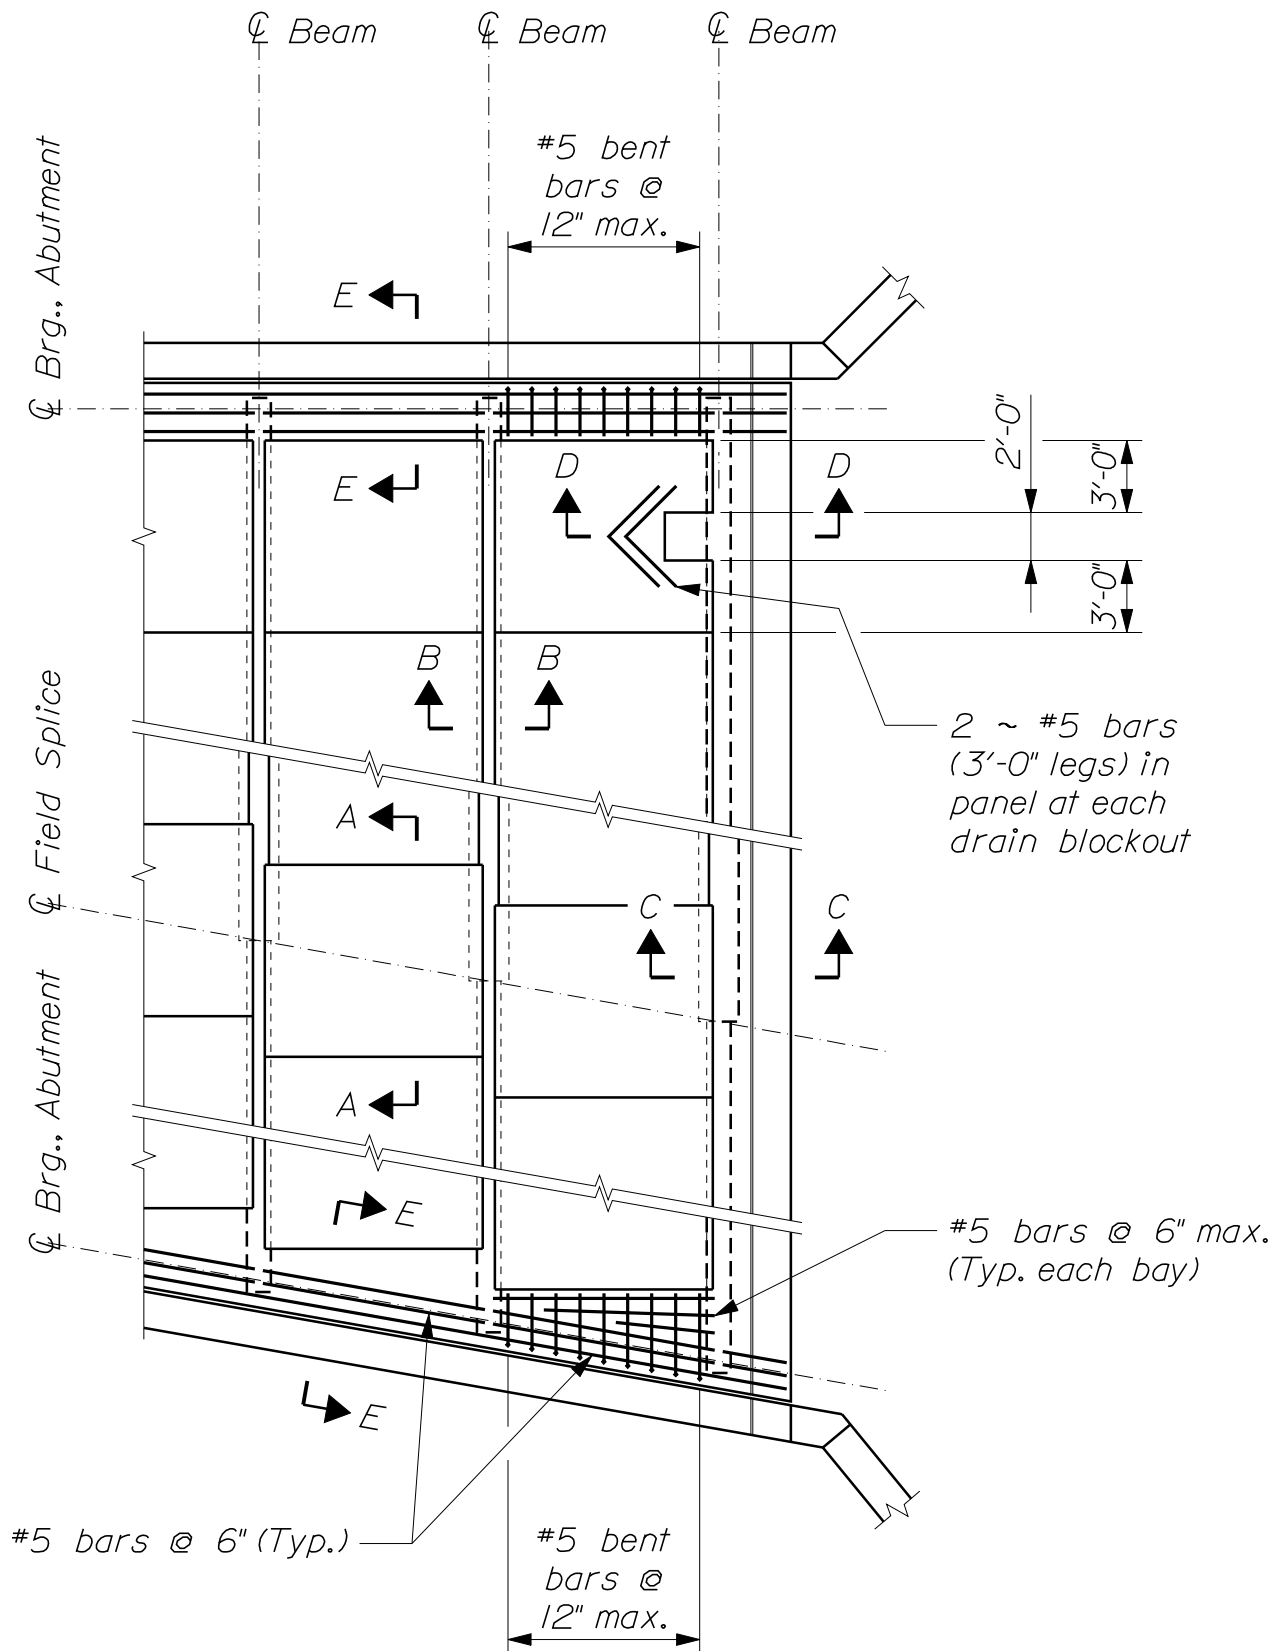

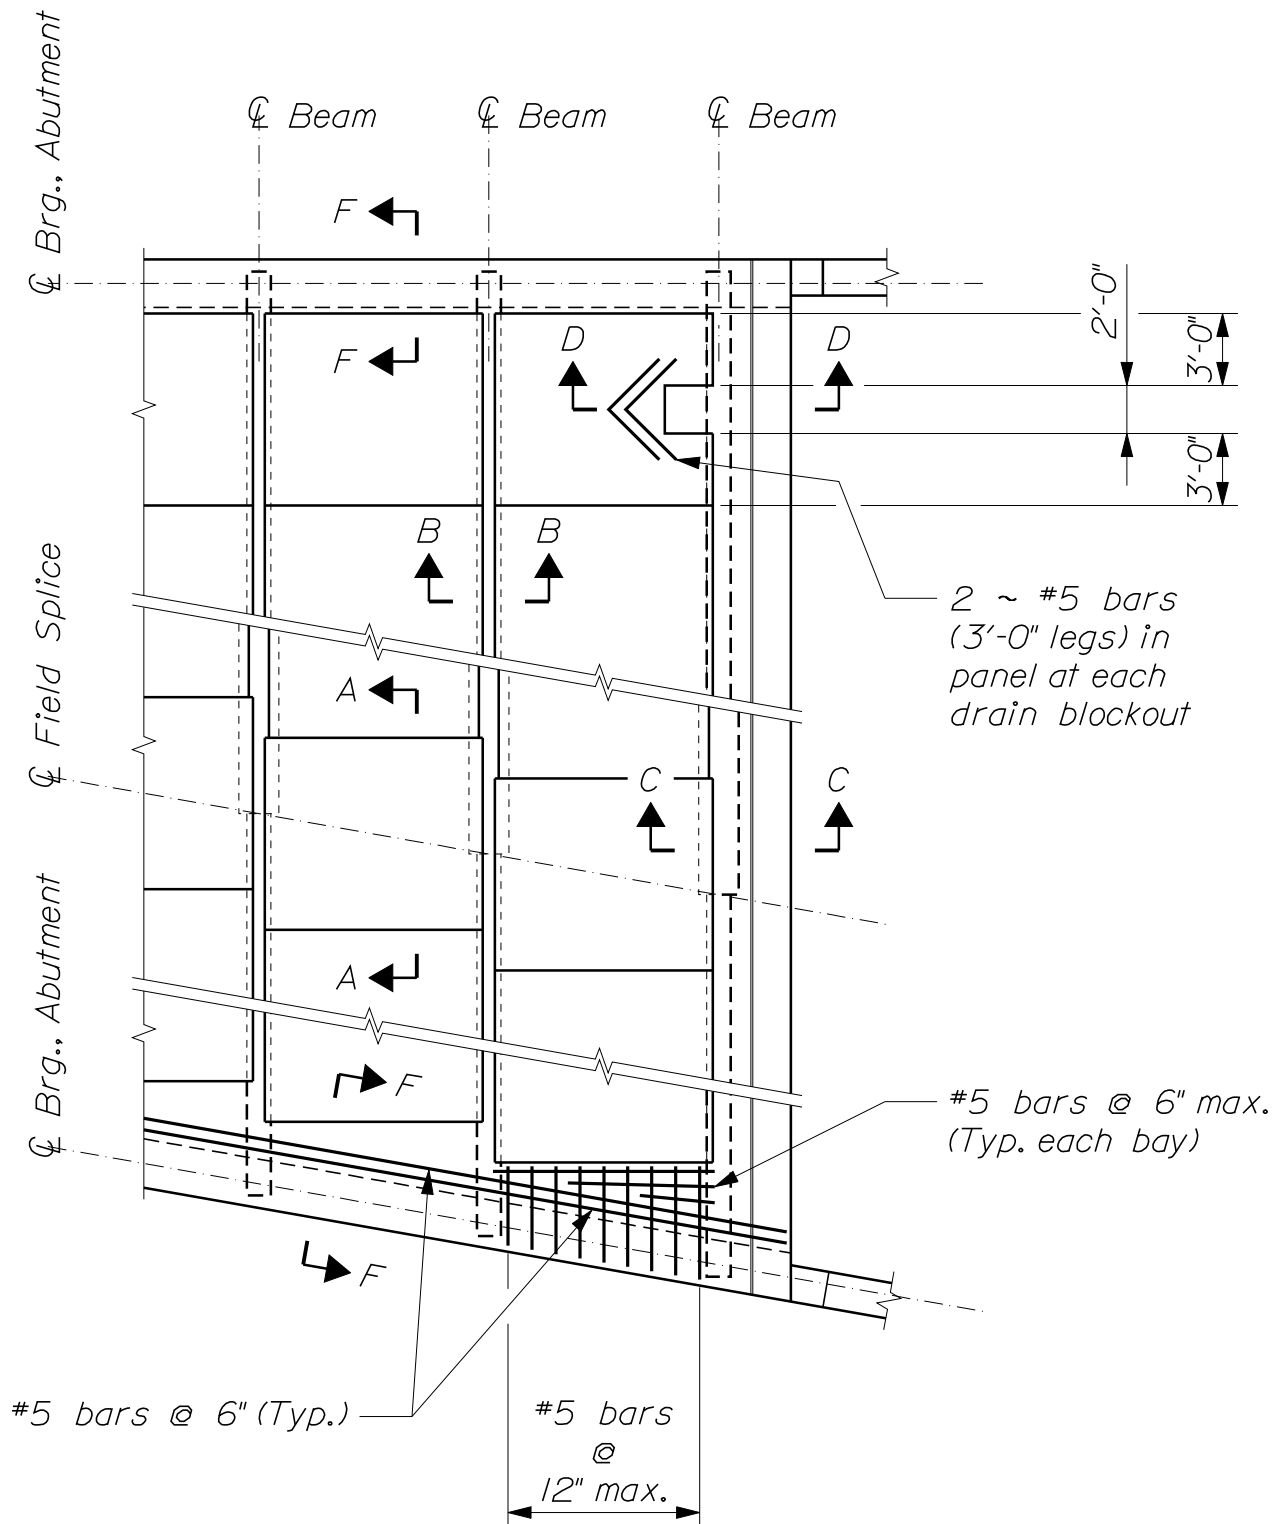


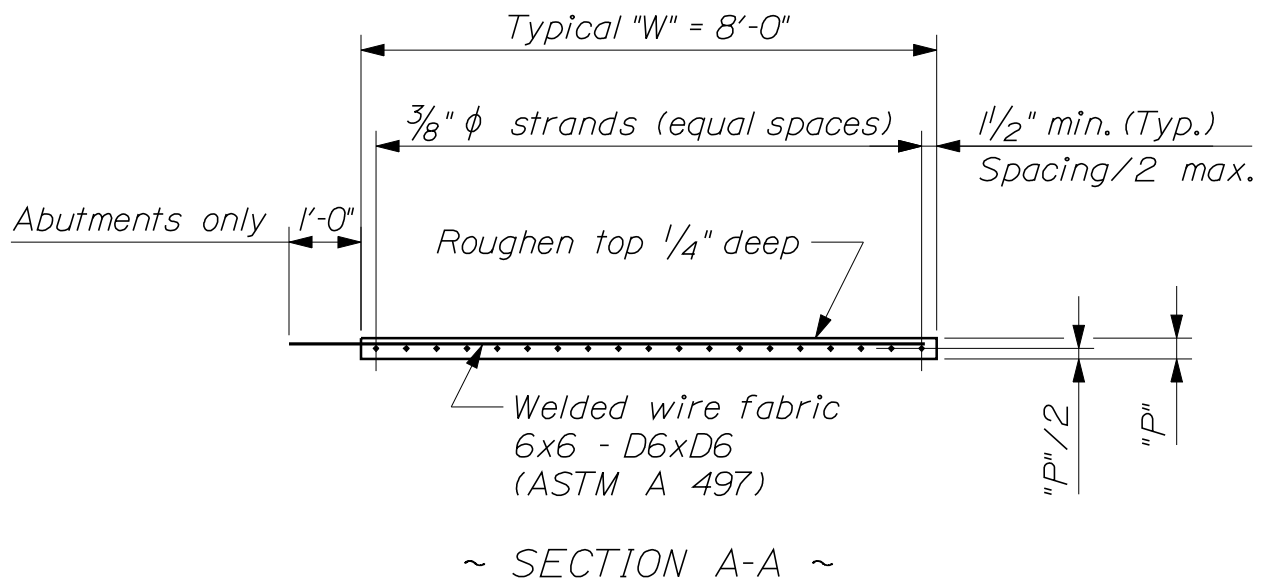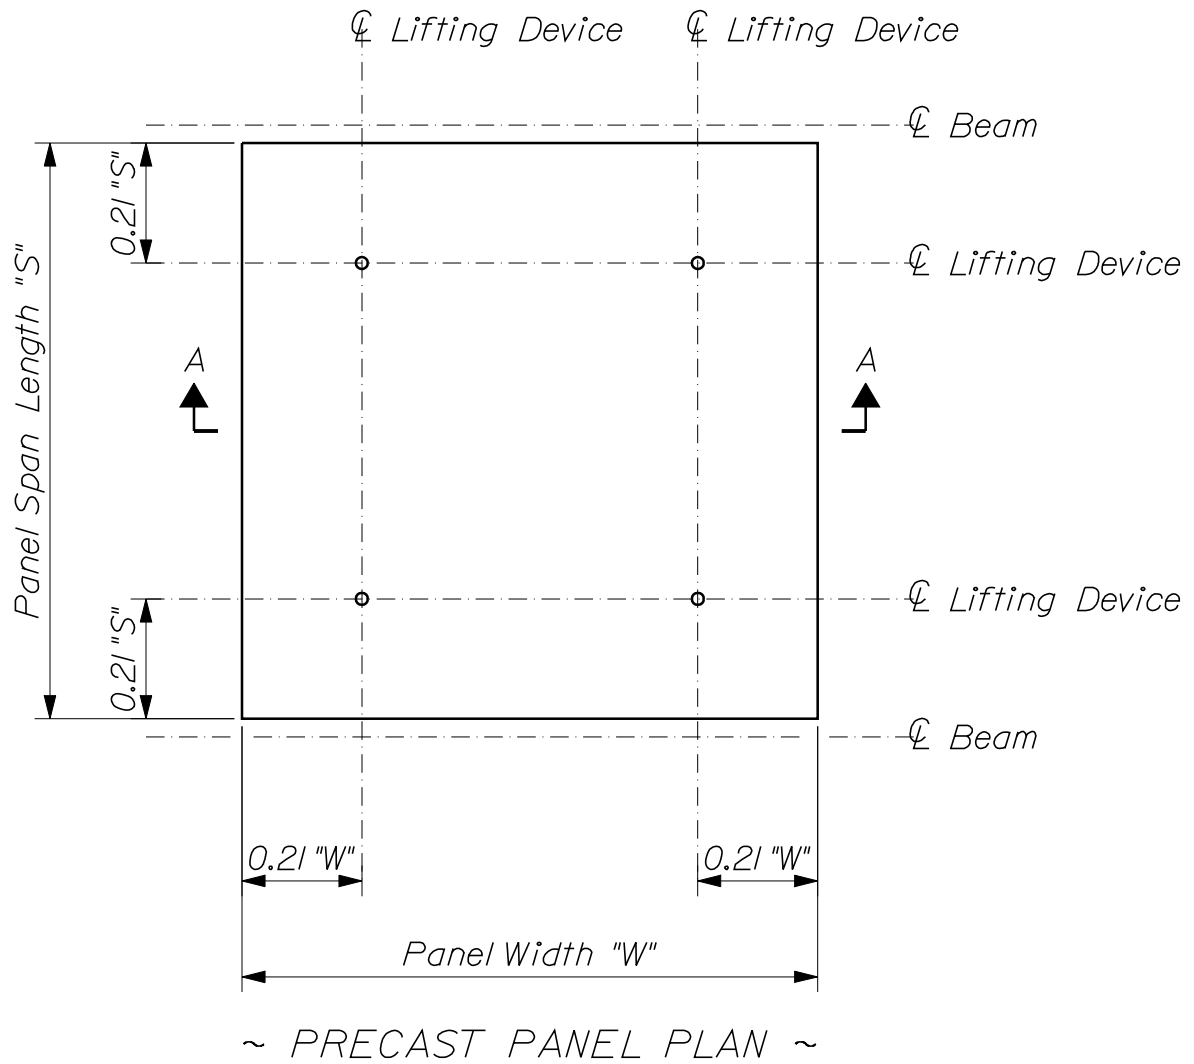

PRECAST CONCRETE DECK PANELS
502(09)


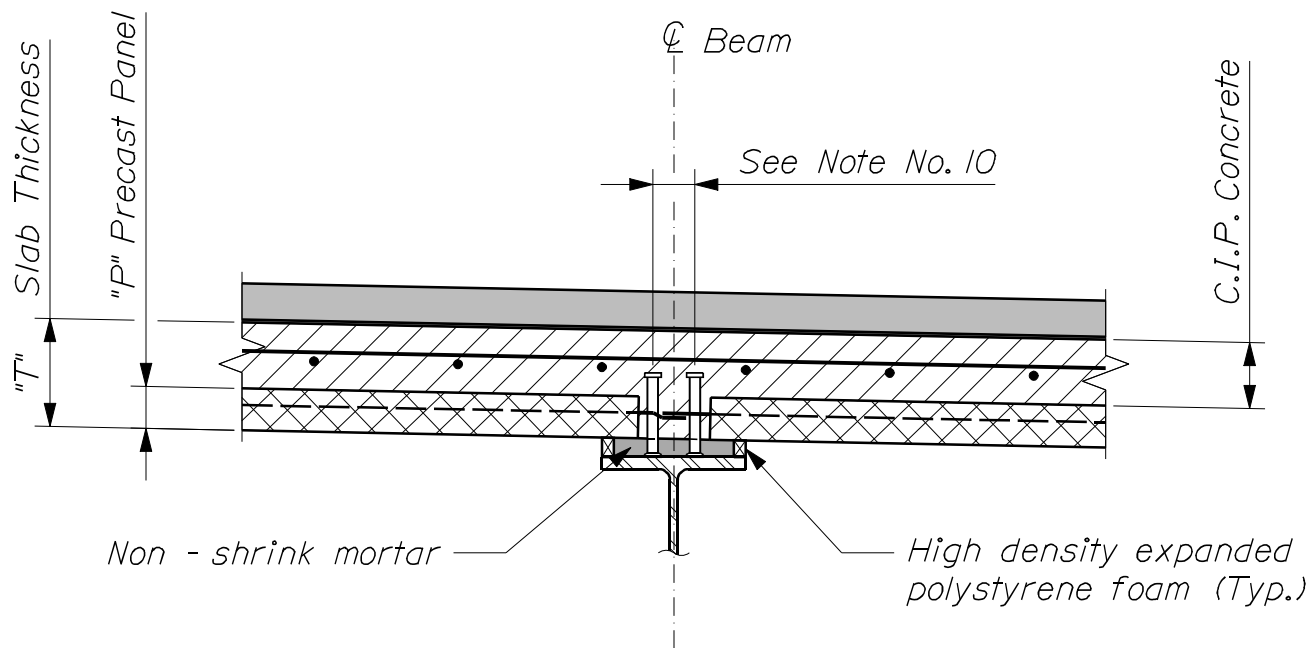


~ SECTION B-B ~

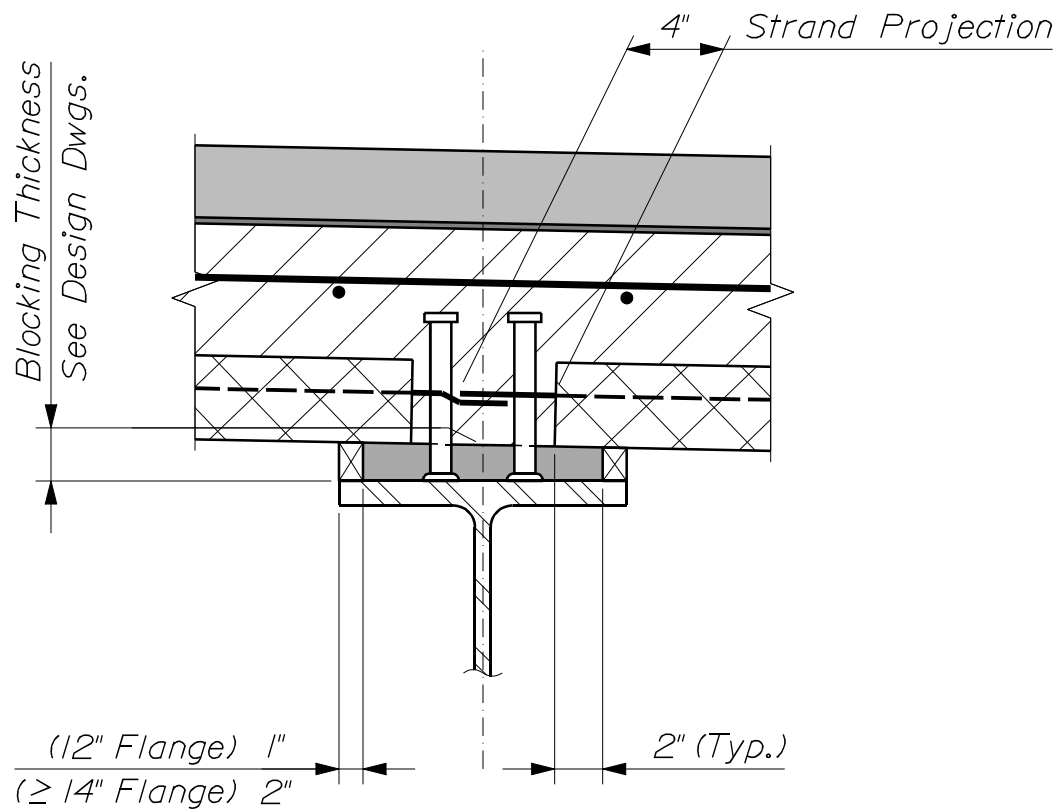


~ BLOCKING DETAIL ~


PRECAST CONCRETE DECK PANELS
502(10)

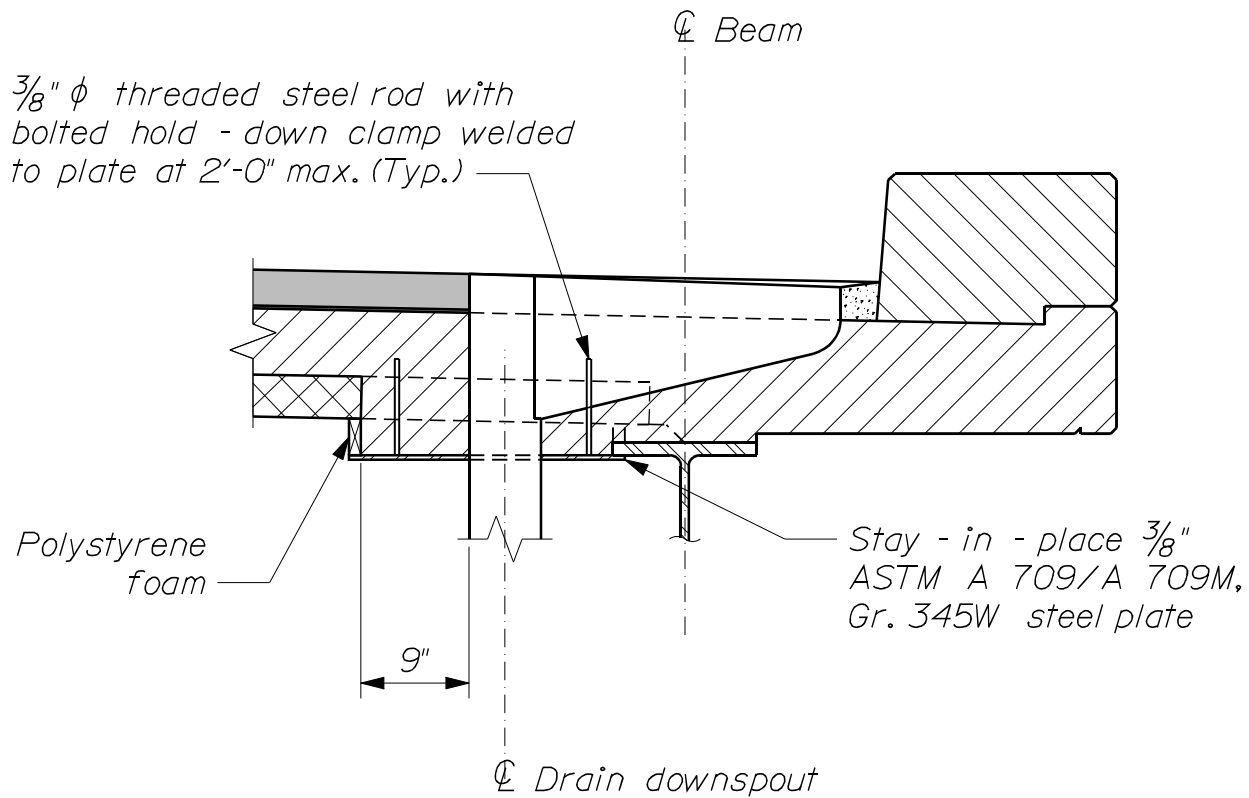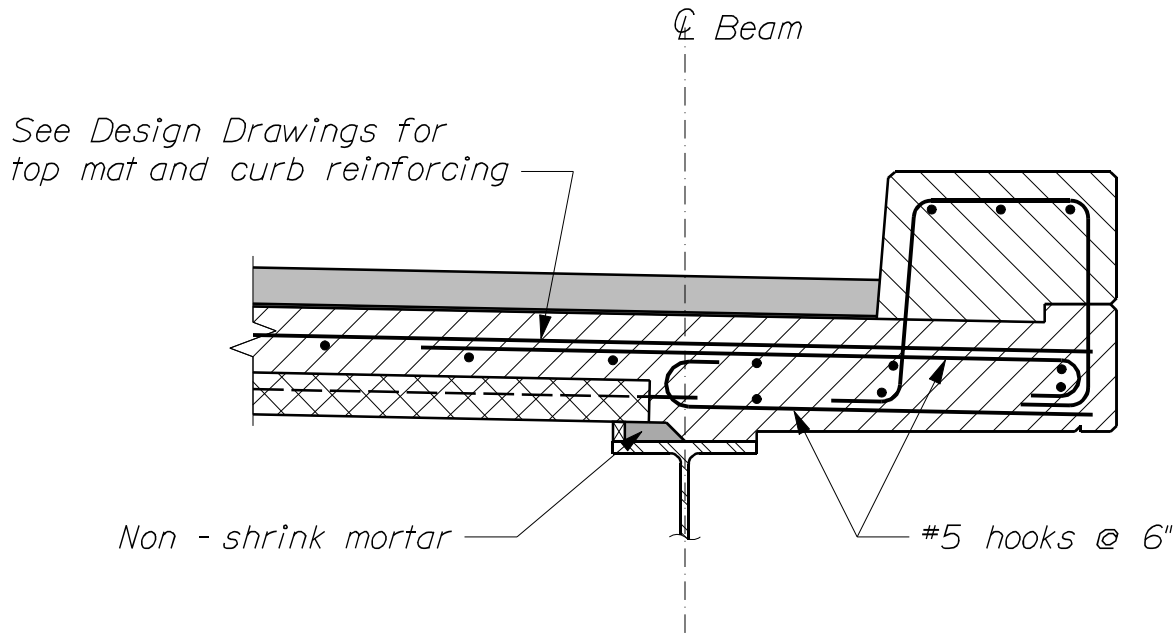

PRECAST CONCRETE DECK PANELS 502(II)

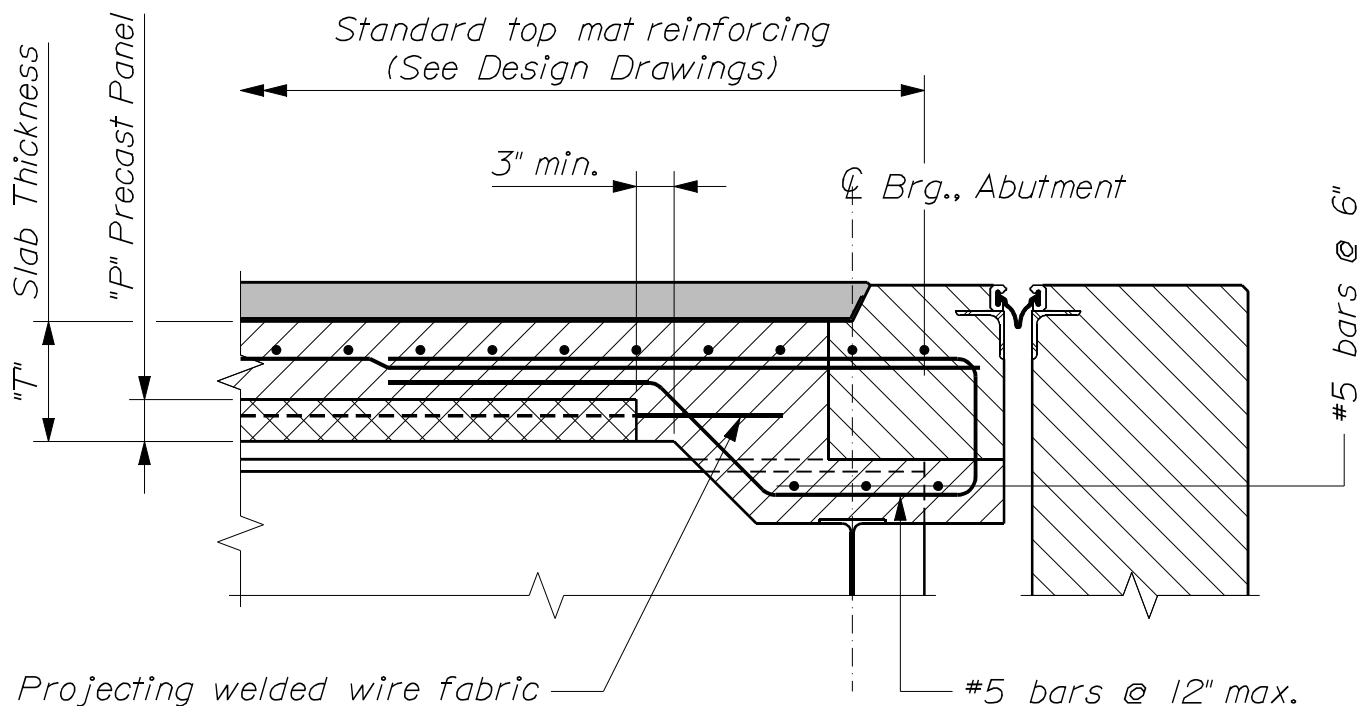

~ SECTION E-E (Cantilevered Abutment) ~

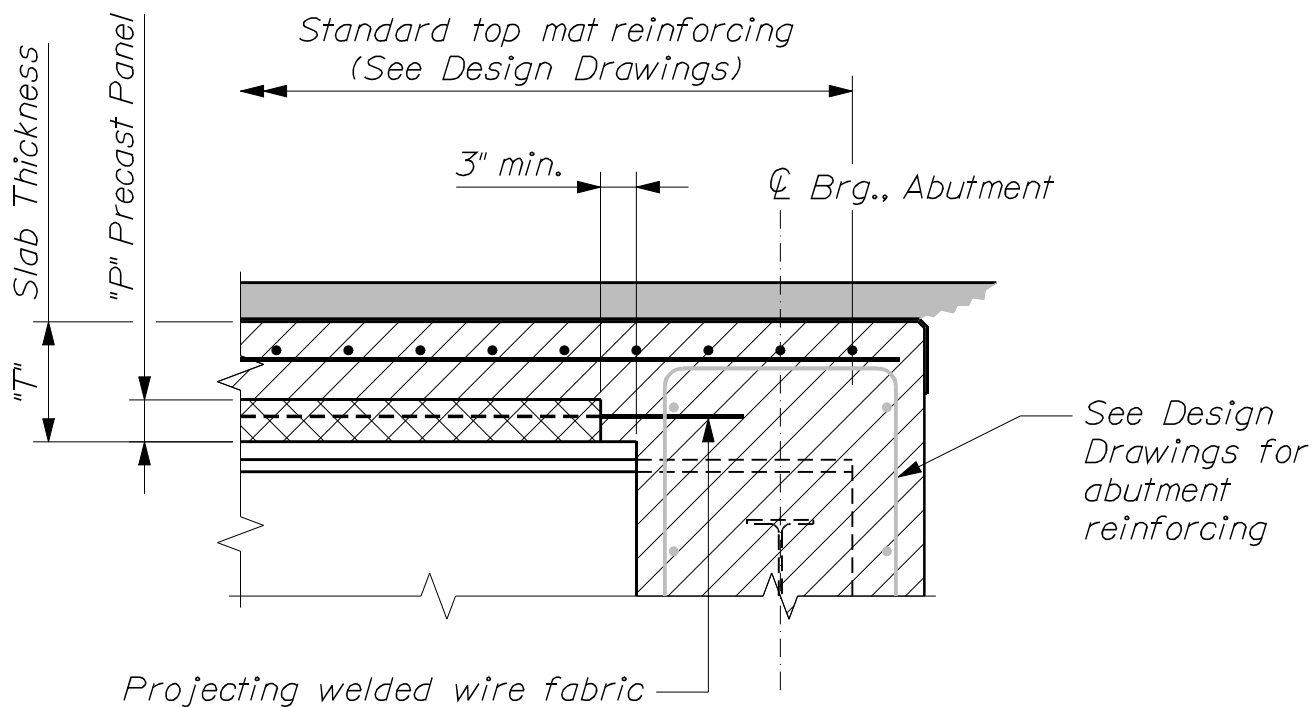

~ SECTION F-F (Integral Abutment) ~

PRECAST CONCRETE DECK PANELS

502(12)

<i>PRECAST PANELS ON STEEL GIRDERS</i>						
<i>Panel Type</i>	<i>Maximum Girder Spacing</i>	<i>Slab "T"</i>	<i>Panel "P"</i>	<i>Number of Strands</i>		
				<i>Flange Width</i>		
				<i>1'-0"</i>	<i>≤ 1'-6"</i>	<i>≤ 2'-0"</i>
<i>A1</i>	<i>7'-6"</i>	<i>8"</i>	<i>3 1/2"</i>	<i>15</i>	<i>15</i>	<i>15</i>
<i>A2</i>	<i>8'-0"</i>	<i>8"</i>	<i>3 1/2"</i>	<i>15</i>	<i>15</i>	<i>15</i>
<i>A3</i>	<i>8'-6"</i>	<i>8"</i>	<i>3 1/2"</i>	<i>17</i>	<i>16</i>	<i>16</i>
<i>A4</i>	<i>9'-0"</i>	<i>8"</i>	<i>3 1/2"</i>	<i>19</i>	<i>17</i>	<i>17</i>
<i>A</i>	<i>9'-6"</i>	<i>8"</i>	<i>3 1/2"</i>	<i>21</i>	<i>19</i>	<i>18</i>
<i>B</i>	<i>10'-0"</i>	<i>8 1/2"</i>	<i>3 1/2"</i>	<i>22</i>	<i>21</i>	<i>19</i>
<i>C</i>	<i>10'-6"</i>	<i>9"</i>	<i>3 1/2"</i>	<i>24</i>	<i>22</i>	<i>20</i>
<i>D</i>	<i>11'-0"</i>	<i>9 1/2"</i>	<i>3 1/2"</i>	<i>27</i>	<i>24</i>	<i>22</i>
<i>E</i>	<i>11'-6"</i>	<i>10"</i>	<i>3 1/2"</i>	<i>30</i>	<i>27</i>	<i>25</i>
<i>F</i>	<i>12'-0"</i>	<i>10 1/2"</i>	<i>3 1/2"</i>	<i>33</i>	<i>30</i>	<i>28</i>

NOTES:


- 1. Precast Concrete Deck Panels shall be fabricated in accordance with Section 535 of the Standard Specifications.*
- 2. The contractor shall submit working drawings showing the exact layout of panel types and sizes.*
- 3. Refer to the Design Drawings for structures with curved beams or angled splices.*
- 4. Joints at expansion piers shall be treated similarly to the abutment joint details.*
- 5. Panel widths of less than 8'-0" may be used. Provide strands in the ratio of the smaller panel width to 8'-0", multiplied by the number of strands given in the table, rounding up to the next even number of strands. The minimum panel width is 3'-0"*
- 6. Prestressing strands shall be 3/8-in. diameter Grade 270 seven - wire low relaxation strands conforming to the requirements of ASTM A 416. Initial tension shall be 17.2 kips per strand.*

(Continued)


NOTES (Continued):

- 7. A mat of #3 reinforcing bars spaced at 6 inches O.C. in each direction may be substituted for welded wire fabric. The welded wire fabric or the reinforcing bars shall have the same corrosion resistance characteristics and/or coating system as the reinforcing steel used in the cast - in - place portion of the deck slab.*
- 8. Concrete for panels shall have a minimum 28 day compressive strength of 5000 psi and a minimum release strength of 4000 psi. Permeability shall be as required for the cast - in - place portion of the deck slab.*
- 9. Precast deck panels require the use of 7-in. long shear connectors rather than the standard 5-in. length. Payment for any additional costs will be considered incidental to the precast deck panel pay item.*
- 10. Where 1'-0" wide girder flanges are specified on the Design Drawings, the transverse shear connector spacing shall be 3½ inches rather than the standard 6-in. spacing.*
- 11. When flange thicknesses differ or flange cover plates are used, the temporary blocking thickness shall vary. Precast panels shall align vertically to within ¼ inch.*
- 12. High - density expanded polystyrene foam shall be cut in the field to the required thickness.*
- 13. Mortar to be used for support under the deck panels shall have an approved high range water reducing additive.*
- 14. The specific reinforcing steel layout for the cast - in - place portions of the slab shall be as shown on the Design Drawings.*
- 15. If there is a conflict between these Standard Details and the Design Drawings, the requirements of the Design Drawings shall be followed.*


PRECAST CONCRETE DECK PANELS

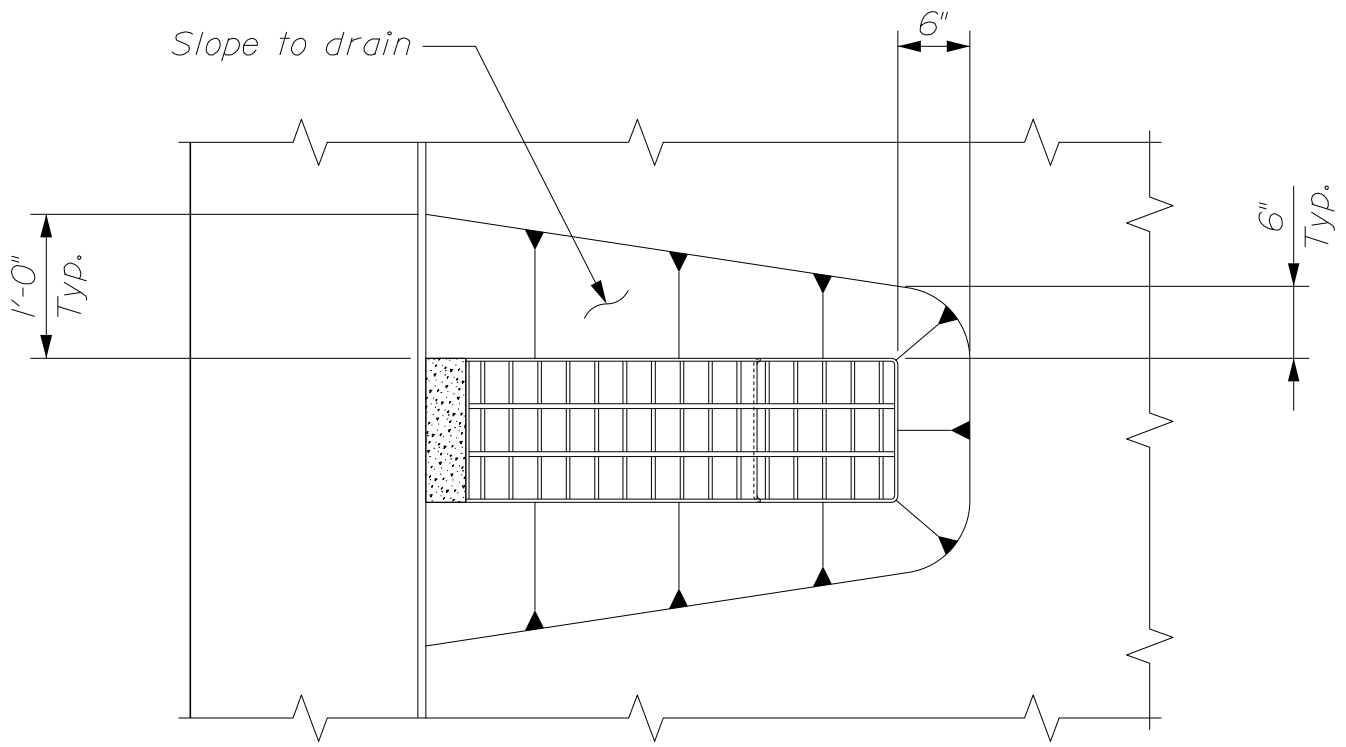

~ LONG PAN BRIDGE DRAIN PLAN ~

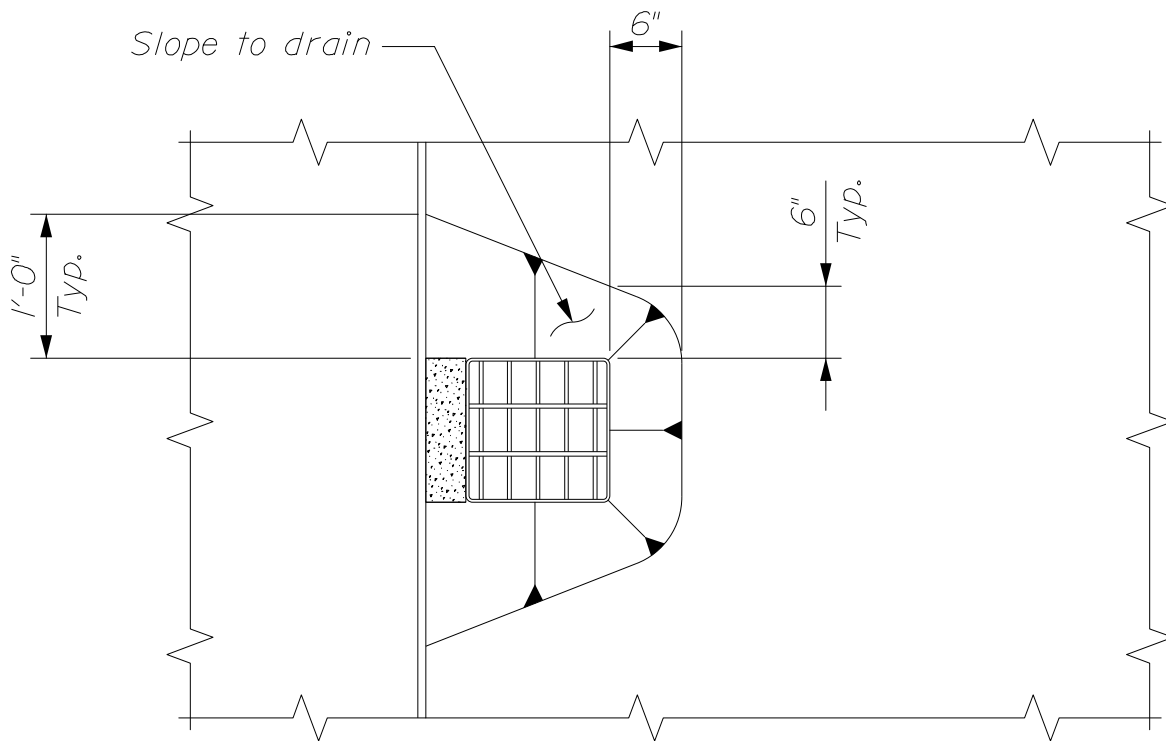


~ SHORT PAN BRIDGE DRAIN PLAN ~

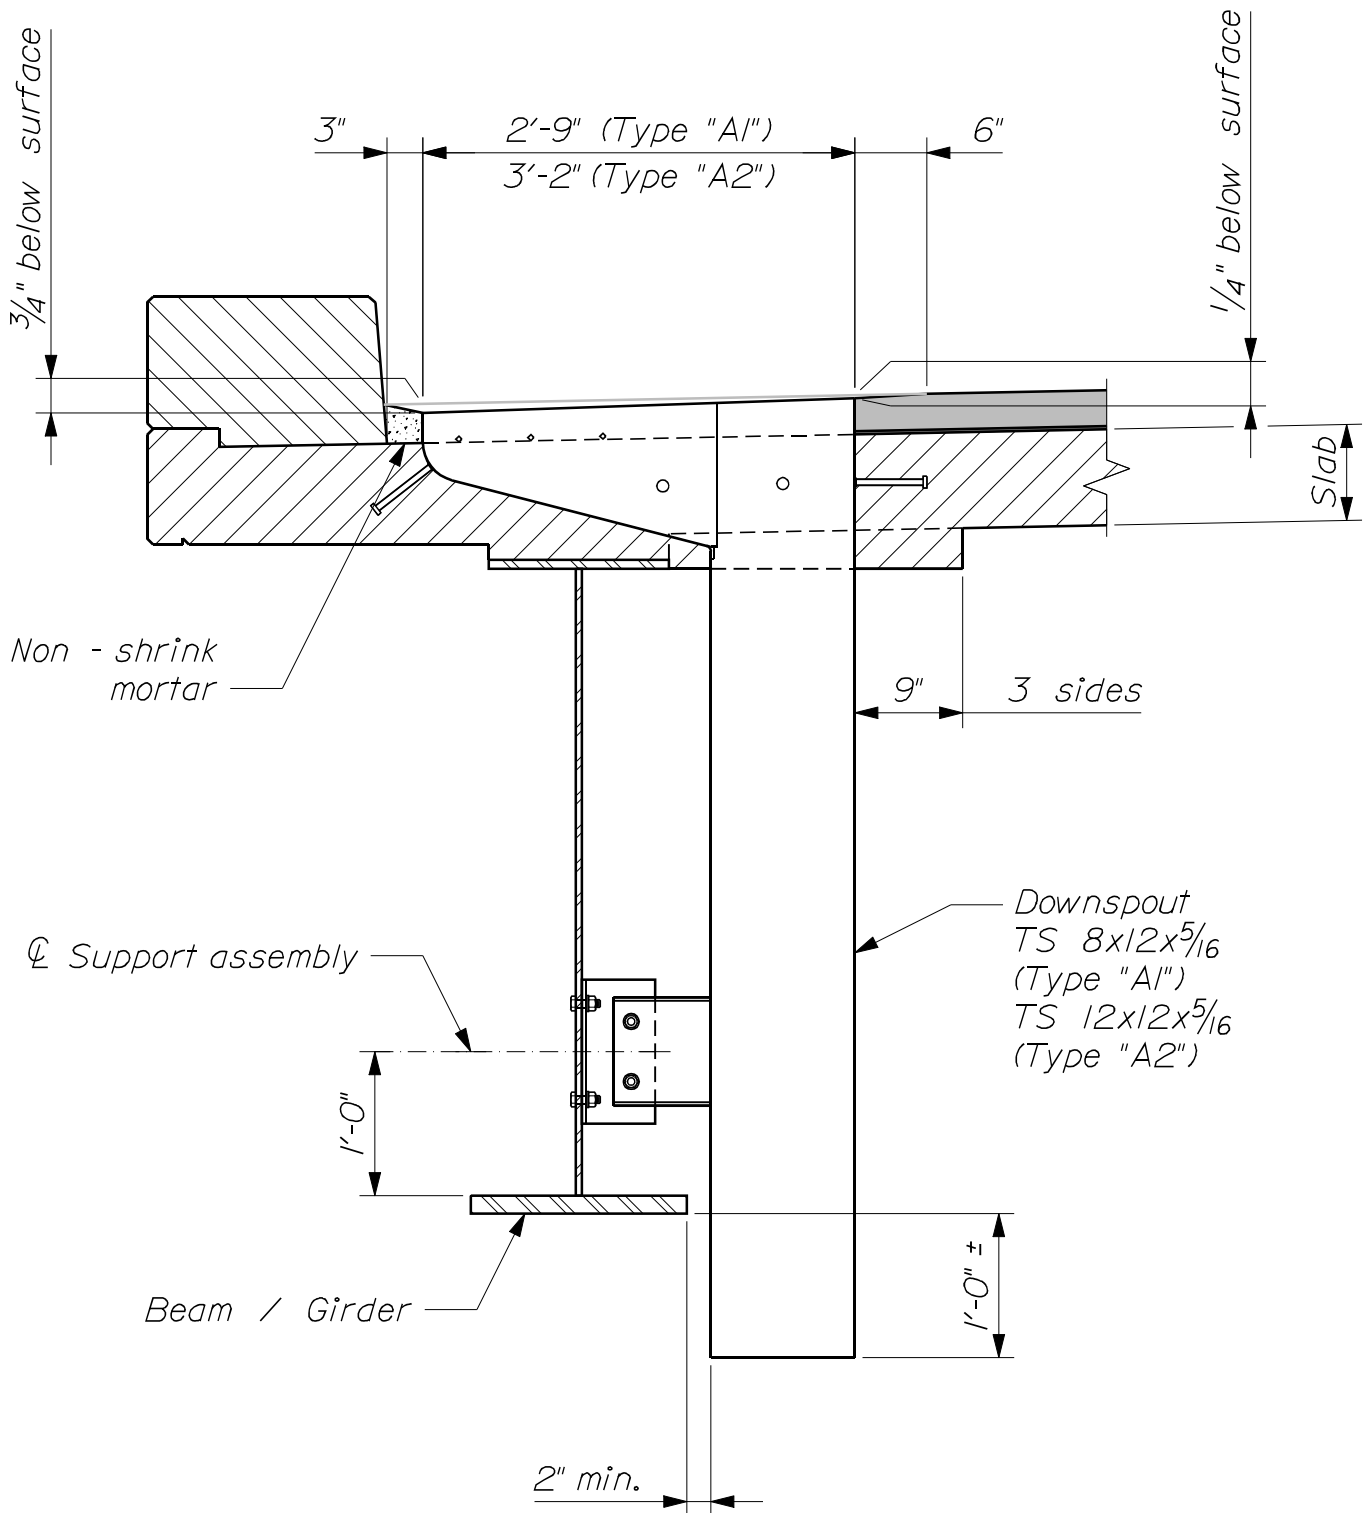

~ BRIDGE DRAIN TYPE "A1" OR "A2" ELEVATION ~


BRIDGE DRAINS

502(16)

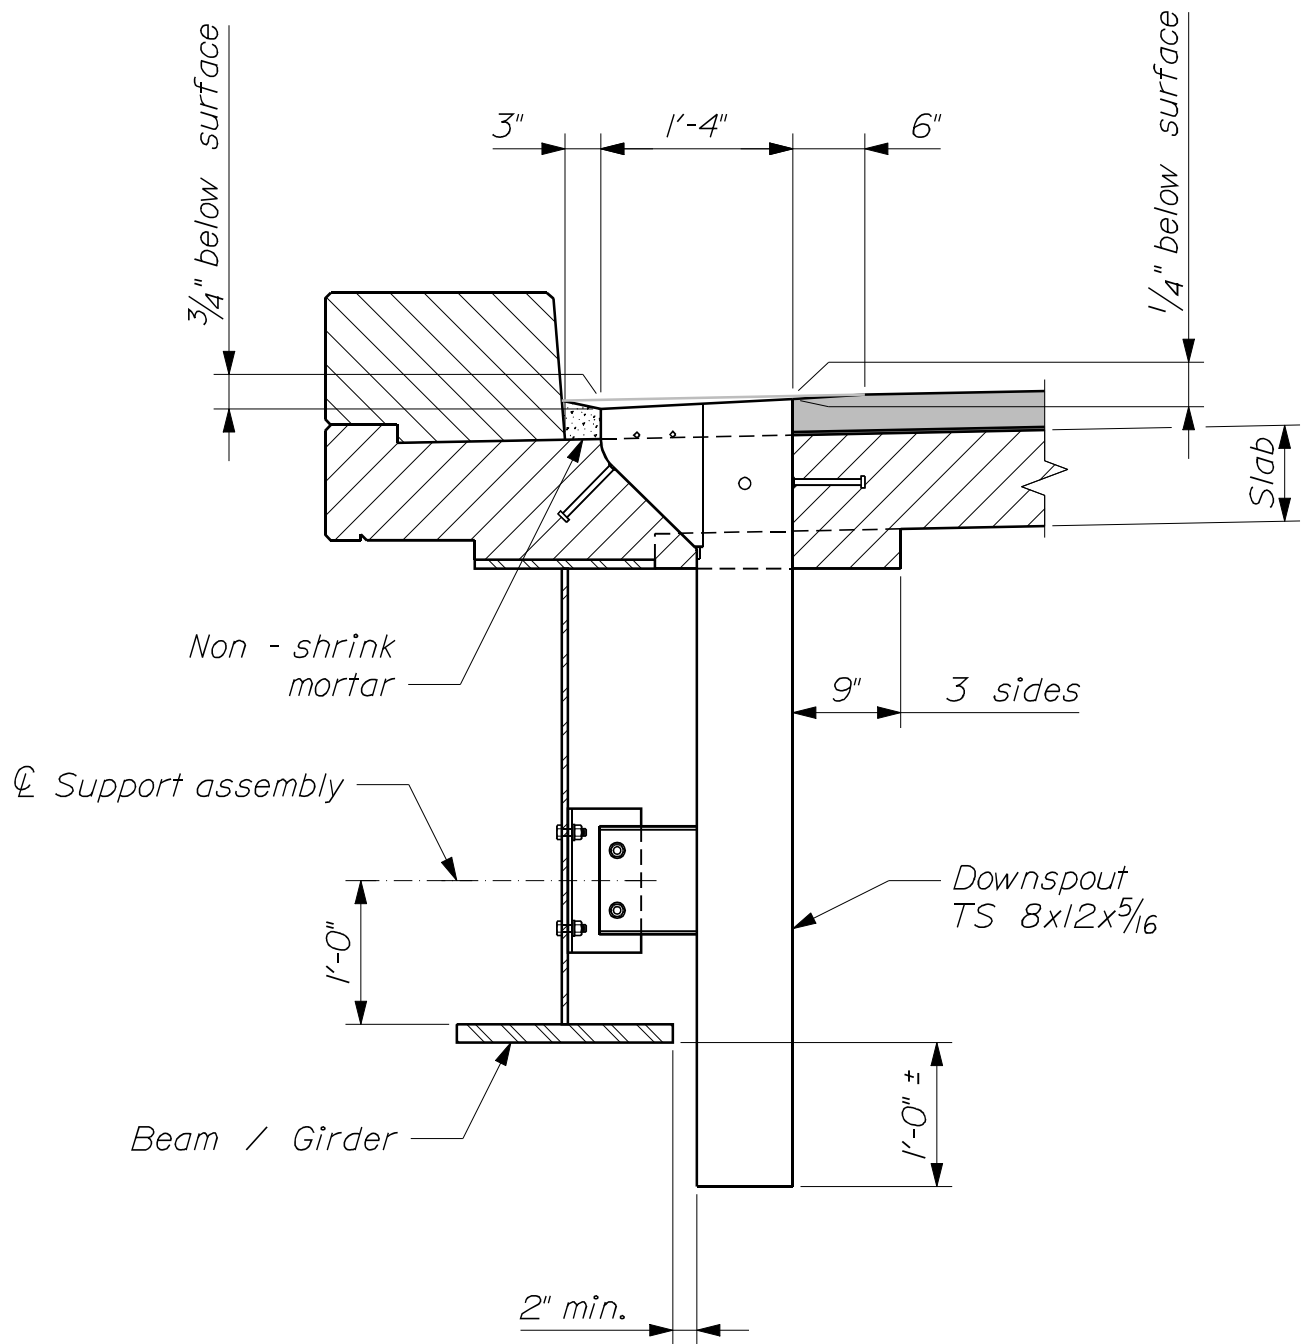


~ BRIDGE DRAIN TYPE "B" ELEVATION ~

BRIDGE DRAINS
502(17)

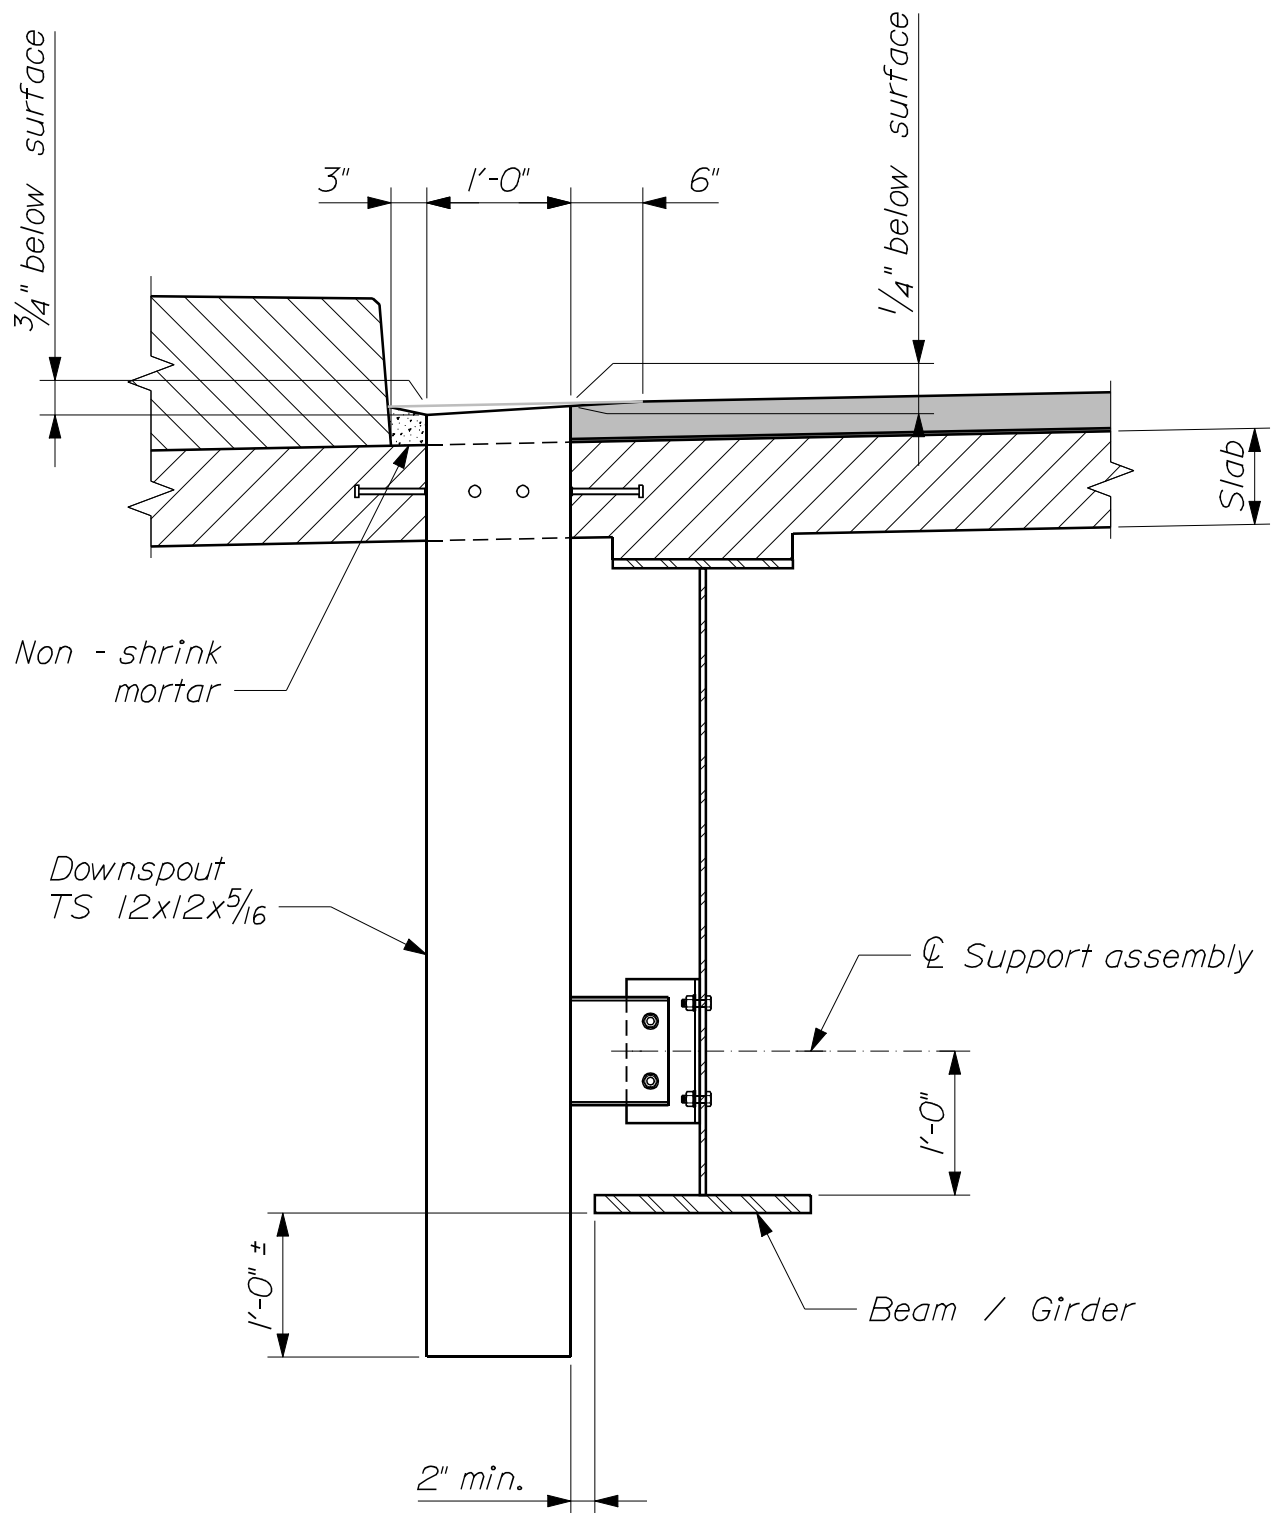


~ BRIDGE DRAIN TYPE "C" ELEVATION ~

BRIDGE DRAINS
502(18)




0'-9" For A 1" Thick Integral Concrete Wearing Surface.

502(19)

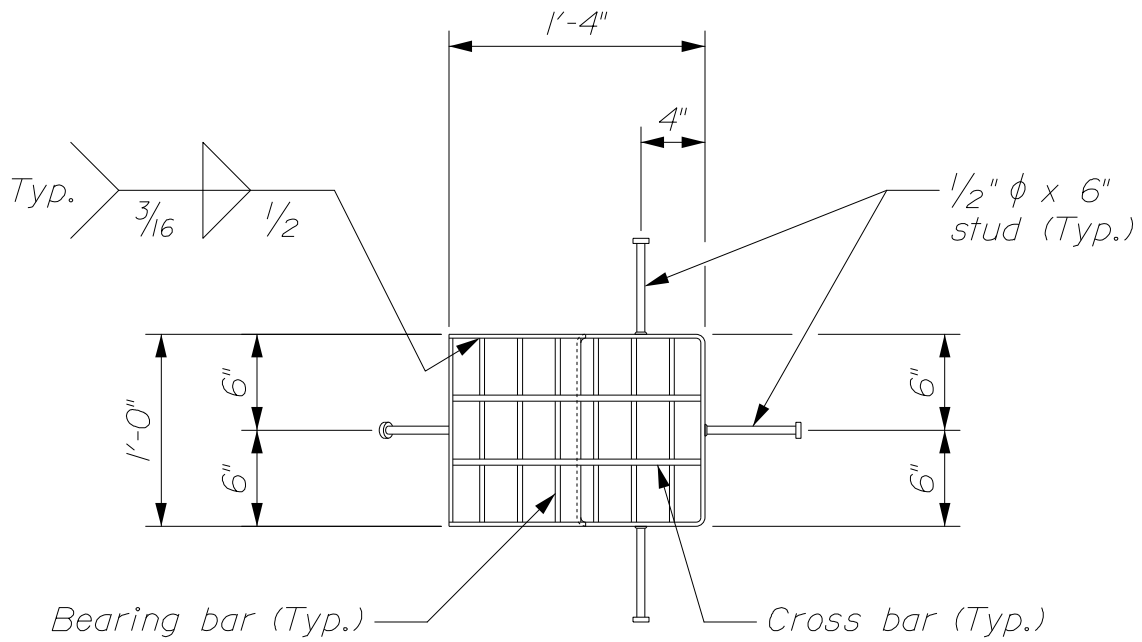

~ DRAIN TYPE "B" TOP VIEW ~

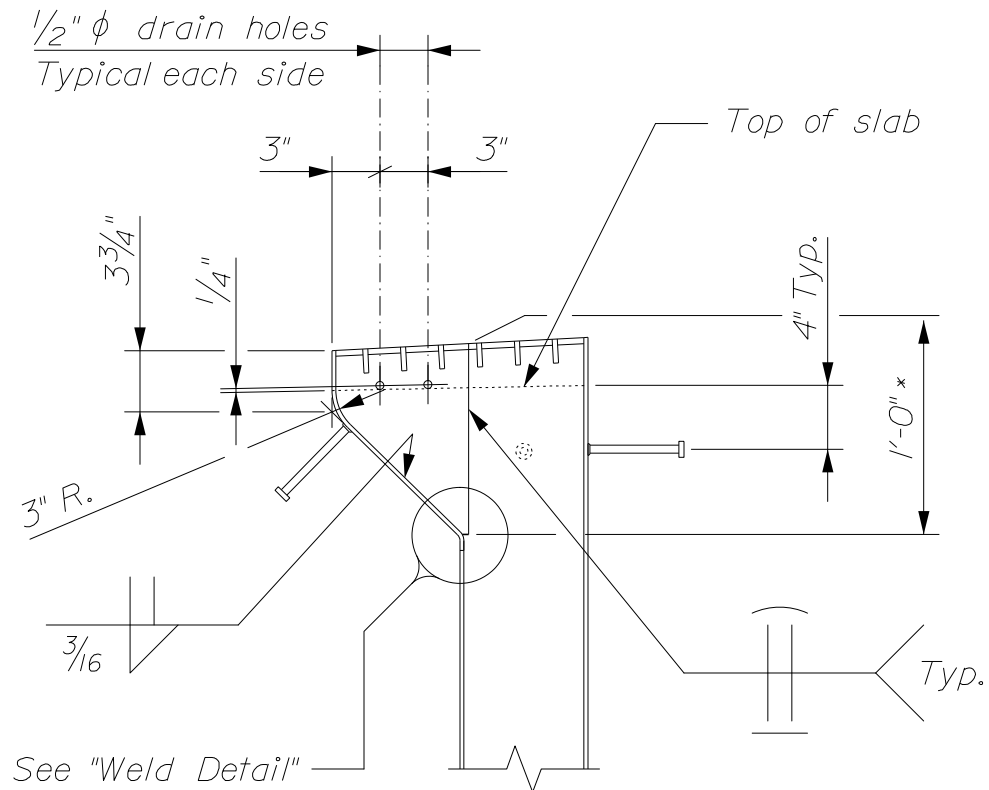


~ DRAIN TYPE "B" SECTION ~

1'-0" For 3" Thick H.M.A. Wearing Surface.


0'-9" For A 1" Thick Integral Concrete Wearing Surface.

BRIDGE DRAINS


502(20)

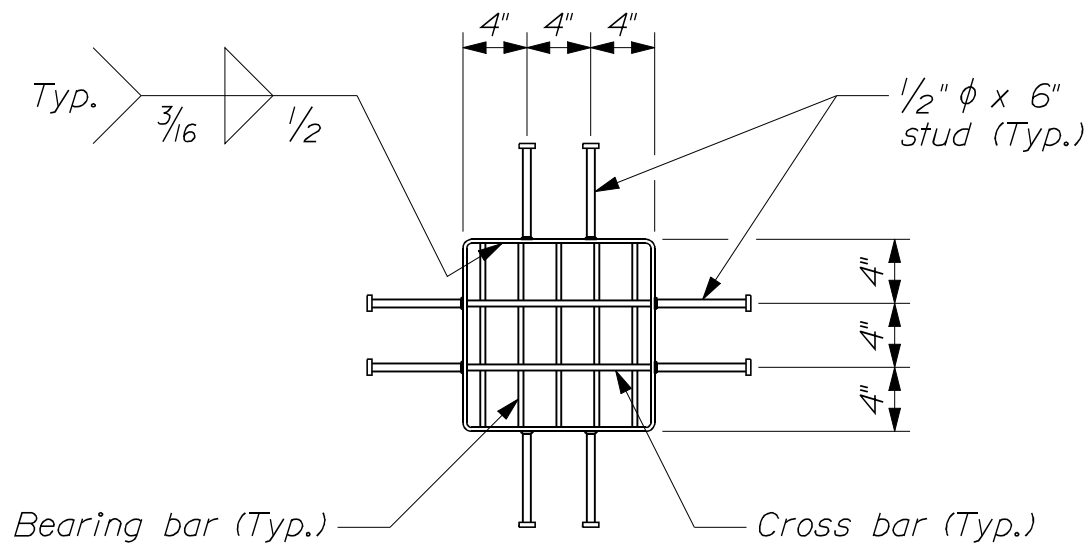


~ DRAIN TYPE "C" TOP VIEW ~

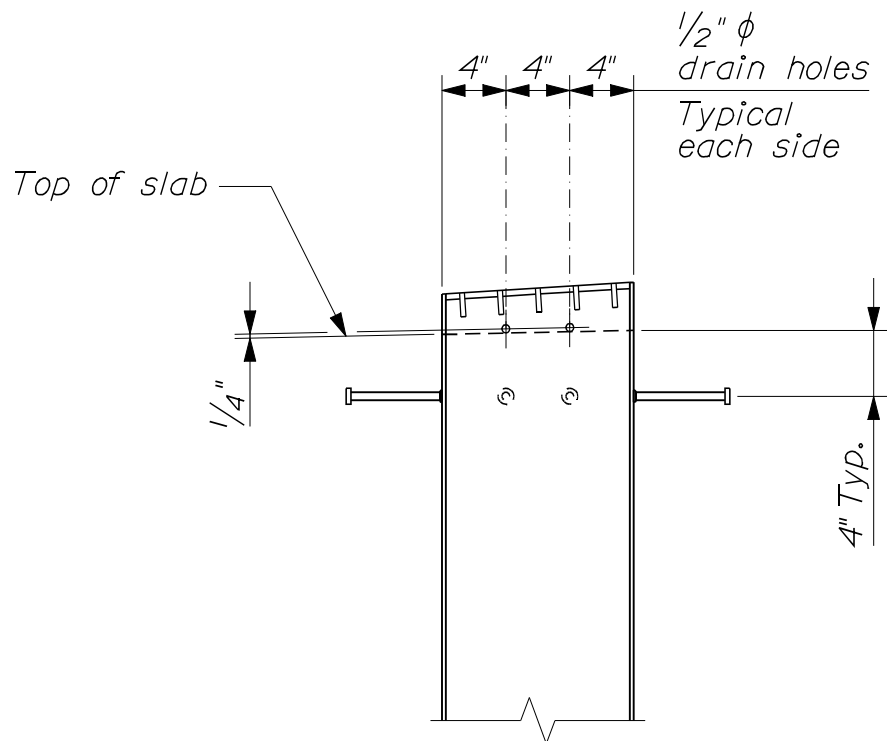


~ DRAIN TYPE "C" SECTION ~

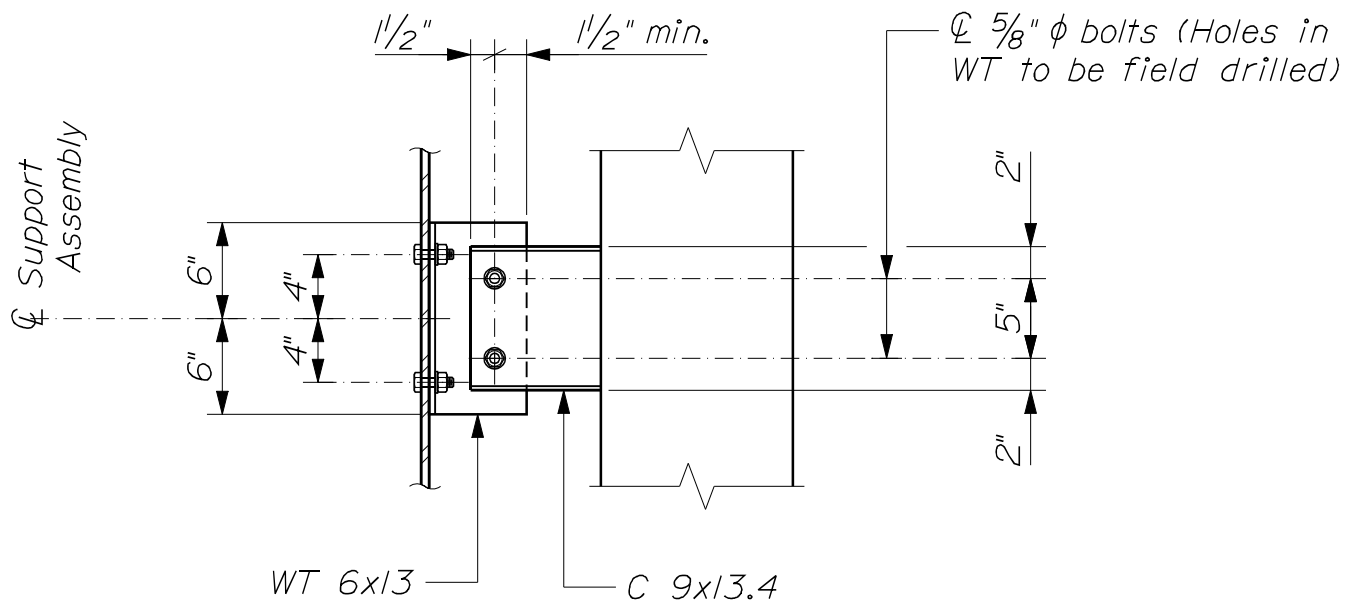

~ SUPPORT ASSEMBLY DETAIL ~

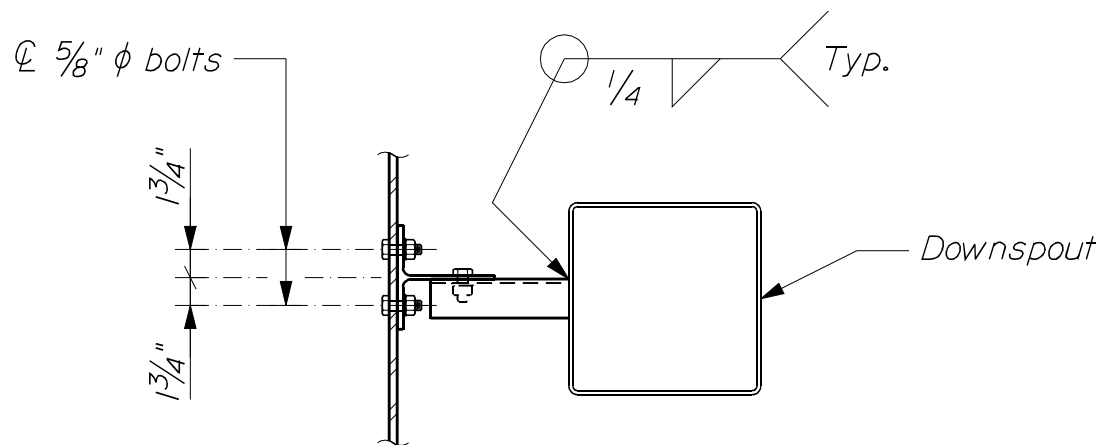


~ SUPPORT ASSEMBLY TOP VIEW ~

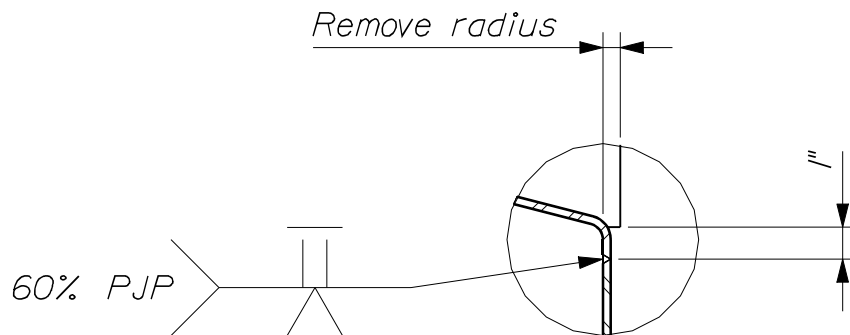


~ WELD DETAIL ~

BRIDGE DRAINS
502(23)

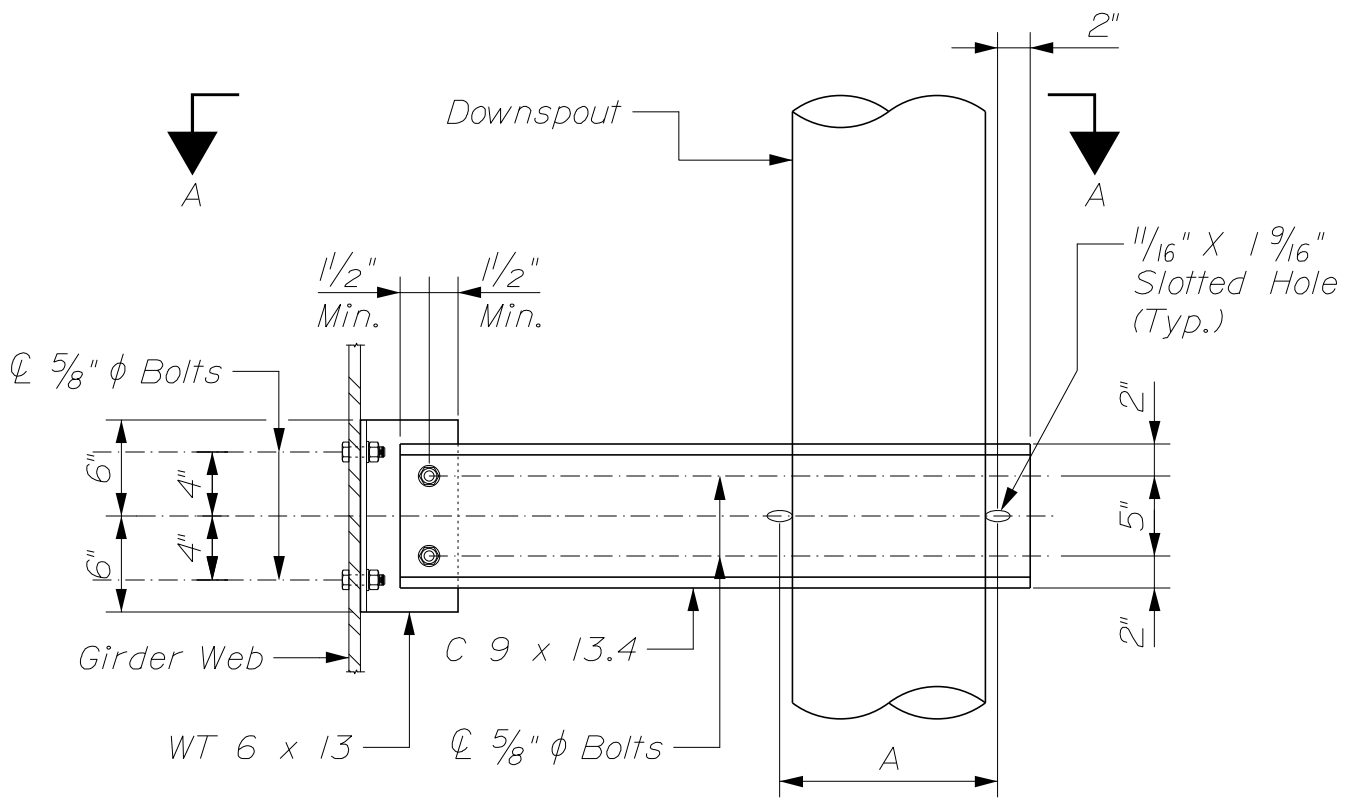

DETAIL A


"A" Dimension =
Downspout Outer Diameter Plus $\frac{5}{8}"$
Plus $\frac{1}{4}"$ Tolerance

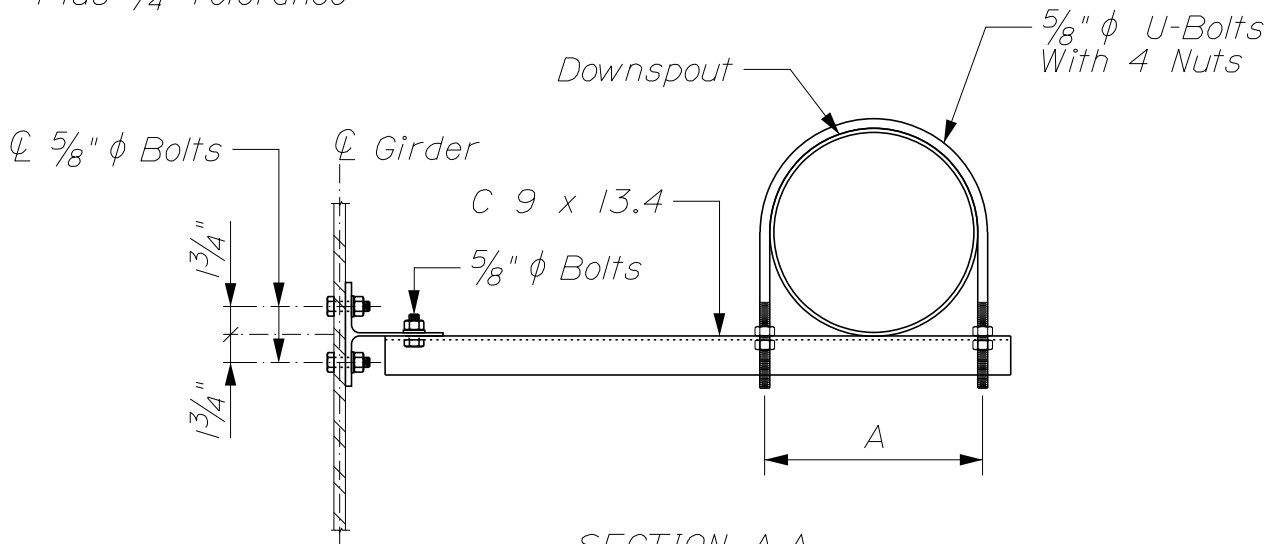


SECTION A-A

~ BRIDGE DRAIN "FRP" DETAILS ~

BRIDGE DRAINS
502(24)

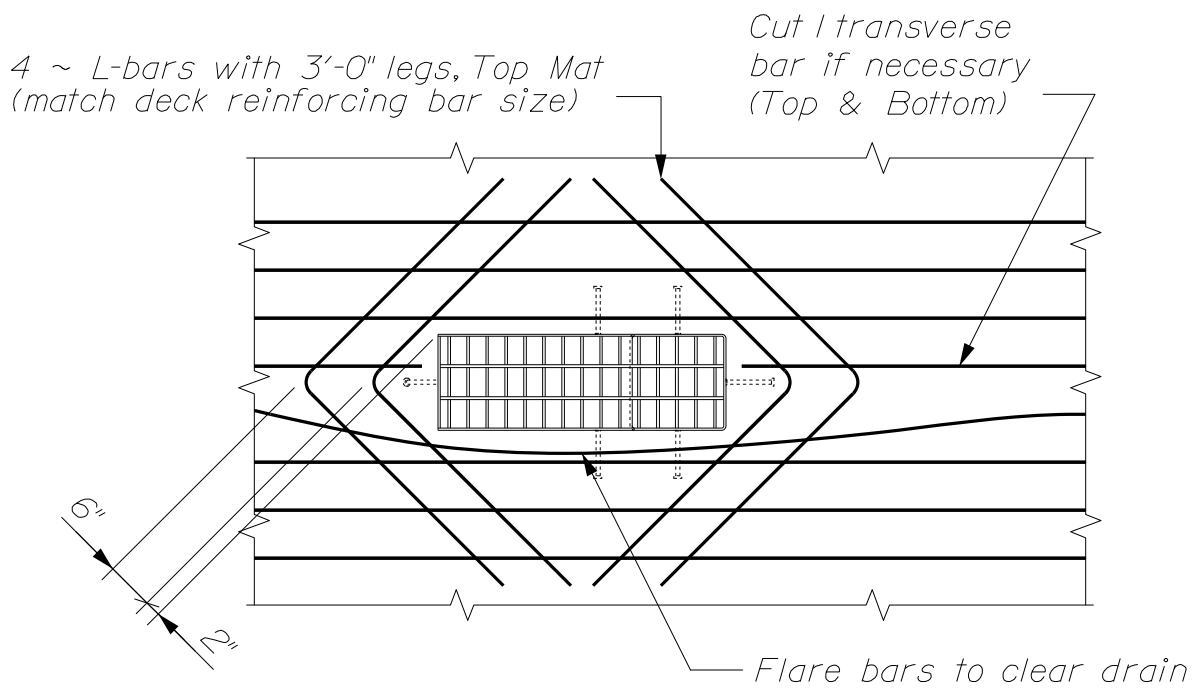

~ SLAB REINFORCING PLAN - LONG PAN DRAINS~

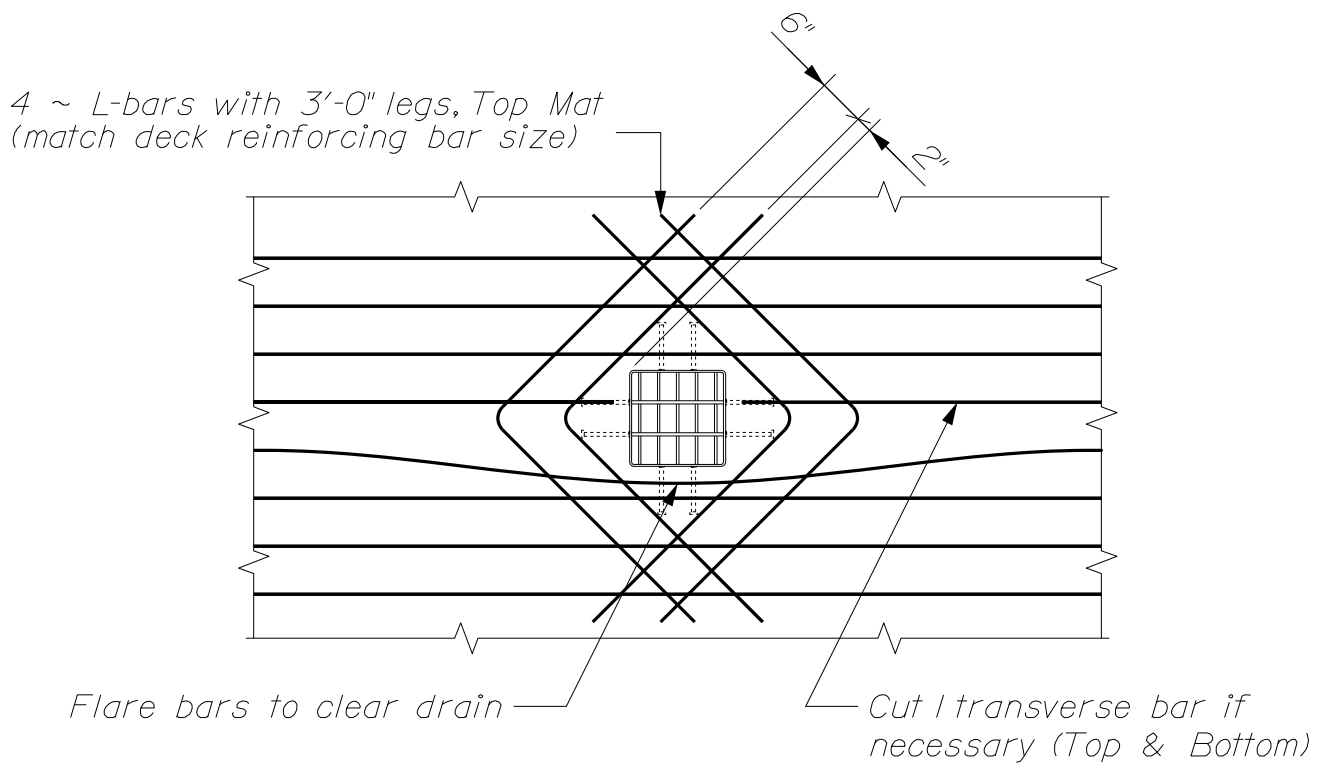

~ SLAB REINFORCING PLAN - SHORT PAN DRAINS ~

GENERAL NOTES


1. The $\frac{1}{2}$ " diameter drain holes are not required with concrete wearing surfaces.
2. Except as noted below, the drain support assembly and all associated hardware shall be galvanized in accordance with Standard Specifications Section 506.
3. For weathering or painted steel superstructures, the WT 6x13 shall be coated with a zinc rich coating system in accordance with Standard Specifications Section 506. Bolts in contact with weathering steel shall be Type 3. Nuts and washers shall be treated in the same manner as their associated bolt.
4. Shear connectors welded to the top flange of steel beams may require adjustment to clear the bridge drains.
5. If the minimum thickness of concrete below the drain pan is 2 inches or less, the concrete haunch shall be extended as shown.
6. For drains installed on bridges with one-inch thick integral concrete wearing surfaces, the drain pan depth shall be reduced from 1'-0" to 0'-9".
7. Payment for bridge drains will be as specified under Subsection 502.19 of the Standard Specifications unless a specific pay item is provided in the Contract.
8. Payment for adjusting and for providing the additional reinforcing at bridge drains will be considered incidental to related Contract items.

STEEL DRAIN NOTES


1. All plates shall be $\frac{1}{4}$ " inch thick.
2. The grating shall be a commercial heavy-duty grating with $1\frac{1}{2}$ " x $\frac{5}{16}$ " bearing bars spaced at $2\frac{3}{8}$ " and $\frac{3}{8}$ " diameter cross bars spaced at 4". The grating shall be centered in the drain top.

MATERIALS

Shapes & plates.....	AASHTO M 270M/M 270
Bolts, nuts & washers.....	ASTM F3125, ASTM A563 & ASTM F436
Stud/shear connectors.....	AASHTO/AWS D1.5, Type A
Steel Drain Downspout.....	ASTM A500

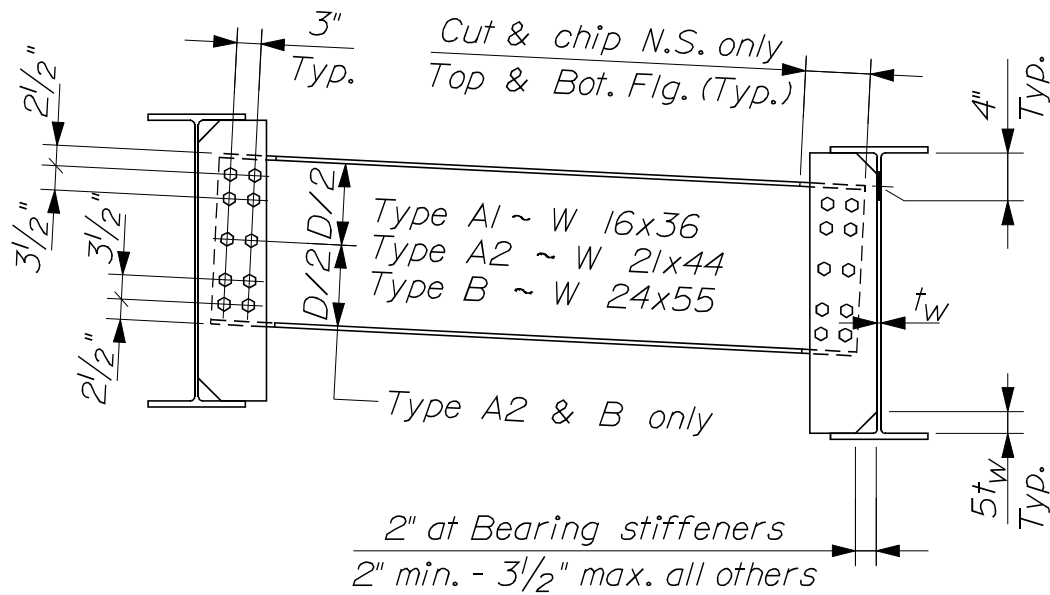


~ TYPE A1, A2, & B ~

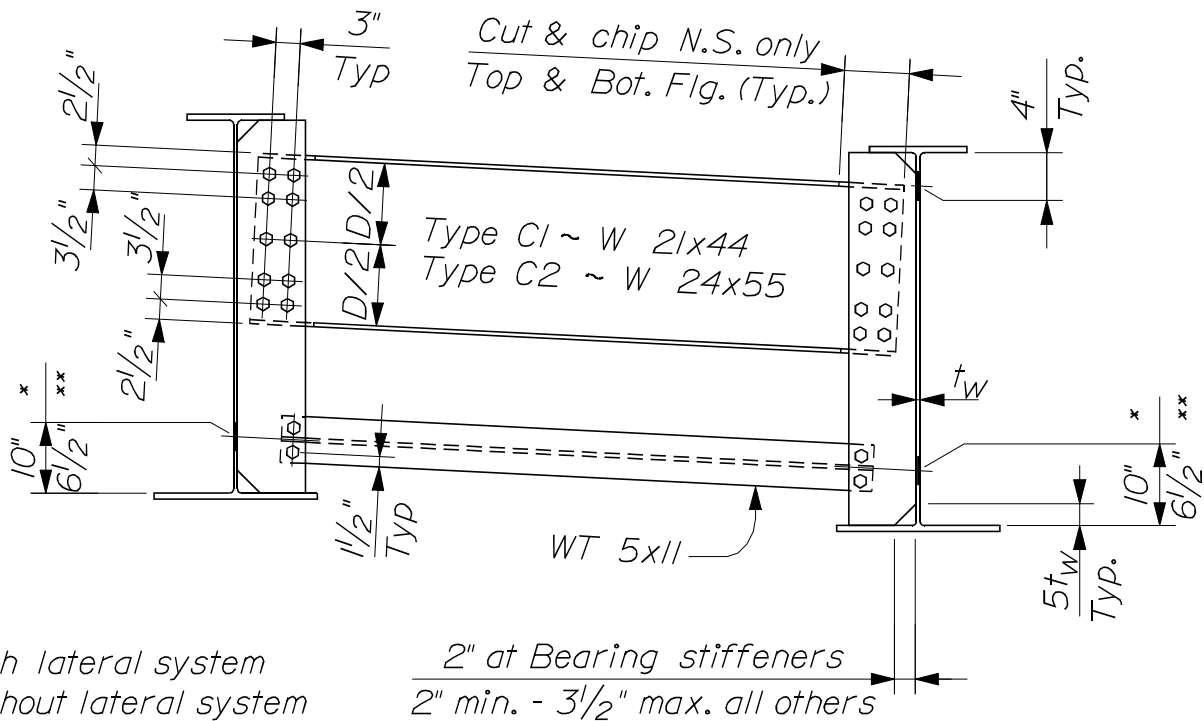


* with lateral system
** without lateral system

~ TYPE C1 & C2 ~

DIAPHRAGMS
504(01)

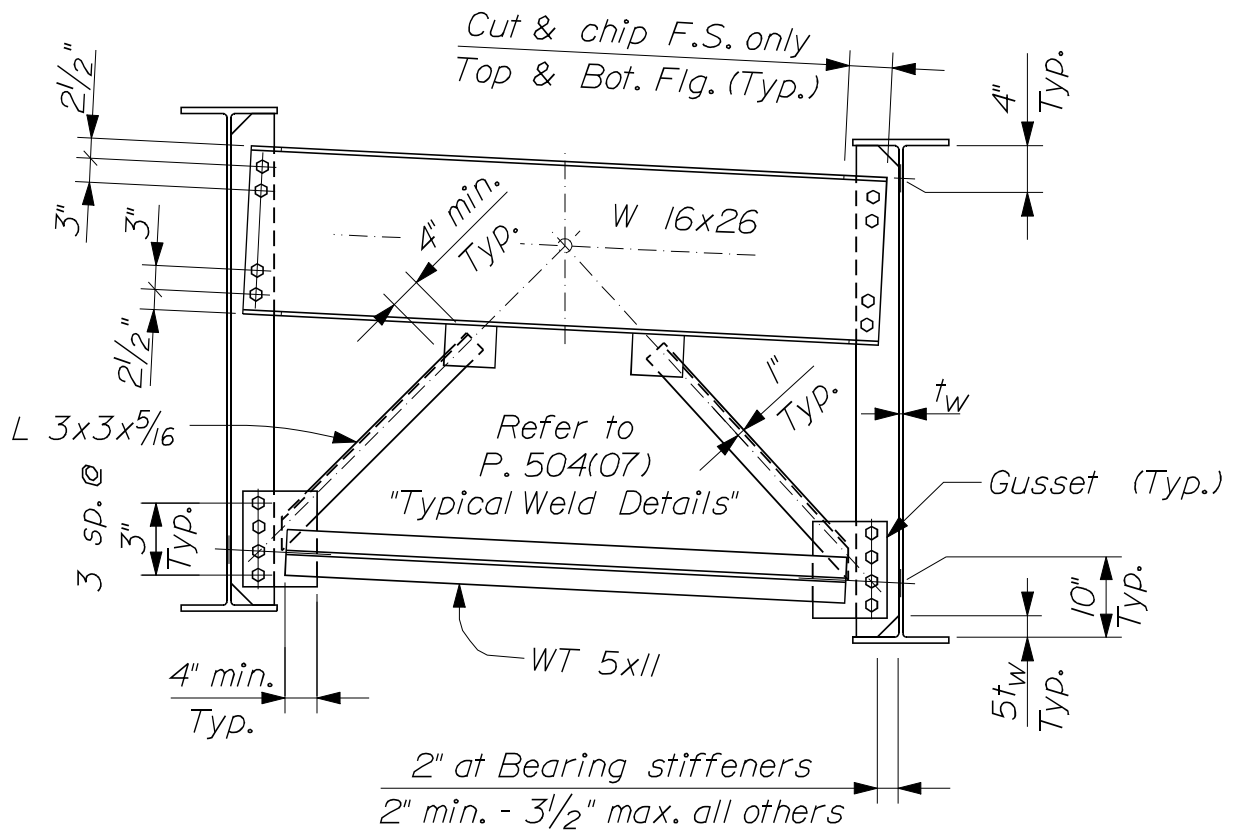


~ TYPE D ~

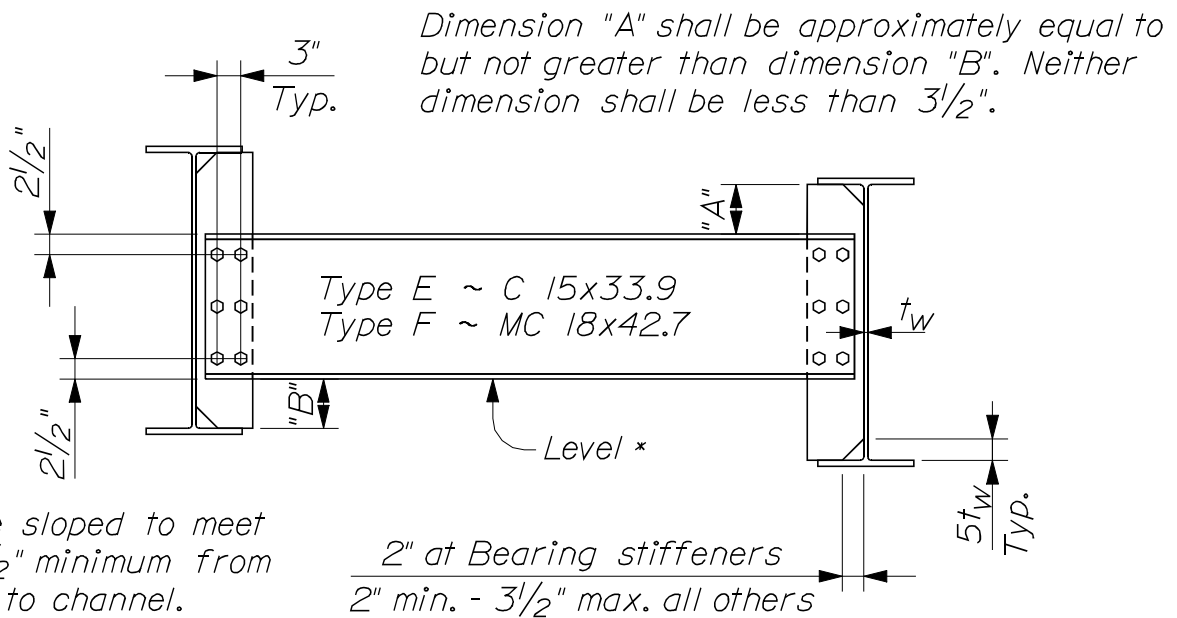


* May be sloped to meet
the 3 $\frac{1}{2}$ " minimum from
flange to channel.

~ TYPE E & F ~

DIAPHRAGMS
504(02)

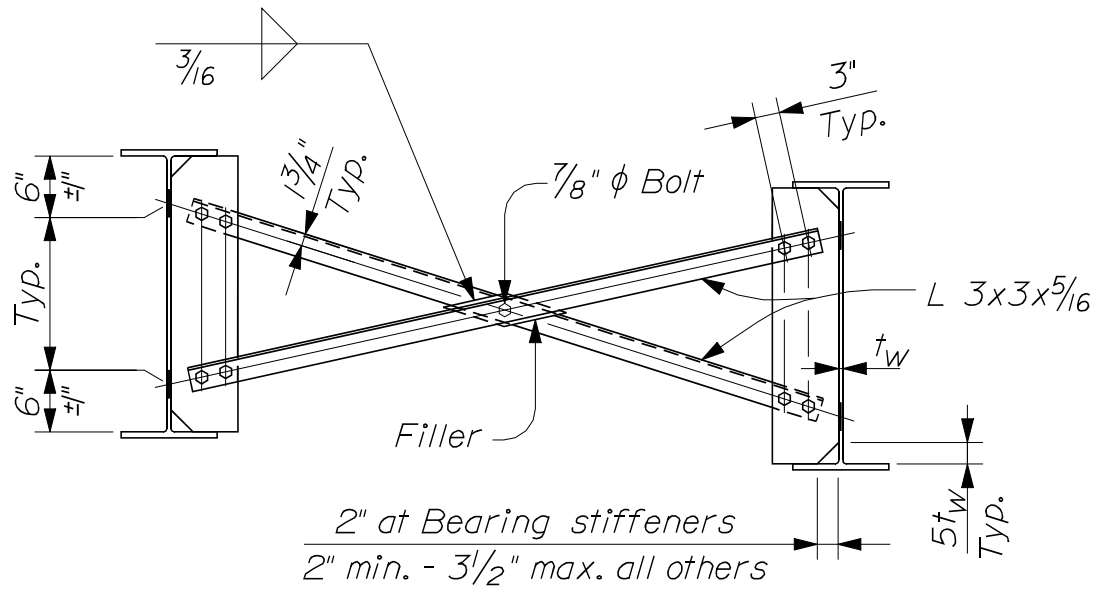


~ TYPE G ~

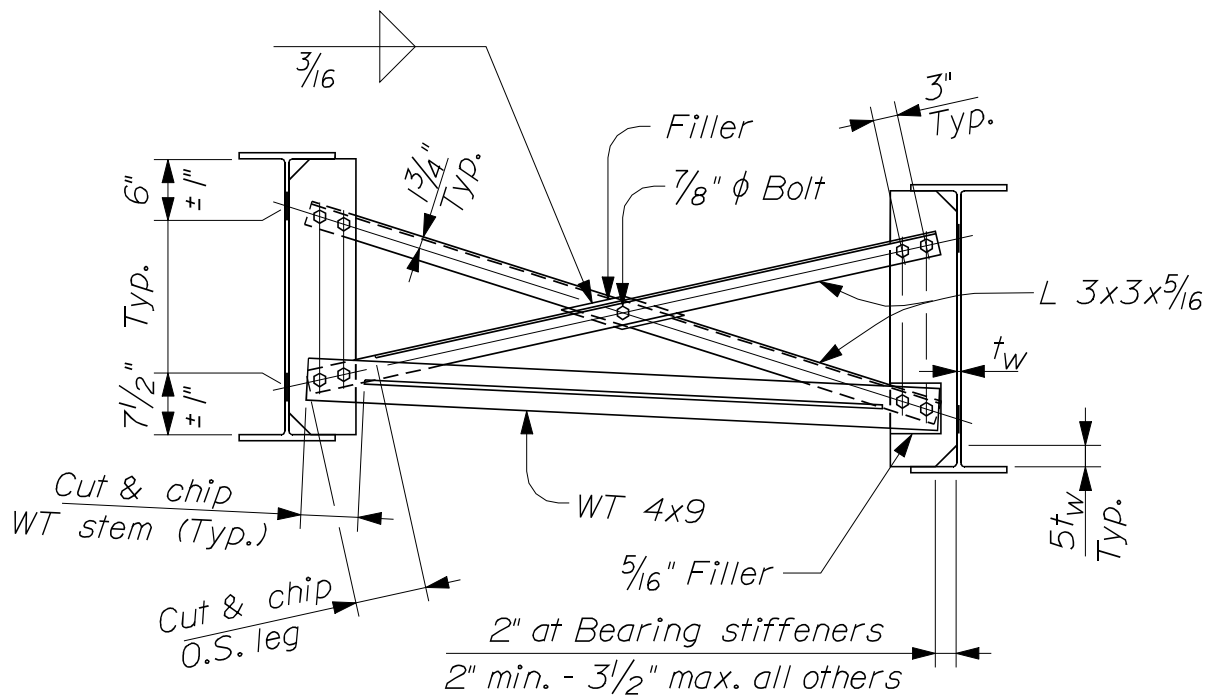


~ TYPE H ~

CROSSFRAMES
504(03)

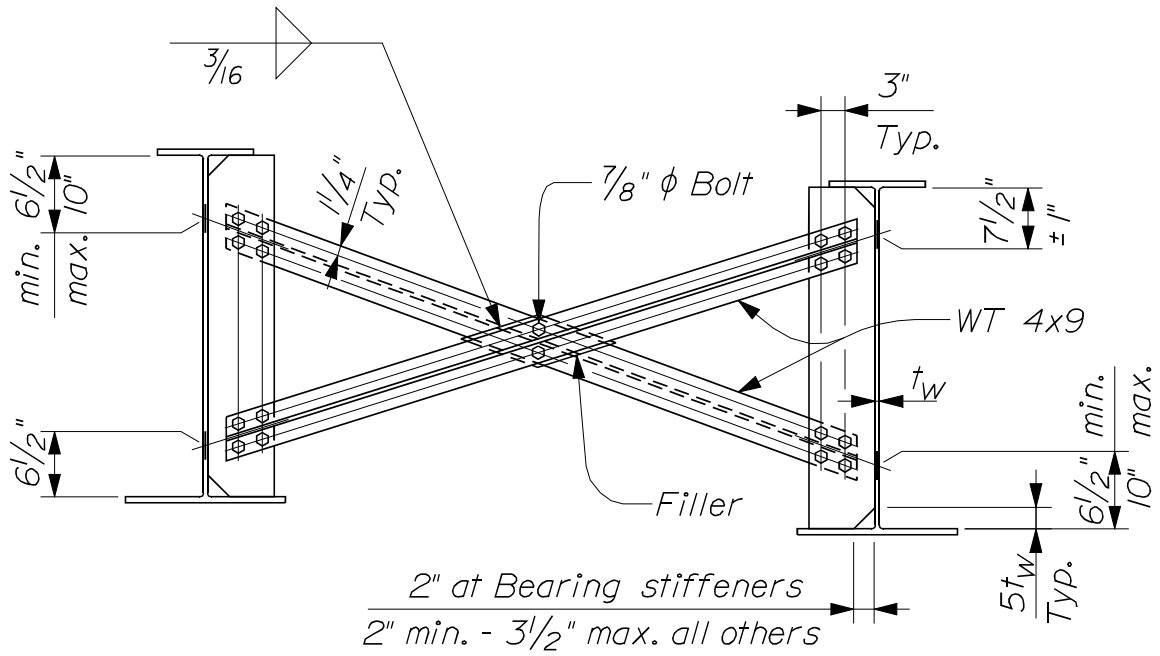

~ TYPE J ~


Refer to P. 504(07)
"Typical Weld Details"

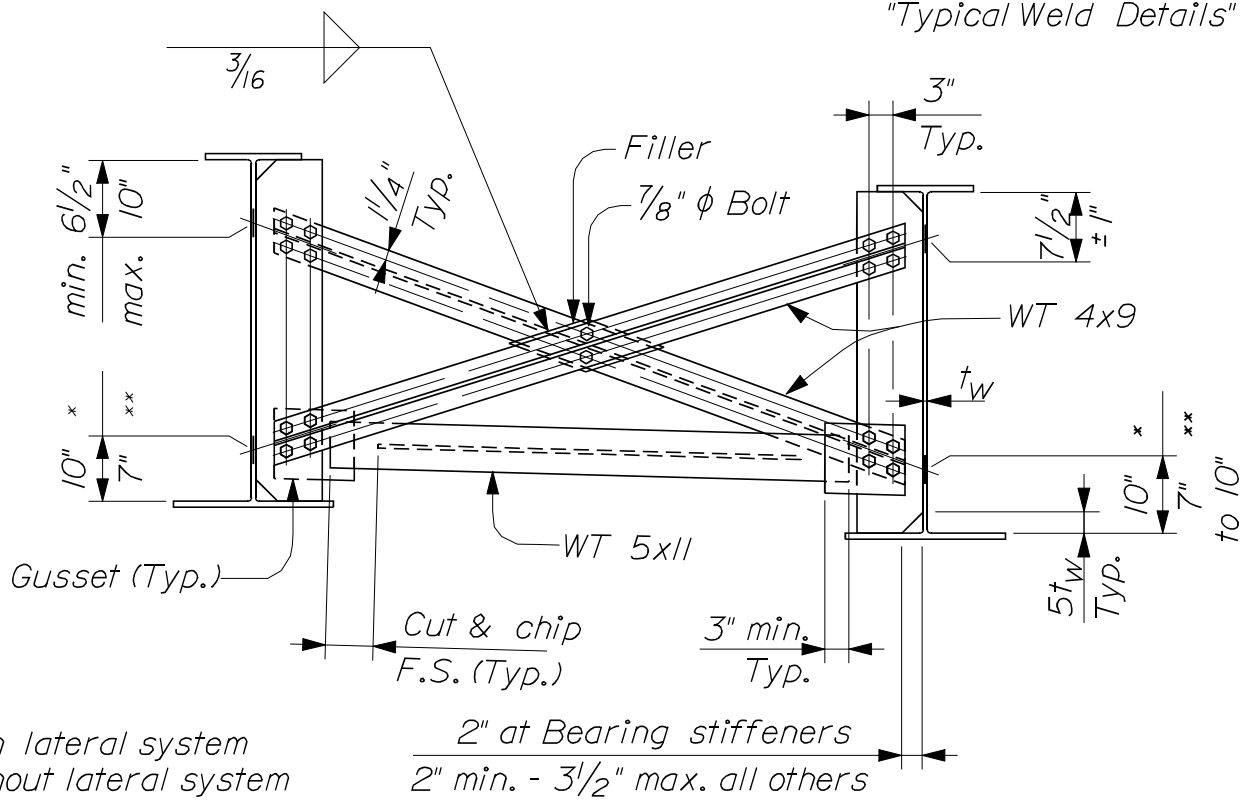

* with lateral system
** without lateral system

~ TYPE K ~

CROSSFRAMES 504(04)

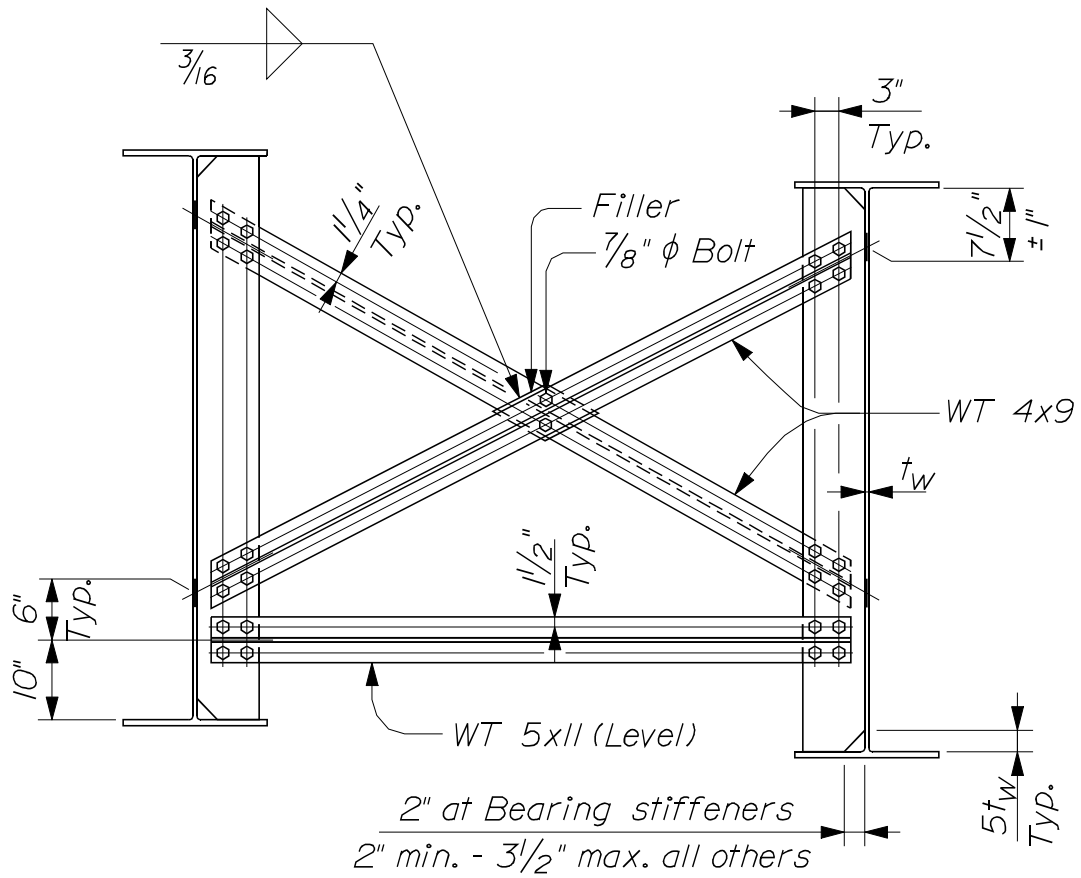

~ TYPE L ~


CROSSFRAMES
504(05)



504(06)


NOTES:

1. Steel for diaphragms, crossframes, connection plates, gussets and stiffeners shall be as designated on the Plans.
2. All welds for diaphragms, crossframes, connection plates, gussets and stiffeners shall terminate $\frac{5}{8}" \pm \frac{1}{8}"$ from the ends of the plates.
3. Bolts shall be $\frac{7}{8}"$ diameter. Bolt holes shall be $\frac{15}{16}"$ diameter. The minimum edge distance shall be $1\frac{1}{2}"$ unless otherwise shown on the Plans. Oversized or short-slotted holes may only be used with the permission of the Fabrication Engineer.
4. Connection plates and gussets shall be $\frac{3}{8}"$ minimum thickness. Connection plates shall be 7" minimum width and full web depth, and they shall be tight fit to both flanges.
5. The plate thickness for stiffeners and bent connection plates shall be as shown on the Plans.
6. The bearing ends of bearing stiffeners shall be flush and square with the web and shall have at least 75% of the bearing end area in contact with the flanges within the tolerances allowed by the latest edition of the AWS D1.5 welding code.
7. Intermediate stiffeners shall be tight fit to both flanges. Intermediate stiffeners used as connection plates shall be detailed as connection plates.
8. Connection plates and stiffeners used as connection plates shall be welded to the web and flanges on both sides of the plates.

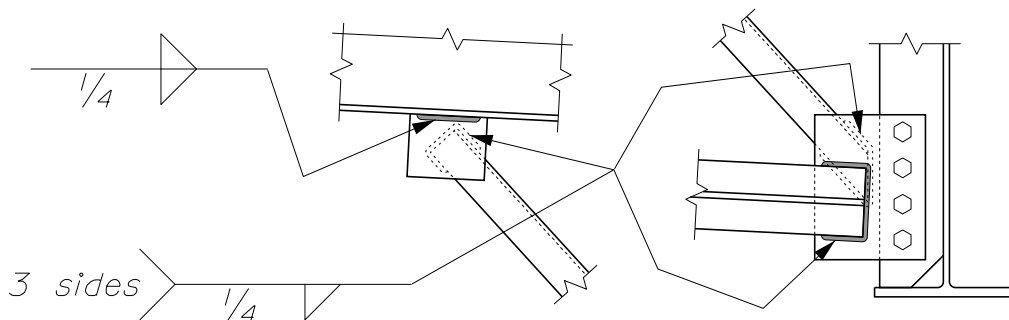


~ TYPICAL WELD DETAILS ~

DIAPHRAGM & CROSSFRAME NOTES

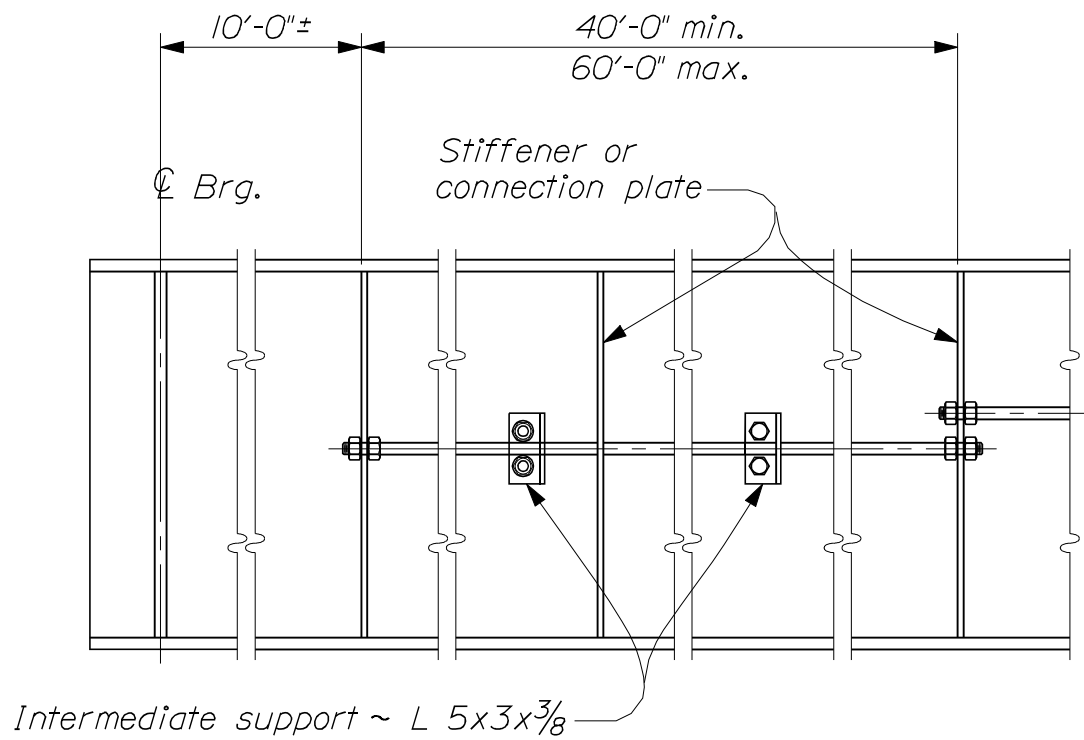


~ ELEVATION ~

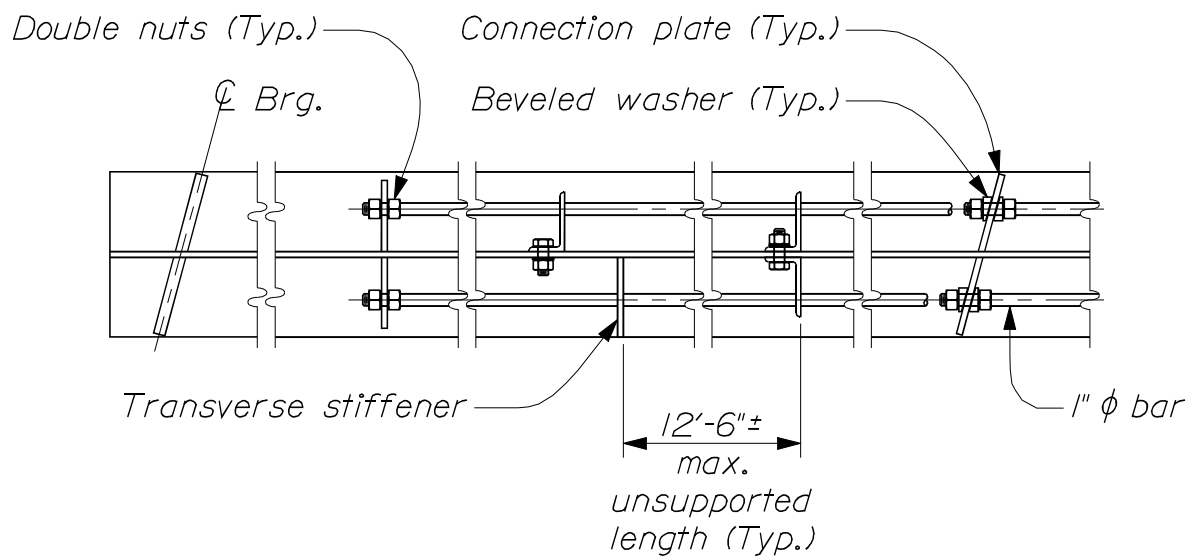

~ PLAN ~

HAND - HOLD DETAILS
504(08)

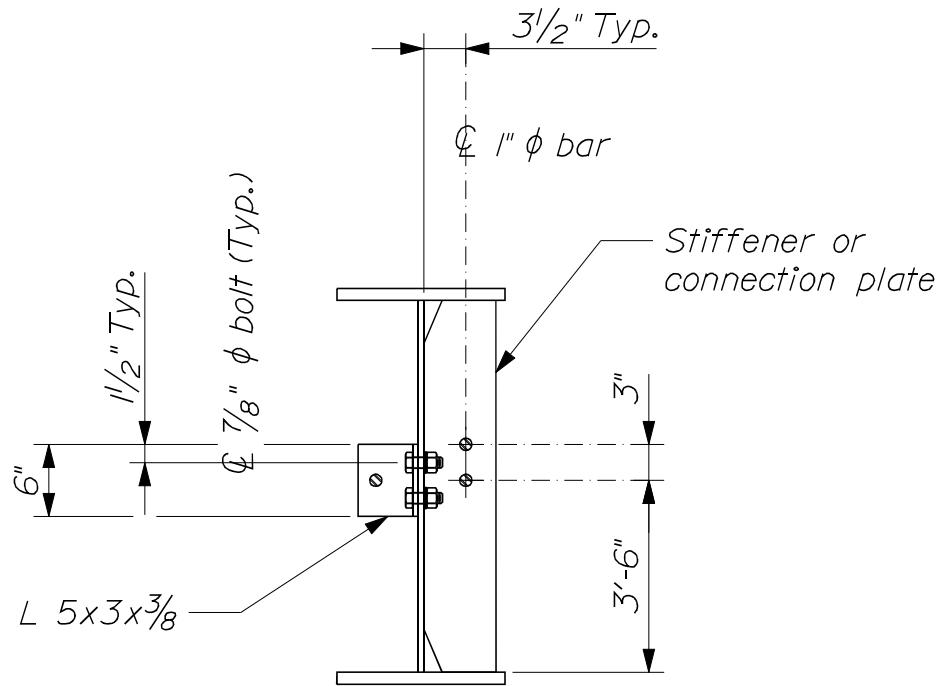

~ TYPICAL SECTION ~

NOTES:


1. Hand - hold bars shall be installed on the inside of exterior beams and on both sides of interior beams when called for on the Design Drawings.
2. Termination and splicing of hand - hold bars shall occur at stiffeners or connection plates. Angle supports shall be used at intermediate locations only. All termination and splice plates shall be a minimum of $\frac{1}{2}$ inch thick. Additional stiffeners shall be provided where necessary to meet the described requirements.
3. Hole sizes for bolts and hand - hold bars shall be $\frac{1}{16}$ inch larger than the bolt / bar size. Edge distances for holes shall be $\frac{1}{2}$ inches unless otherwise shown.
4. For unpainted applications, the hand - hold bar and nuts shall be galvanized to conform to ASTM M 118M/M 118.

MATERIALS:


With unpainted structural steel - All steel.....AASHTO M 270/M 270M, Gr. 50W
 With painted structural steel - All steel.....AASHTO M 270M/M 270, Gr. 36
 Heavy hex nuts for 1" ϕ barAASHTO M 291

HAND - HOLD DETAILS

504(09)


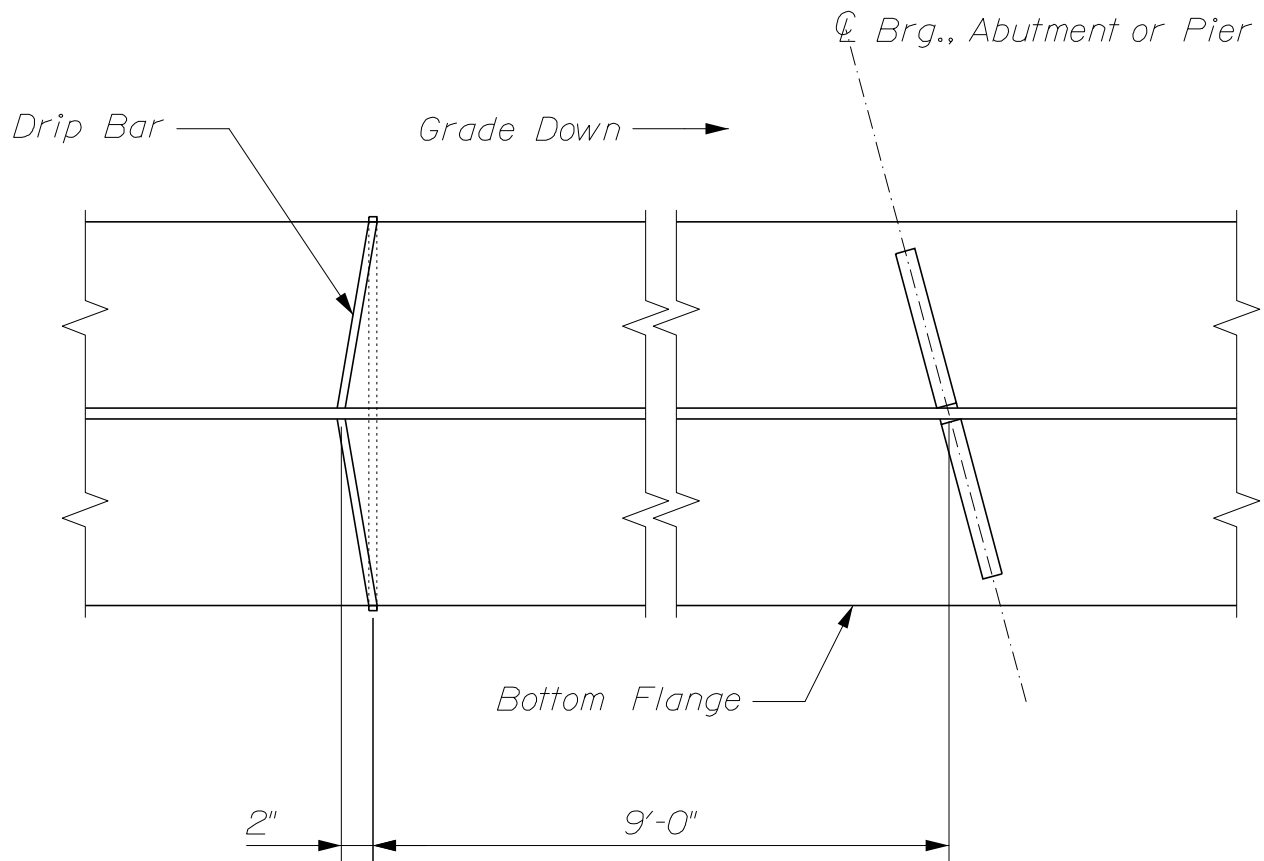


~ DRIP BAR PLAN ~

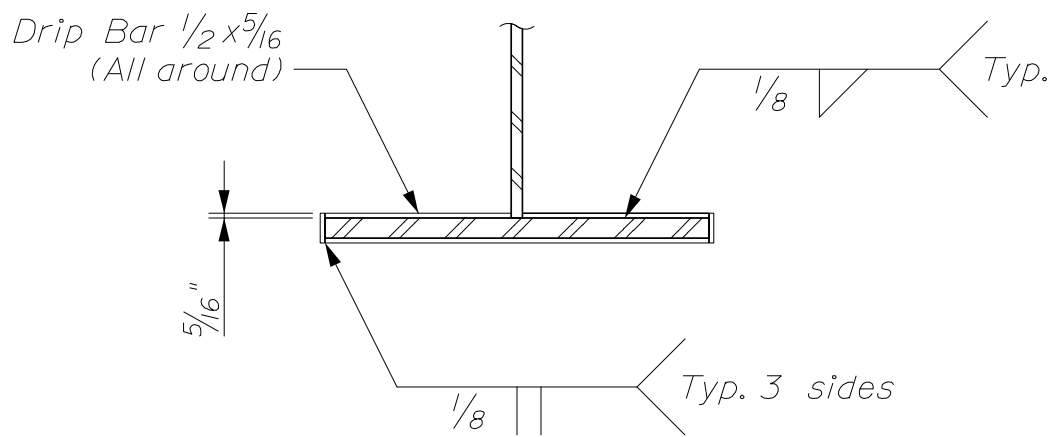

~ DRIP BAR SECTION ~


DRIP BAR DETAILS 504(10)

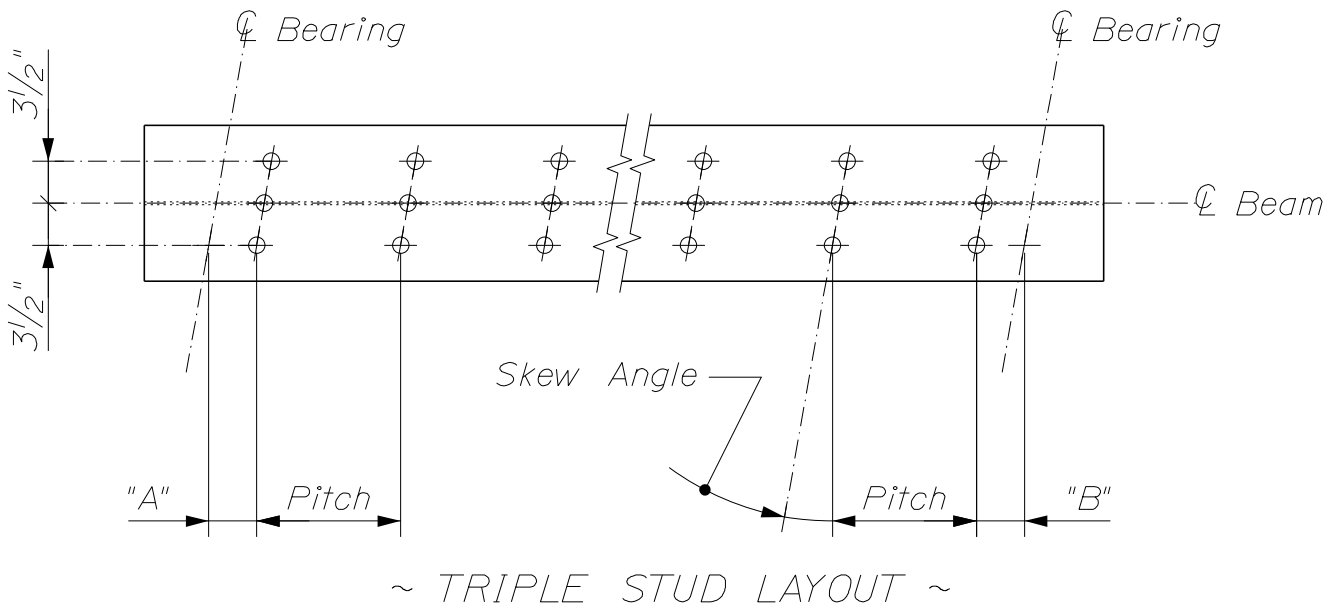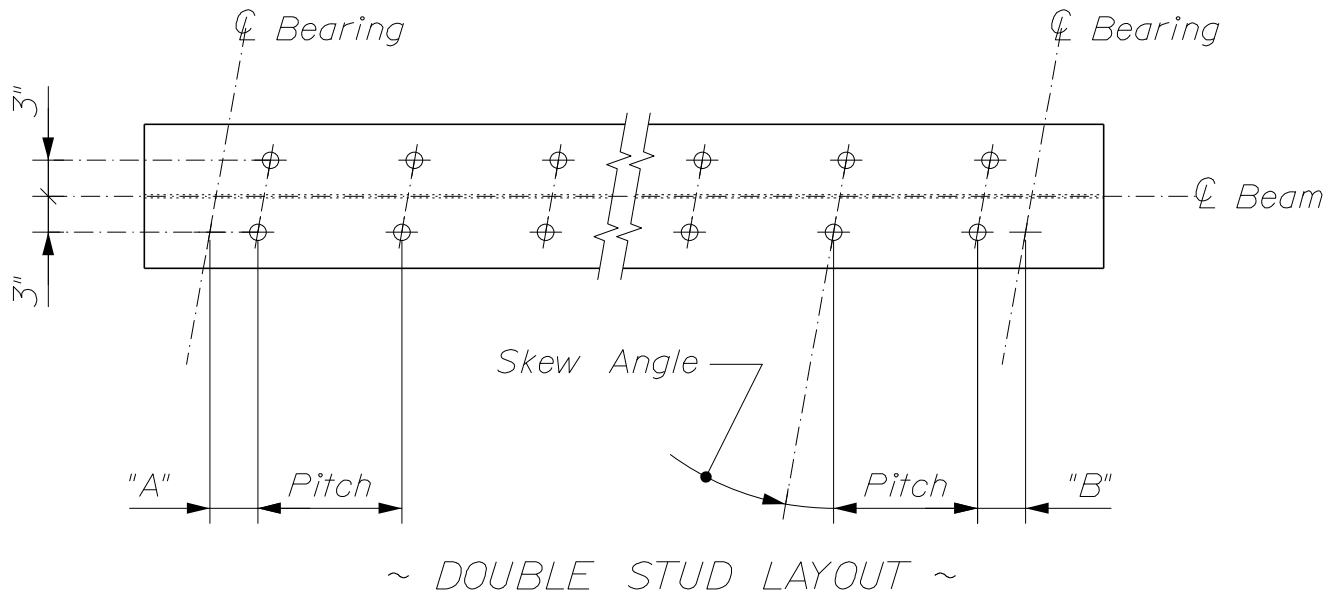

NOTES:

1. Refer to Design Drawings for dimensions "A" and "B", stud pitch and skew angle.




2. Studs shall project a minimum of 2" above the bottom of the slab.

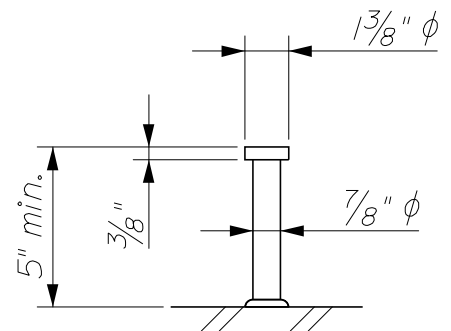


~ STUD DETAIL ~

SHEAR CONNECTORS


505(01)

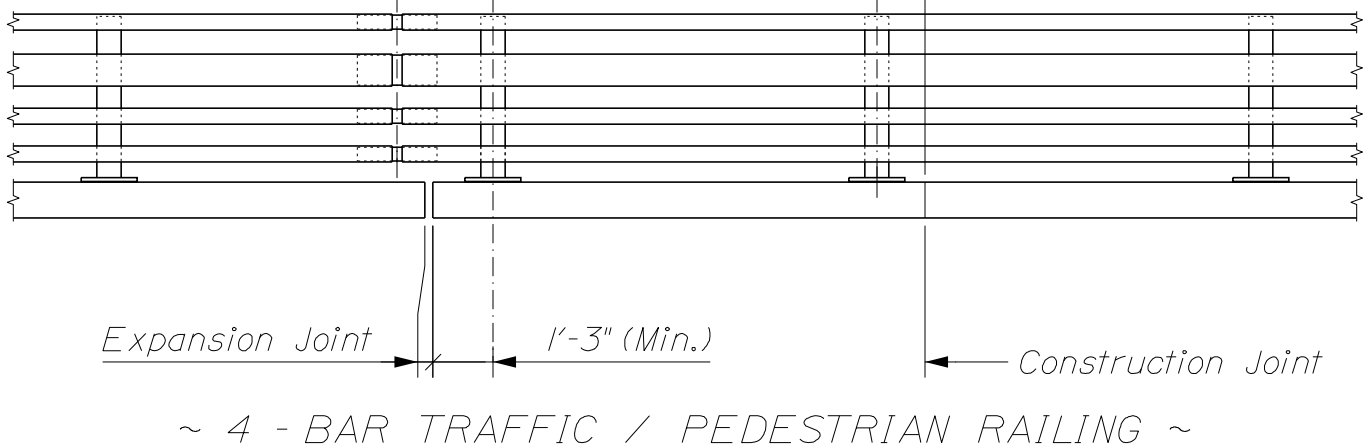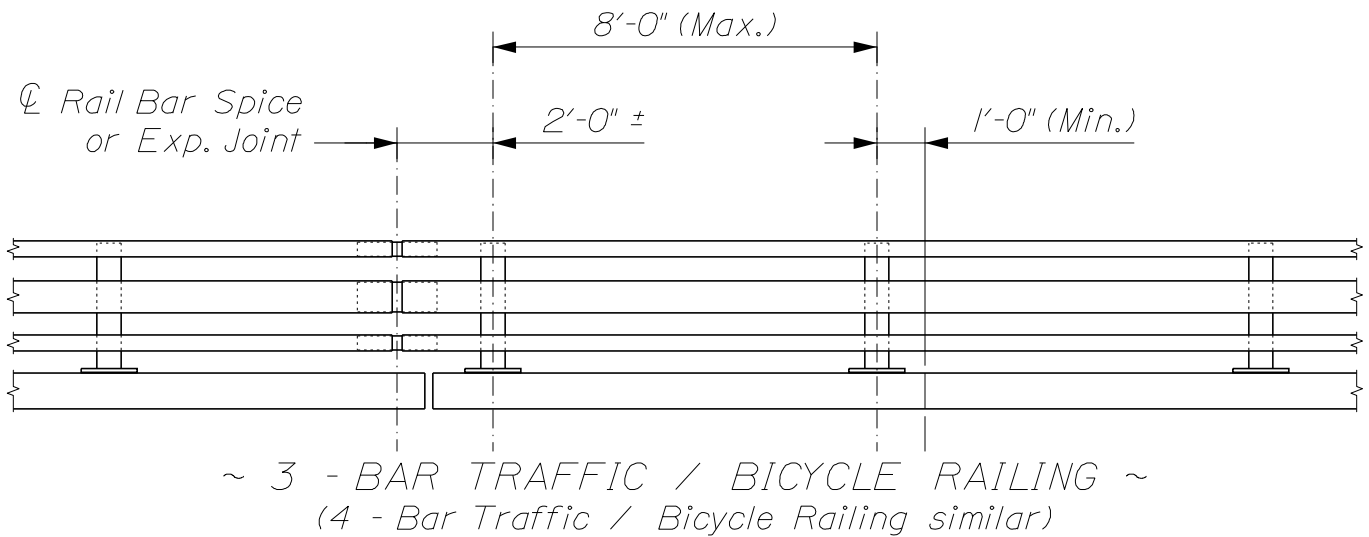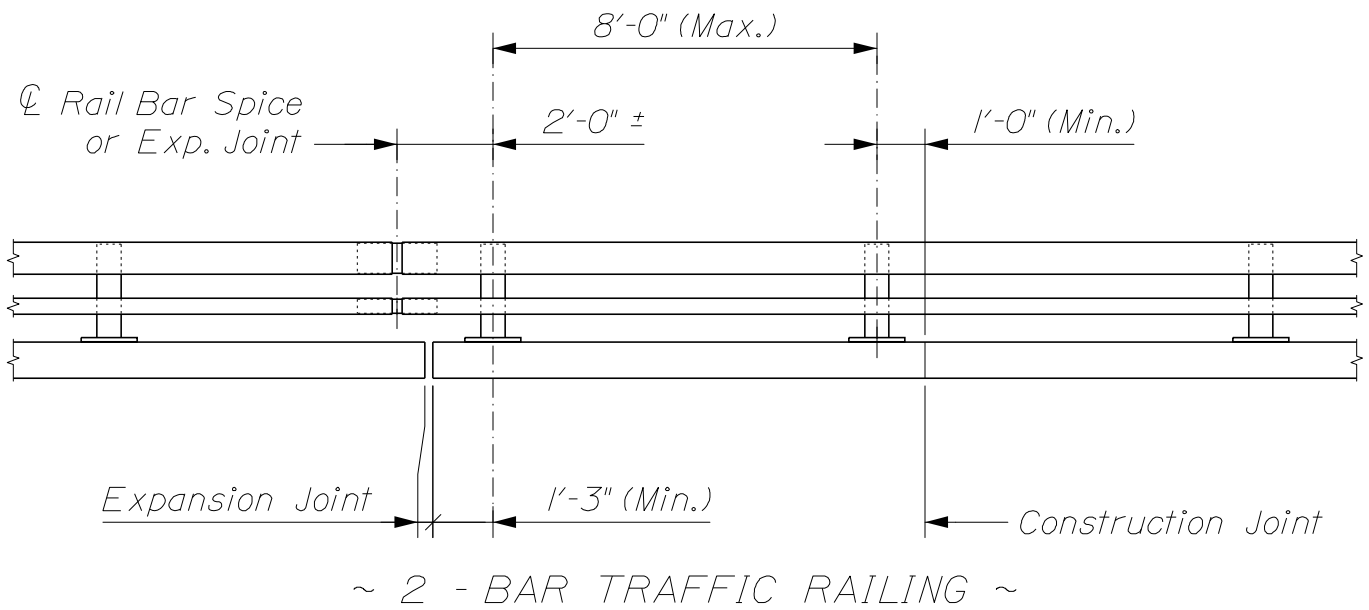


STEEL BRIDGE RAILING
 507(01)

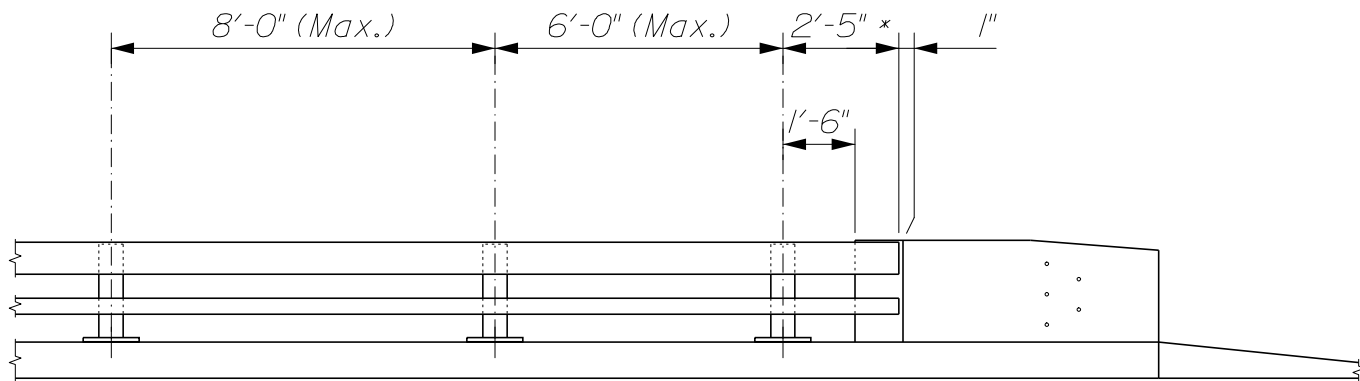

~ 2 - BAR TRAFFIC RAILING ~

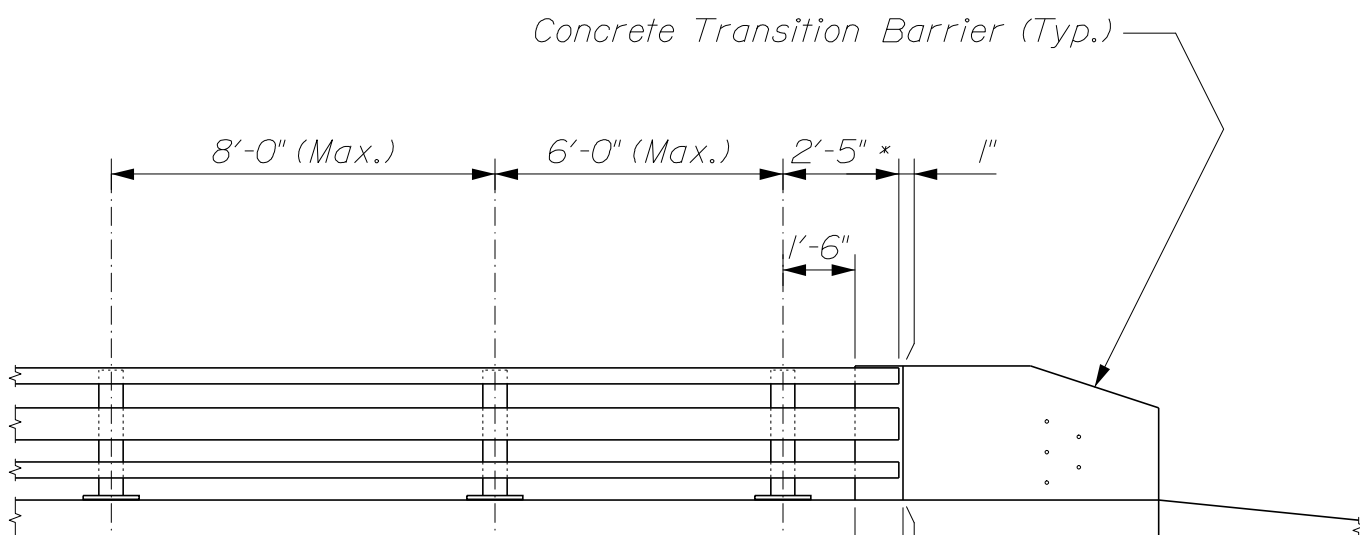


~ 3 - BAR TRAFFIC / BICYCLE RAILING ~
(4 - Bar Traffic / Bicycle Railing similar)

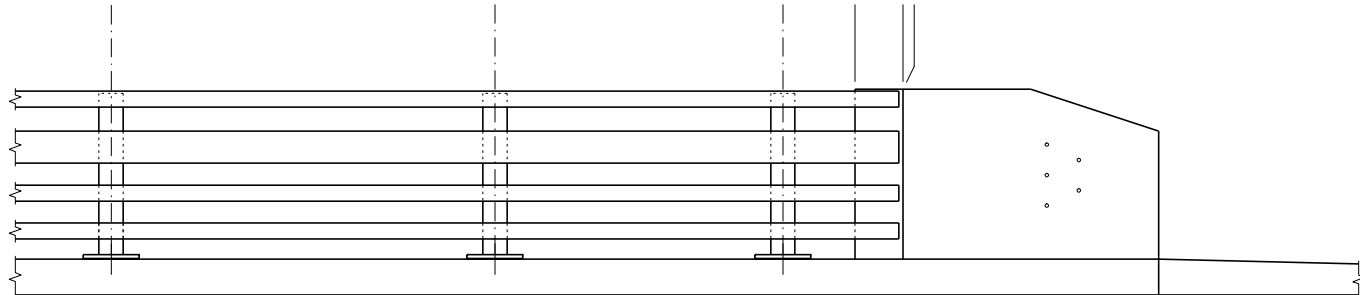

~ 4 - BAR TRAFFIC / PEDESTRIAN RAILING ~

* Including Rail Bar Cap (Typ.)


STEEL BRIDGE RAILING
507(02)

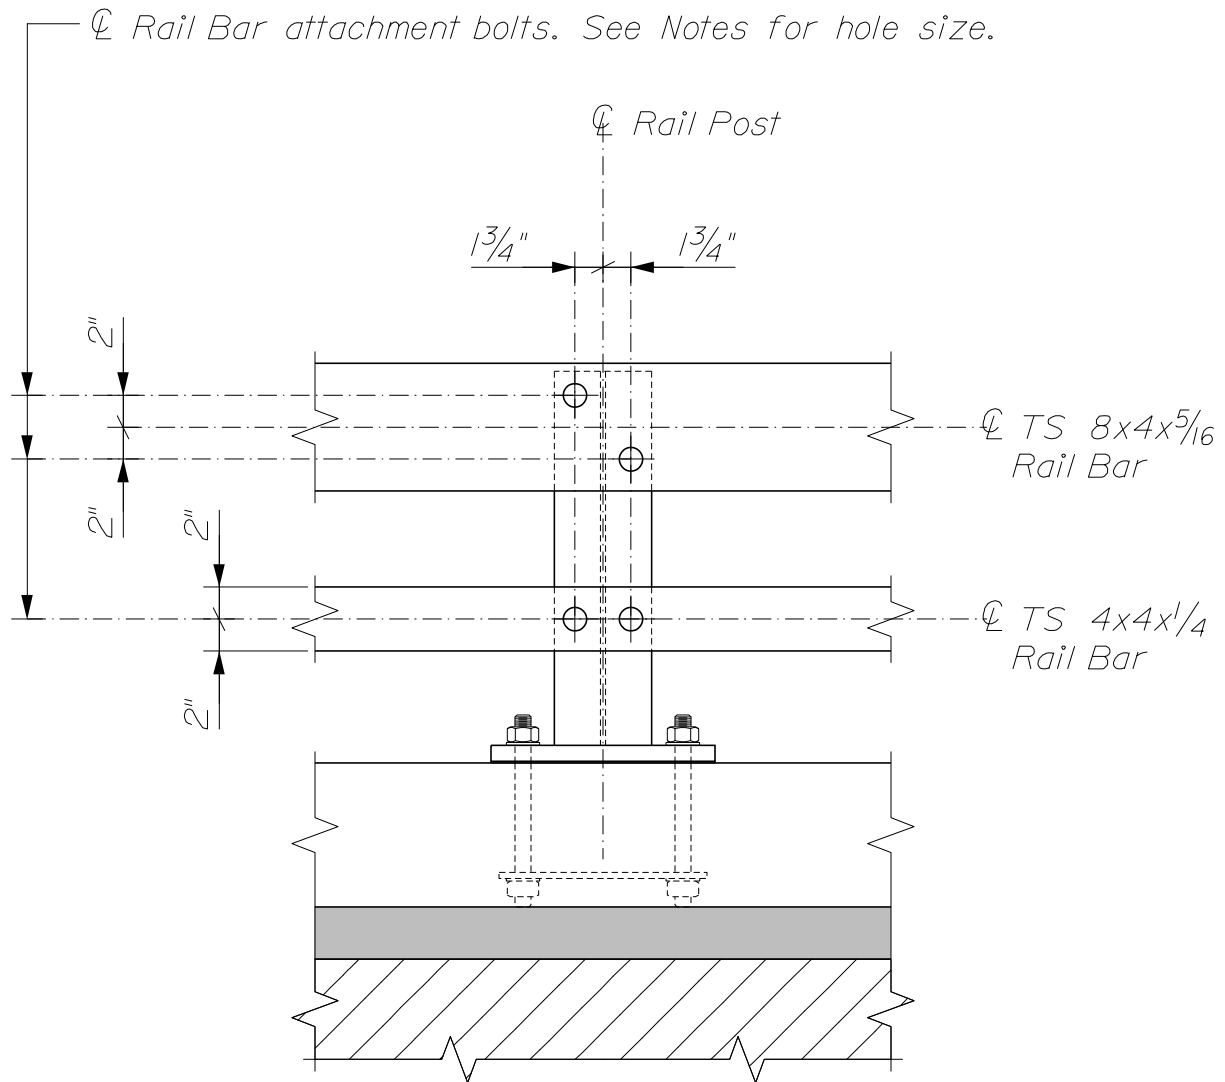

~ TYPICAL RAILING ELEVATION ~
 2 - Bar Traffic Railing is shown.
 Other railing configurations are similar.

STEEL BRIDGE RAILING
 507(03)

Rail Bars:
HSS 8x4x $\frac{5}{16}$ (1)
HSS 4x4x $\frac{1}{4}$ (1)

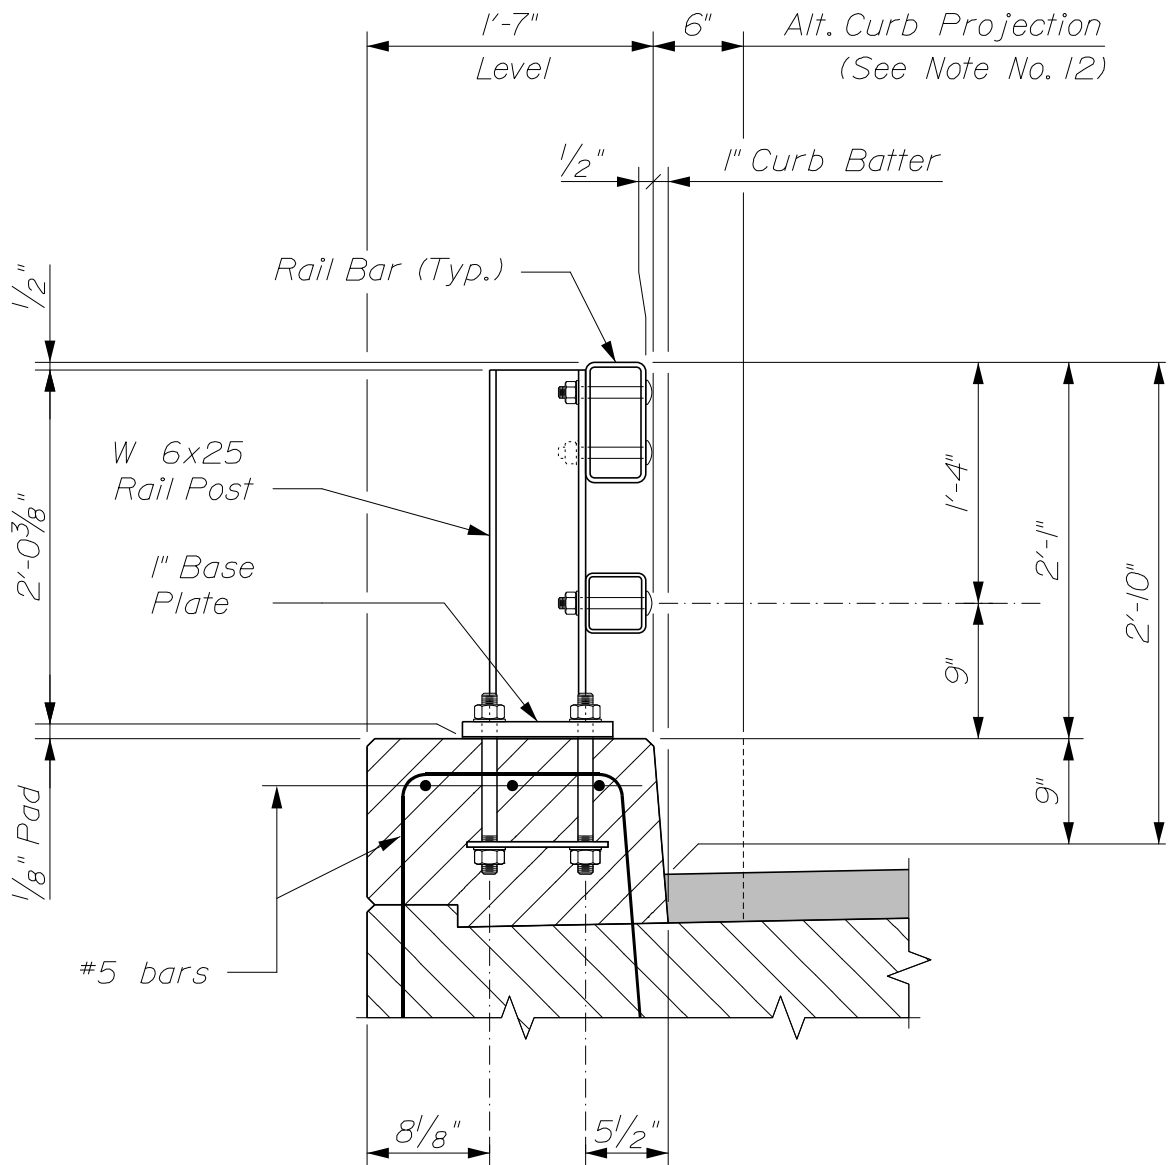


~ TYPICAL RAILING SECTION ~
(2 - Bar Traffic Railing)

STEEL BRIDGE RAILING
507(04)

Rail Bars:

HSS 8x4x $\frac{5}{16}$ (1)

HSS 4x4x $\frac{1}{4}$ (2)

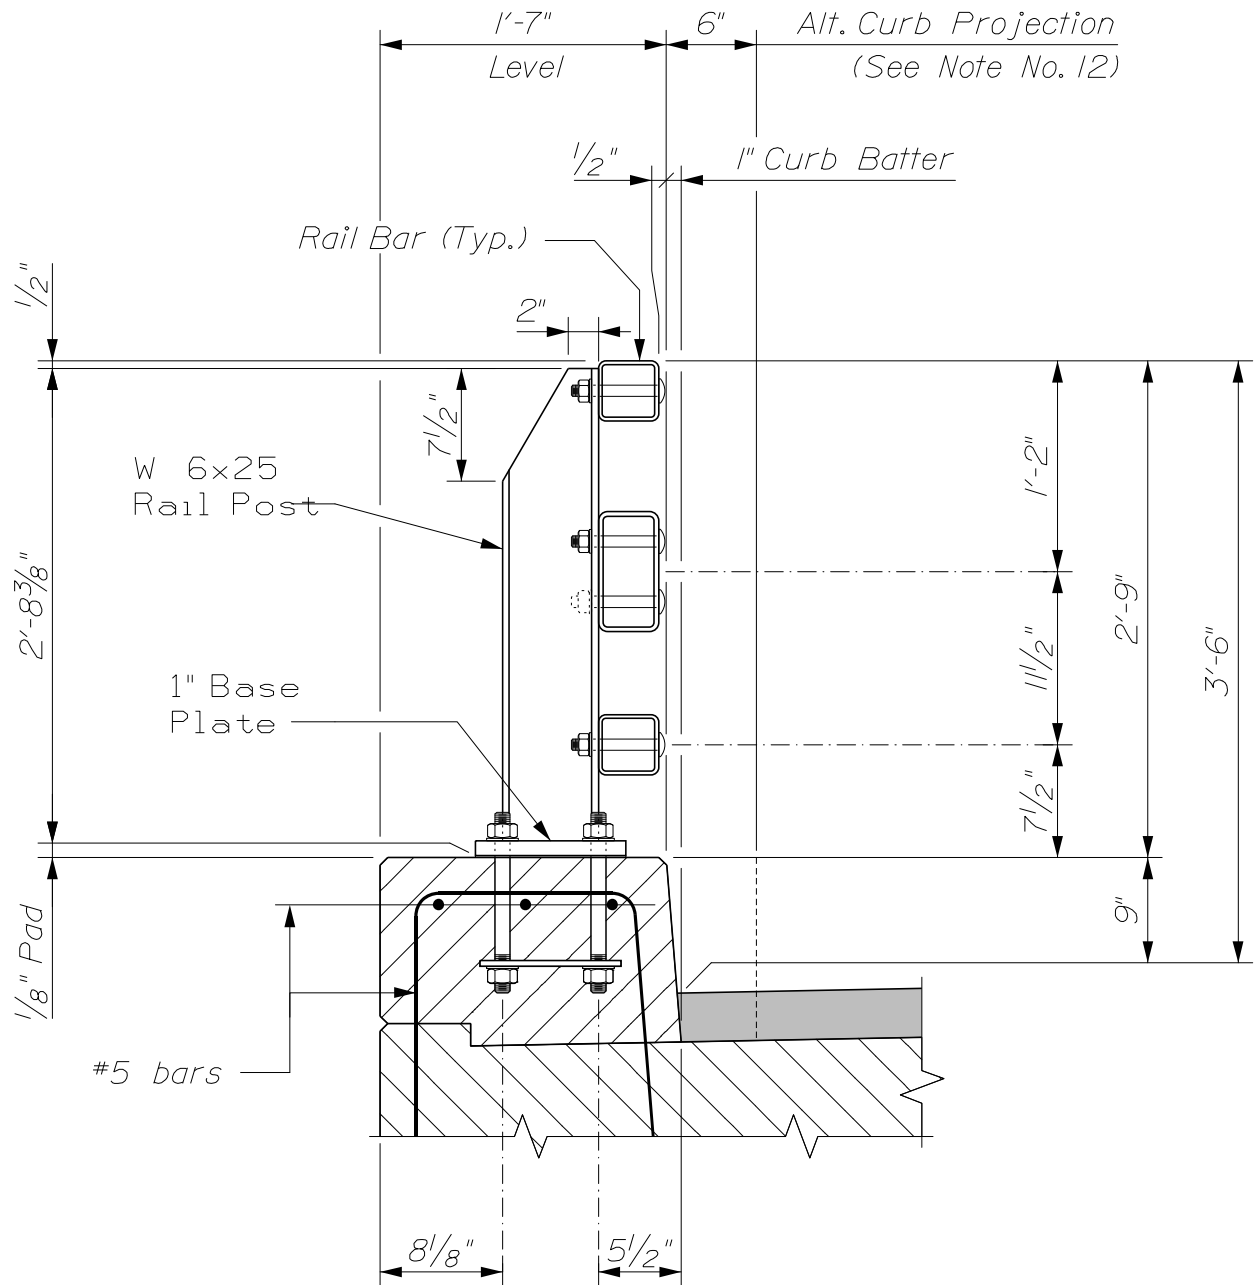


~ TYPICAL RAILING SECTION ~
(3 - Bar Traffic / Bicycle Railing)

STEEL BRIDGE RAILING
507(05)

Rail Bars:

HSS $8 \times 4 \times \frac{5}{16}$ (1)


HSS $4 \times 4 \times \frac{1}{4}$ (3)

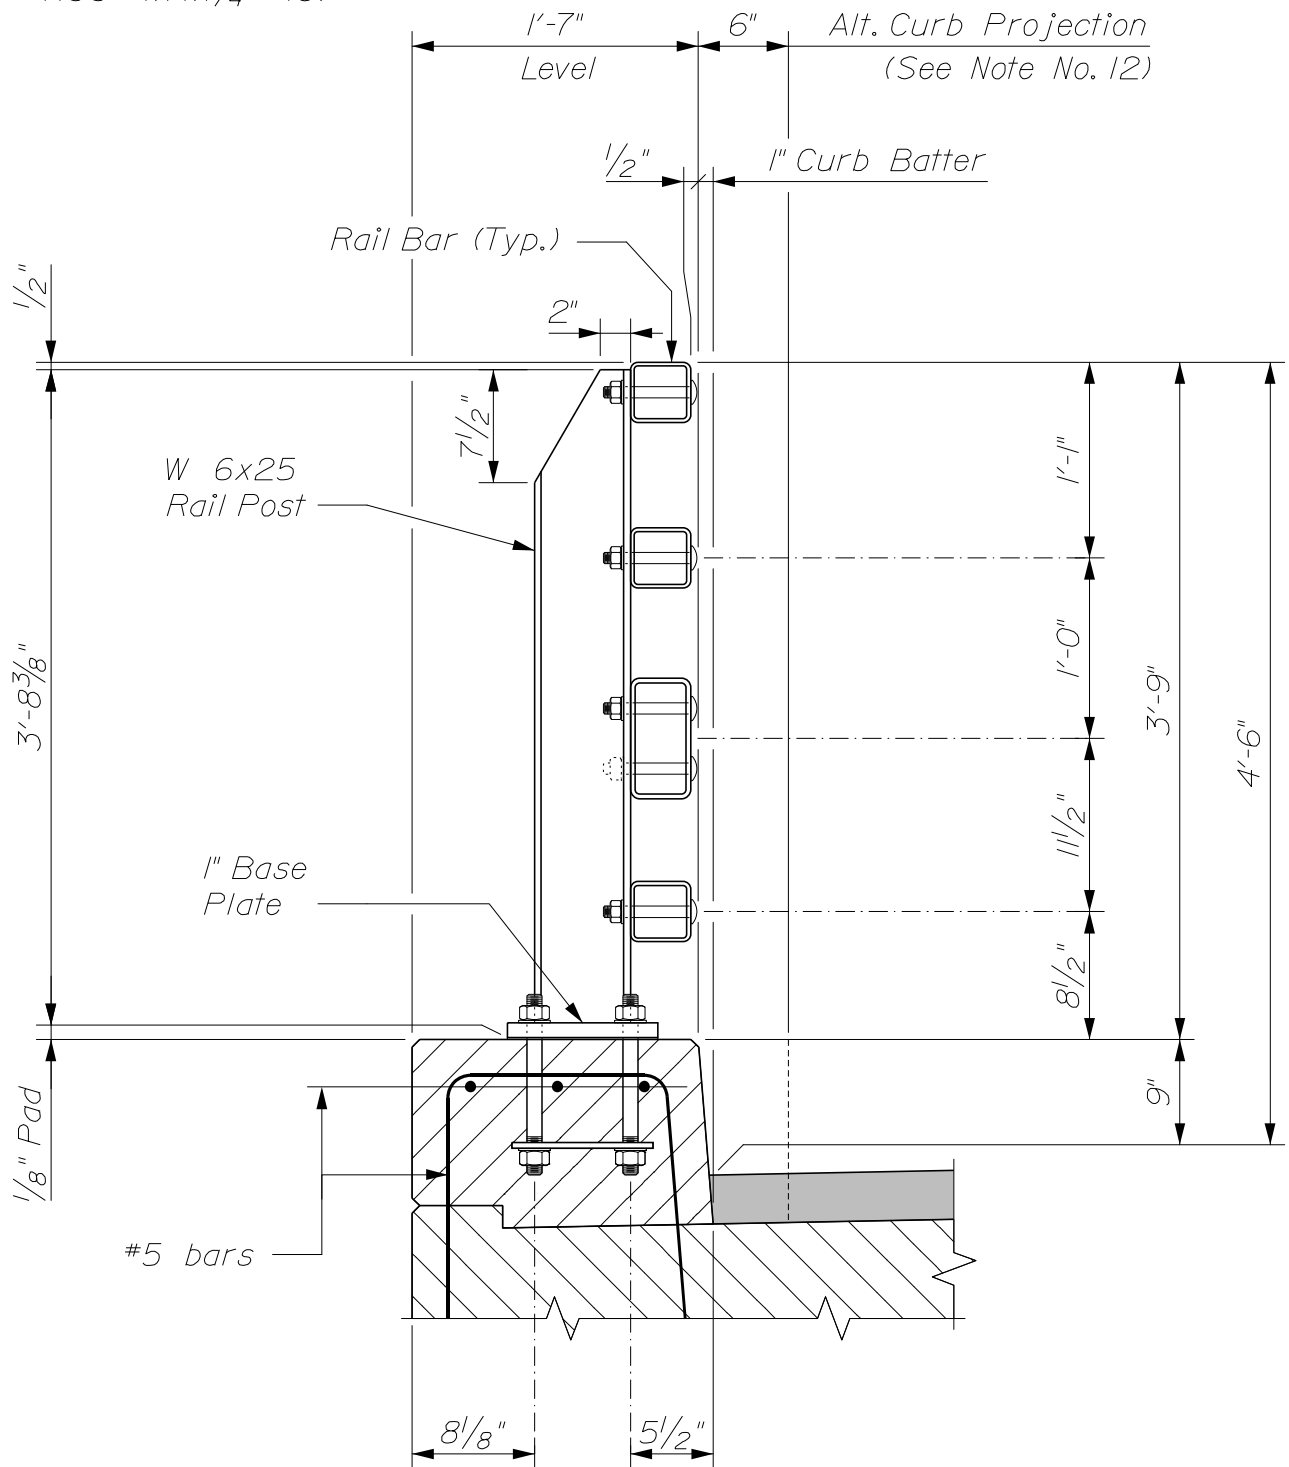

~ TYPICAL RAILING SECTION ~
(4 - Bar Traffic / Bicycle Railing)


STEEL BRIDGE RAILING
507(06)

Rail Bars:
HSS 8x4x $\frac{5}{16}$ (1)
HSS 4x4x $\frac{1}{4}$ (3)

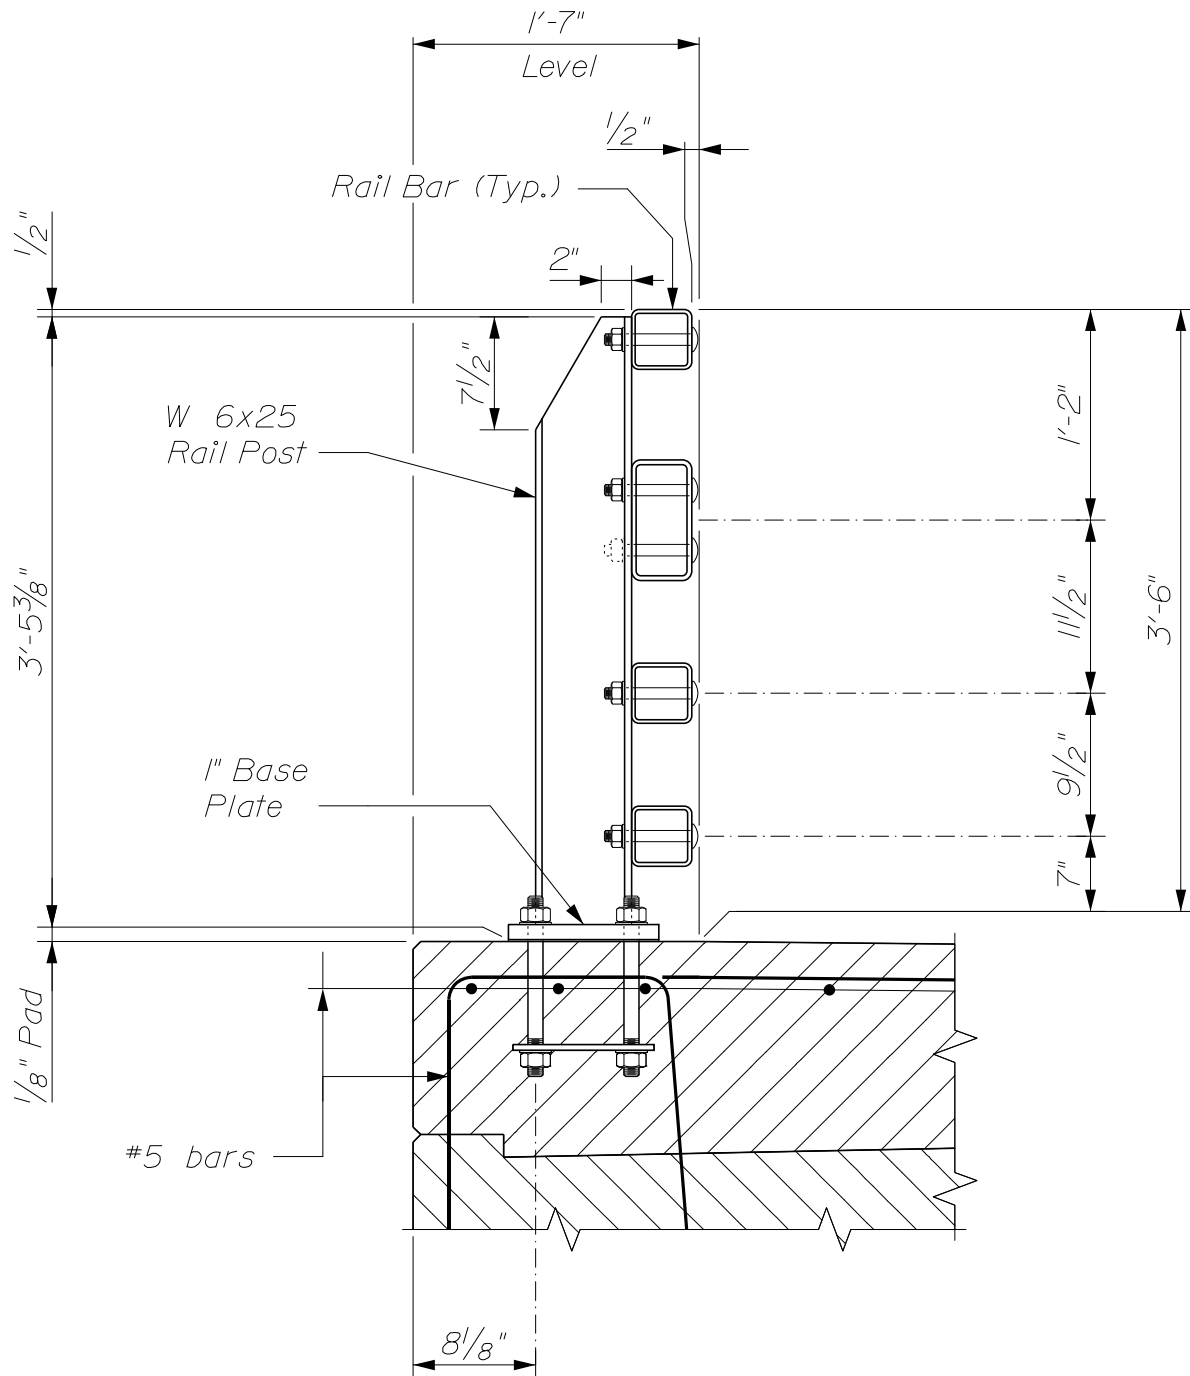


~ TYPICAL RAILING SECTION ~
(4 - Bar Traffic / Pedestrian Railing)


STEEL BRIDGE RAILING
507(07)

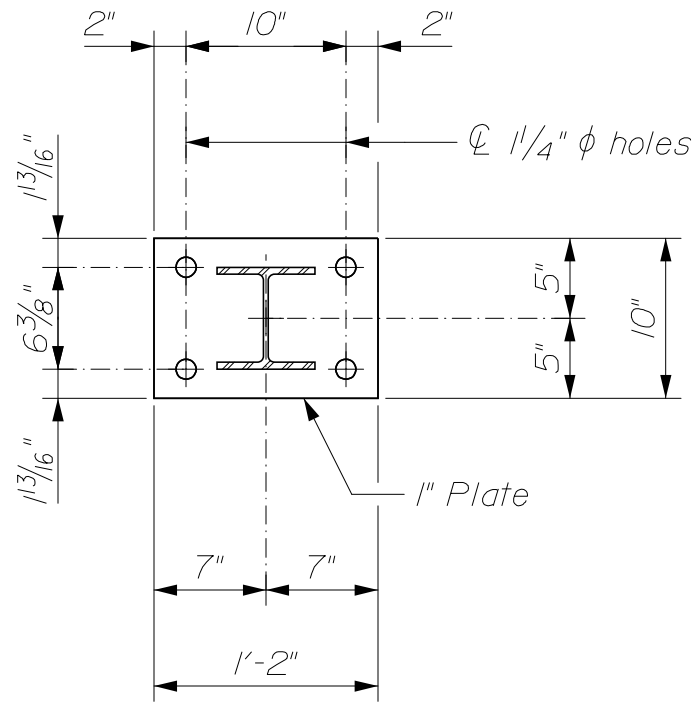

~ POST & BASE PLATE PLAN ~

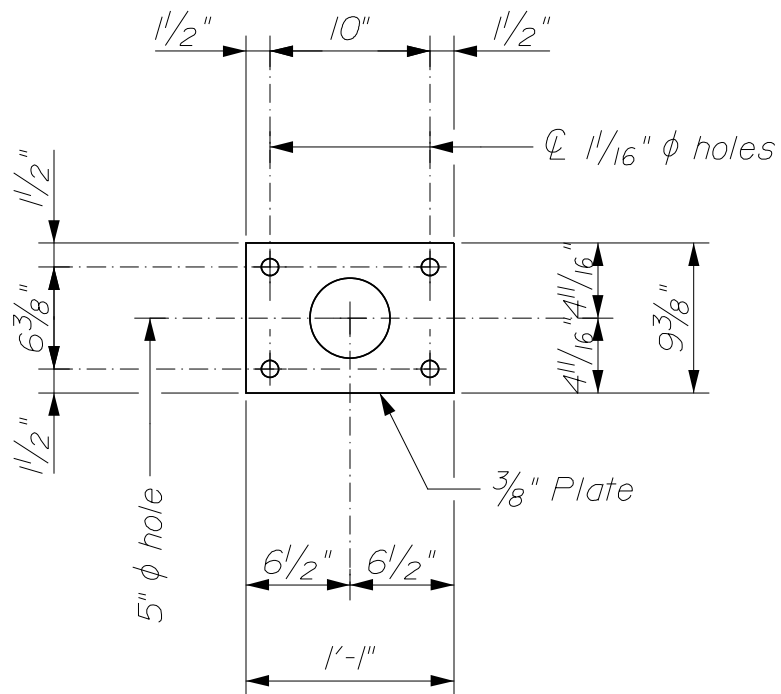


~ ANCHOR PLATE PLAN ~

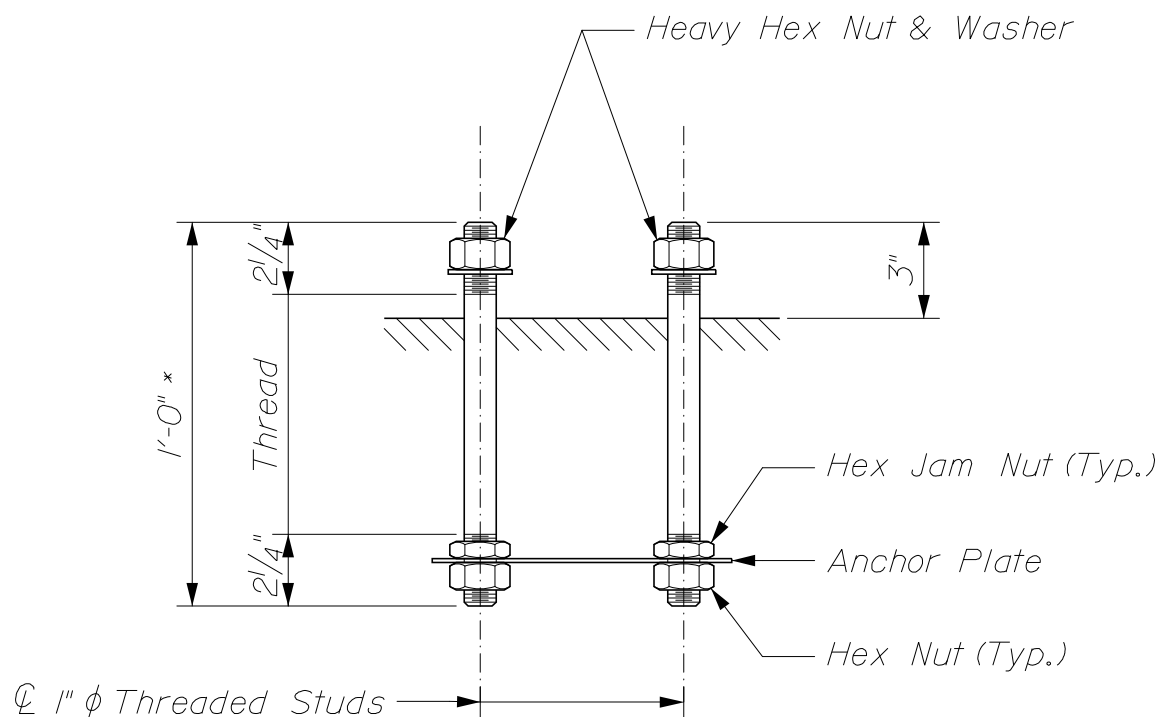

~ RAIL POST ANCHORAGE ~

* = 9" for curb with integral concrete wearing surface.

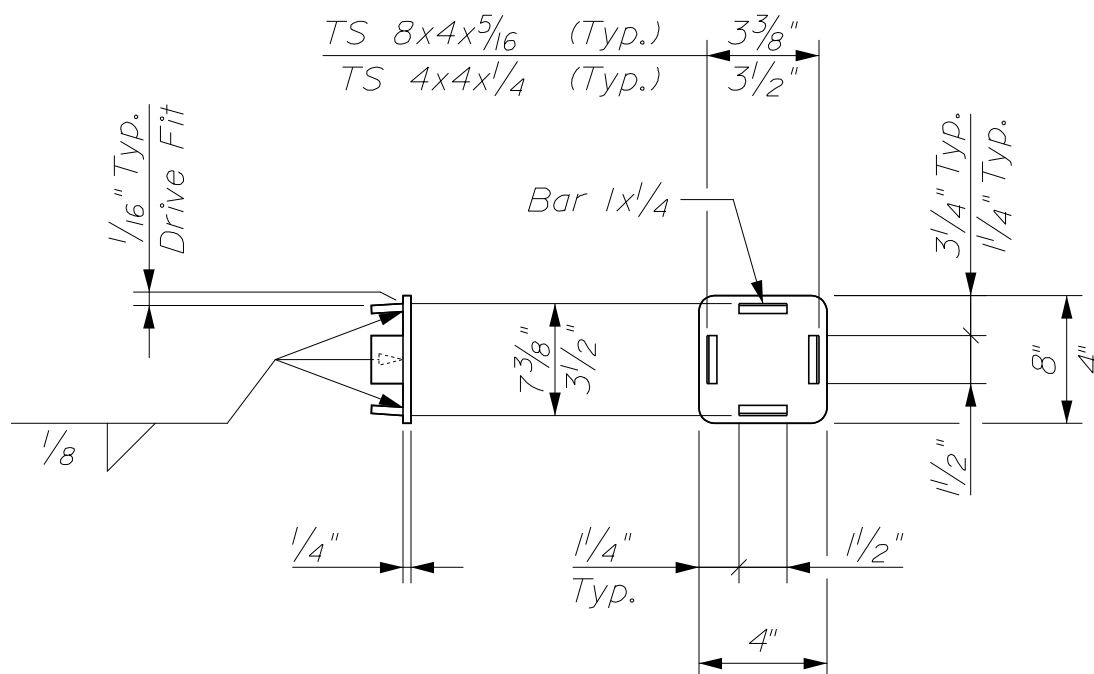


~ RAIL BAR CAP ~

Note: Match corner radius of rail bar


STEEL BRIDGE RAILING

507(09)

Seal Weld
flange edges

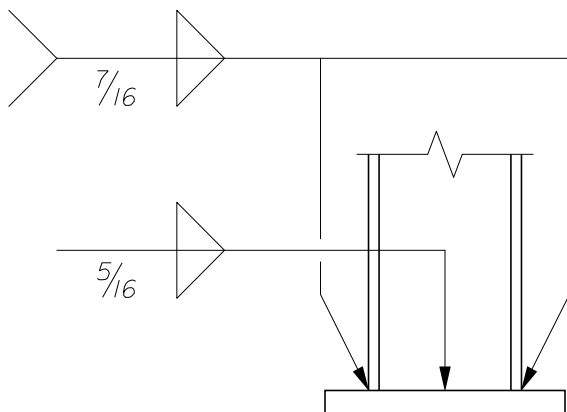


~ POST - TO - BASE WELD DETAIL ~

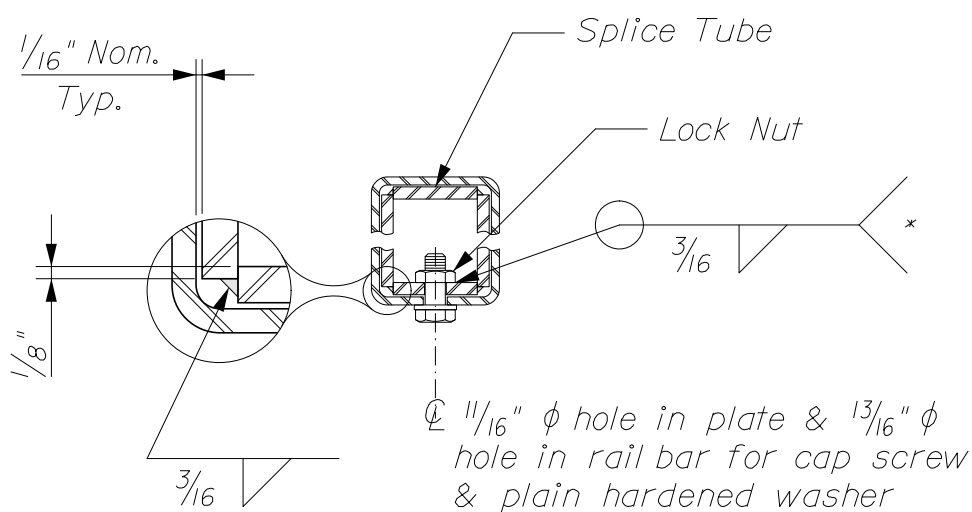

~ RAIL BAR SPLICE SECTION ~

* Weld nuts to plate before assembling splice tube

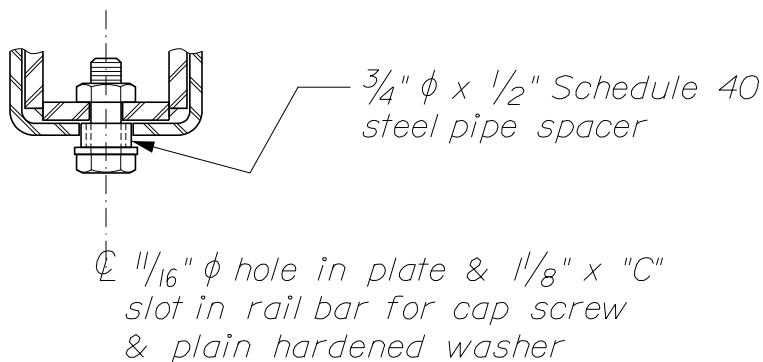


~ RAIL BAR EXPANSION JOINT SECTION ~


For details not shown, see "Rail Bar Splice Section"

STEEL BRIDGE RAILING

507(10)

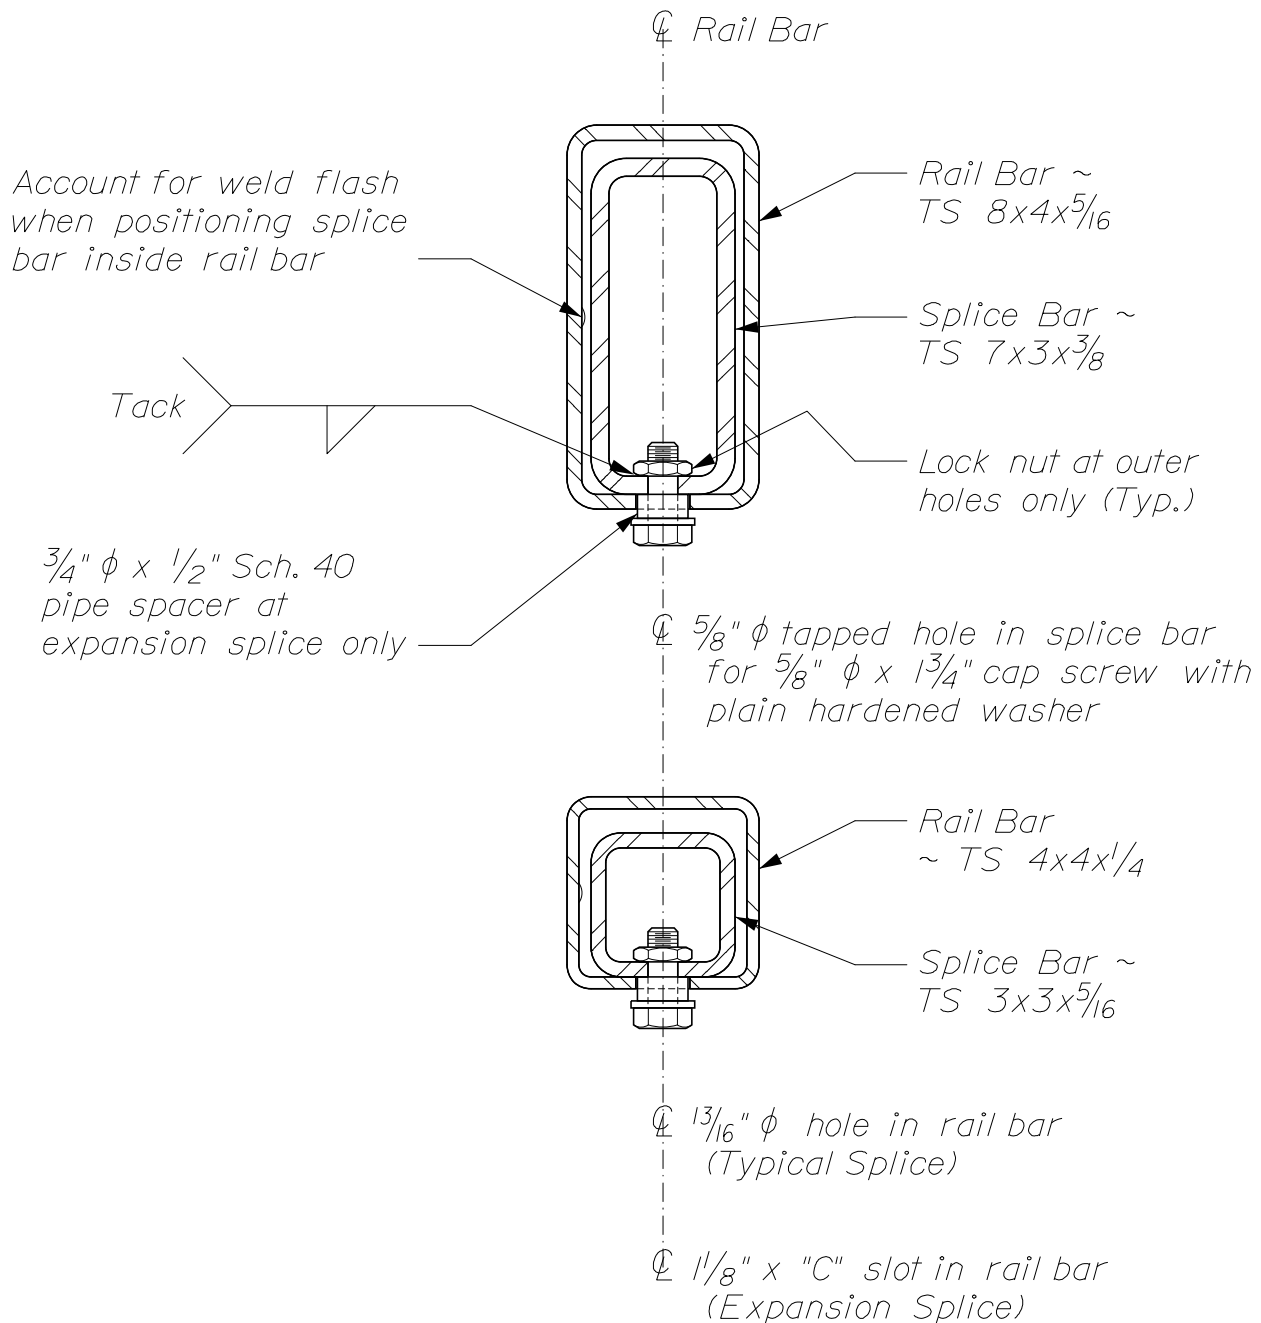

-- OPTIONAL RAIL BAR SPLICE SECTION --
 (Details Typical for both rail bars)

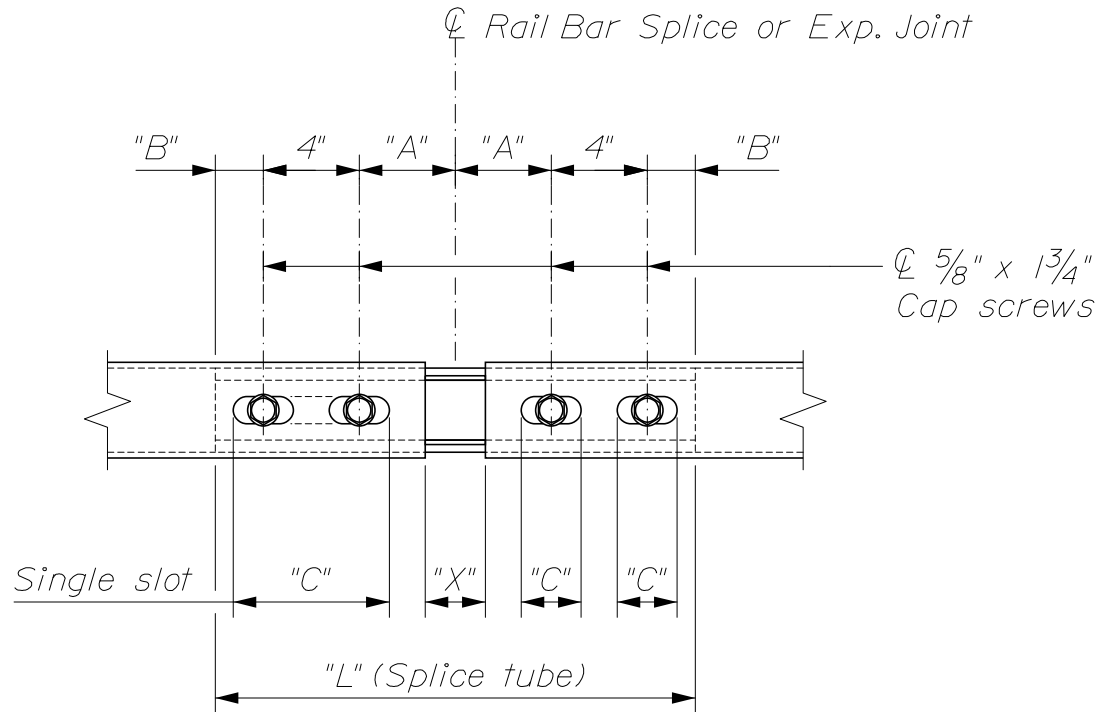


~ RAIL BAR SPLICE & EXPANSION JOINT DETAIL ~
(Bottom View)

SPLICE TUBE DIMENSIONS		
	TS 8x4	TS 4x4
Top & Bot. Plates	$2\frac{1}{2} \times \frac{3}{8} \times "L"$	$2\frac{5}{8} \times \frac{3}{8} \times "L"$
Side Plates	$6\frac{3}{4} \times \frac{3}{8} \times "L"$	$2\frac{7}{8} \times \frac{3}{8} \times "L"$


SPLICE & EXPANSION JOINT TABLE					
"T"	"A"	"B"	"C"	"L"	"X"
Splice	4"	2"	--	1'-8"	$\frac{3}{4}"$
$\leq 4"$	4"	2"	$2\frac{1}{2}"$	1'-8"	$2\frac{1}{2}"$
$> 4" \leq 6\frac{1}{2}"$	$5\frac{1}{2}"$	$2\frac{1}{2}"$	$3\frac{1}{2}"$	2'-0"	$3\frac{3}{4}"$
$> 6\frac{1}{2}" \leq 9"$	$6\frac{1}{2}"$	$3\frac{1}{2}"$	9" *	2'-4"	5"
$> 9" \leq 13"$	$8\frac{1}{2}"$	$4\frac{1}{2}"$	11" *	2'-10"	7"

T = Total Movement

* = Single Slot

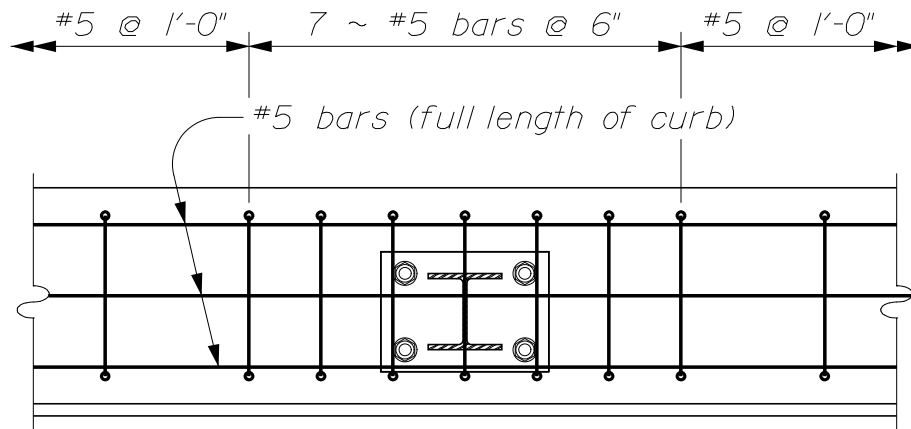

~ CURB REINFORCING PLAN ~

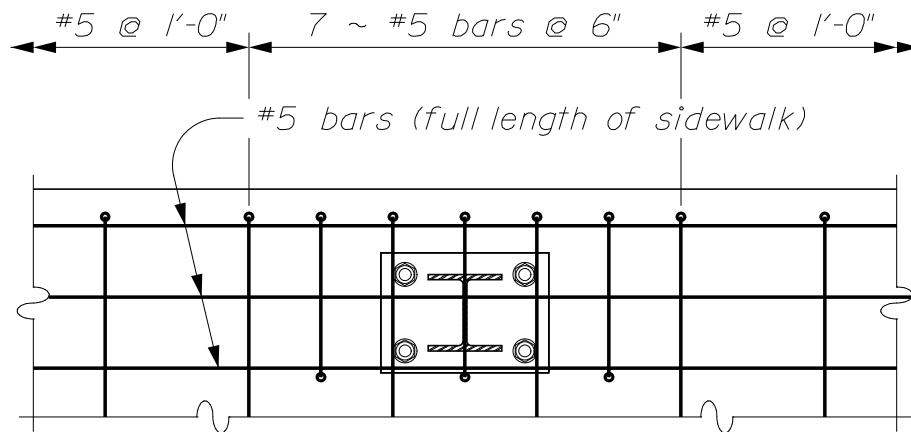

~ SIDEWALK REINFORCING PLAN ~

NOTES:

1. All work and materials shall conform to the provisions of Section 507 - Railings of the Standard Specifications.

2. Tubing shall meet the longitudinal CVN minimum requirements of 15 ft-lb at 0° F or proportional values of sub - size specimens. Testing shall be done in accordance with ASTM A673. The H frequency shall be used and the material shall be as - rolled.

3. All exposed cut or sheared edges shall be broken and free of burrs. The inside weld flash of tubing shall be removed at splices and expansion joints.

4. Rail posts shall be set normal to grade unless otherwise shown.

5. Lengths of rail bar shall be attached to a minimum of 2 rail posts and to at least 4 posts whenever possible.

6. Rail bar expansion joints shall be provided in any rail bay spanning a superstructure expansion joint. Expansion joint width shall be "X" at 45° F and will be adjusted in the field as directed by the Resident. Refer to detail and table on page 507(12) for dimension "X".

7. All parts shall be galvanized after fabrication in accordance with except that hardware shall meet the requirements of either ASTM F2329 or ASTM B695, Class 50, Type I. Parts except hardware shall be blast - cleaned prior to galvanizing in accordance with SSPC - SP6.

8. Anchor bolts shall be set with a template. Nuts securing the post base plate shall be tightened to a snug fit and given an additional $\frac{1}{8}$ turn.

9. Bolts for attaching rail bars to posts shall be $\frac{3}{4}$ " Diameter round or dome head and may be rib neck, slotted, wrench head or tension control (TC or twist - off). Holes in posts shall be $\frac{1}{16}$ " inch larger than the diameter of the bolt. Holes in rail bars shall be drilled to size as follows:

Slotted, wrench head or TC bolts: $\frac{1}{16}$ " larger than bolt diameter

Rib neck bolts: Size appropriate to accomodate an interference fit

Bolts shall be 6 inches in length and shall include a flat washer under the nut.

(Continued)

NOTES (Continued):

10. Holes in rail bars shall be field - drilled and shall be coated with an approved zinc - rich paint prior to erection.


11. Bolts in expansion joints shall be tightened only to a point that will allow rail movement.

12. The alternate curb projection shown for the curb - mounted railings is intended for use with granite bridge curb.

13. If there is a conflict between these Standard Details and the Design Drawings, the Contractor shall notify the Resident immediately.

MATERIALS:

Rail bars & rail splice bars ASTM A500, Grade C
Rail posts, base plates
& fabricated splice bars AASHTO M 270M/M 270, Grade 50
All other shapes & plates ASTM A36/A36M
Anchor bolts, washers & heavy hex nuts AASHTO M 314, Grade 105
Rail attachment bolts ASTM A449
All other bolts & nuts (unless noted) ASTM A307 & ASTM A563,
Grade D or DH

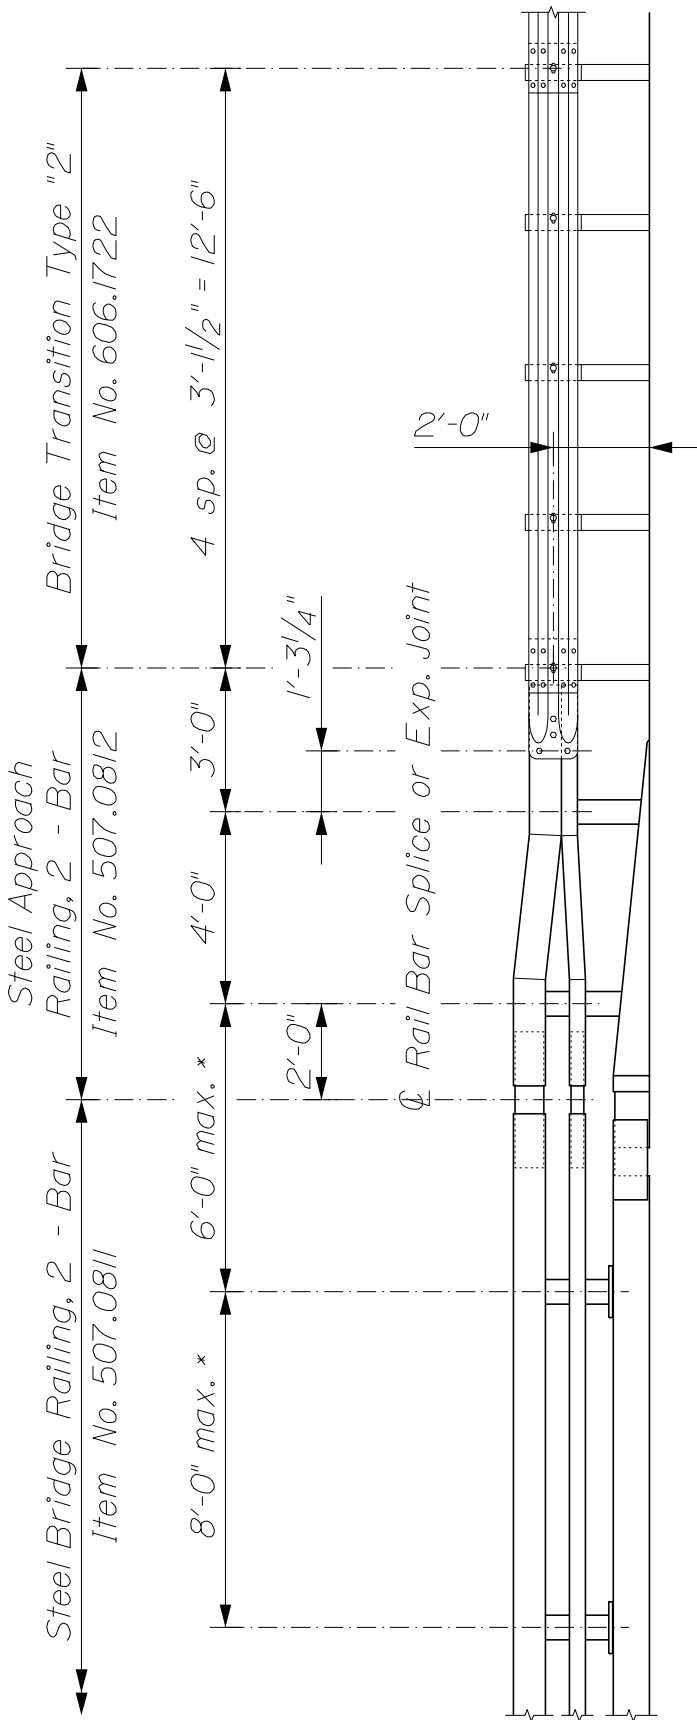


~ ELEVATION ~

* See Design Drawings for dimensions


NOTES:

1. The bottom rail bar may be bent to shape from one continuous length of stock provided that the fabricator can achieve the required geometry without deforming the tube.
2. To facilitate field fit - up of the approach railing, posts shall be set loosely into fiber form tubes while parts are being assembled. Post holes shall be backfilled with Class "S" or other concrete mix approved by the Resident. Payment will be considered incidental to the Steel Approach Railing pay item.

STEEL APPROACH RAILING, 2-BAR
507(16)

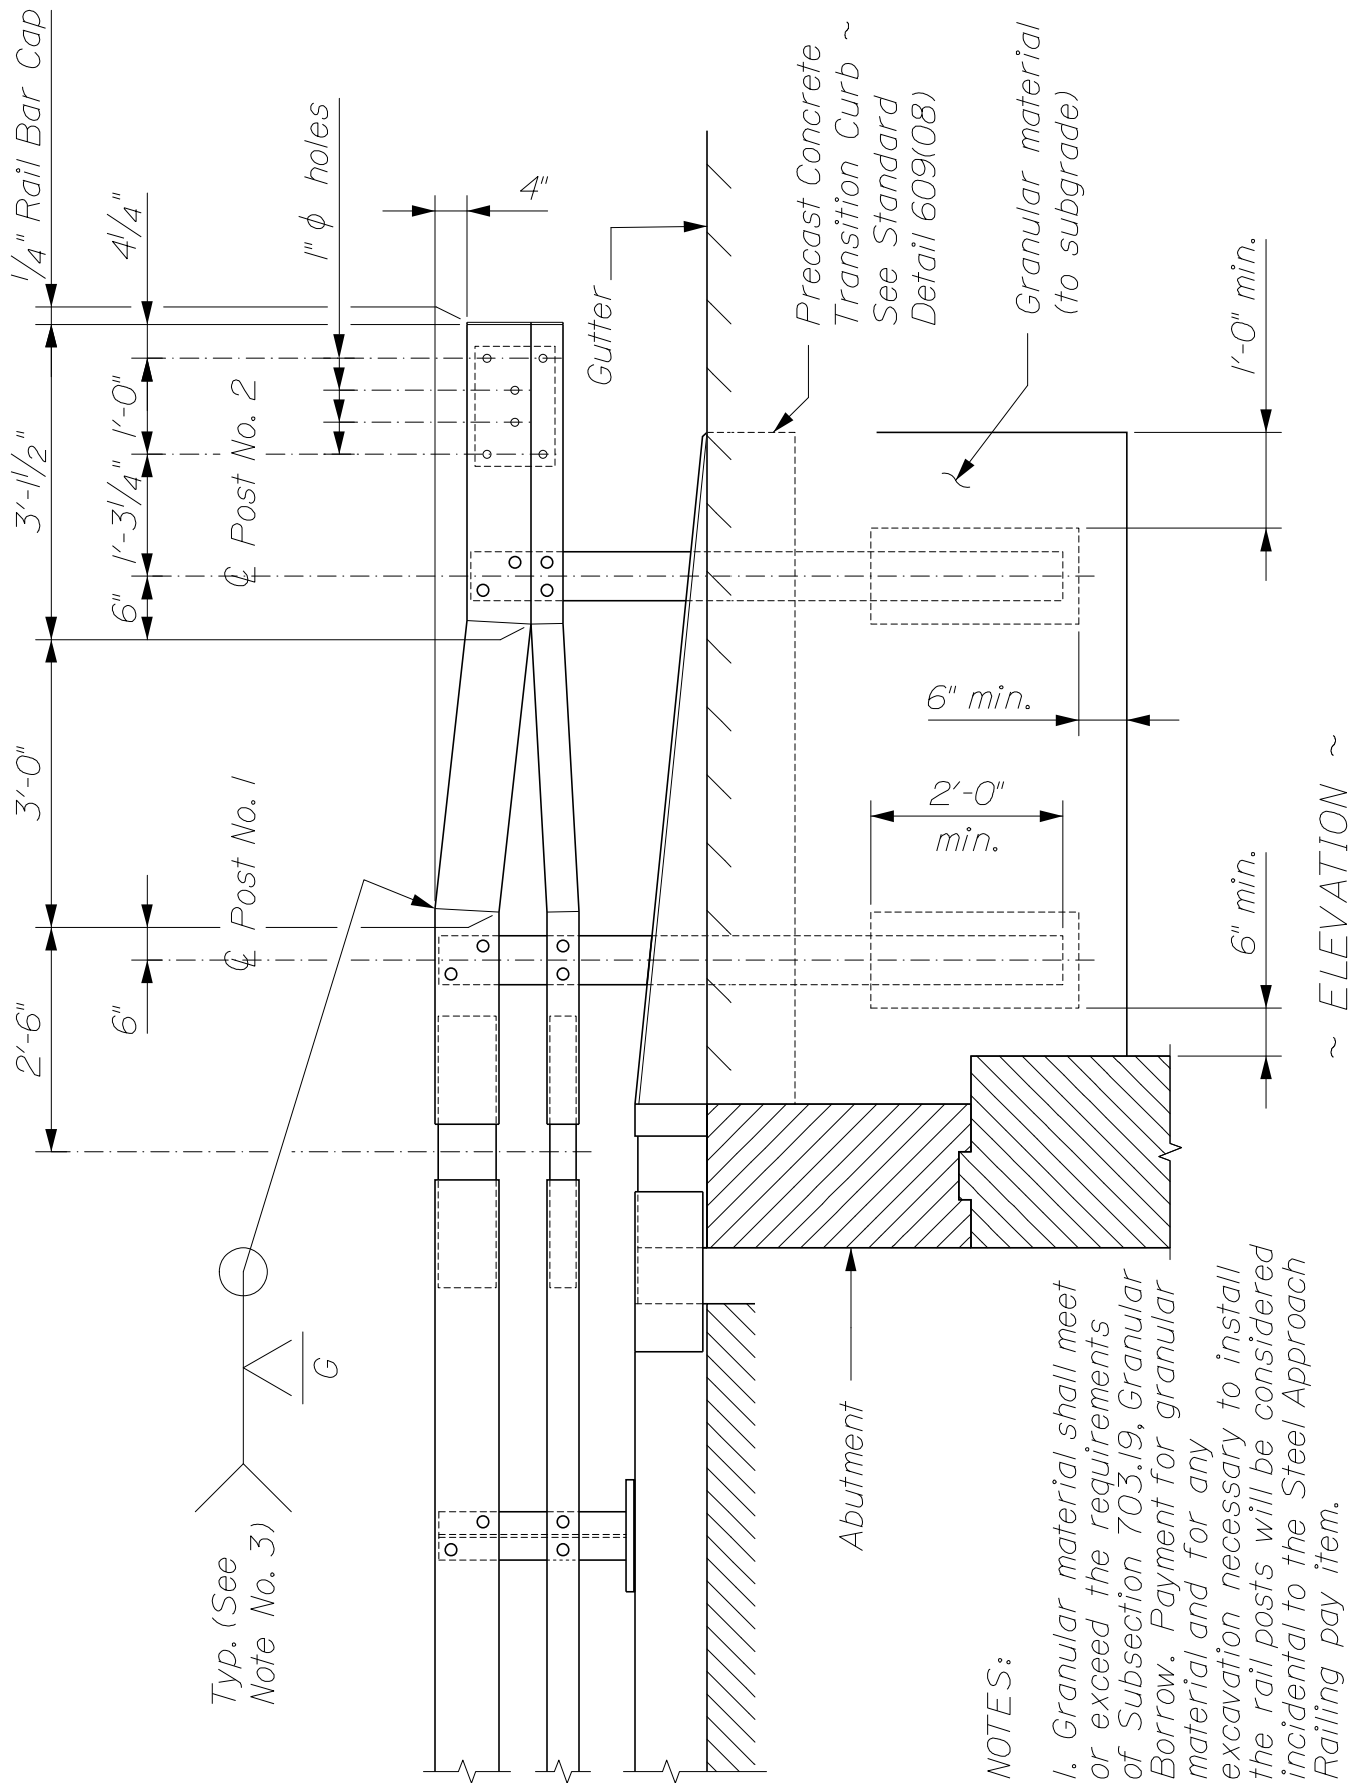


STEEL APPROACH RAILING, 2-BAR
507(17)

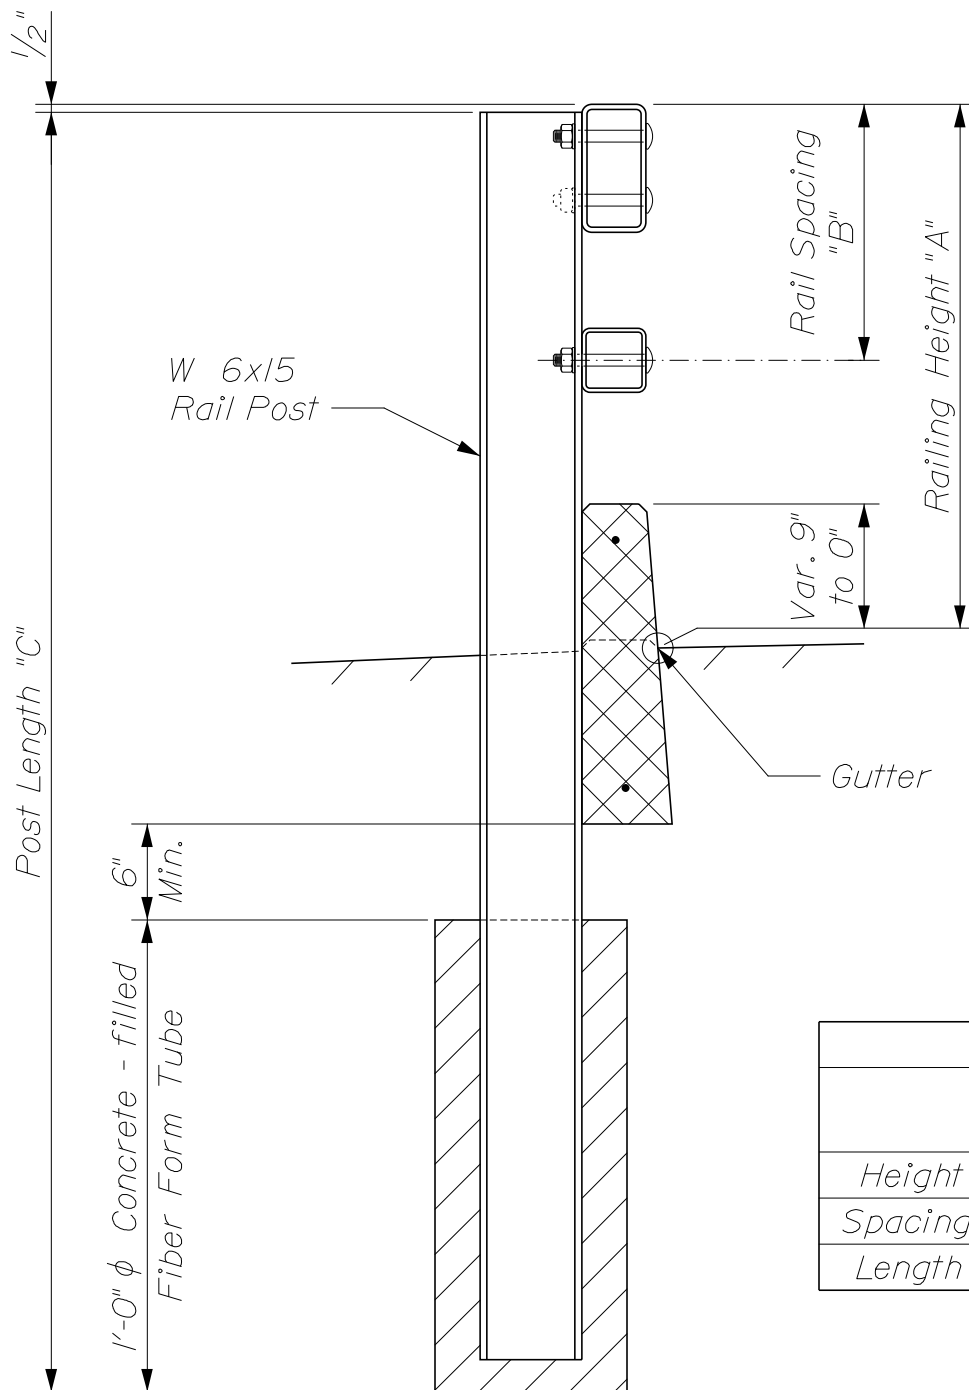


DIMENSIONS		
	Post No. 1	Post No. 2
Height "A"	2'-10"	2'-6"
Spacing "B"	1'-4"	10"
Length "C"	6'-6"	6'-2"

~ TYPICAL SECTION ~

STEEL APPROACH RAILING, 2-BAR 507(18)

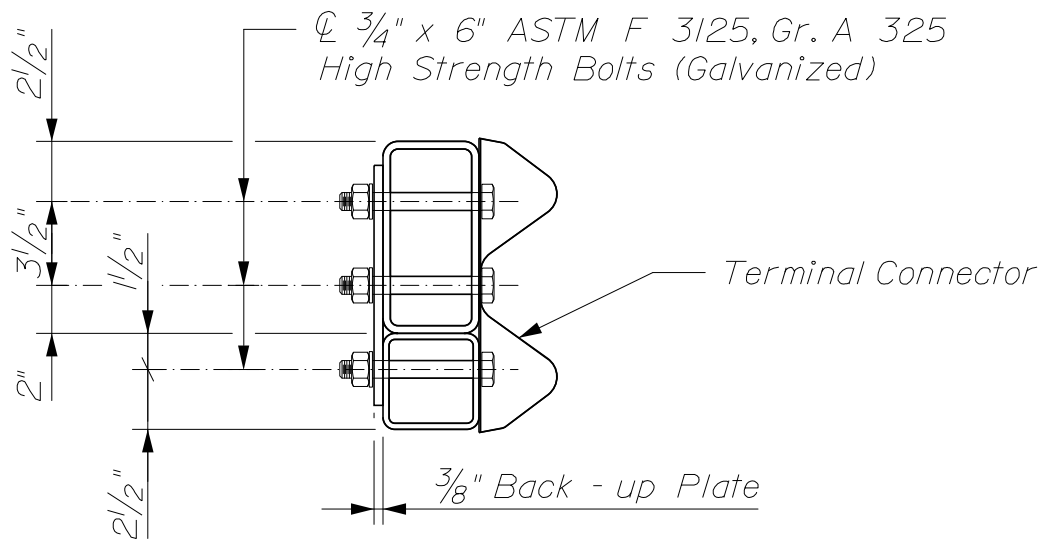

~ SECTION THROUGH
 TERMINAL CONNECTOR ~

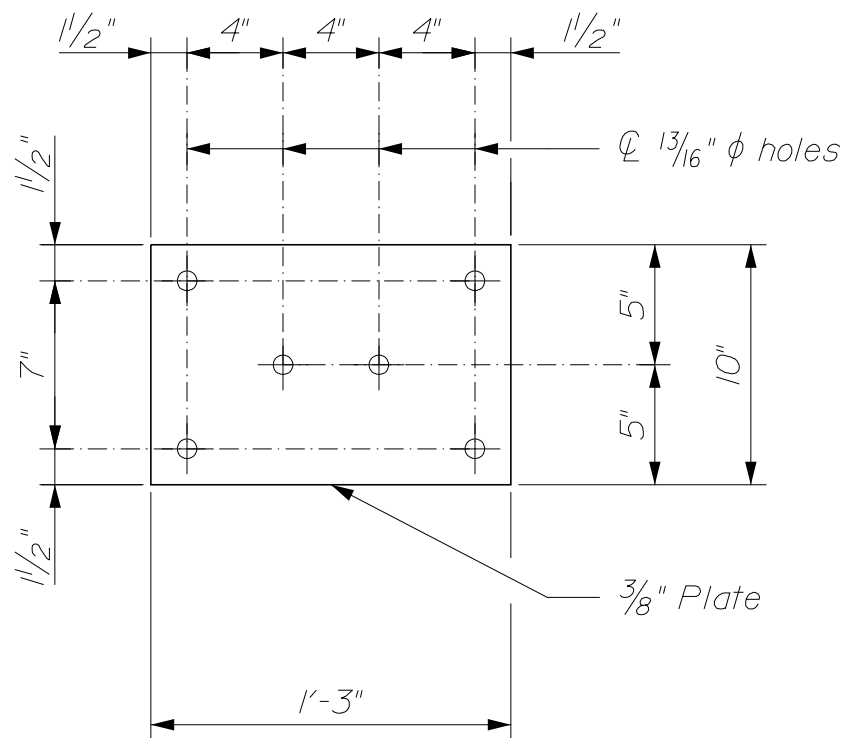


~ BACK - UP PLATE ~

NOTES:

1. The Bridge Transition Type "2" as shown is a slight modification of the standard Type "2" detail shown in Section 606. The $\frac{3}{4}" \phi$ bolts and back - up plate will be considered as part of the Steel Approach Railing pay item.


STEEL APPROACH RAILING, 2-BAR

507(19)

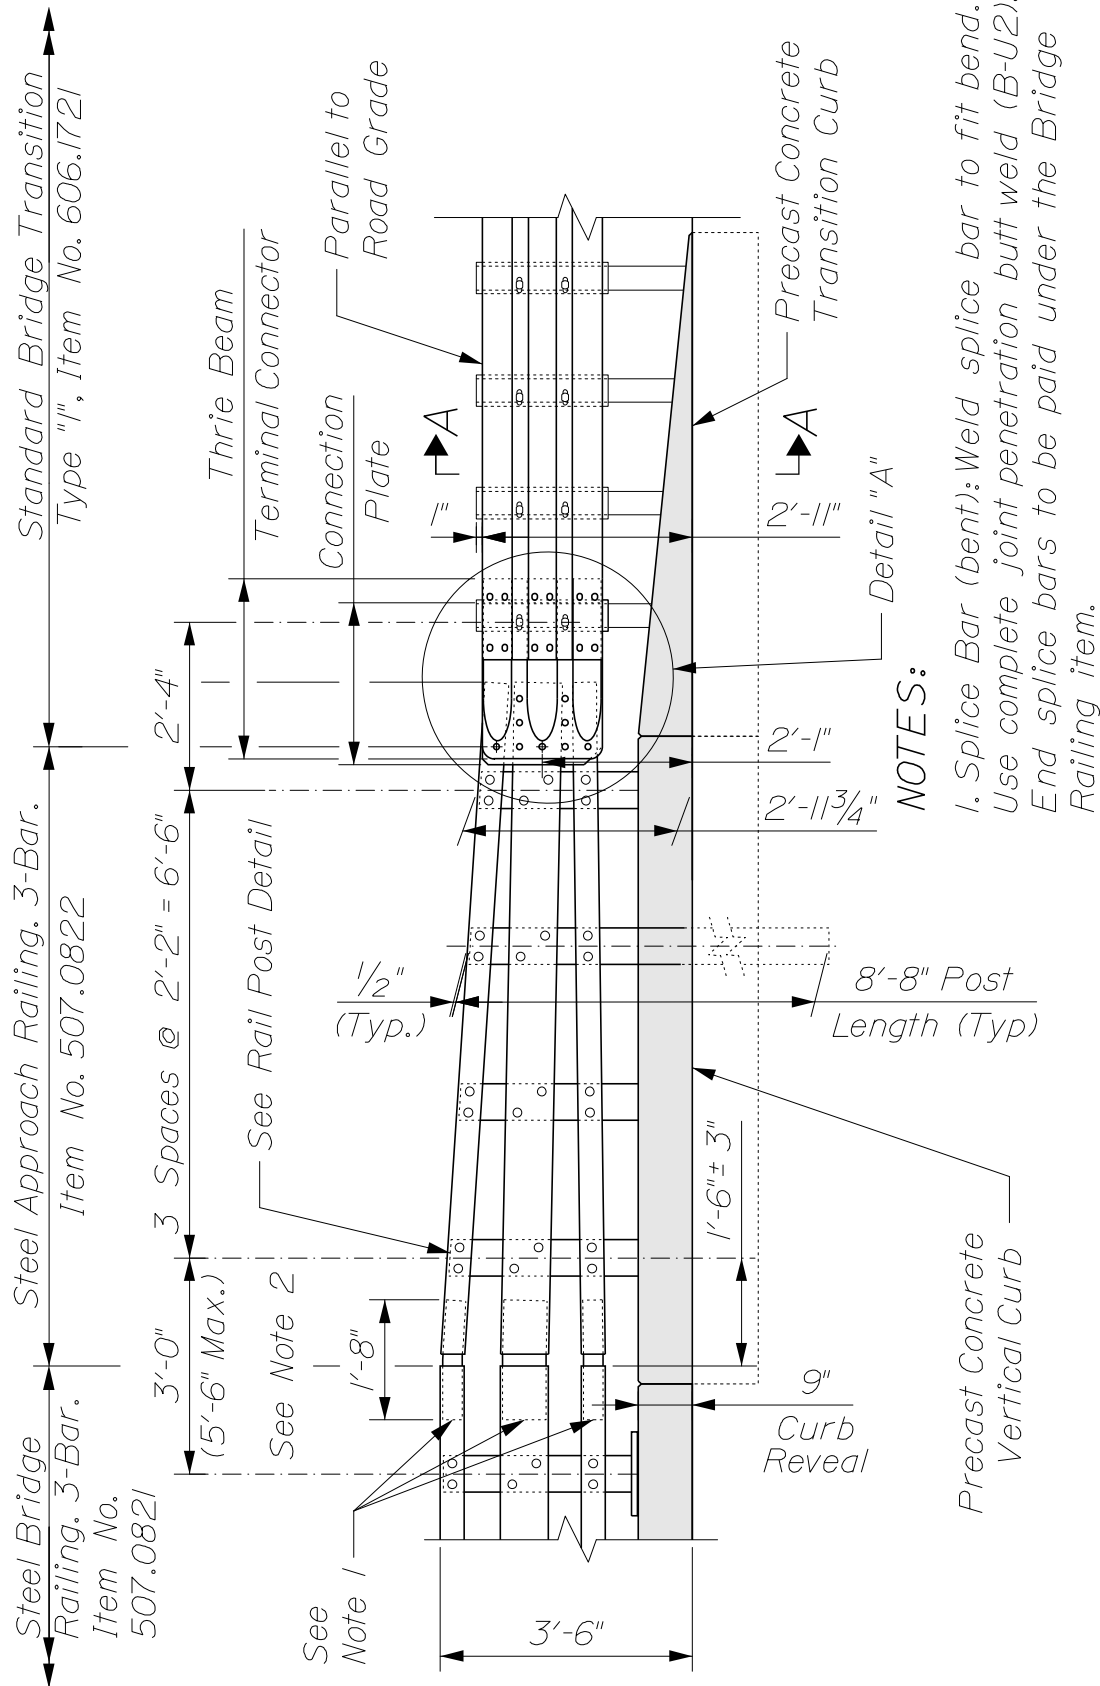


STEEL APPROACH RAILING, 3-BAR
507(20)

~ ELEVATION ~

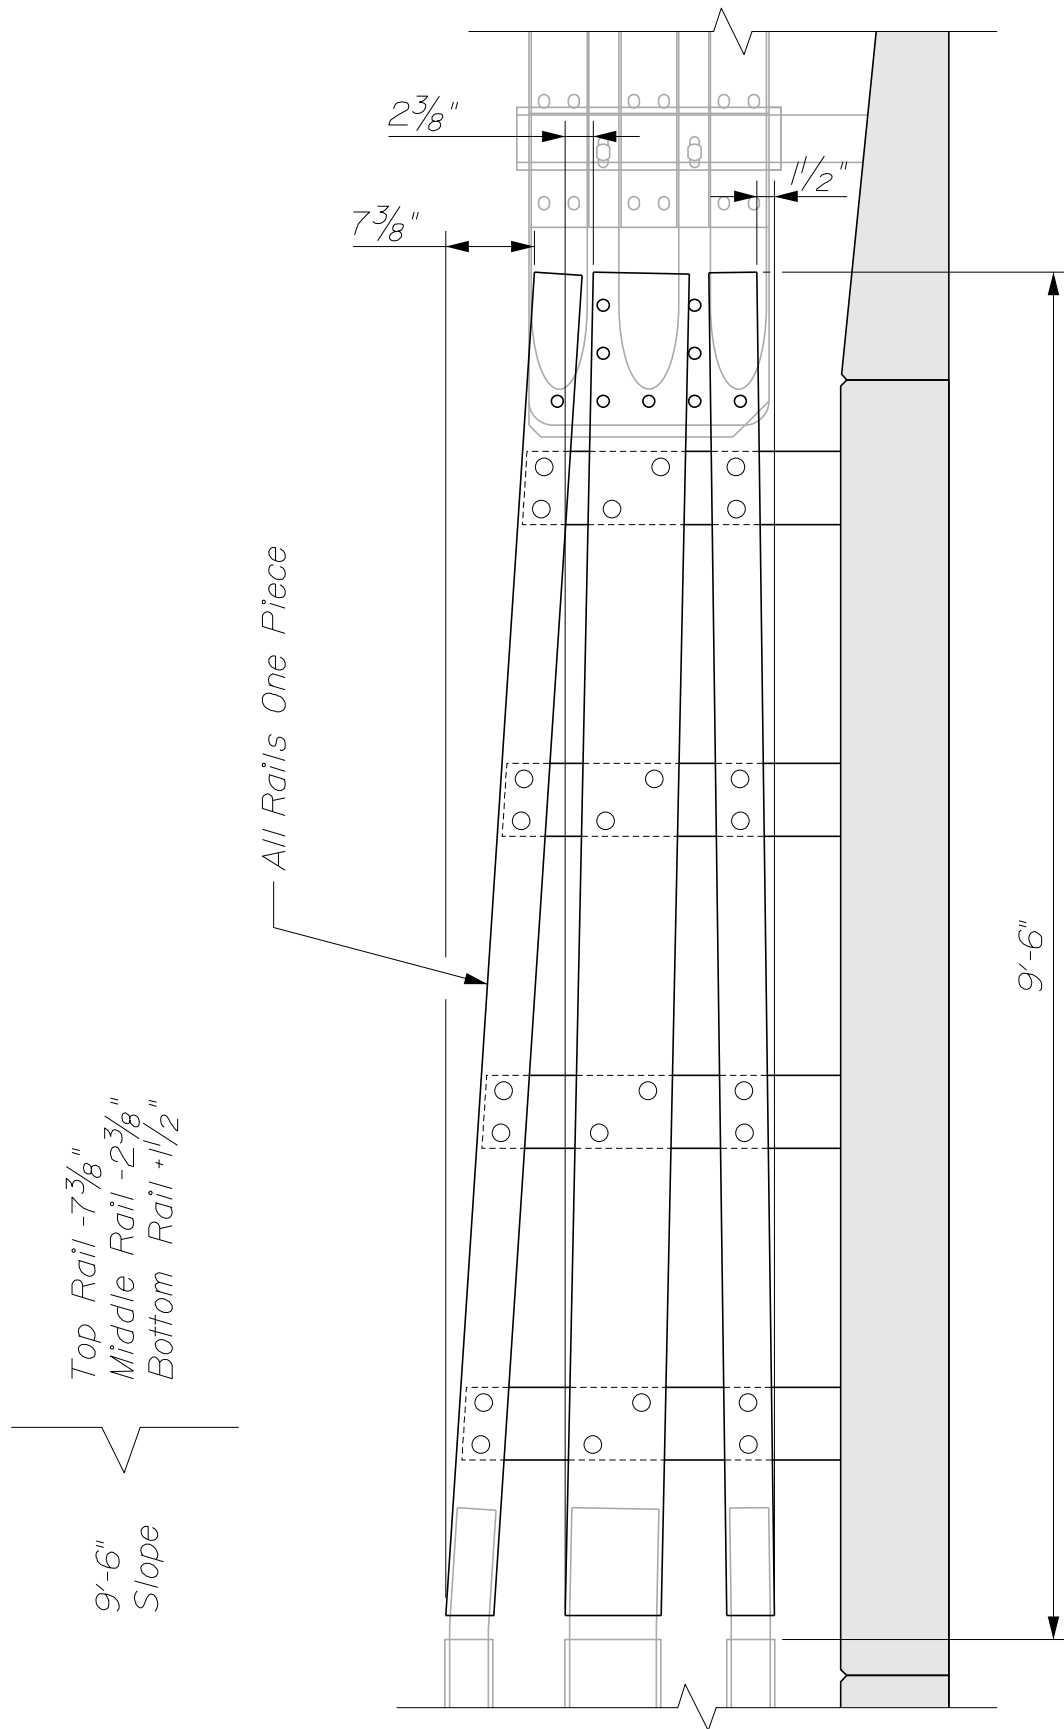


~ DETAIL - RAIL SLOPE ~

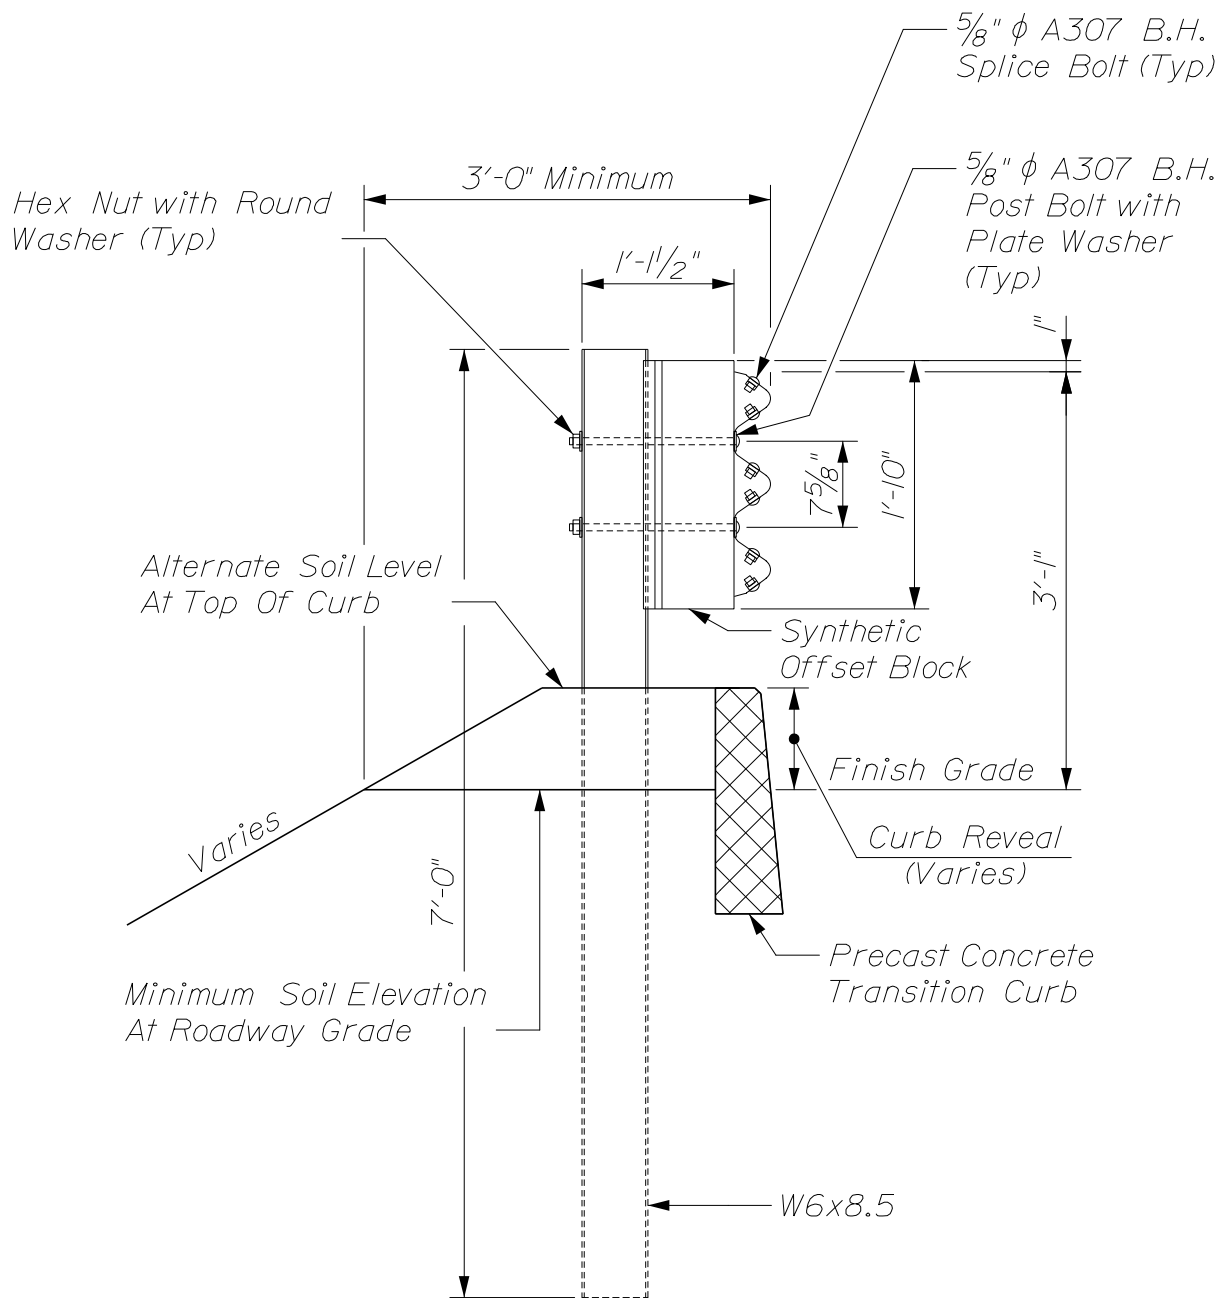


~ SECTION A-A ~
(POST RAIL ASSEMBLY)

STEEL APPROACH RAILING, 3-BAR 507(22)

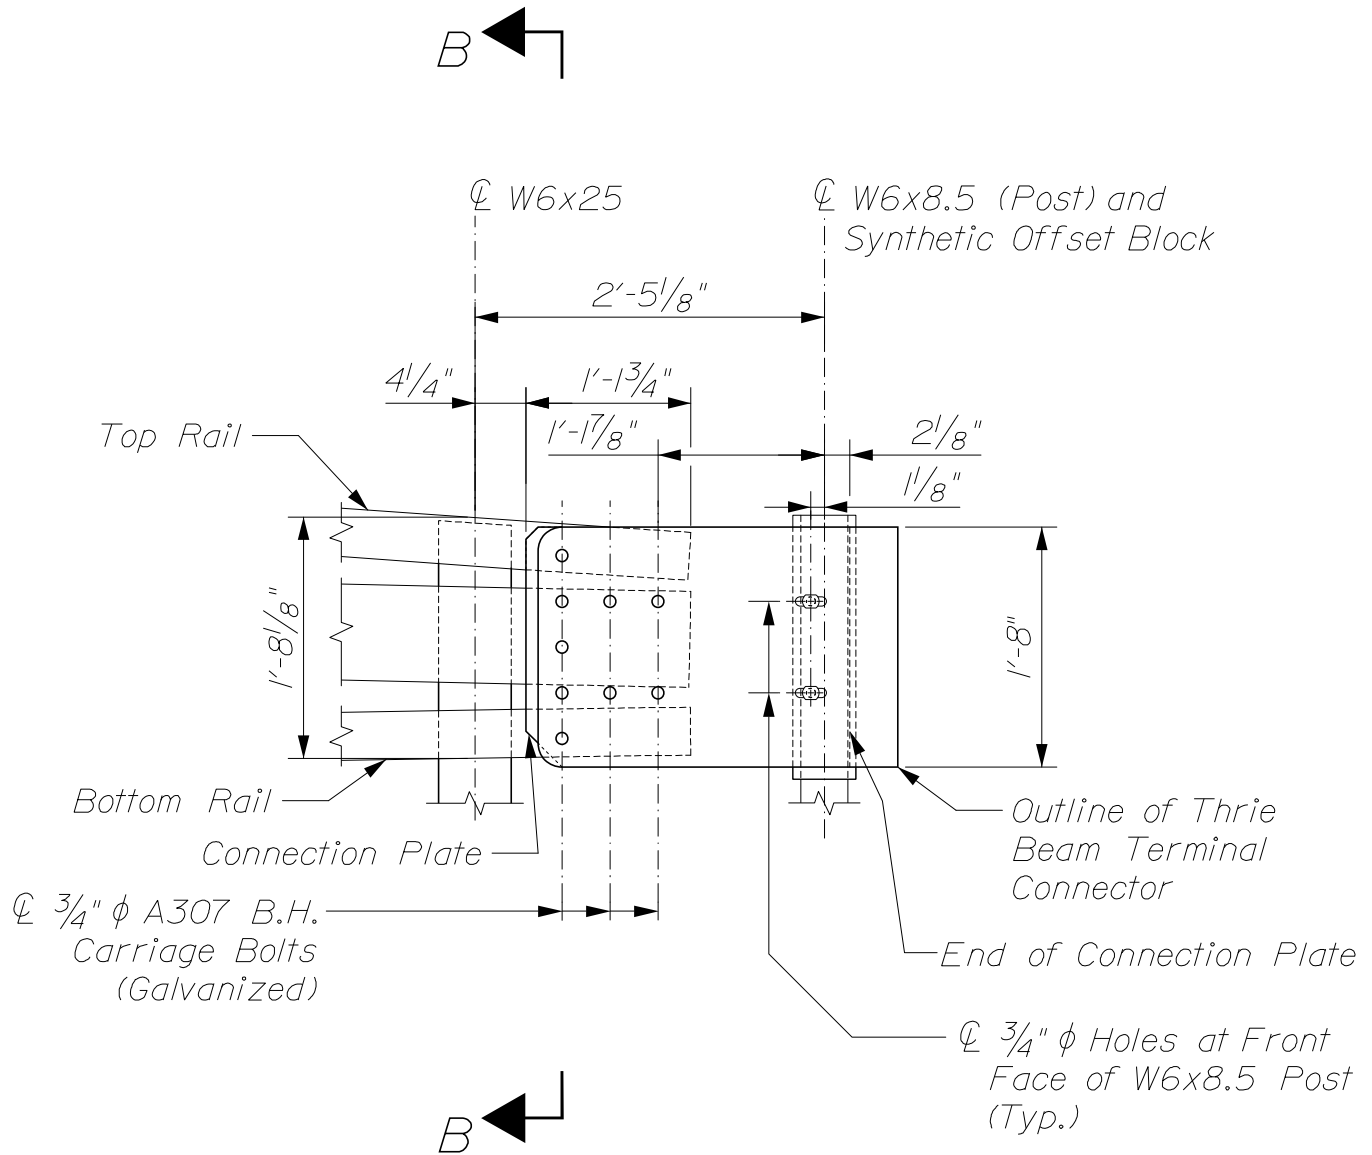


~ DETAIL "A" ~
 (Overlapping of Double Nested Thrie-Beam not Shown for Clarity)

STEEL APPROACH RAILING, 3-BAR
 507(23)

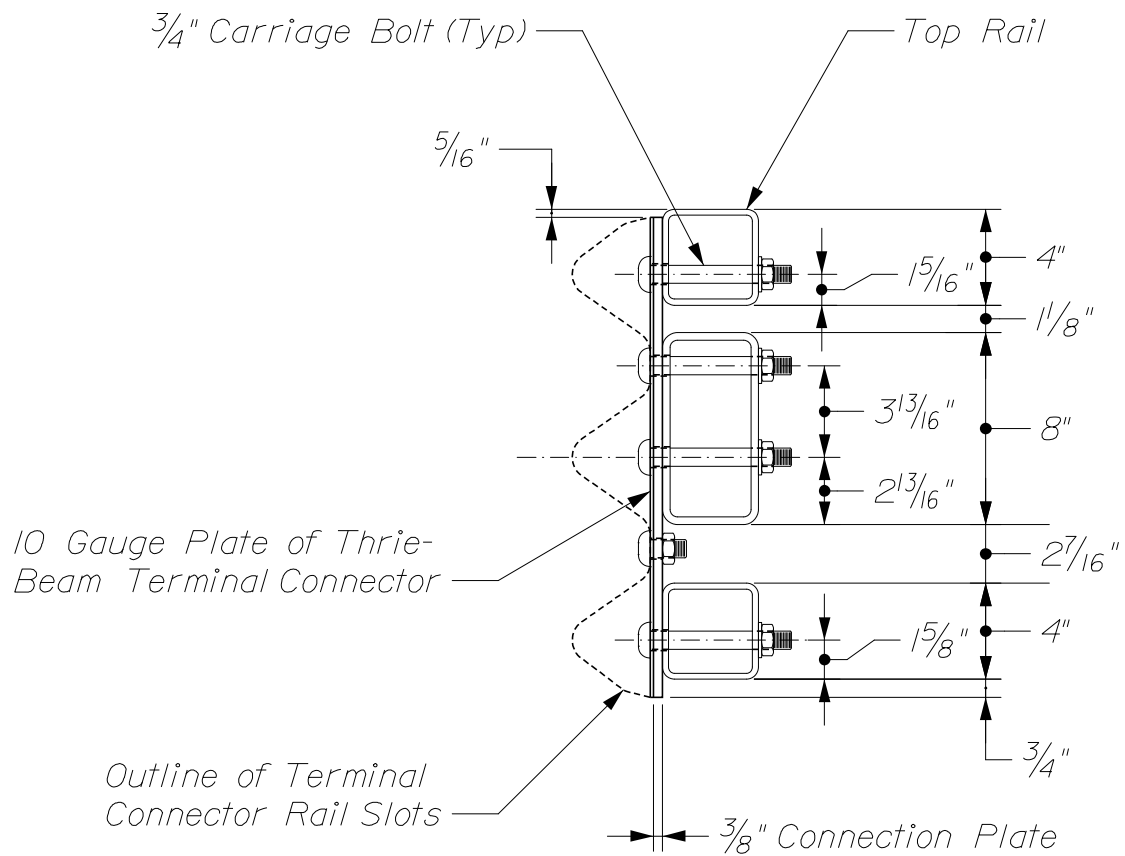

~ SECTION B-B (CONNECTION PLATE) ~

STEEL APPROACH RAILING, 3-BAR
507(24)

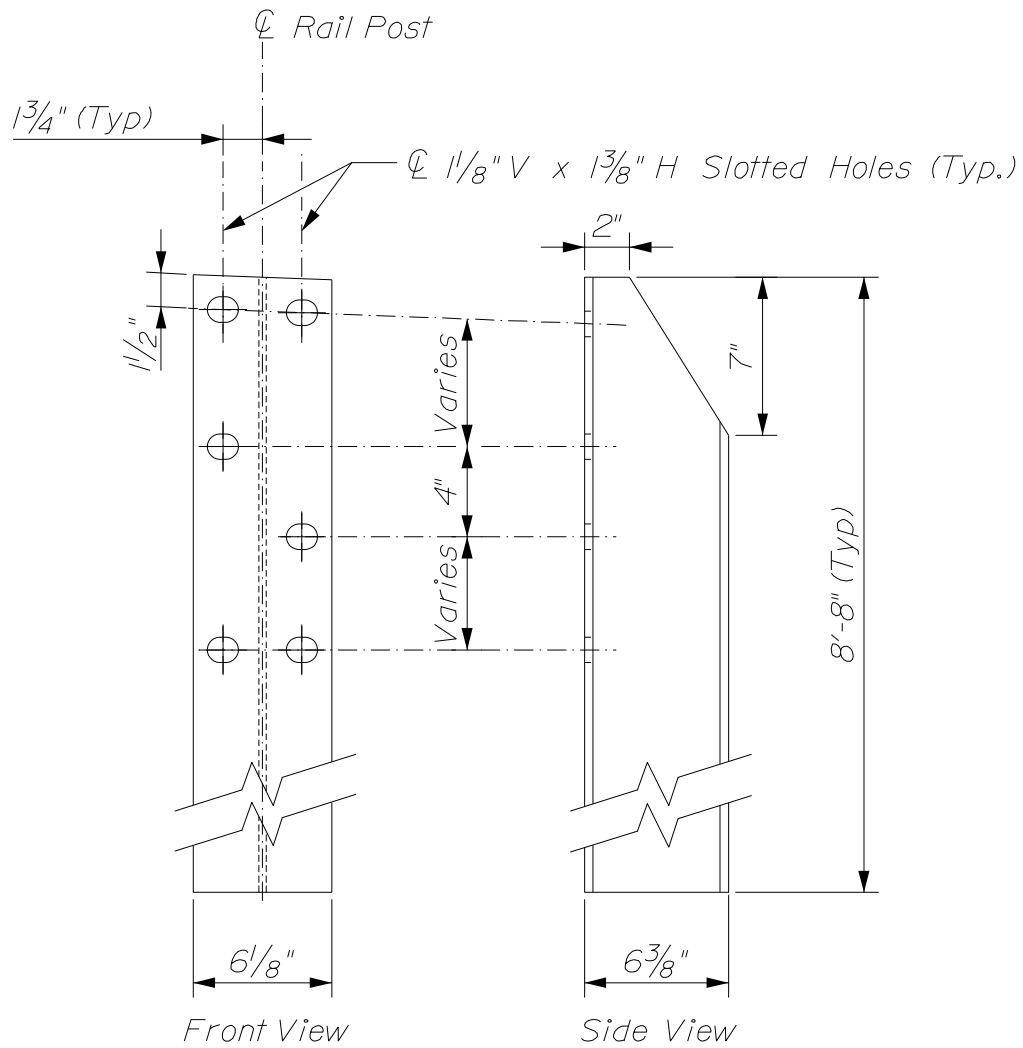


~ DETAIL - RAIL POST (W6x25) ~


STEEL APPROACH RAILING, 3-BAR
507(26)

NOTES:


- 1. Refer to Steel Bridge Railing pages for additional details, notes and materials specifications.*
- 2. Rail bar welds shall have a minimum penetration of 80% as demonstrated by a test weld performed by the fabricator.*
- 3. The precast concrete vertical or transition curb shall meet the provisions of Section 609 - Curbing of the Standard Specifications. The bridge end of the curb shall be saw - cut in the field to fit flush against the backwall, as dictated by the bridge skew angle and the profile grade. Where curbing is specified on the adjacent highway, the transition shall be modified accordingly.*

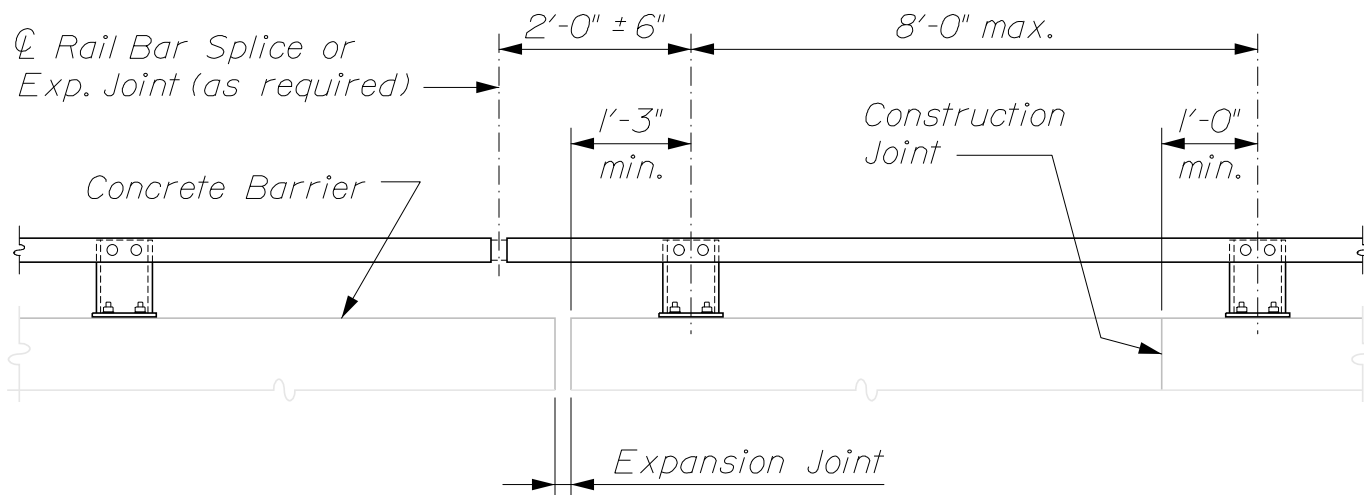


~ 1 - BAR PEDESTRIAN RAILING ~

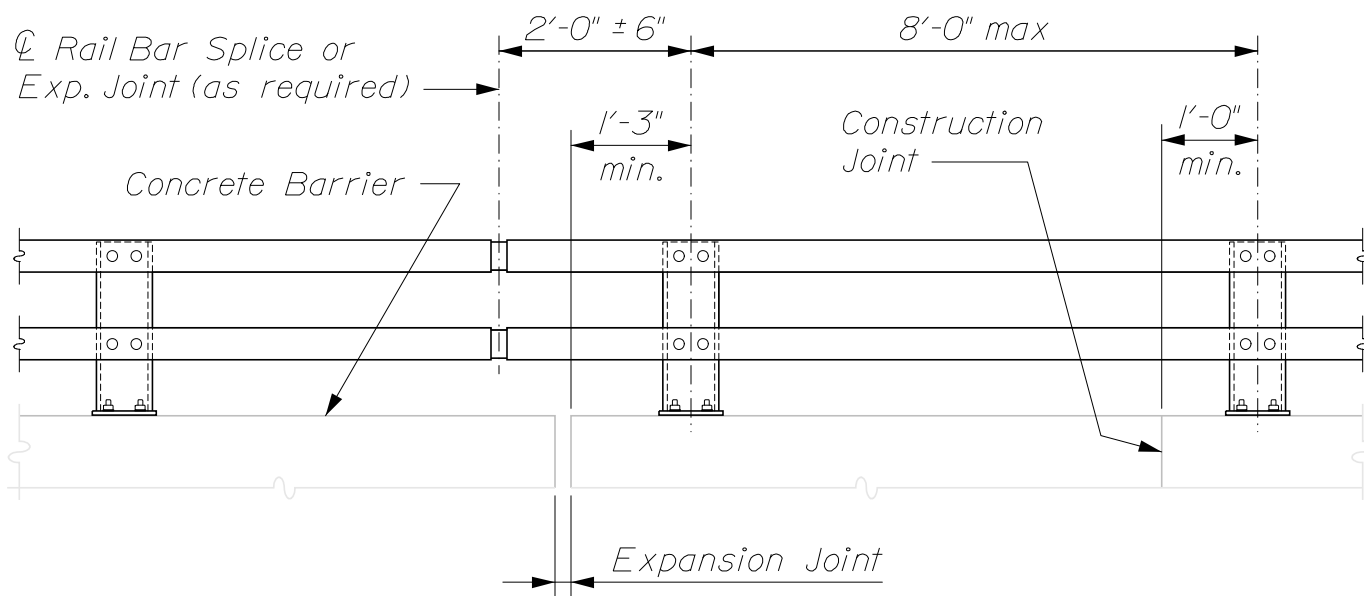

~ 2 - BAR BICYCLE RAILING ~

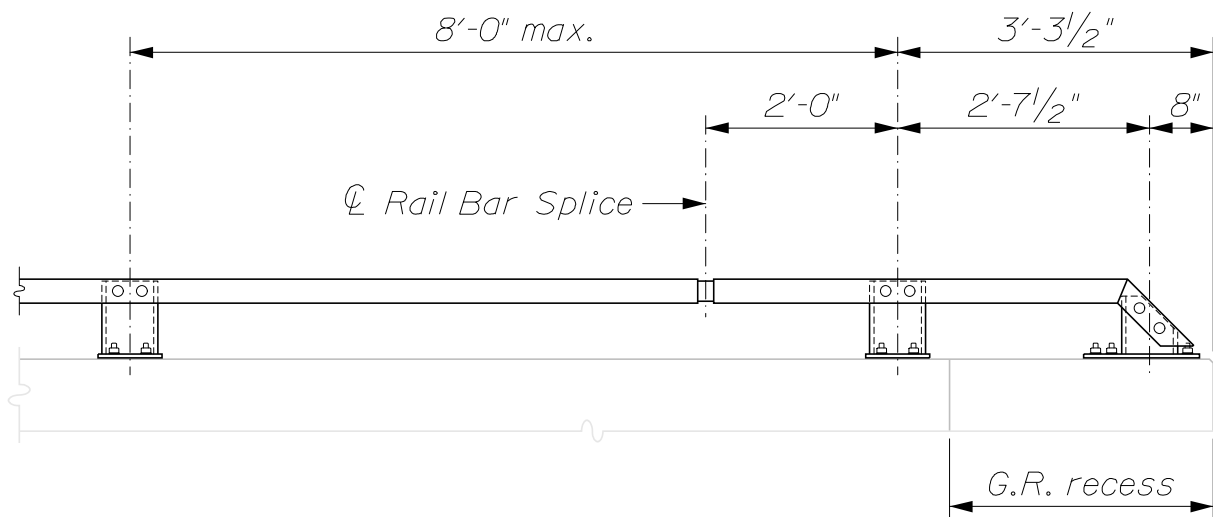


~ 1 - BAR PEDESTRIAN RAILING ~
(Showing End Treatment)

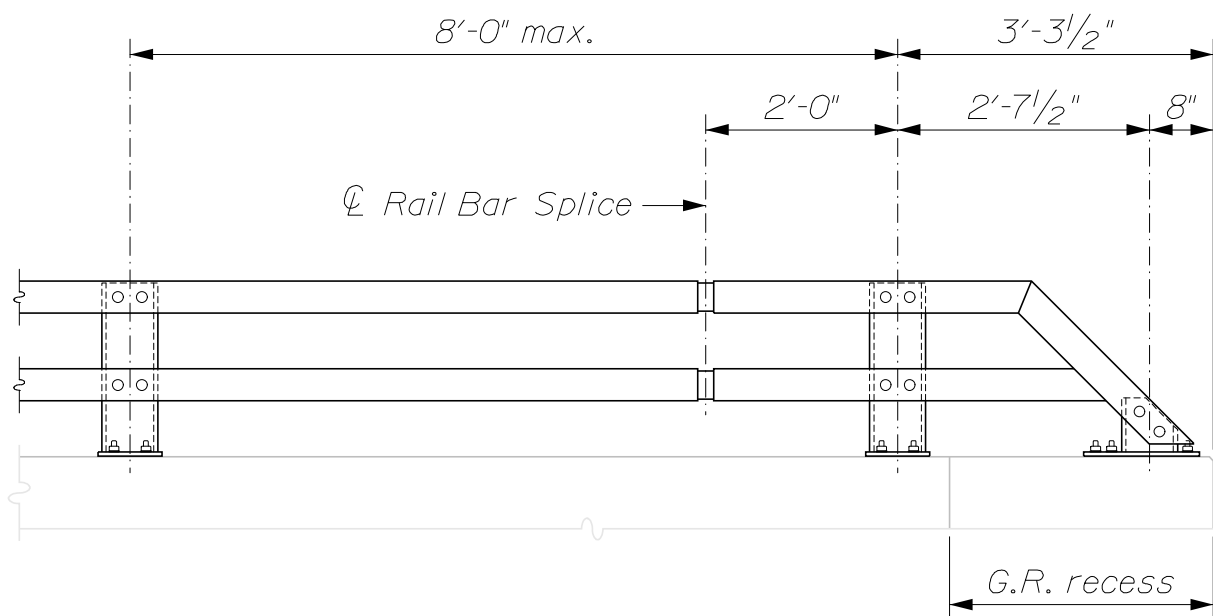

~ 2 - BAR BICYCLE RAILING ~
(Showing End Treatment)




507(31)

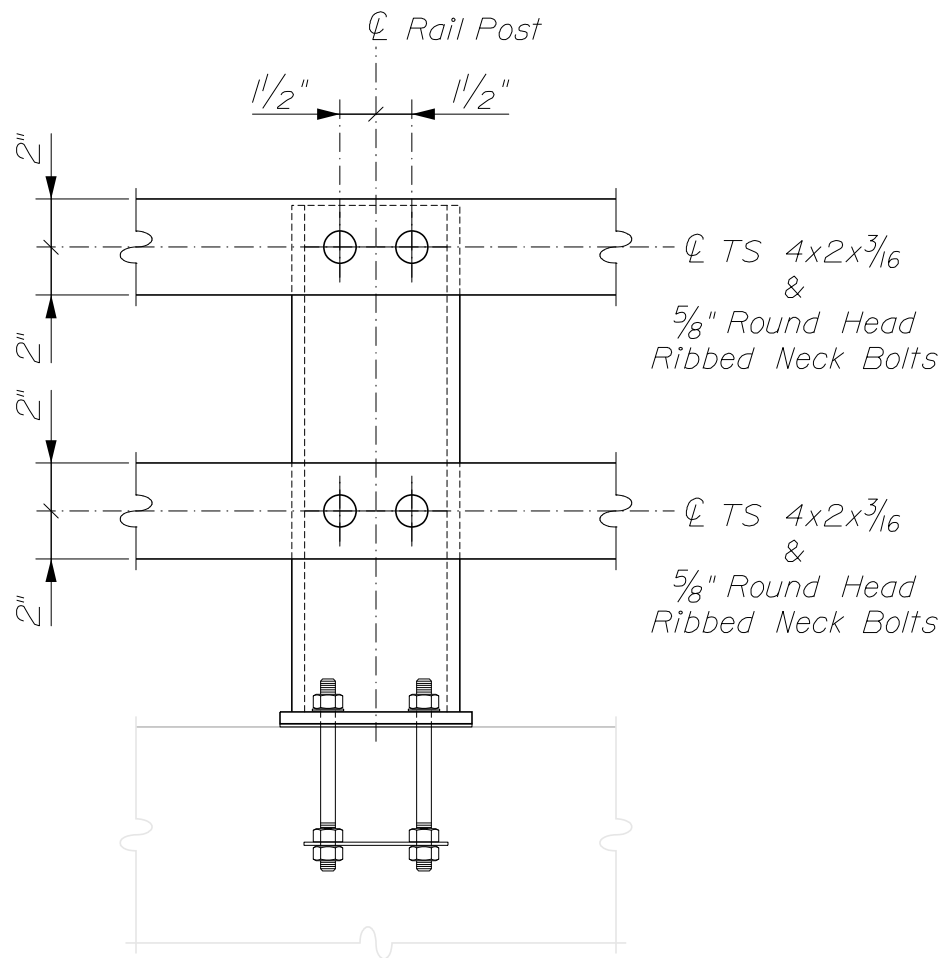


~ RAIL & POST ELEVATION ~
(2 - Bar Bicycle Railing)


BARRIER - MOUNTED STEEL BRIDGE RAILING
507(32)

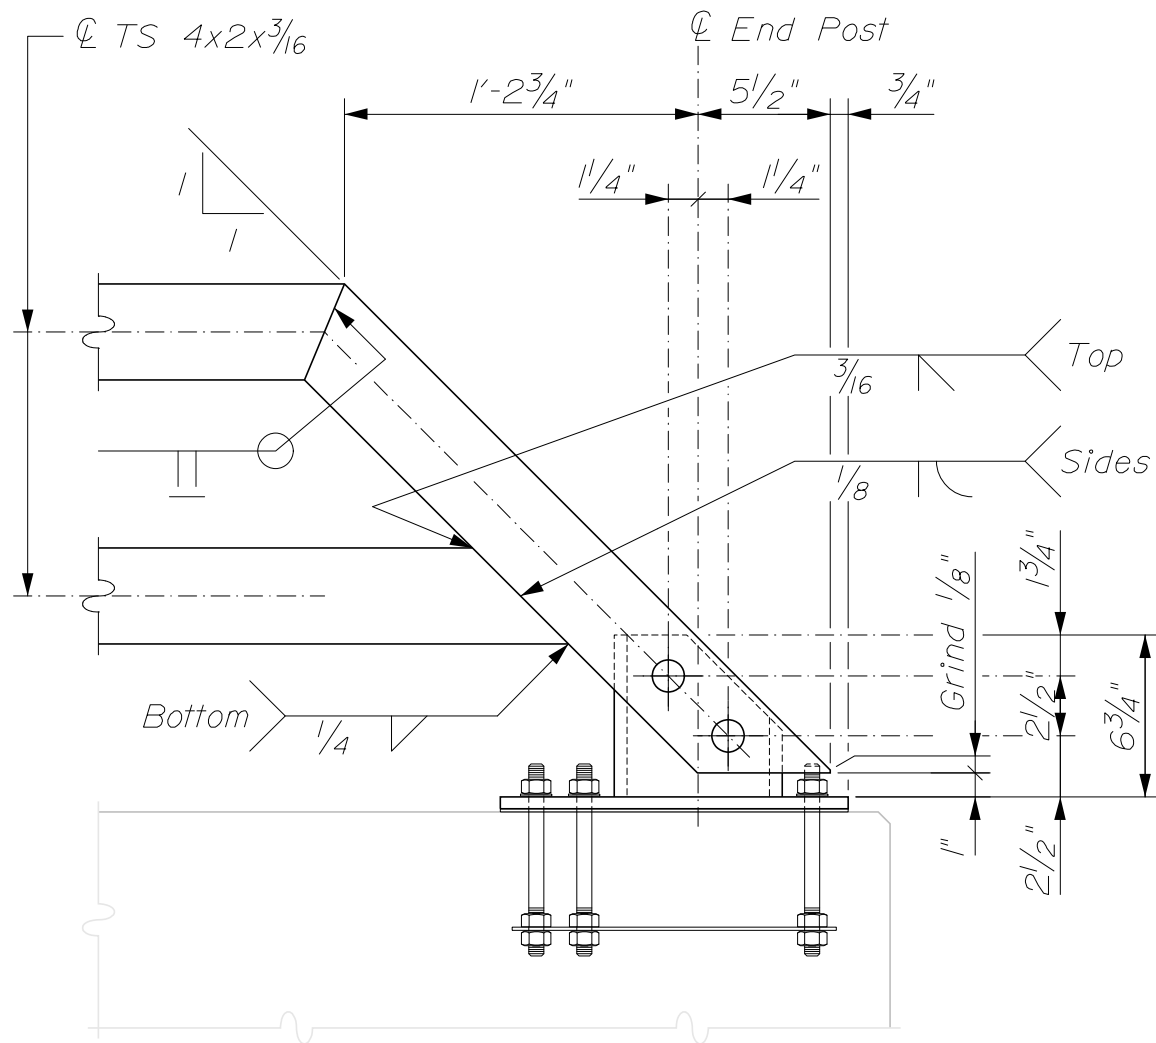


~ RAIL END TREATMENT ~
 (2 - Bar Bicycle Railing)

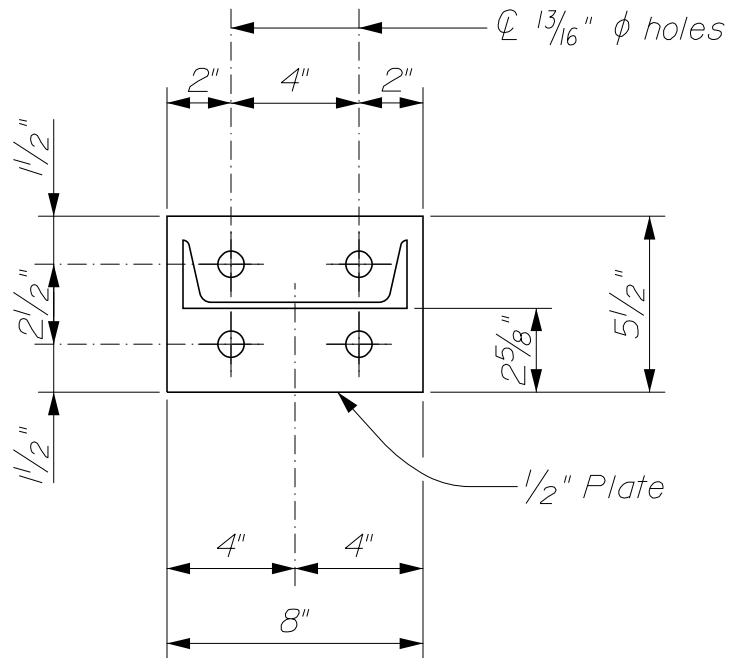


~ POST & BASE PLATE PLAN ~

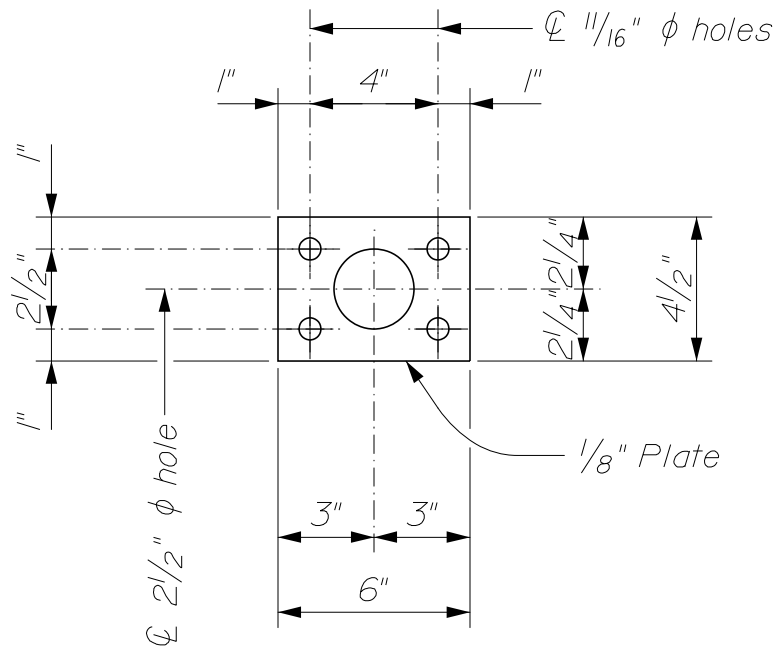


~ SPACER PLATE PLAN ~

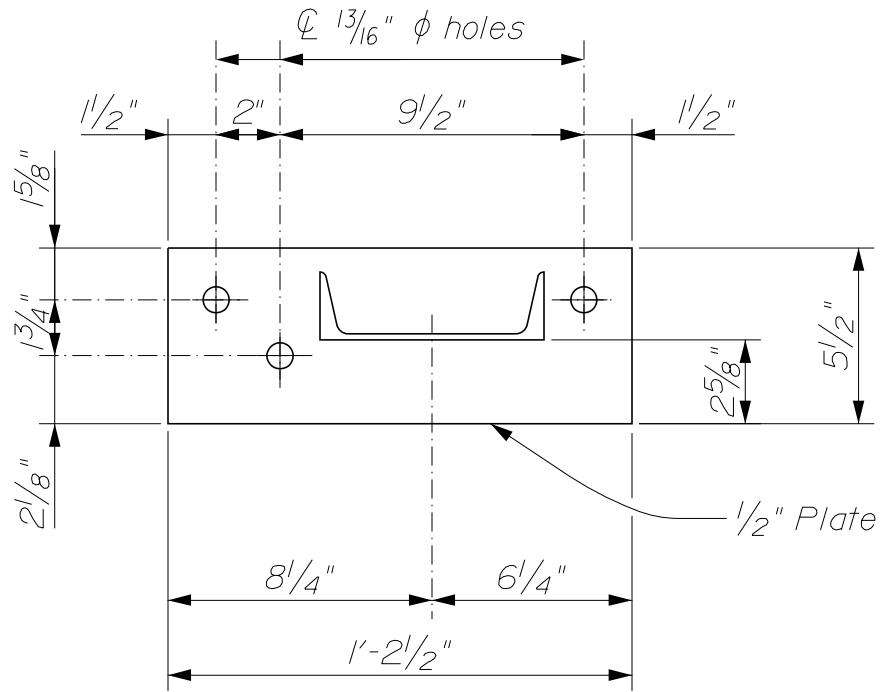


~ END POST & BASE PLATE PLAN ~

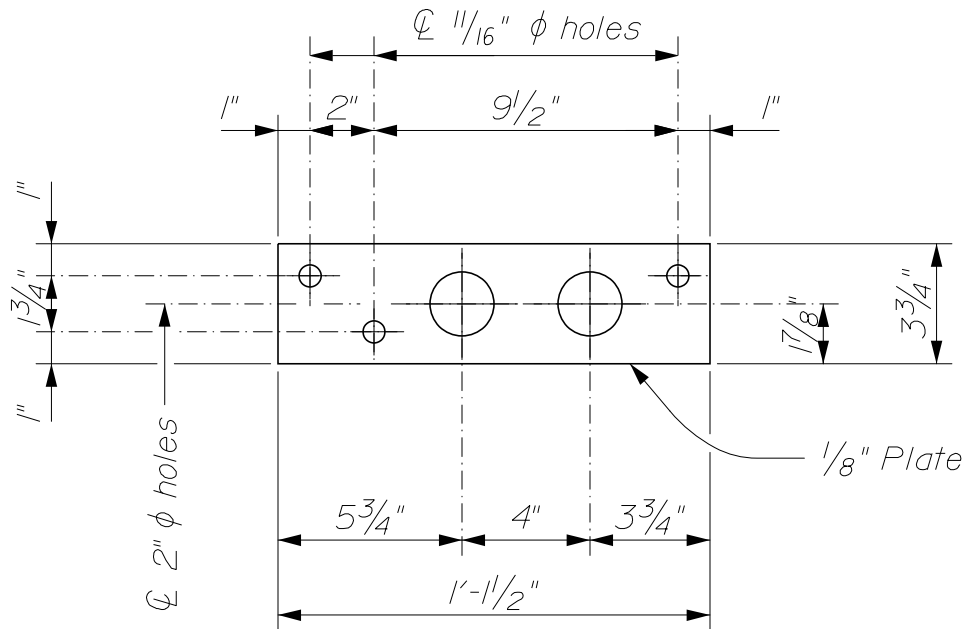

~ END SPACER PLATE PLAN ~

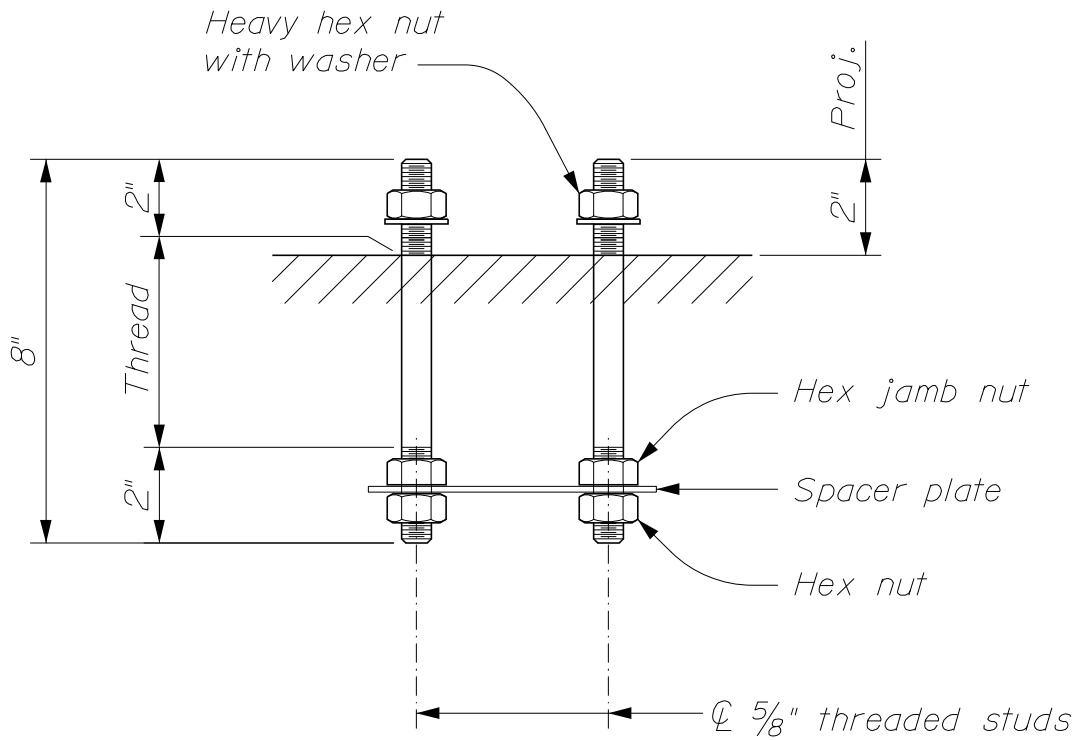


~ ANCHOR BOLT DETAIL ~

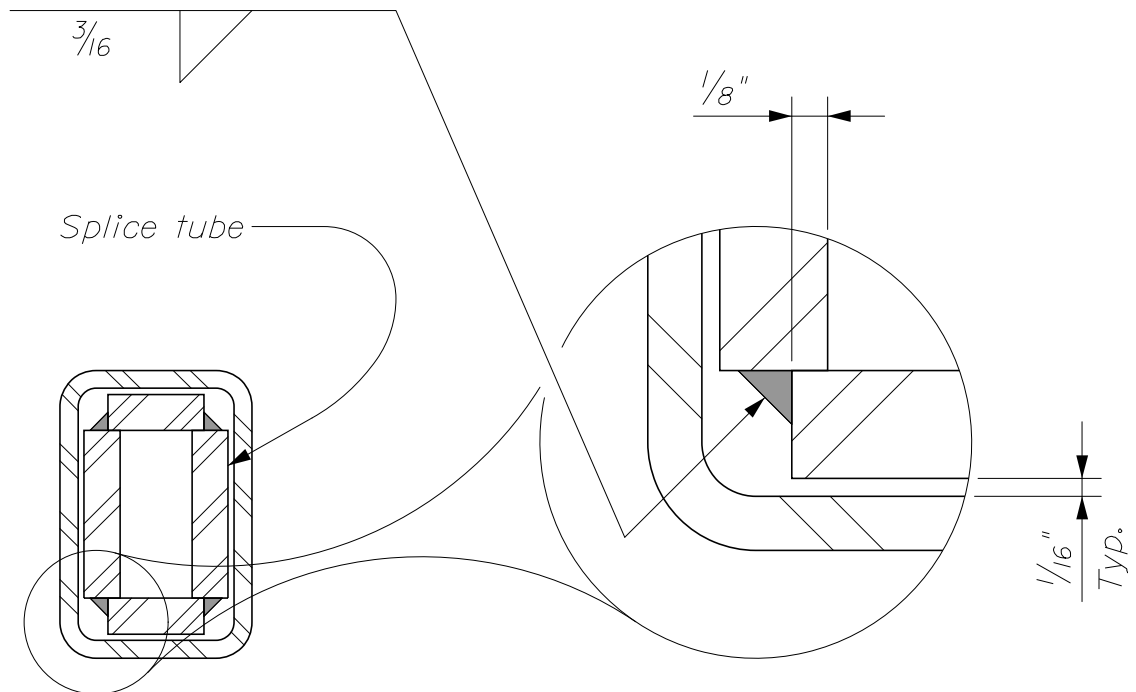


~ RAIL SPLICE SECTION ~

BARRIER - MOUNTED STEEL BRIDGE RAILING
507(37)

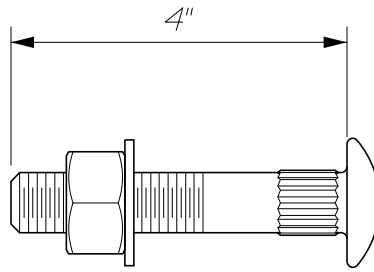

~ RIBBED NECK BOLT ~
(with washer & lock nut)

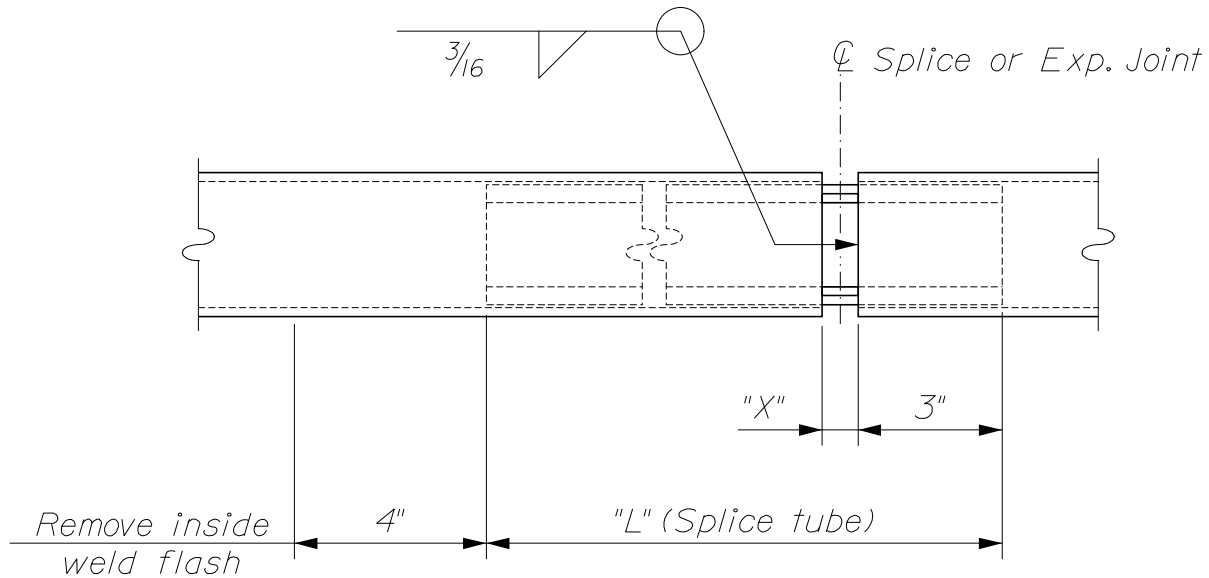

~ RAIL BAR SPLICE / EXPANSION JOINT ~

RAIL BAR SPLICE & EXPANSION JOINT TABLE		
"T"	"L"	"X"
Splice	1'-8"	$\frac{3}{4}$ "
$\leq 4"$	1'-8"	$2\frac{1}{2}"$
$> 4" \leq 6\frac{1}{2}"$	2'-0"	4"
$> 6\frac{1}{2}" \leq 9"$	2'-4"	5"
$> 9" \leq 13"$	2'-10"	7"

"T" = Total Movement

SPLICE TUBE (1 - Bar Railing)	
Top & Bot. Plates	Bar $1 \times \frac{3}{8}$ x "L"
Side Plates	Bar $1\frac{3}{4} \times \frac{3}{8}$ x "L"

SPLICE TUBE (2 - Bar Railing)	
Top & Bot. Plates	Bar $1 \times \frac{3}{8}$ x "L"
Side Plates	Bar $2\frac{3}{4} \times \frac{3}{8}$ x "L"

BARRIER - MOUNTED STEEL BRIDGE RAILING

507(38)

NOTES:


1. All work and materials shall conform to the provisions of Standard Specifications Section 507 - Railings.
2. All exposed cut or sheared edges shall be rounded and free of burrs.
3. All parts shall be galvanized after fabrication in accordance with AASHTO M 111 (ASTM A123), except that hardware shall meet the requirements of AASHTO M 232 (ASTM A153) or ASTM F2329. Parts shall be blast - cleaned prior to galvanizing in accordance with SSPC - SP6.
4. Rail posts shall be set normal to grade unless otherwise indicated.
5. Lengths of rail bar shall be attached to a minimum of 2 rail posts and to at least 4 posts whenever possible.
6. Rail bar expansion joints shall be provided in any rail bay spanning a superstructure expansion joint. Expansion joint width shall be "X" at 45 °F and will be adjusted as directed by the Resident.
7. Holes for ribbed - neck bolts shall be field - drilled to an appropriate size to produce an interference fit with the bolts.
8. Rail post anchoring nuts shall be tightened to a snug fit and given an additional $\frac{1}{8}$ turn.
9. All butt joint welds shall have a minimum penetration of 60 percent.
10. If there is a conflict between these Standard Details and the Design Drawings, the requirements of the Design Drawings shall be followed.

MATERIALS:

Rail bars ASTM A500
All other shapes & plates AASHTO M 270/M 270, Grade 36
Threaded studs, washers &
exposed heavy hex nuts AASHTO M 314, Grade 105
All other bolts & nuts ASTM A307, Grade C


BARRIER - MOUNTED STEEL BRIDGE RAILING

507(39)

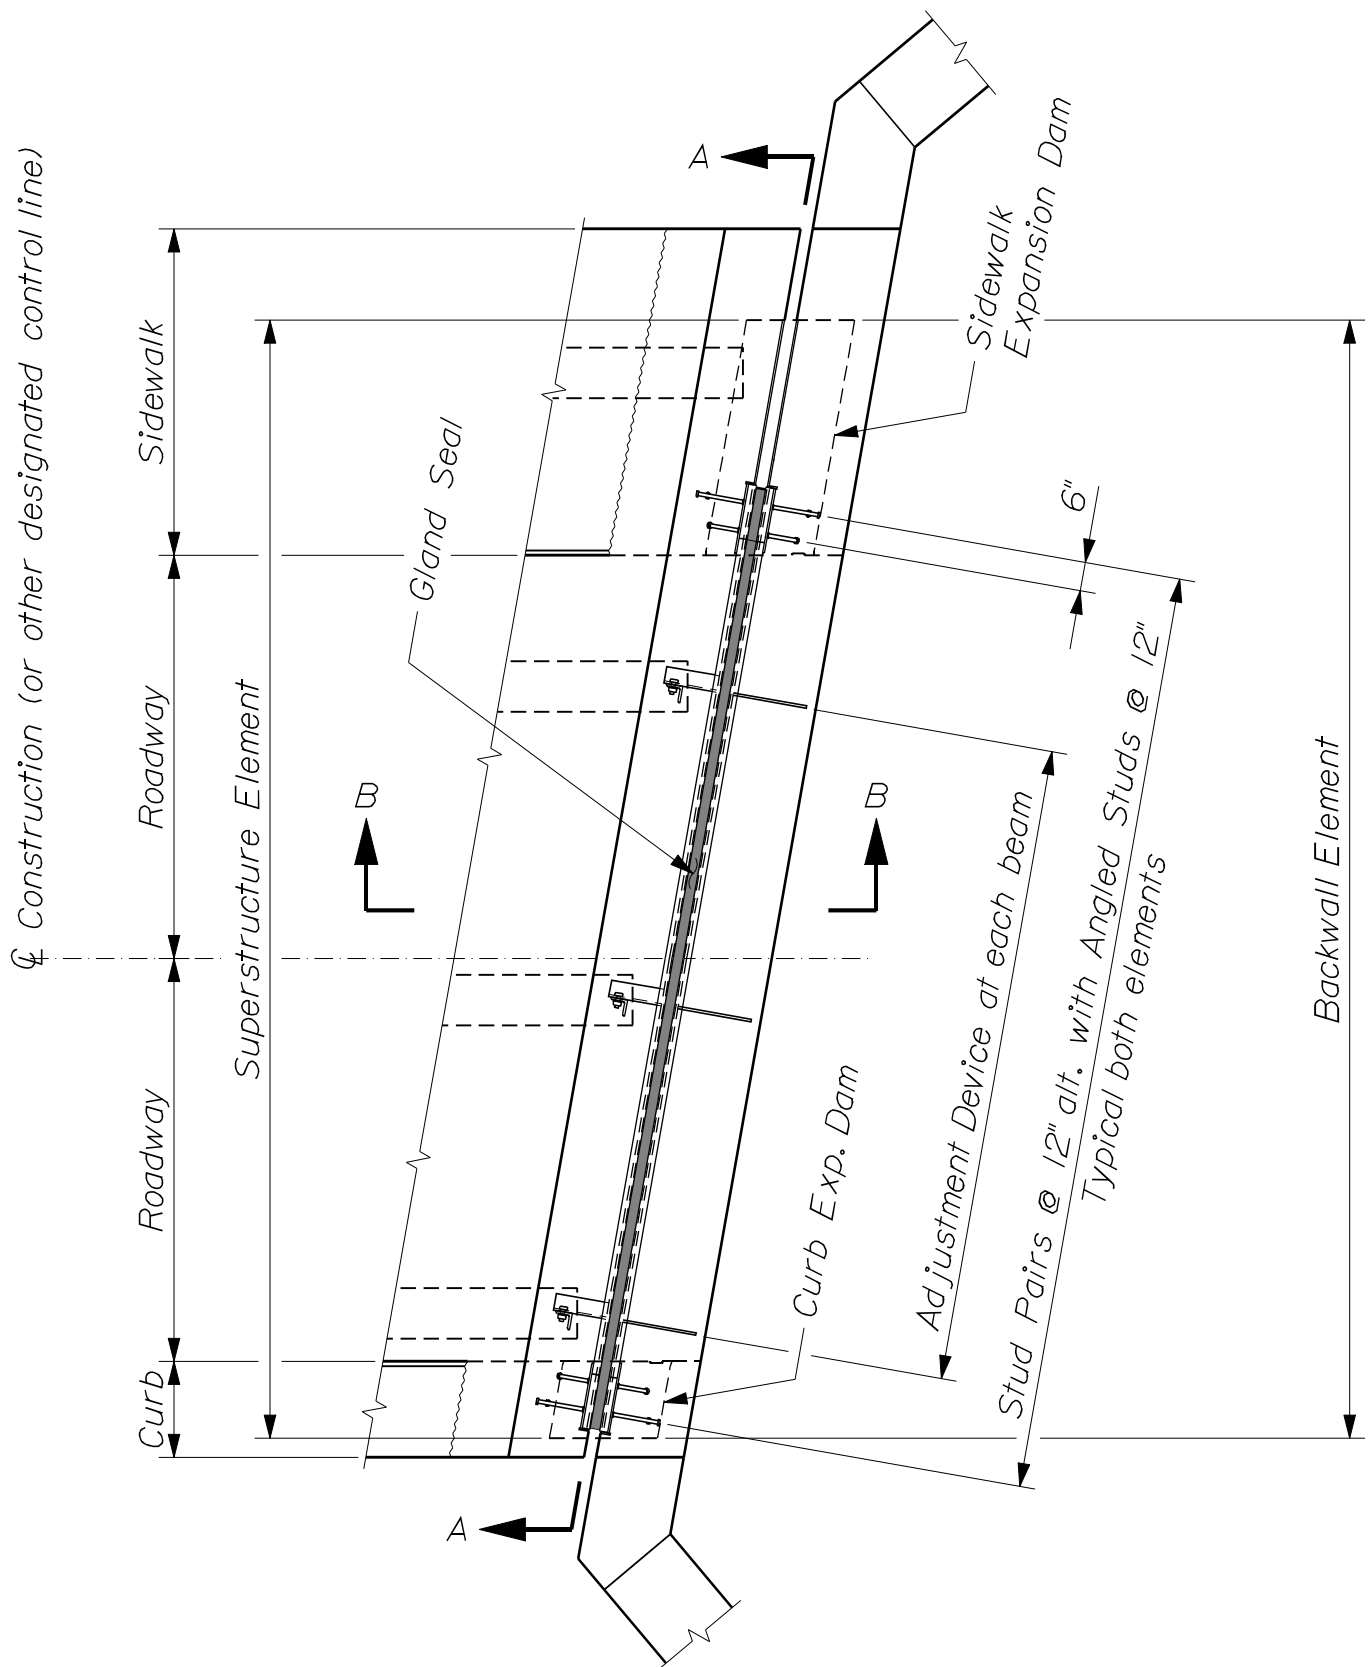


~ EXPANSION DEVICE PLAN ~
 (Typical installation)


EXPANSION DEVICE - GLAND SEAL
 520(01)

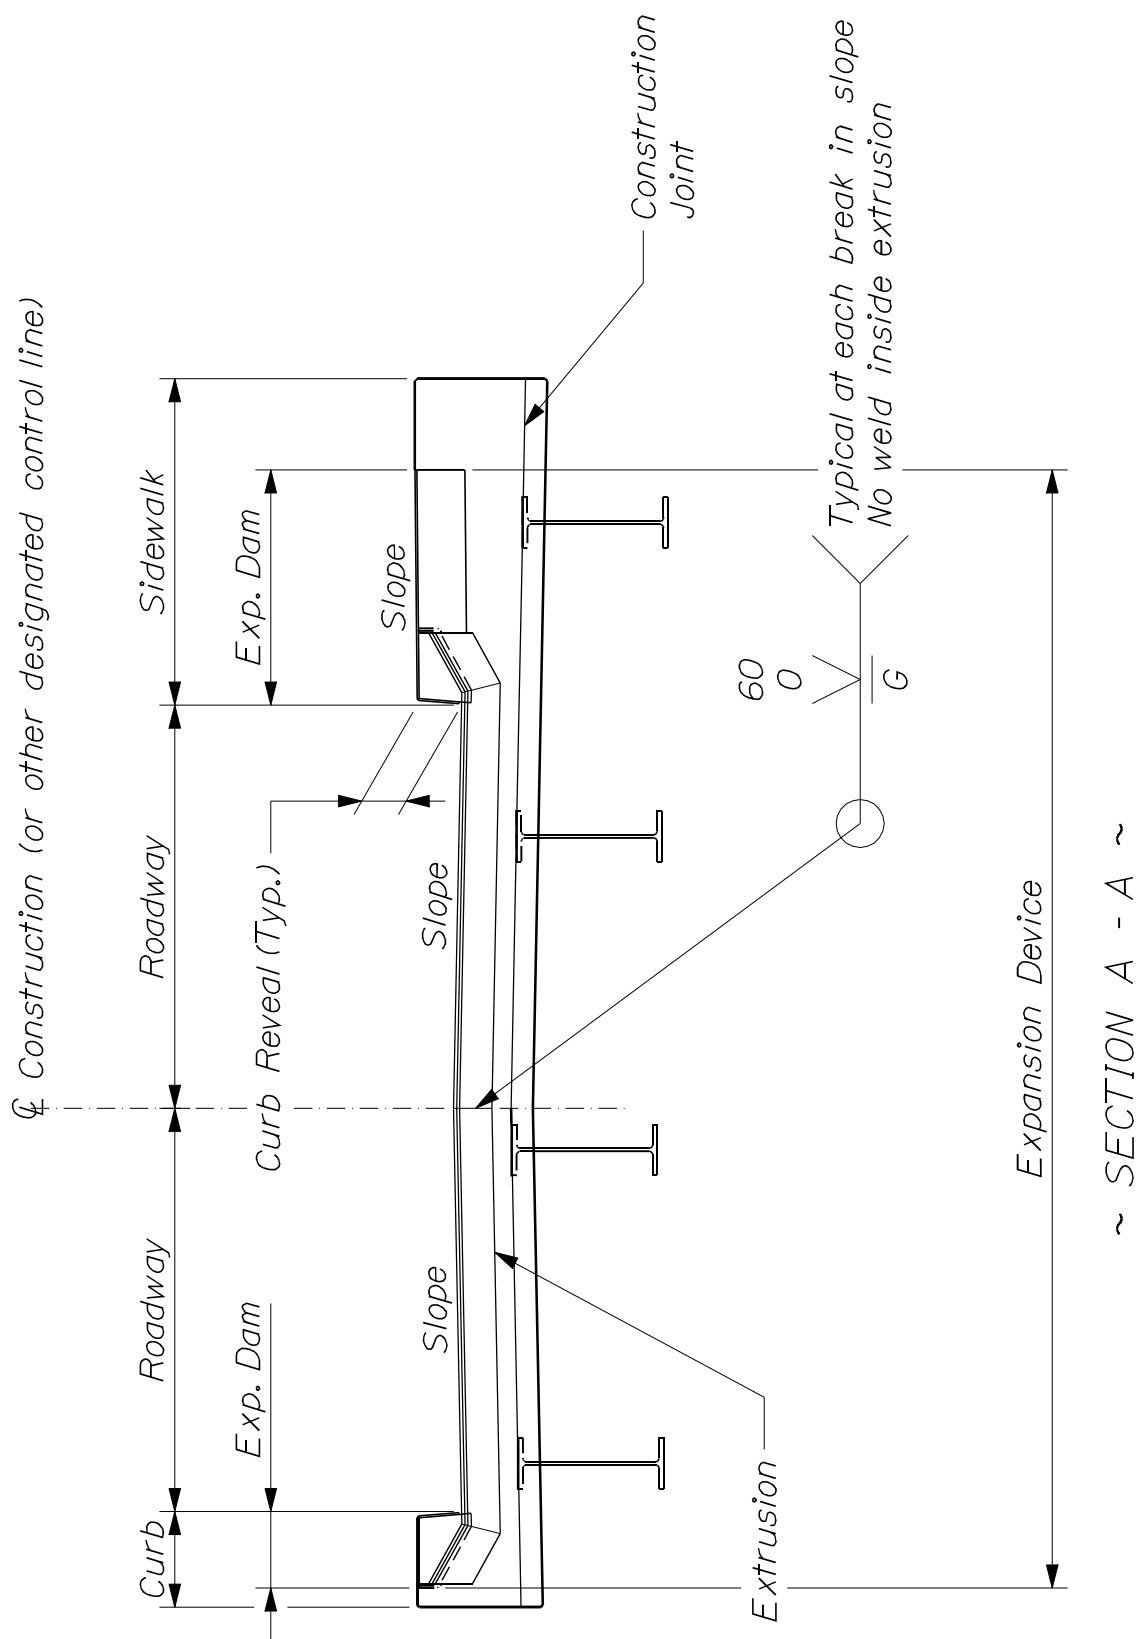

EXPANSION DEVICE - GLAND SEAL
 520(02)

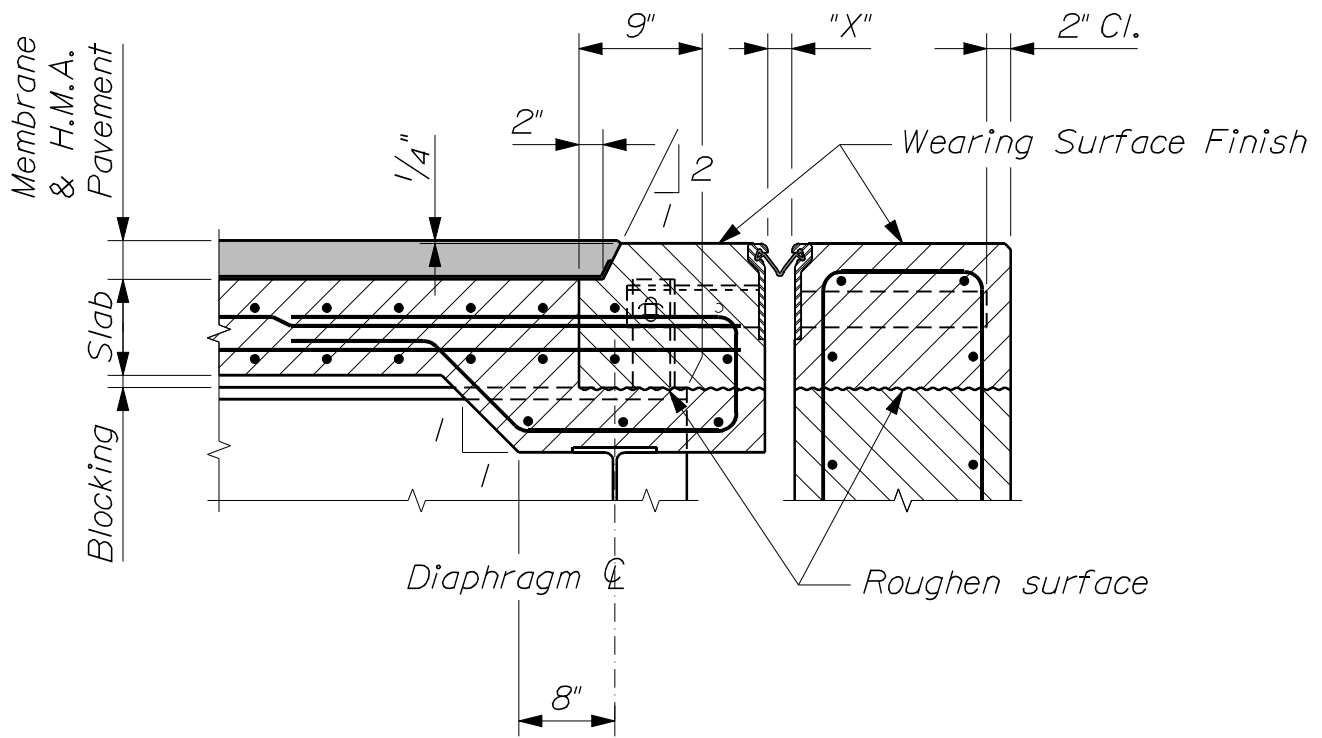


~ SECTION B - B ~
 (Showing Hot Mix Asphalt Pavement Wearing Surface)

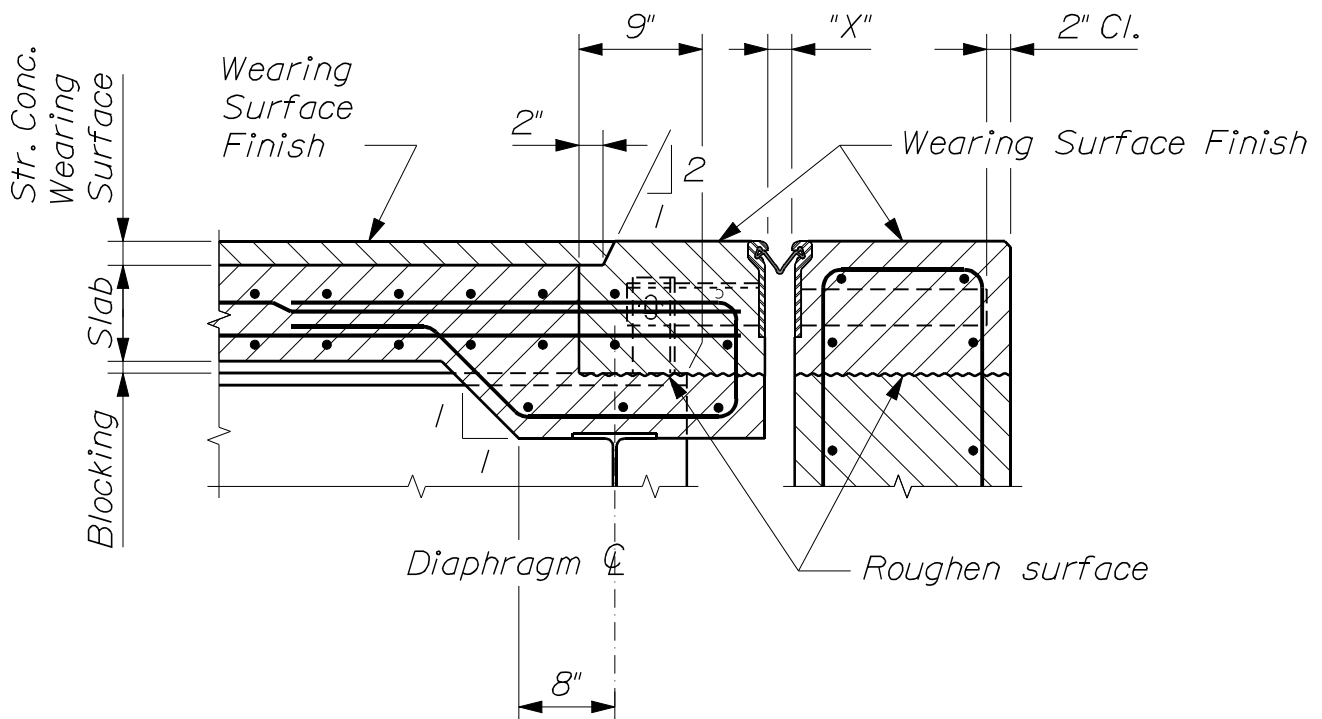


~ SECTION B - B ~
 (Showing Structural Concrete Wearing Surface)



520(05)


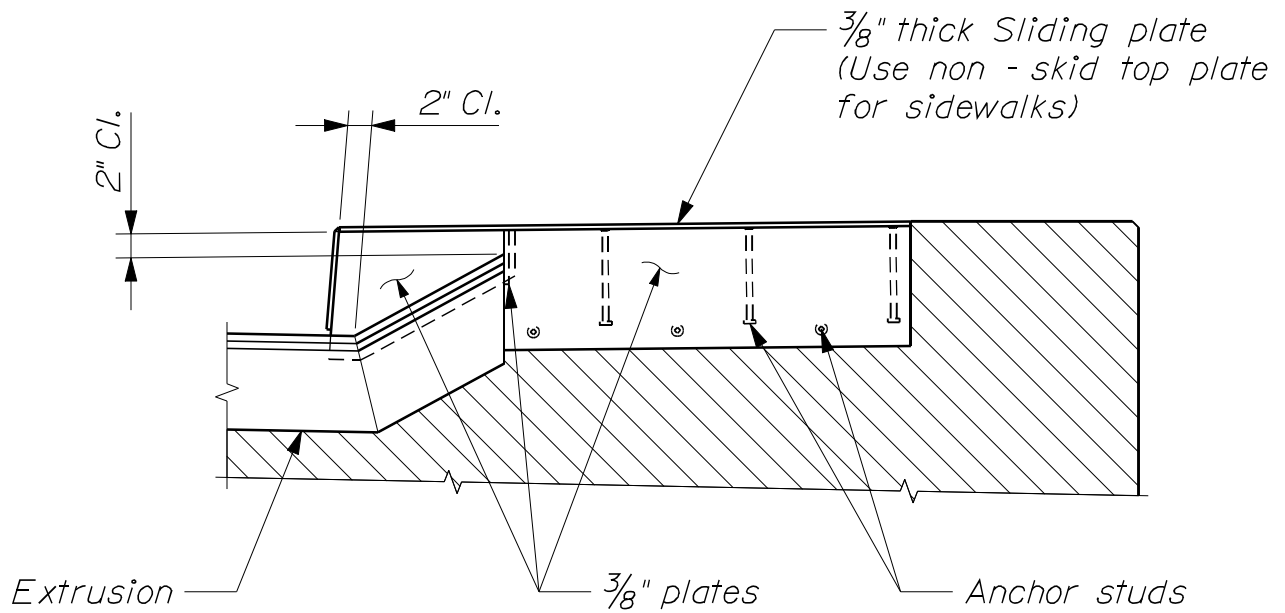


~ EXPANSION DAM SECTION ~

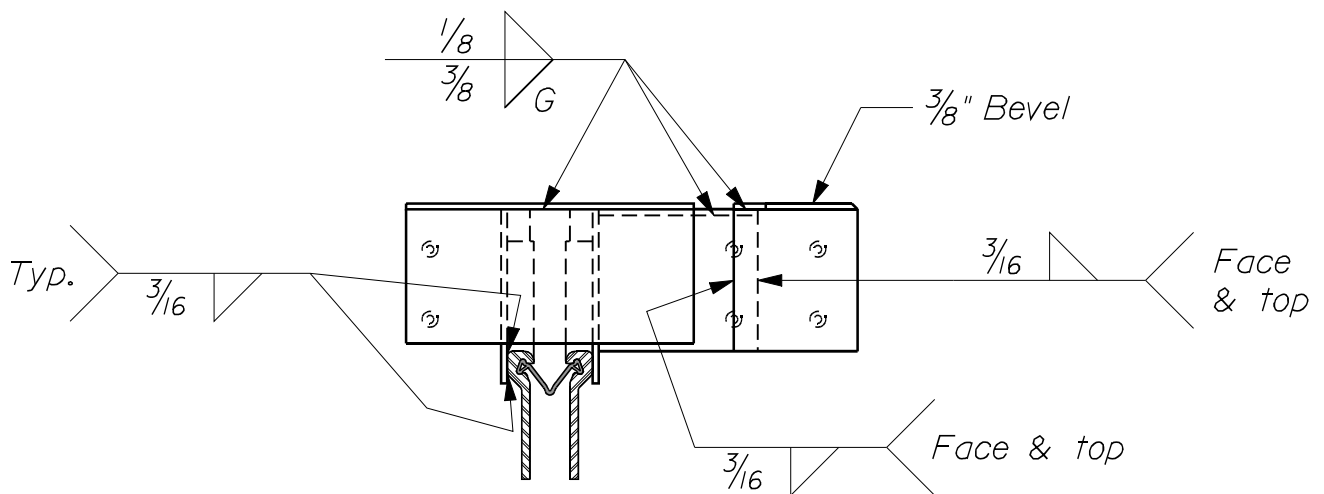

~ WELDING DETAIL ~

EXPANSION DEVICE - GLAND SEAL
520(06)

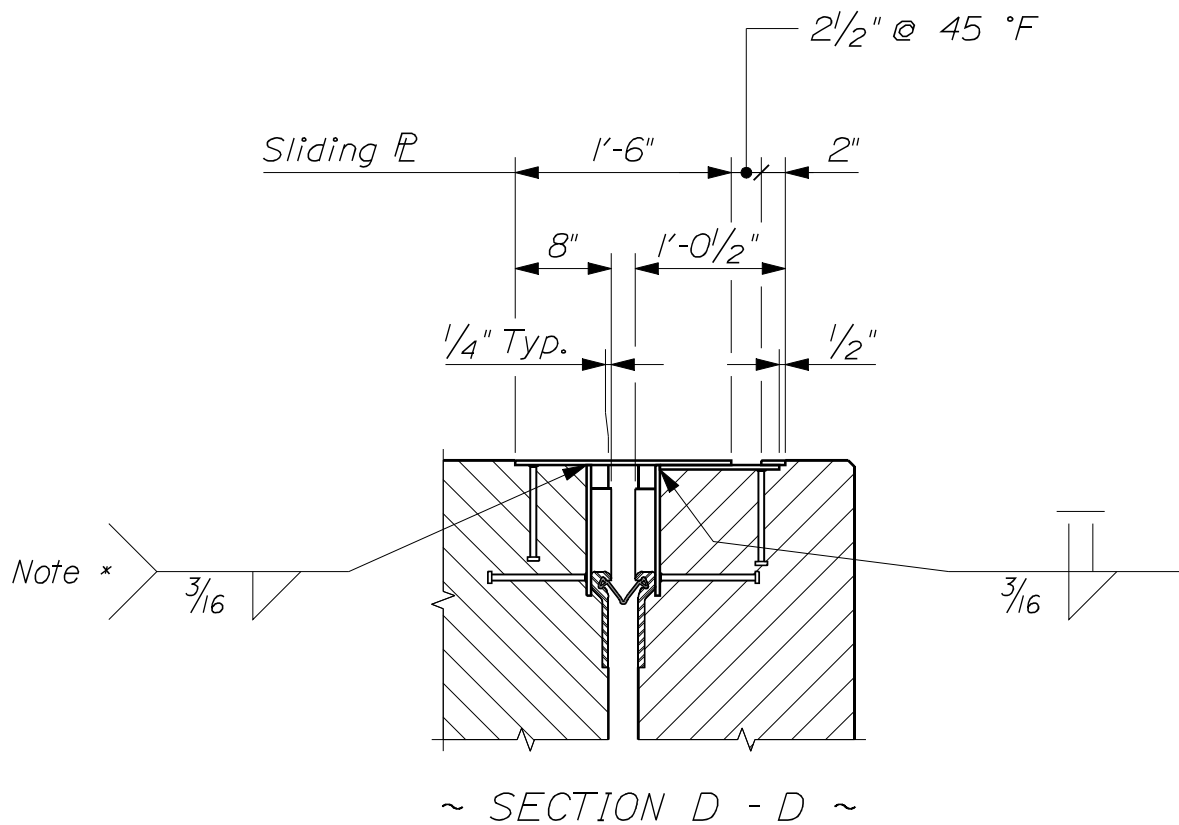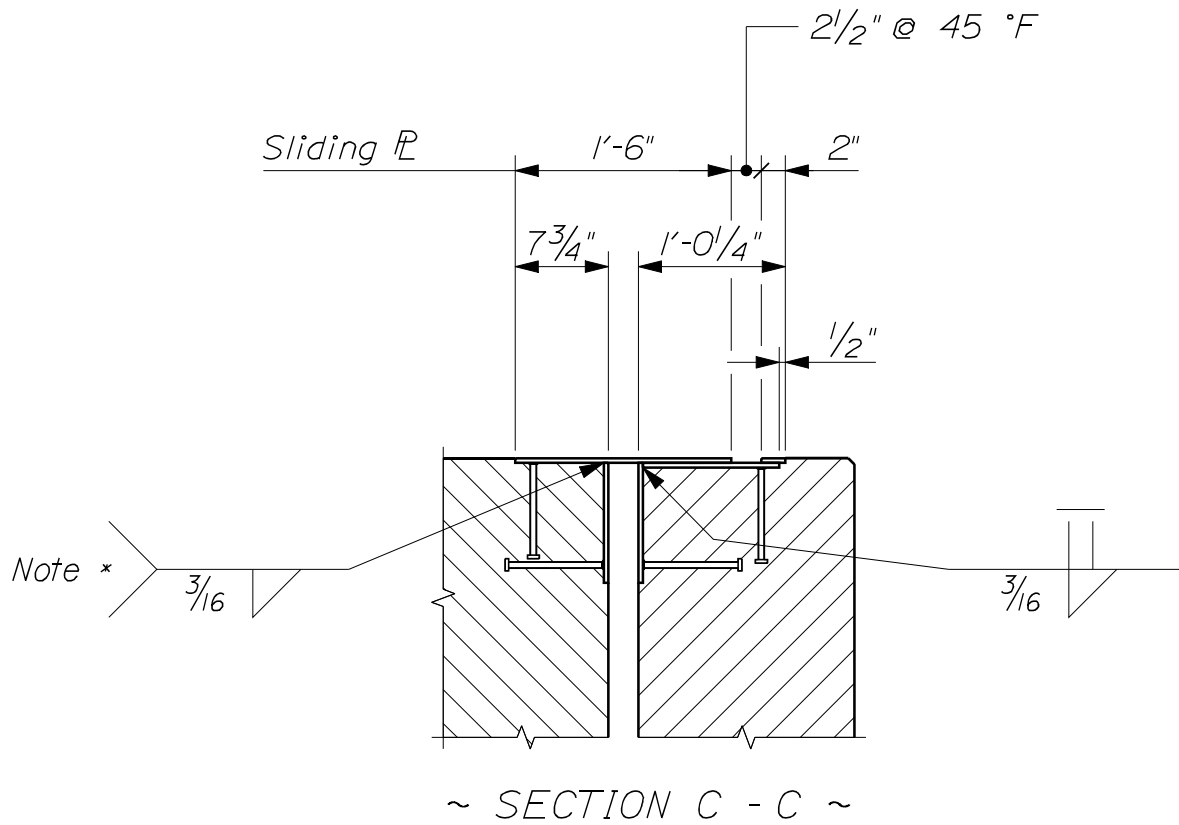

EXPANSION DEVICE - GLAND SEAL
520(07)

NOTES:

1. Each "Expansion Device - Gland Seal" consists of one backwall element and one superstructure element (or two superstructure elements over piers) with expansion dams as required.
2. Refer to Design Drawings for dimensions, slopes, skew and all other information necessary to fabricate and install each Expansion Device.
3. The Expansion Device shall be fabricated to be installed normal to grade.
4. Anchor studs shall be installed using automatically timed stud welding equipment.
5. The Expansion Device shall be set to an opening of two inches in the fabrication shop. The joint opening shall be adjusted for temperature in the field at the time of installation using the following formula:

$$0.00008 \times "D" \times "\Delta T" = \text{Adjustment (in inches)}$$

"D" is the distance in feet between the backwall and the nearest fixed bearings (for joints at abutments) or between the fixed bearings at either side of the expansion joint (for joints at piers). " ΔT " is the difference between the temperature of the structure and 45 °F.


A structure temperature above 45 °F will result in a smaller joint opening.

6. Welding to reinforcing steel will be allowed in the top of the abutment backwall above the block - out joint.
7. The slab and backwall concrete shall be in place before the Expansion Device is fixed in position. No allowance for movement due to dead load deflection is necessary.
8. The concrete in the block - out may be placed with the curb / sidewalk concrete. An approved epoxy bonding agent shall be applied to all vertical surfaces of the block - out before making the final concrete placement.
9. If there is a conflict between these Standard Details and the Design Drawings, the requirements of the Design Drawings shall be followed.

MATERIALS:

All shapes and plates ----- AASHTO M 270M/M 270, Grade 36


EXPANSION DEVICE - GLAND SEAL
520(08)

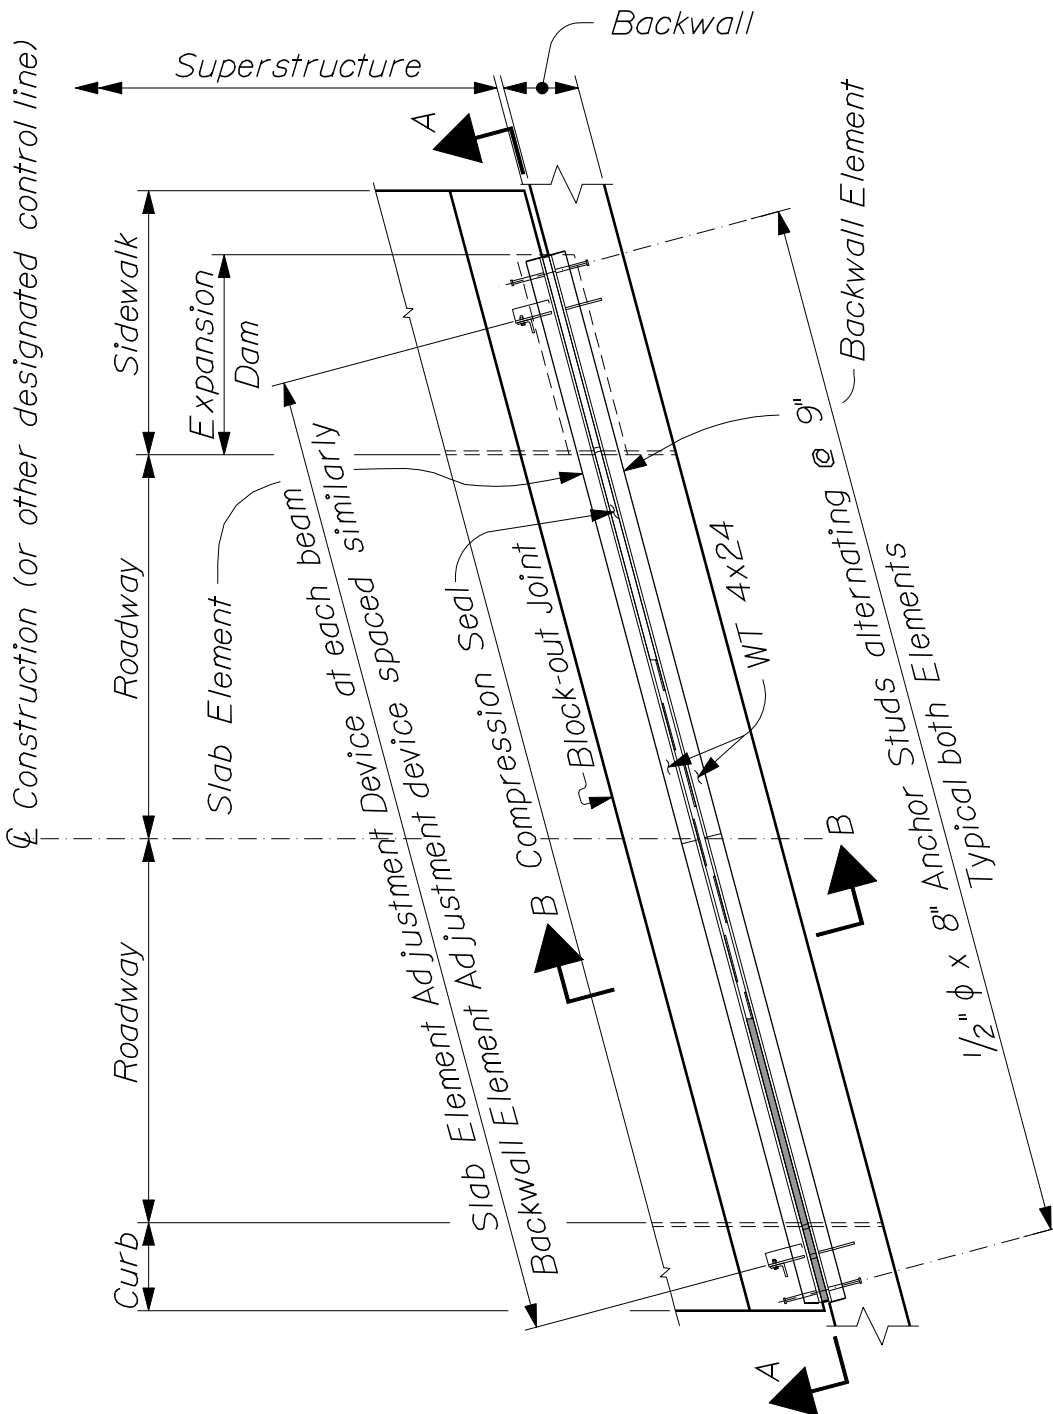

-- PLAN ~ TYPICAL INSTALLATION --
 (Expansion Dam not shown for clarity)


EXPANSION DEVICE - COMPRESSION SEAL

520(10)

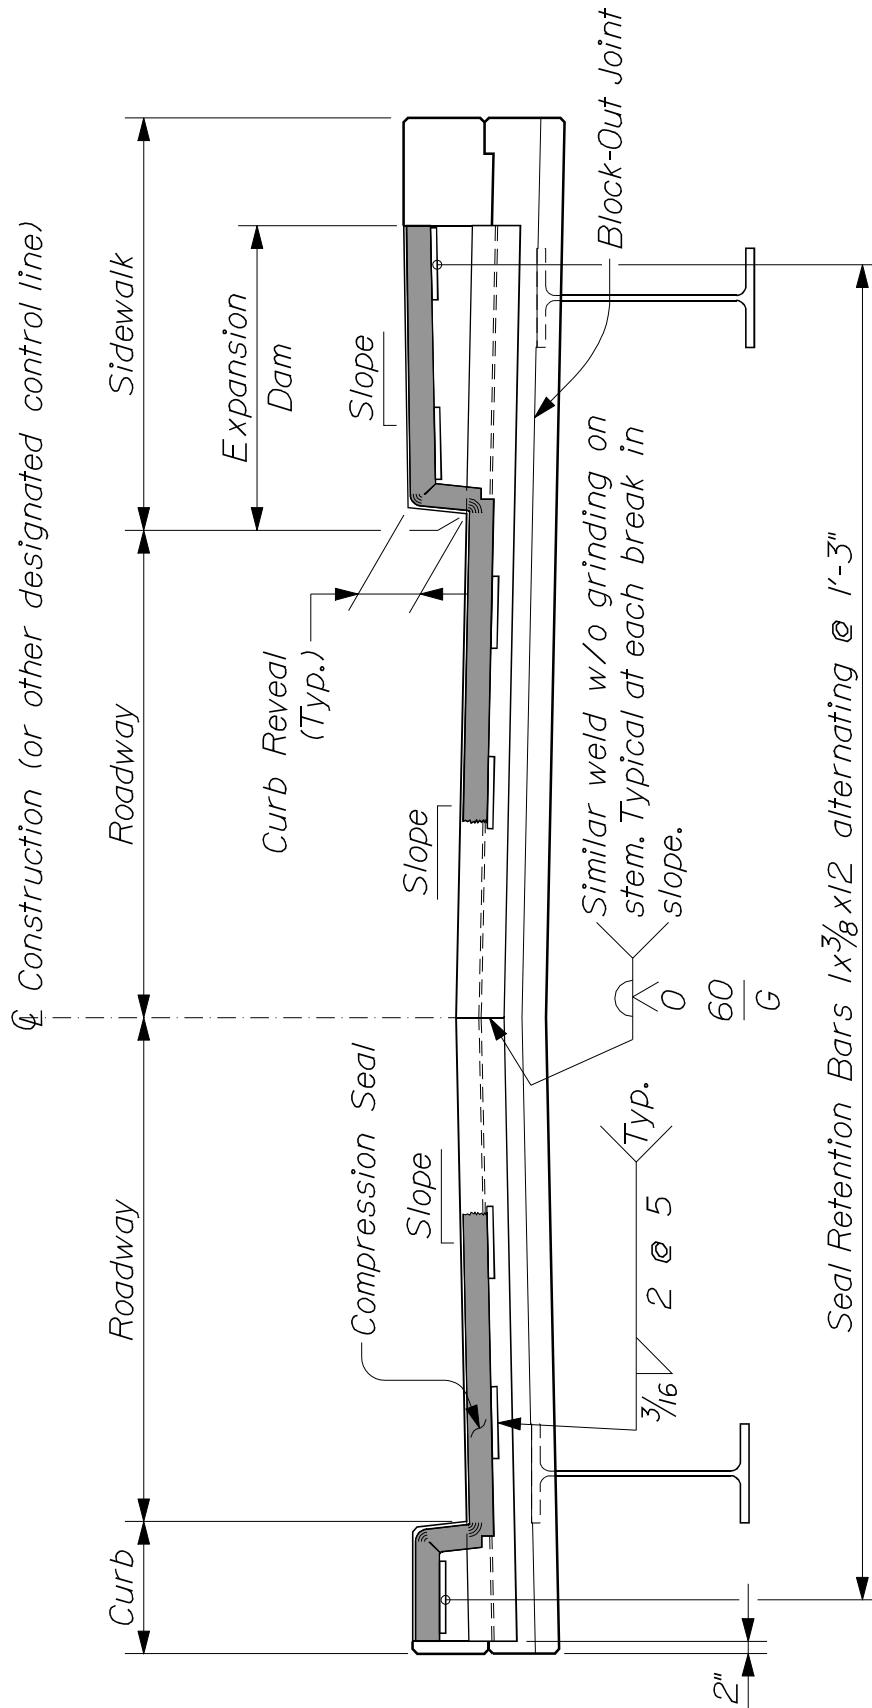


Section A-A / 520(09)


~ ELEVATION ~ TYPICAL INSTALLATION ~

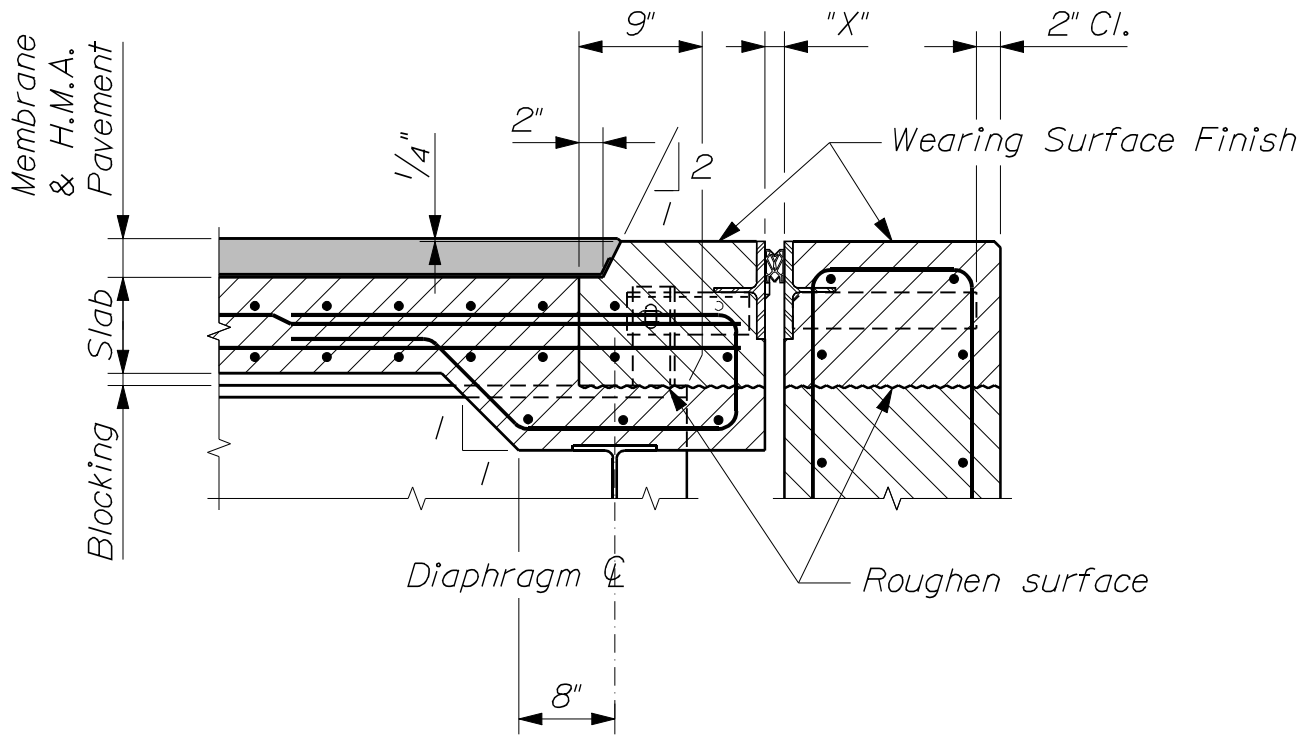


~ SECTION B - B ~
 (Showing Hot Mix Asphalt Pavement Wearing Surface)

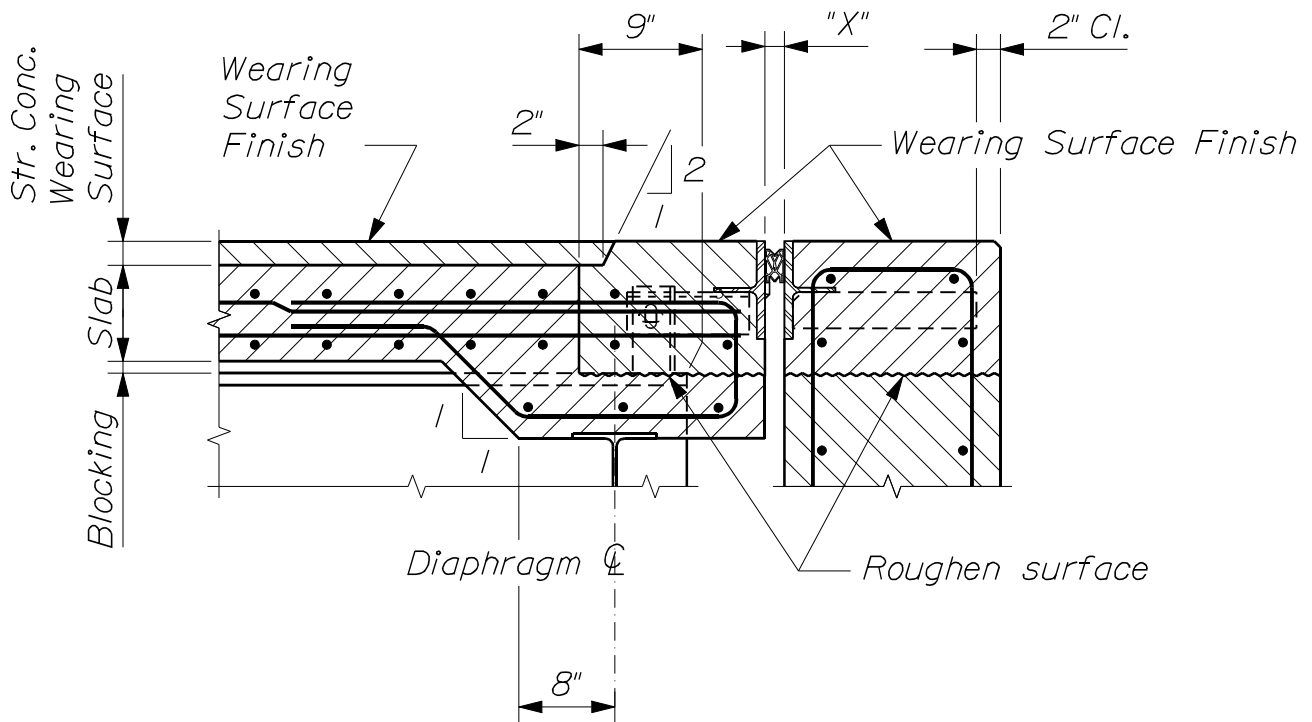

~ SECTION B - B ~
 (Showing Structural Concrete Wearing Surface)

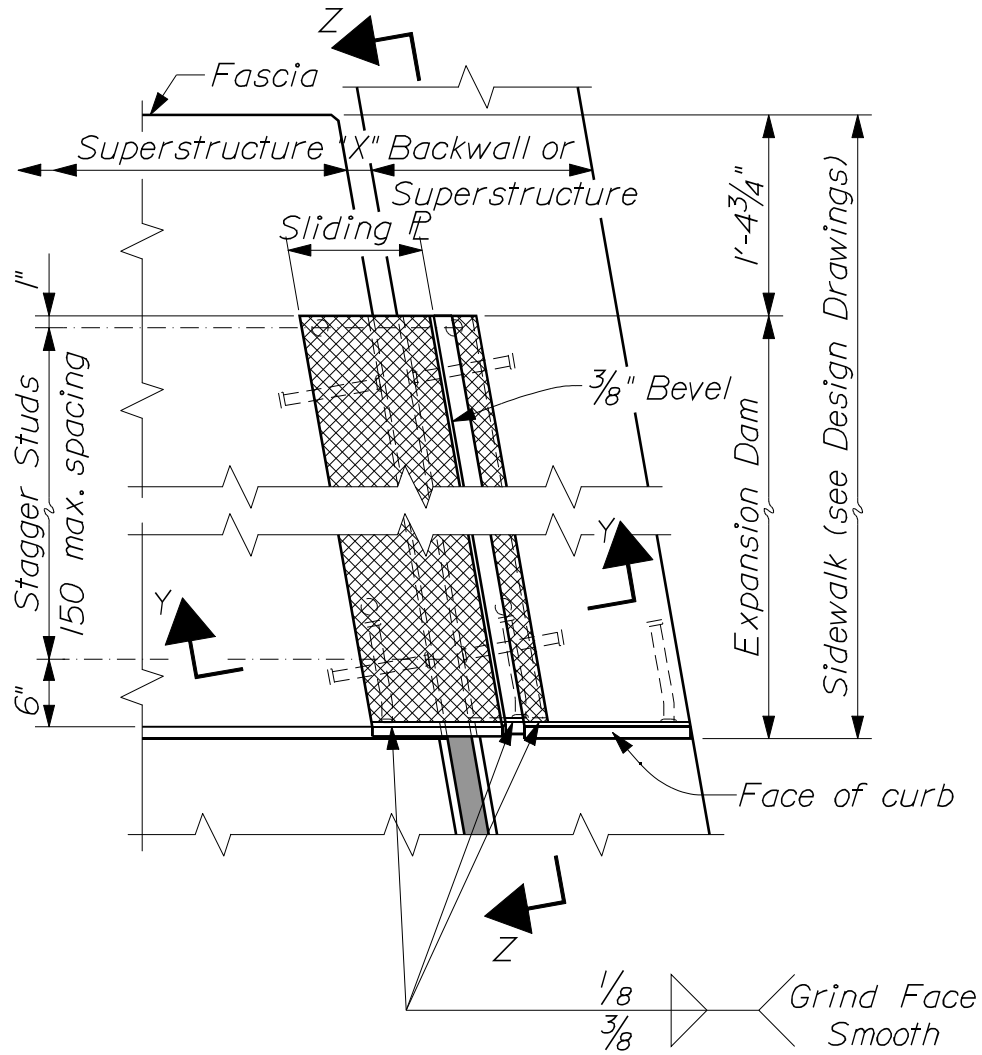


~ PLAN - SIDEWALK EXPANSION DAM ~

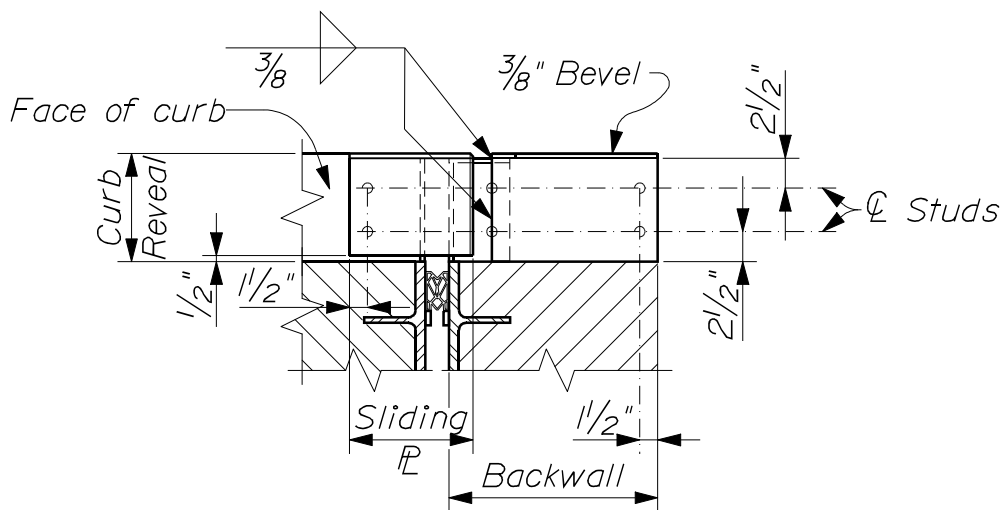


~ ELEVATION - SIDEWALK EXPANSION DAM ~

EXPANSION DEVICE - COMPRESSION SEAL

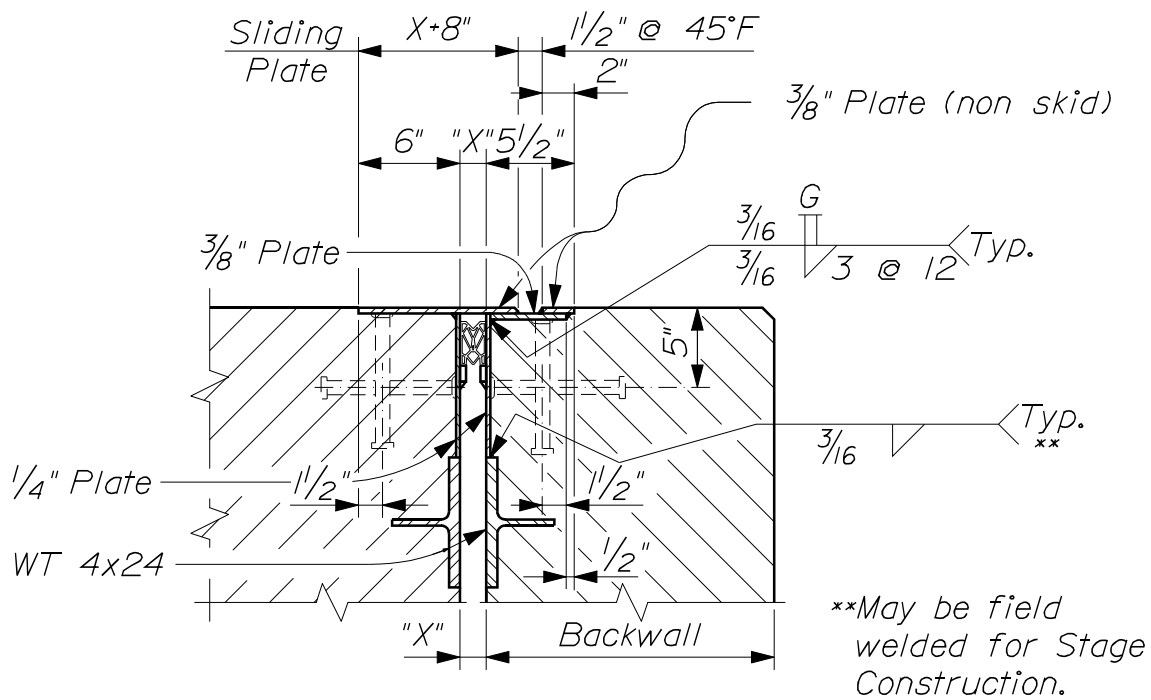

Section Y-Y / 520(13)

Slope of curb plates shall match slope of curb shown on Design Drawings.

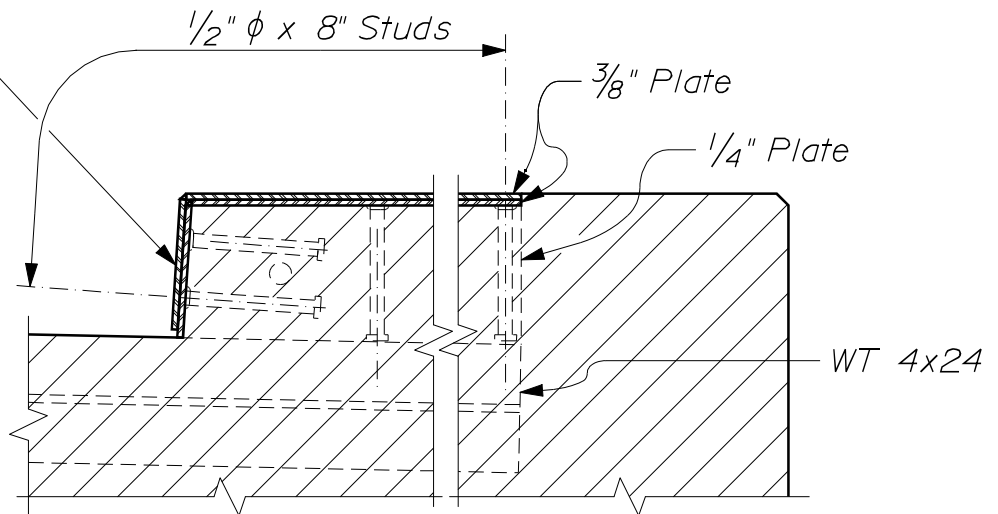

Section Z-Z / 520(13)

~ SIDEWALK EXPANSION DAM SECTIONS ~

EXPANSION DEVICE - COMPRESSION SEAL

520(14)

NOTES:

1. Each "Expansion Device - Compression Seal" consists of one backwall element and one superstructure element (or two superstructure elements over piers) with expansion dams as required.
2. Refer to Design Drawings for dimensions, slopes, skew and all other information necessary to fabricate and install each Expansion Device.
3. The Expansion Device shall be fabricated to be installed normal to grade.
4. Anchor studs shall be installed using automatically timed stud welding equipment.
5. Dimension "X" at 45 °F shall be determined as follows:


$$(0.85 \times \text{nominal seal width}) - \frac{1}{2}MR$$

The Movement Rating (MR) for each seal shall be as determined by MaineDOT for the make and type of seal to be provided. Dimension "X" at 45 °F and the make and type of seal shall be shown on the Shop Detail Drawings.

6. Final adjustment for temperature shall be made in the field according to the "Compression Seal Adjustment Chart" shown on the Design Drawings. The adjustment shall be measured parallel to the centerline of construction.
7. Welding to reinforcing steel will be allowed in the top of the abutment backwall above the block - out joint.
8. The slab and backwall concrete shall be in place before the Expansion Device is fixed in position. No allowance for movement due to dead load deflection is necessary.
9. The concrete in the block - out may be placed with the curb / sidewalk concrete. An approved epoxy bonding agent shall be applied to all vertical surfaces of the block - out before making the final concrete placement.
10. If there is a conflict between these Standard Details and the Design Drawings, the requirements of the Design Drawings shall be followed.

MATERIALS:


All shapes and plates AASHTO M 270M/M 270, Grade 36

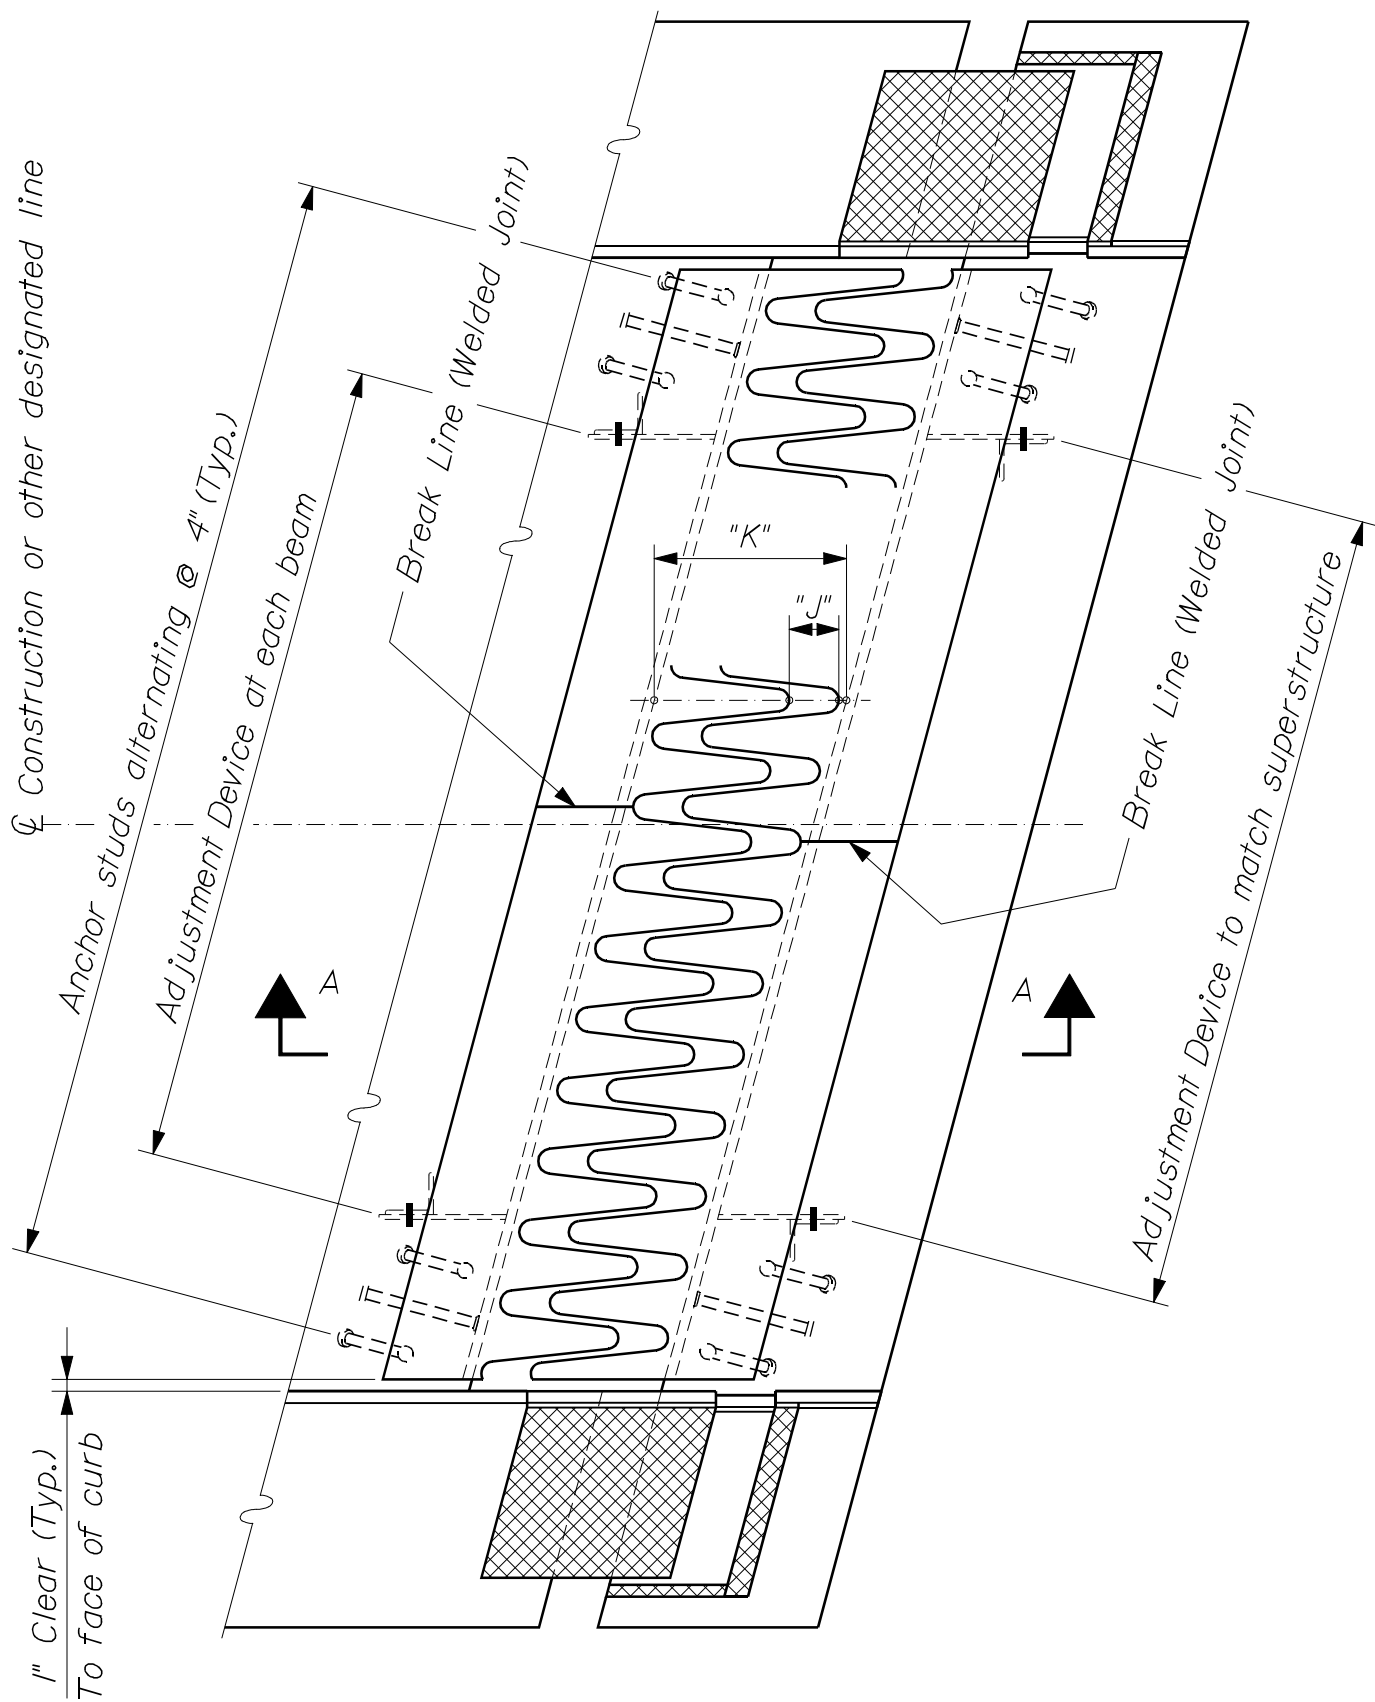


~ FINGER JOINT PLAN ~

EXPANSION DEVICE - FINGER JOINT


52(01)

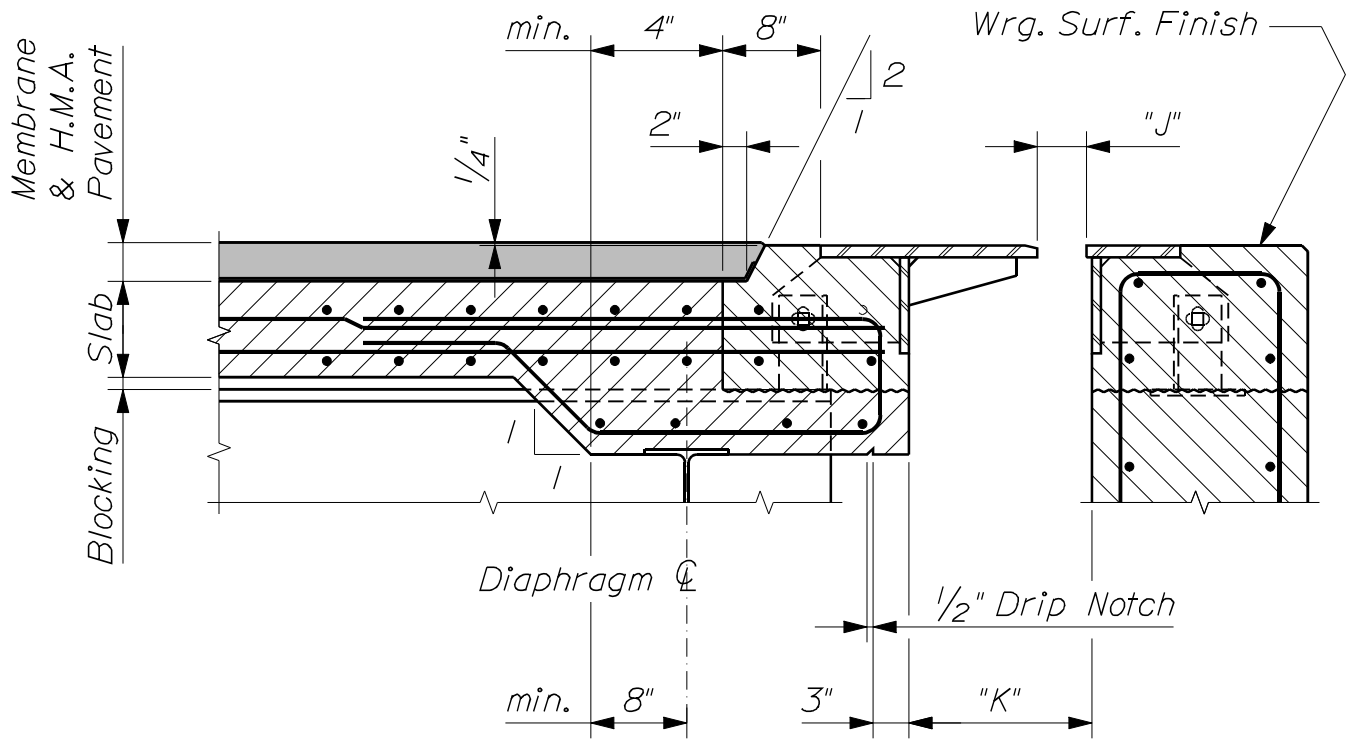


~ SECTION A - A ~
(Showing Hot Mix Asphalt Pavement Wearing Surface)

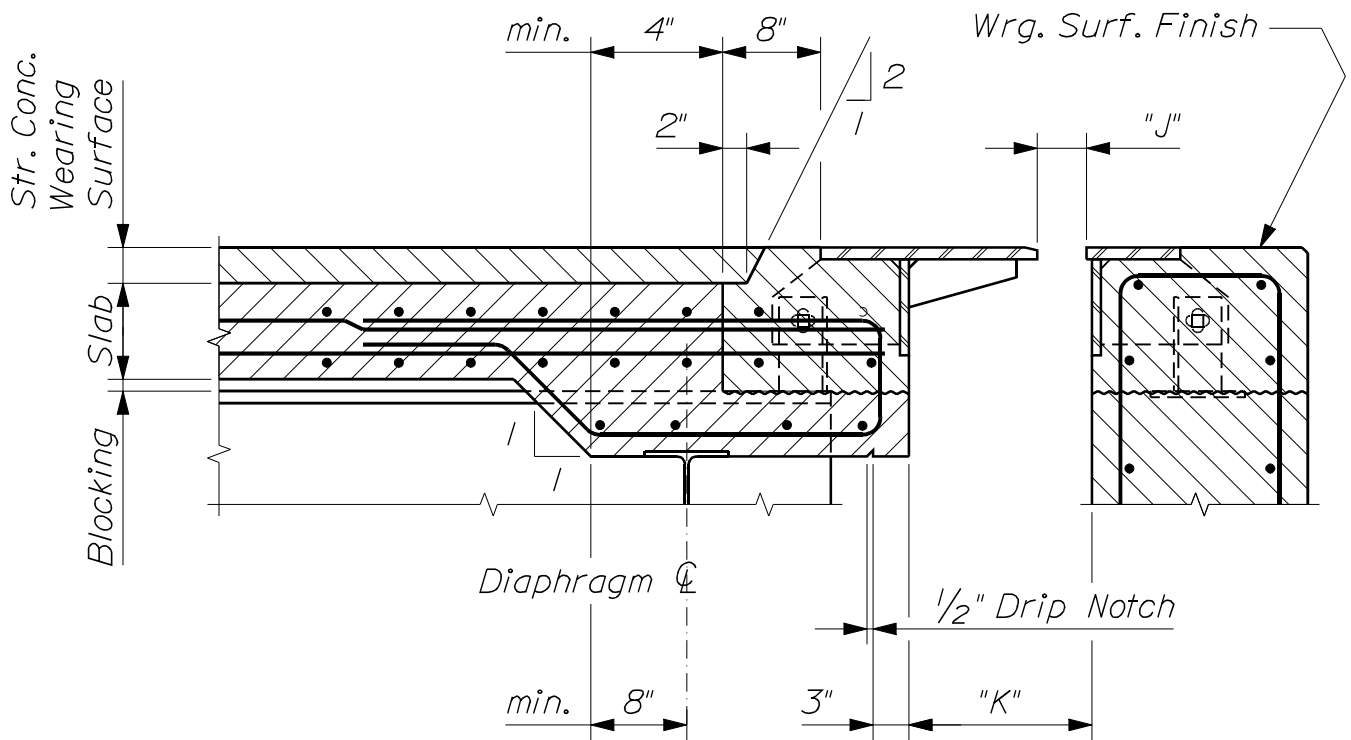

~ SECTION A - A ~
(Showing Structural Concrete Wearing Surface)

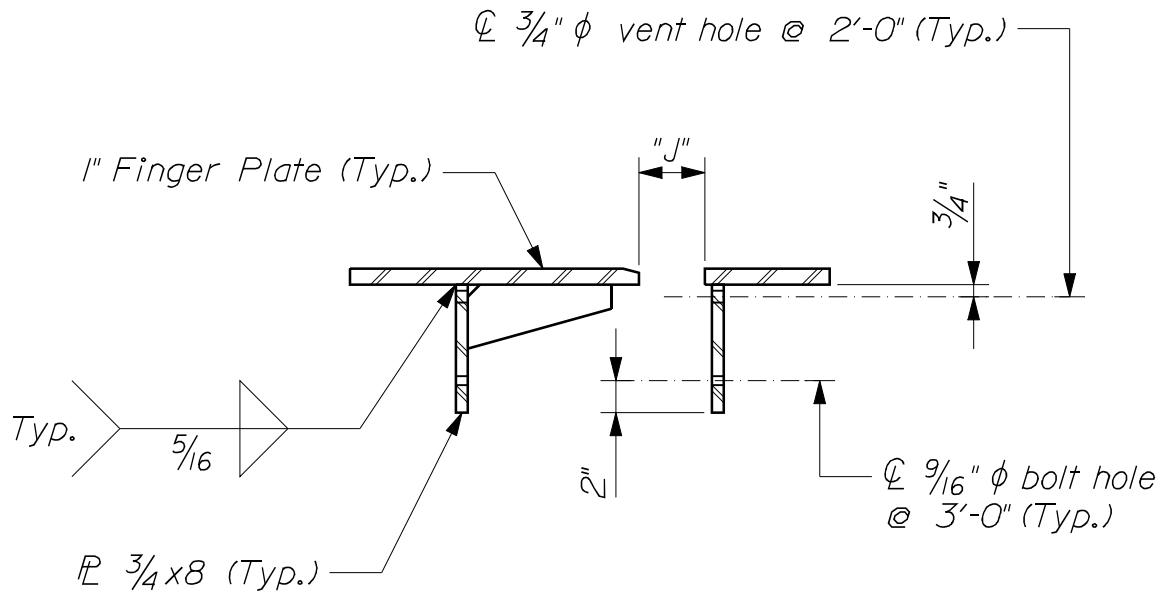


-- TYPICAL FINGER JOINT SECTION --

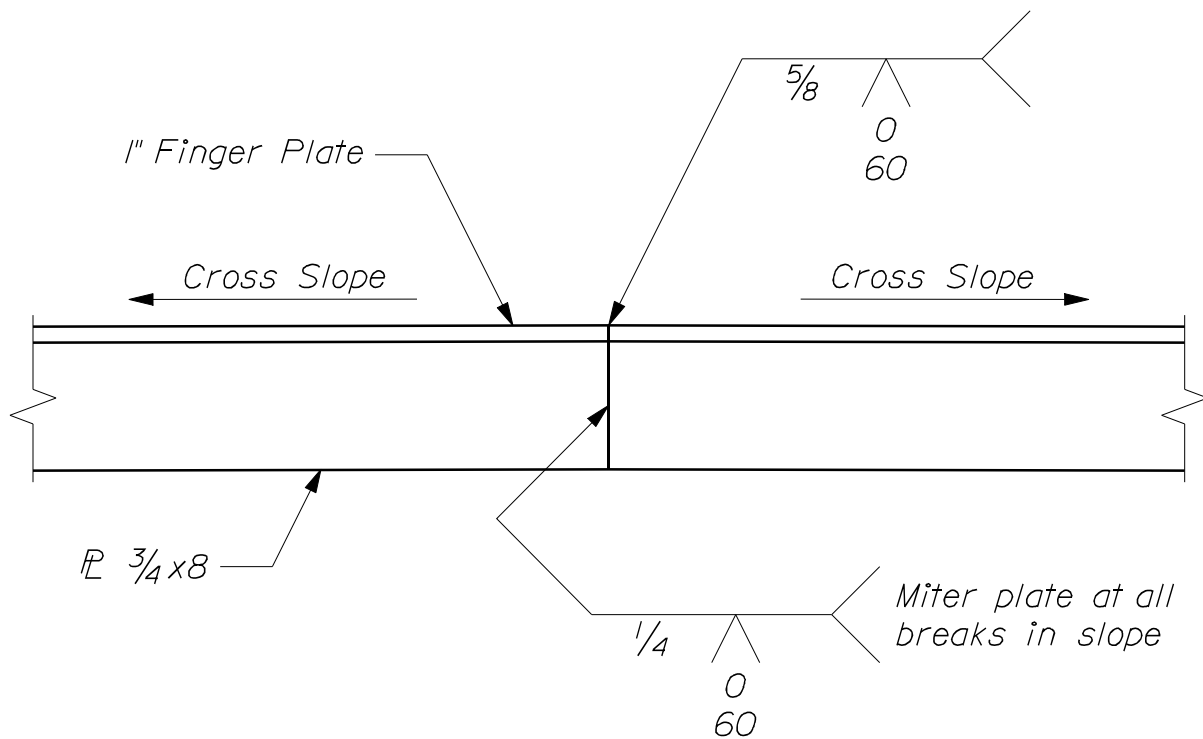


-- FINGER JOINT ELEVATION AT BREAK IN CROSS SLOPE --

EXPANSION DEVICE - FINGER JOINT

52(03)

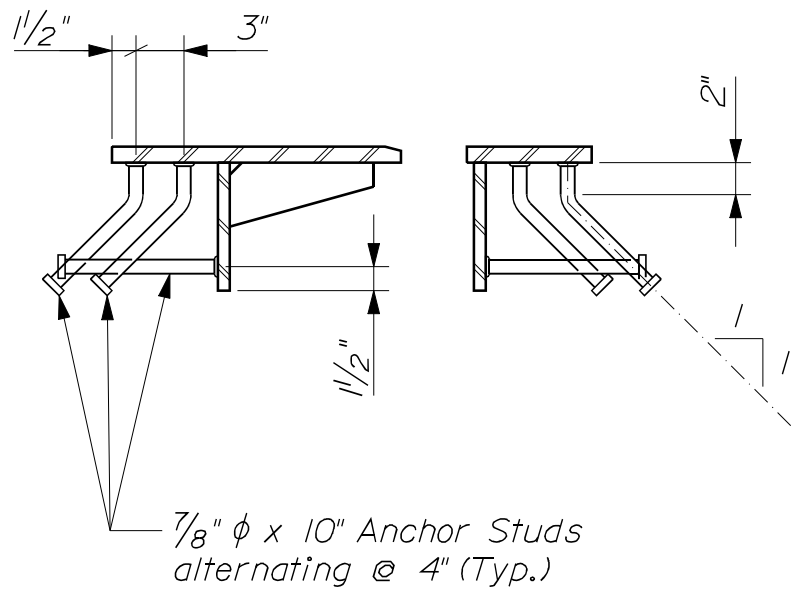


-- ANCHOR STUD DETAIL --

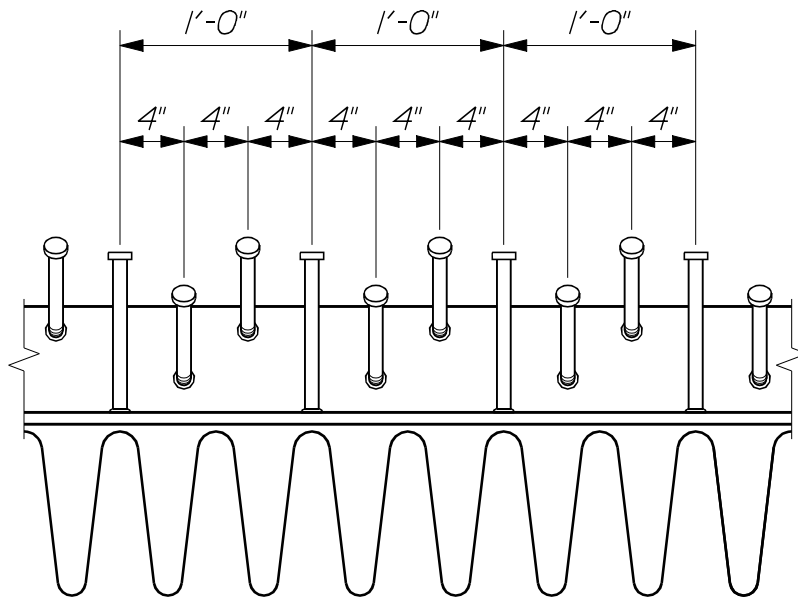


-- ANCHOR STUD LAYOUT PLAN (BOTTOM VIEW) --

EXPANSION DEVICE - FINGER JOINT
 521(04)

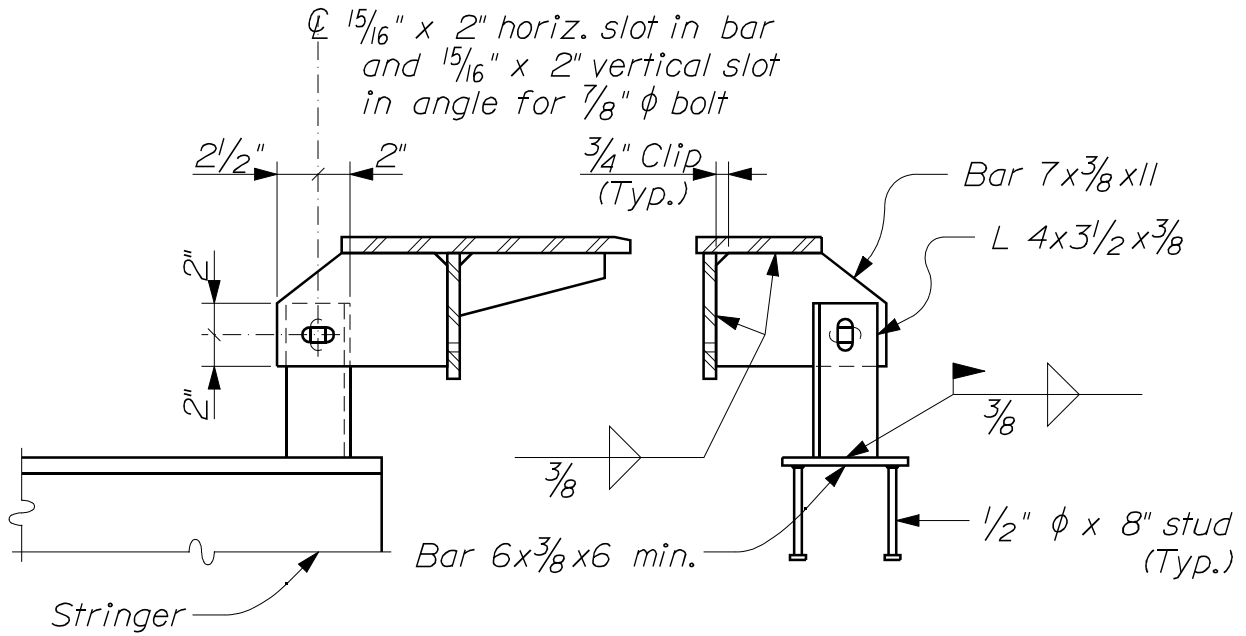


~ ADJUSTMENT DEVICES ~
 Symmetrical both sides of joint except as shown

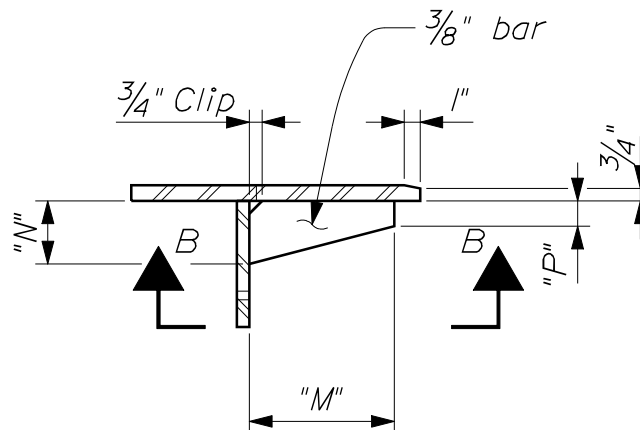


~ FINGER DETAIL ~


EXPANSION DEVICE - FINGER JOINT
 52(05)

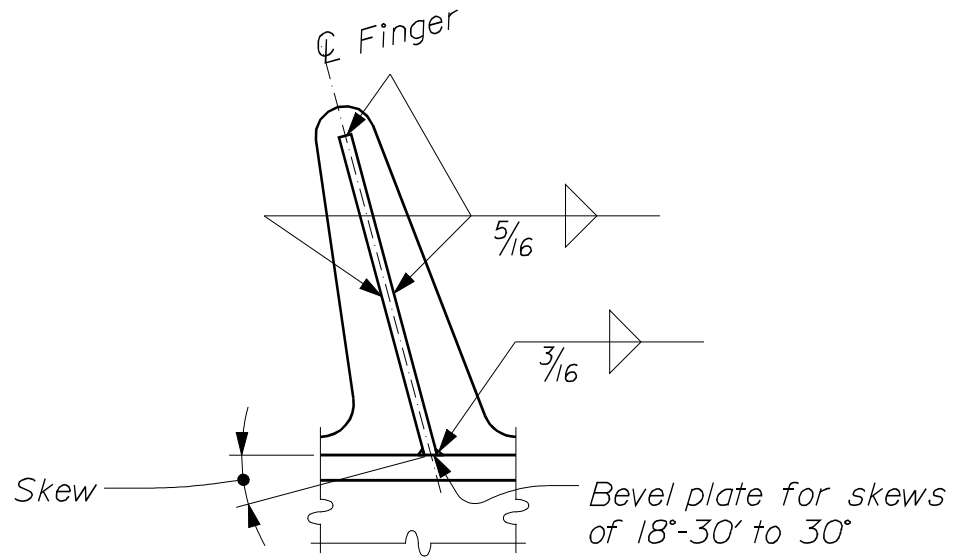

~ VIEW B-B ~
 Skew 0° to 30°

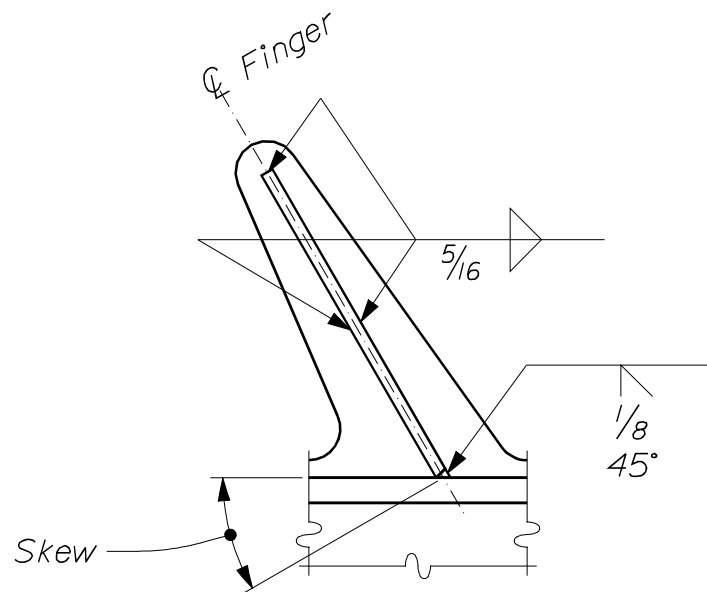


~ VIEW B-B ~
 Skew over 30°

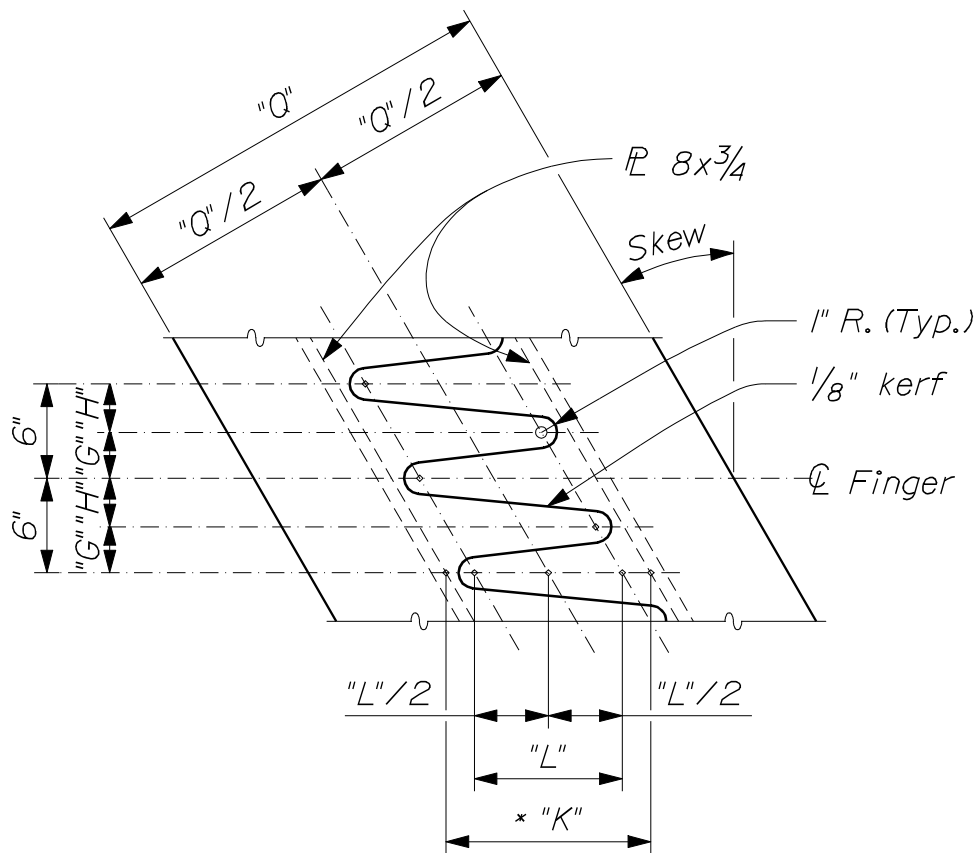

~ FINGER CUTTING DETAIL ~
(Skew back on left)



Note; Cut from one plate and match mark
* K is K dimension prior to cutting plate

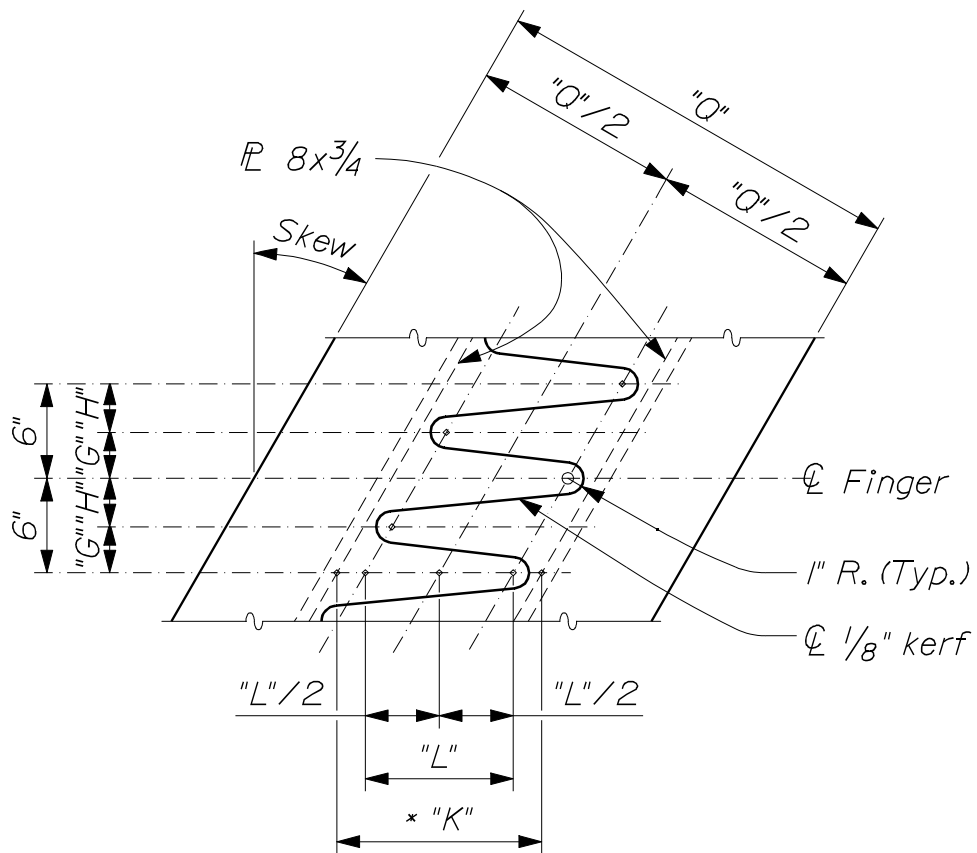


~ FINGER CUTTING DETAIL ~
(Skew ahead on left)

Note; Cut from one plate and match mark
* "K" is "K" dimension prior to cutting plate


EXPANSION DEVICE - FINGER JOINT
52(08)

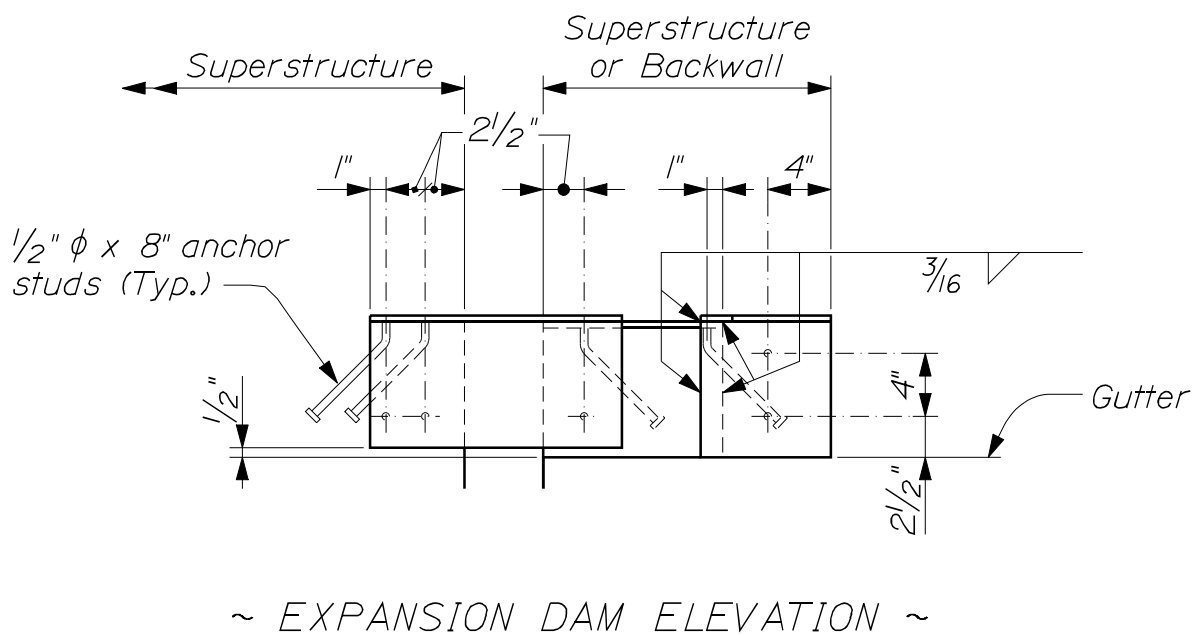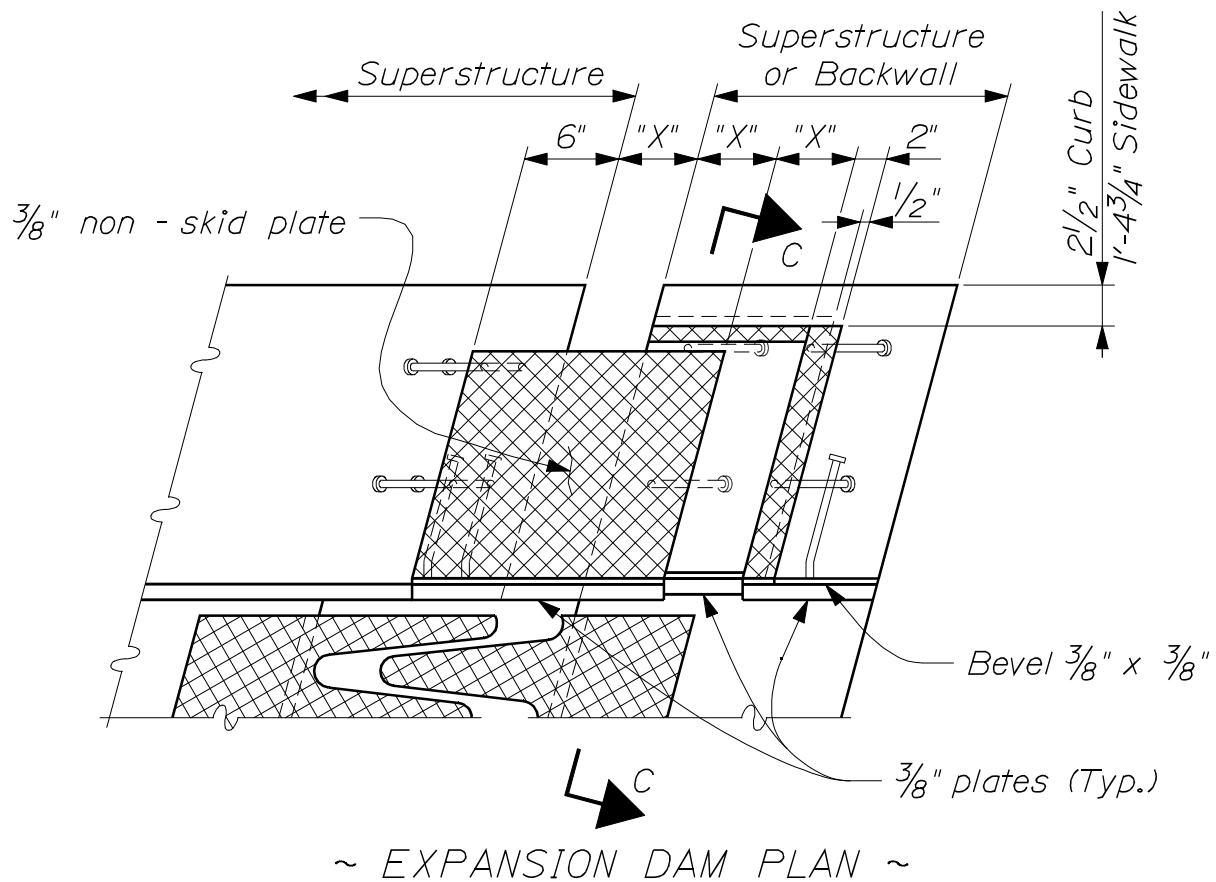


EXPANSION DEVICE - FINGER JOINT
521(09)

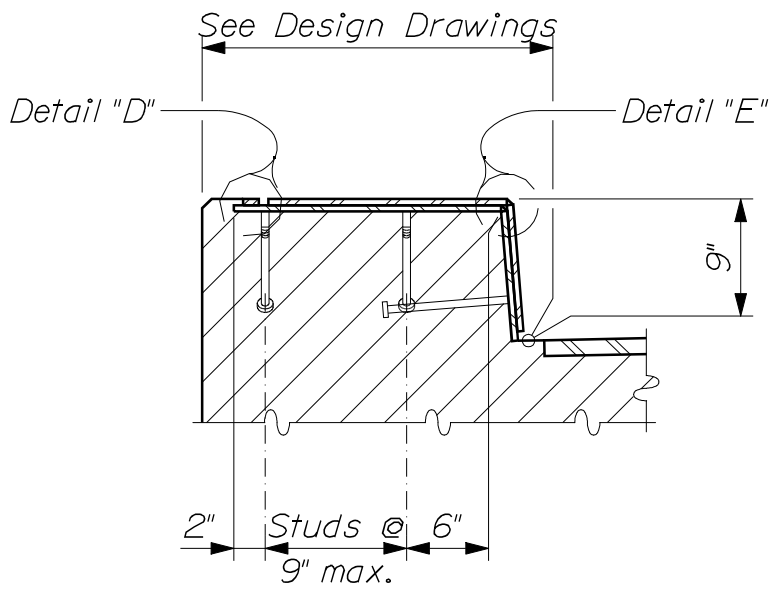

~ SECTION C-C ~

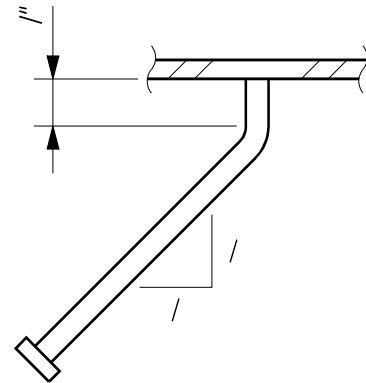

~ BENT STUD DETAIL ~

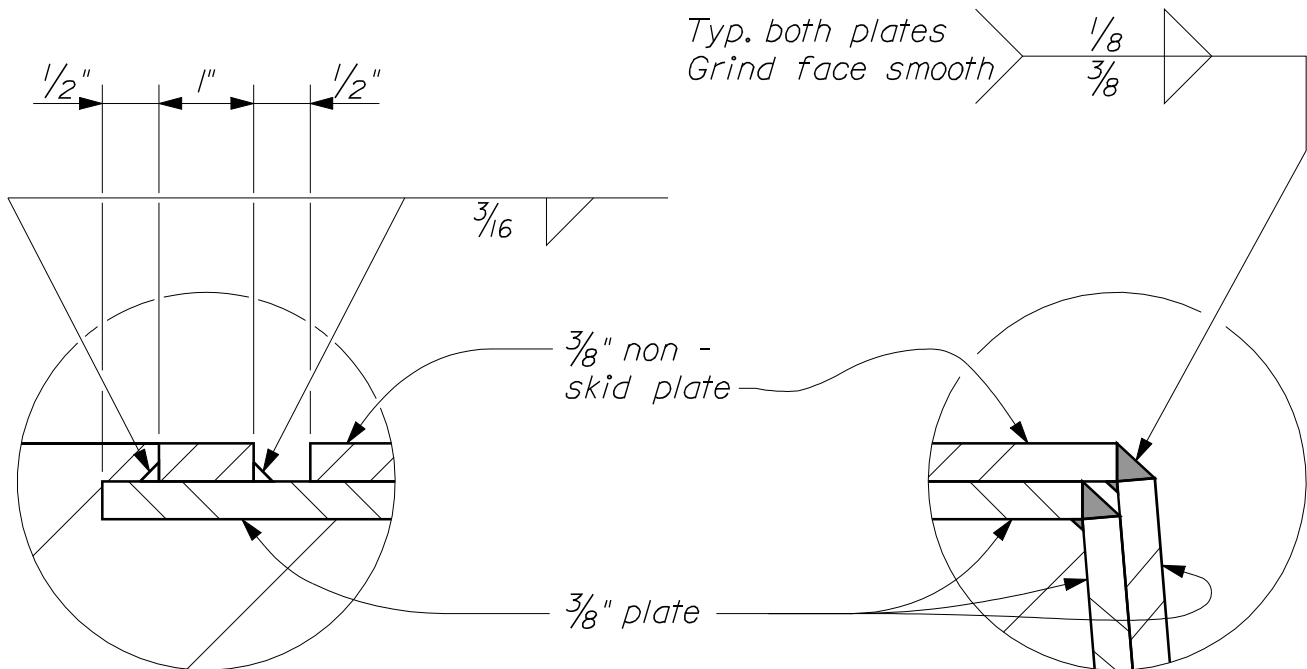

~ DETAIL "D" ~

~ DETAIL "E" ~

EXPANSION DEVICE - FINGER JOINT

TABLE OF DIMENSIONS													
Type	Exp. Length	Skew	"K"	"L"	"G"	"H"	"K" @ 45°	"J" @ 45°	"M"	"N"	"P"	"Q"	"X" @ 45°
A	100' to 280'	0° to 5°	7"	4"	3"	3"	9"	2 1/8"	--	--	--	21"	3"
		> 5° to 10°	7 1/4"	4 1/4"	2 7/8"	3 1/8"	9 1/4"	2 1/8"	--	--	--	22"	3"
		> 10° to 20°	8"	4 3/4"	2 7/8"	3 1/8"	10"	2 1/8"	--	--	--	22"	3"
		> 20° to 30°	8 3/4"	5 1/4"	2 3/4"	3 1/4"	10 3/4"	2 1/8"	--	--	--	23"	3"
		> 30° to 40°	9 3/4"	5 3/4"	2 5/8"	3 3/8"	11 3/4"	2 1/8"	--	--	--	23"	3"
		> 40° to 50°	11 1/4"	6 1/2"	2 1/2"	3 1/2"	13 1/4"	2 1/8"	--	--	--	23"	3"
B	280' to 440'	0° to 5°	9"	6"	3"	3"	12"	3 1/8"	--	--	--	23"	4"
		> 5° to 10°	9 1/4"	6 1/4"	2 7/8"	3 1/8"	12 1/4"	3 1/8"	--	--	--	24"	4"
		> 10° to 20°	10"	6 3/4"	2 7/8"	3 1/8"	13"	3 1/8"	--	--	--	24"	4"
		> 20° to 30°	10 3/4"	7 1/4"	2 3/4"	3 1/4"	13 3/4"	3 1/8"	--	--	--	25"	4"
		> 30° to 40°	12"	8"	2 3/4"	3 1/4"	15"	3 1/8"	--	--	--	25"	4"
		> 40° to 50°	13 1/2"	8 3/4"	2 5/8"	3 3/8"	16 1/2"	3 1/8"	--	--	--	25"	4"
C	440' to 600'	0° to 10°	11 1/4"	8 1/4"	3"	3"	15 1/4"	4 1/8"	9"	4"	1 1/2"	26"	5"
		> 10° to 20°	12"	8 3/4"	2 7/8"	3 1/8"	16"	4 1/8"	10"	4"	1 1/2"	26"	5"
		> 20° to 30°	12 3/4"	9 1/4"	2 7/8"	3 1/8"	16 3/4"	4 1/8"	11"	4"	1 1/2"	26"	5"
		> 30° to 40°	14"	10"	2 3/4"	3 1/4"	18"	4 1/8"	11"	4"	1 1/2"	26"	5"
		> 40° to 50°	15 1/2"	10 3/4"	2 3/4"	3 1/4"	19 1/2"	4 1/8"	12"	4"	1 1/2"	26"	5"
		0° to 10°	13 1/4"	10 1/4"	3"	3"	18 1/4"	5 1/8"	11"	5"	2"	30"	6"
D	600' to 760'	> 10° to 20°	14"	10 3/4"	2 7/8"	3 1/8"	19"	5 1/8"	12"	5"	2"	30"	6"
		> 20° to 30°	14 3/4"	11 1/4"	2 7/8"	3 1/8"	19 3/4"	5 1/8"	13"	5"	2"	30"	6"
		> 30° to 40°	16"	12"	2 7/8"	3 1/8"	21"	5 1/8"	13"	5"	2"	30"	6"
		> 40° to 50°	17 3/4"	13"	2 3/4"	3 1/4"	22 3/4"	5 1/8"	15"	5"	2"	30"	6"
		0° to 10°	15 1/4"	12 1/4"	3"	3"	21 1/4"	6 1/8"	13"	6"	2 1/2"	36"	7"
		> 10° to 20°	16"	12 3/4"	2 7/8"	3 1/8"	22"	6 1/8"	14"	6"	2 1/2"	36"	7"
E	760' to 920'	> 20° to 30°	16 3/4"	13 1/4"	2 7/8"	3 1/8"	22 3/4"	6 1/8"	15"	6"	2 1/2"	36"	7"
		> 30° to 40°	18"	14"	2 7/8"	3 1/8"	24"	6 1/8"	15"	6"	2 1/2"	36"	7"
		> 40° to 50°	19 3/4"	15"	2 3/4"	3 1/4"	25 3/4"	6 1/8"	17"	6"	2 1/2"	36"	7"

NOTES:

1. Each "Expansion Device - Finger Joint" consists of one backwall element and one superstructure element (or two superstructure elements over piers) with expansion dams as required.
2. Refer to Design Drawings for dimensions, slopes, skew and all other information necessary to fabricate and install each Expansion Device.
3. The Expansion Device shall be fabricated to be installed normal to grade.
4. Anchor studs shall be installed using automatically timed stud welding equipment.
5. The Expansion Device shall be installed with a joint opening of "J" at 45 °F. The joint opening shall be adjusted for temperature in the field at the time of installation using the following formula:
$$0.00008 \times "D" \times "\Delta T" = \text{Adjustment (in inches)}$$
"D" is the distance in feet between the backwall and the nearest fixed bearings (for joints at abutments) or between the fixed bearings at either side of the expansion joint (for joints at piers). "Δ T" is the difference between the temperature of the structure and 45 °F.


A structure temperature above 45 °F will result in a smaller joint opening.
6. Welding to reinforcing steel will be allowed in the top of the abutment backwall above the block - out joint.
7. After the Expansion Device is in final position, weld the bar and angle of the adjustment devices together with a 1/4-in. fillet weld.
8. The slab and backwall concrete shall be in place before the Expansion Device is fixed in position. No allowance for movement due to dead load deflection is necessary.
9. The concrete in the block - out may be placed with the curb / sidewalk concrete. An approved epoxy bonding agent shall be applied to all vertical surfaces of the block - out before making the final concrete placement.
10. If there is a conflict between these Standard Details and the Design Drawings, the requirements of the Design Drawings shall be followed.

MATERIALS:


All shapes and plates ----- AASHTO M 270M/M 270, Grade 36

EXPANSION DEVICE - FINGER JOINT

521(12)

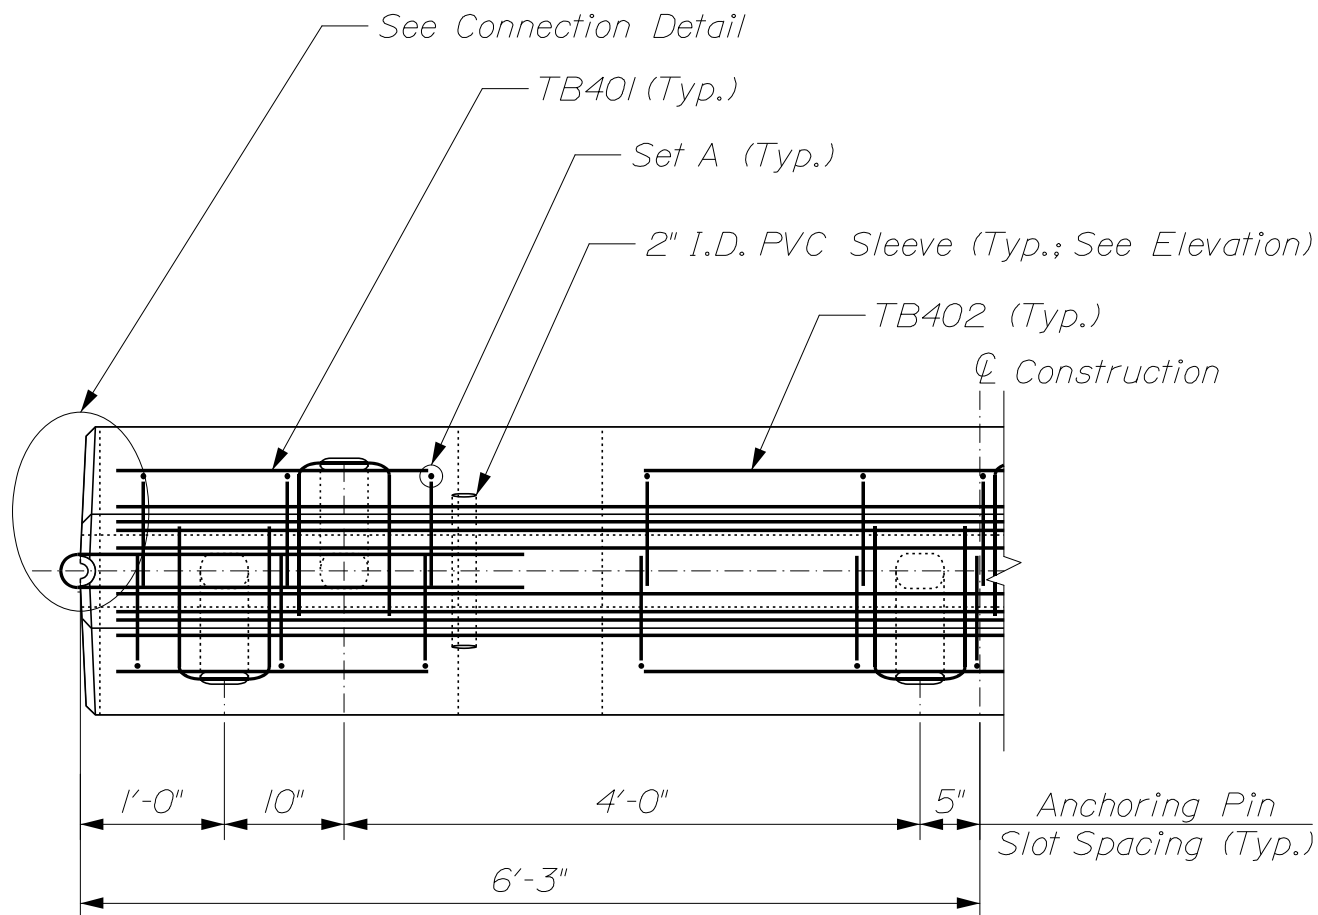


TB451, As Shown in Section B-B (1 Per Anchoring Pin Slot, Center Around Slot; Typ.)

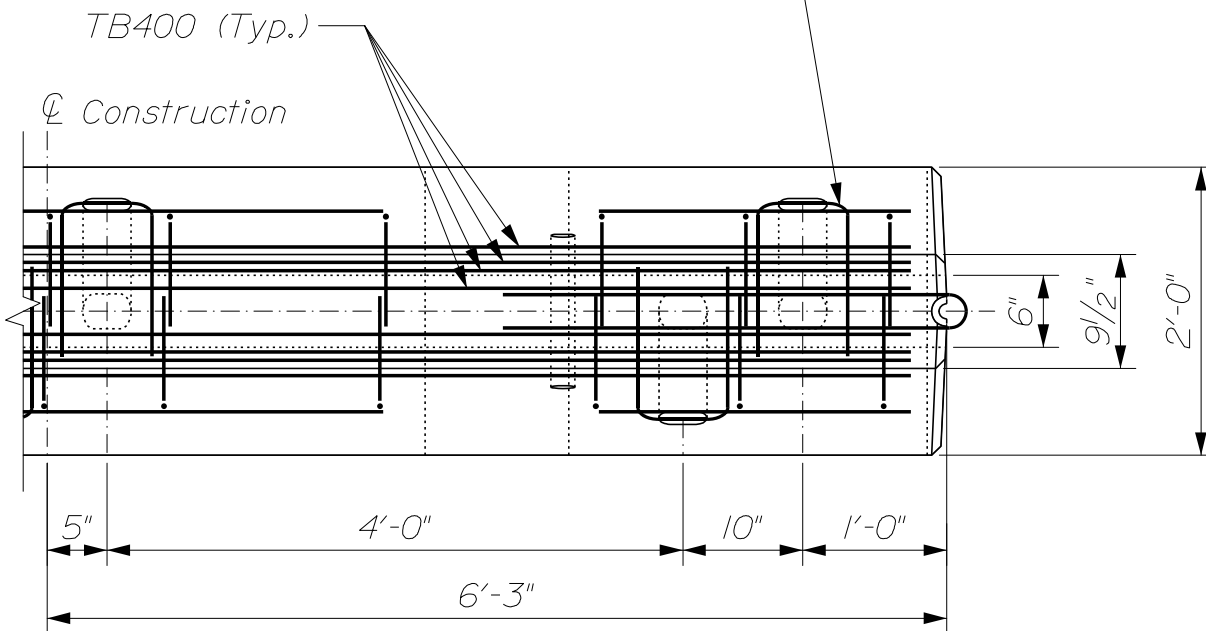


~ PLAN ~

PORTABLE CONCRETE BARRIER
526(01)

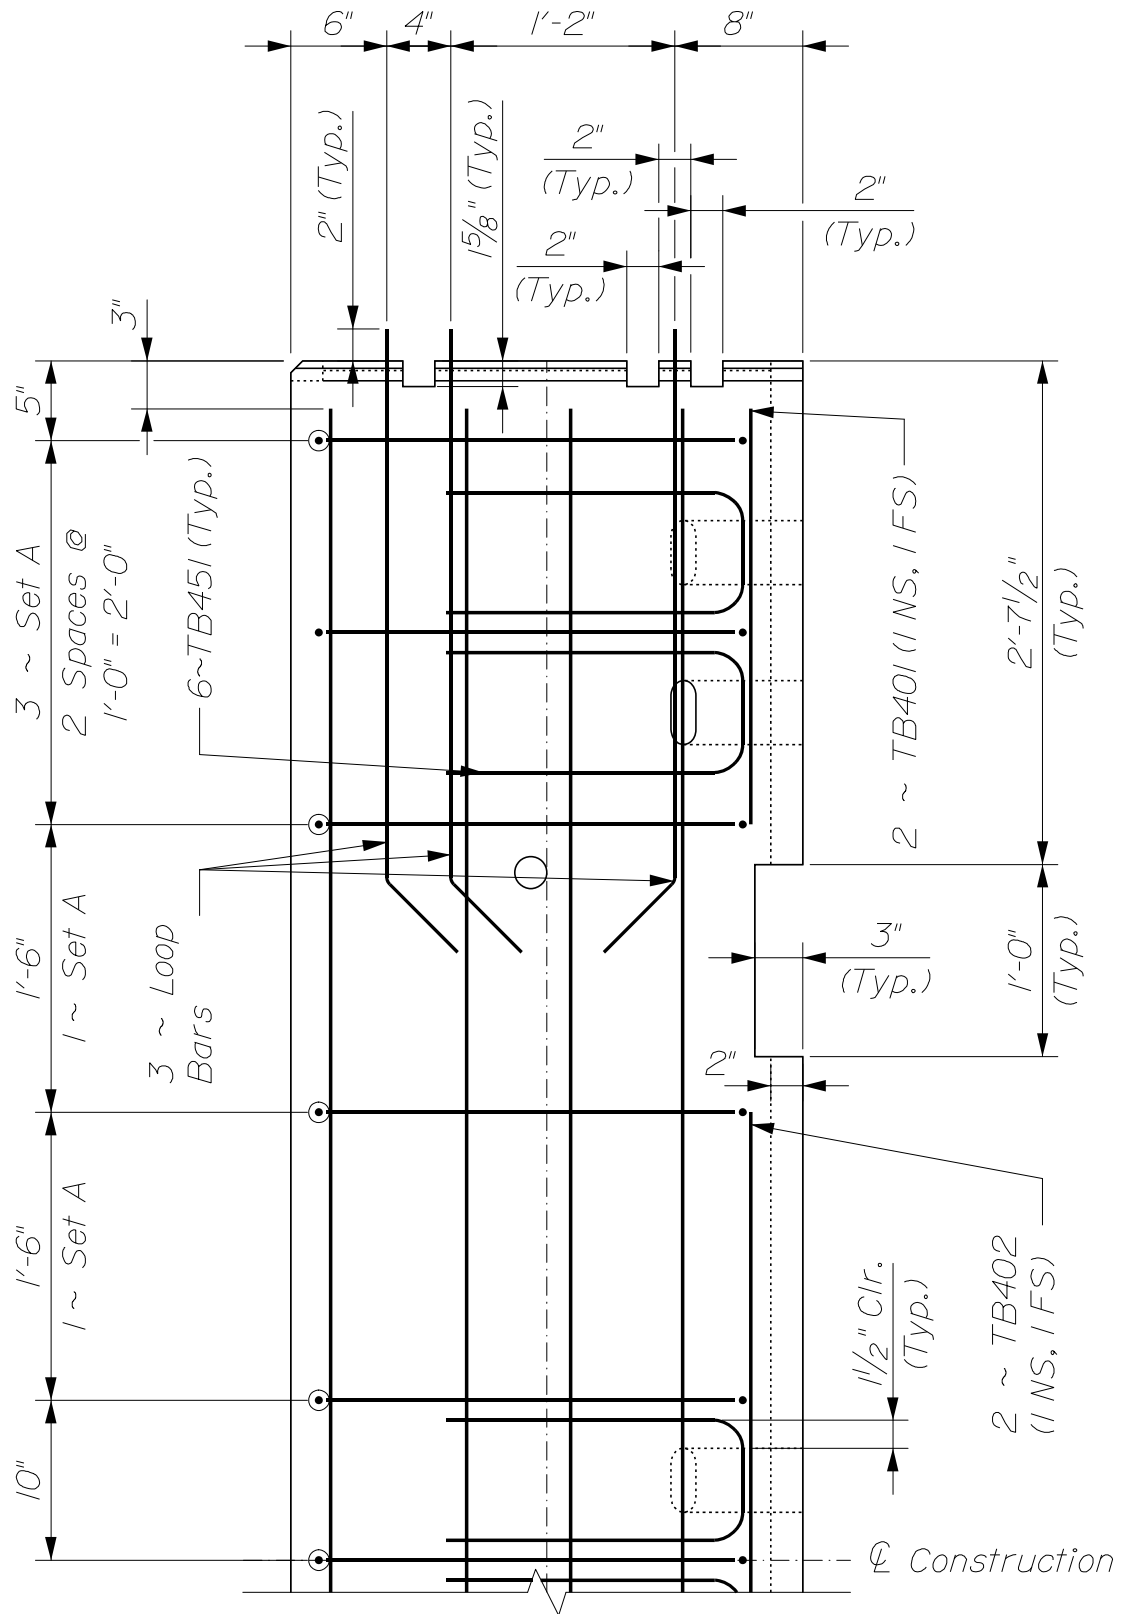


~ ELEVATION (2 of 2) ~

PORTABLE CONCRETE BARRIER
526(01B)

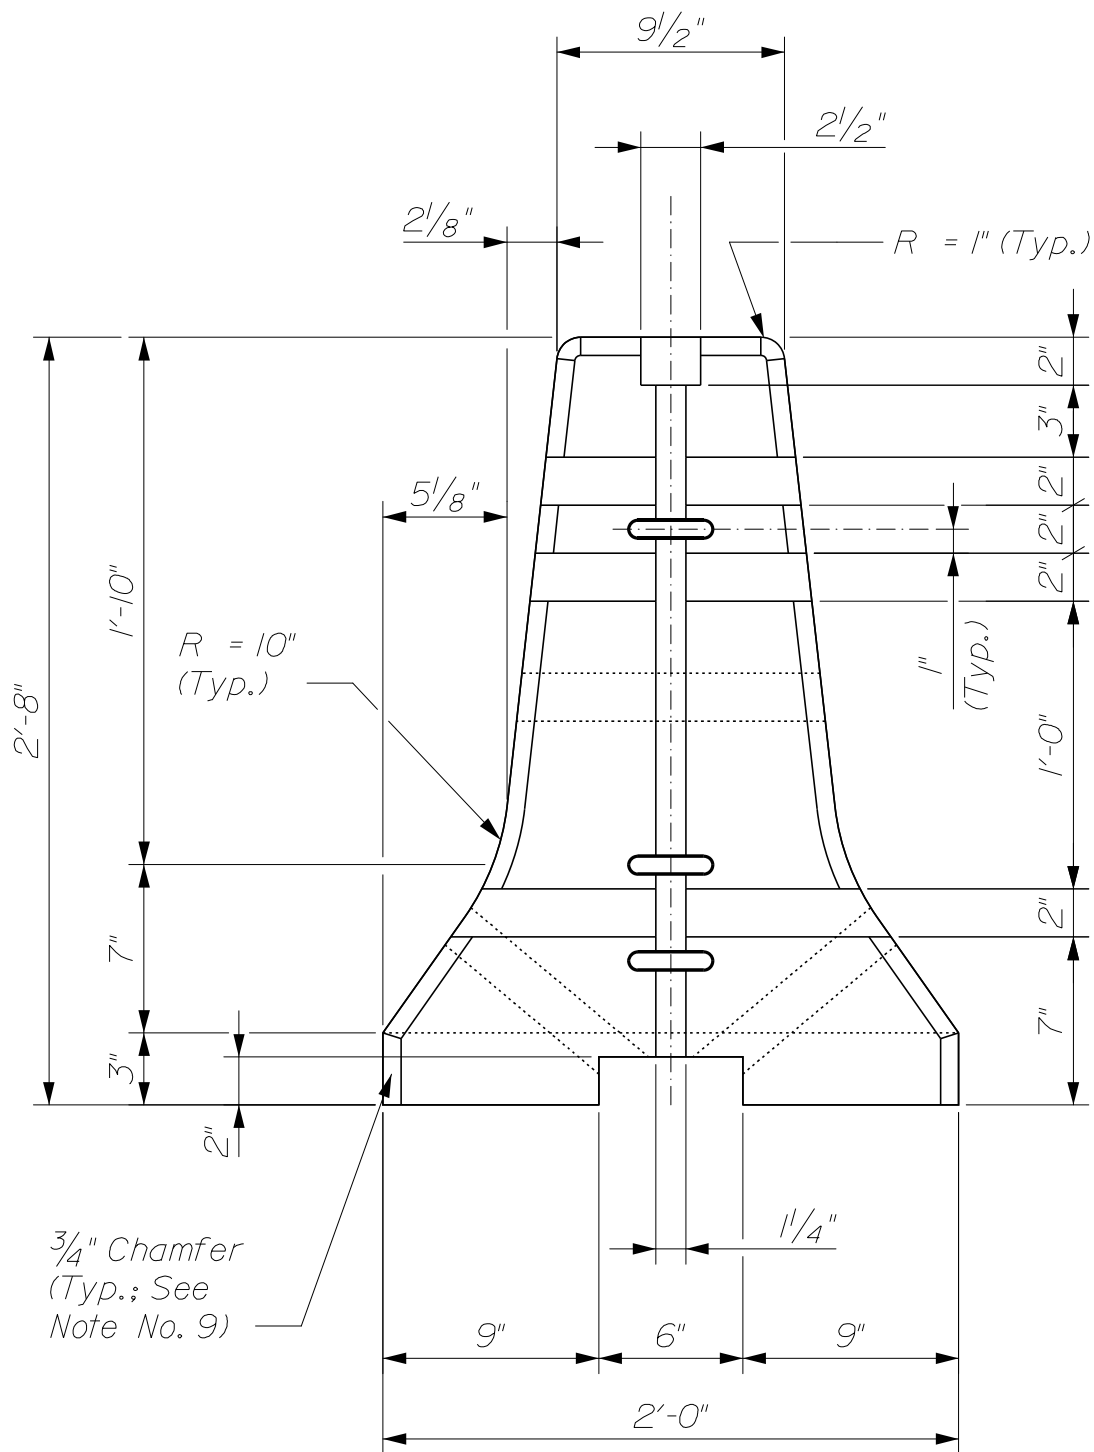

~ SECTION A-A ~


PORTABLE CONCRETE BARRIER
526(02)

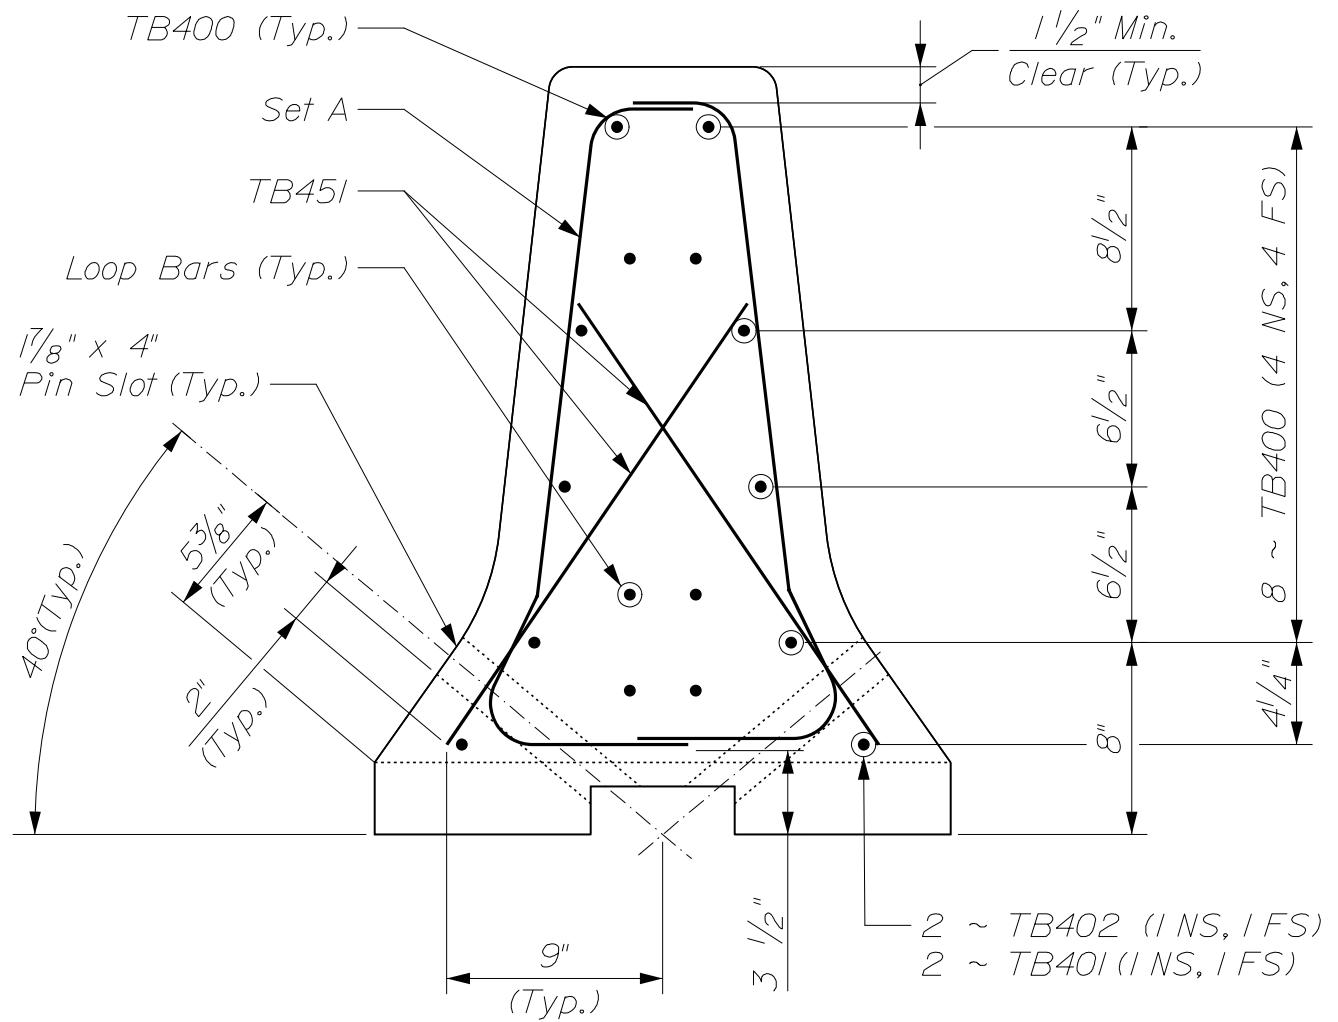

~ SECTION B-B ~




PORTABLE CONCRETE BARRIER
526(02A)

STRAIGHT BARS			
MARK	QTY.	LENGTH	NOTES
<i>TB400</i>	<i>8</i>	<i>12'-0"</i>	<i>Grade 60</i>
<i>TB401</i>	<i>4</i>	<i>2'-2"</i>	<i>Grade 60</i>
<i>TB402</i>	<i>2</i>	<i>4'-8"</i>	<i>Grade 60</i>
BENT BARS			
MARK	QTY.	LENGTH	NOTES
<i>TB450</i>	<i>22</i>	<i>3'-4"</i>	<i>Grade 60</i>
<i>TB451</i>	<i>6</i>	<i>4'-5"</i>	<i>Grade 60</i>

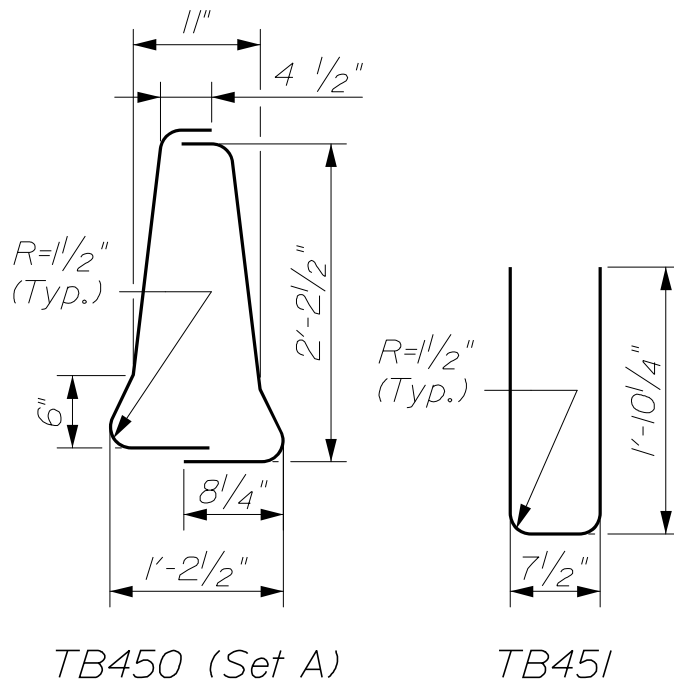


REINFORCEMENT BAR SCHEDULE

PORTABLE CONCRETE BARRIER
526(03)

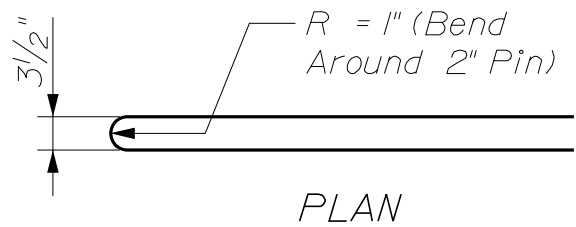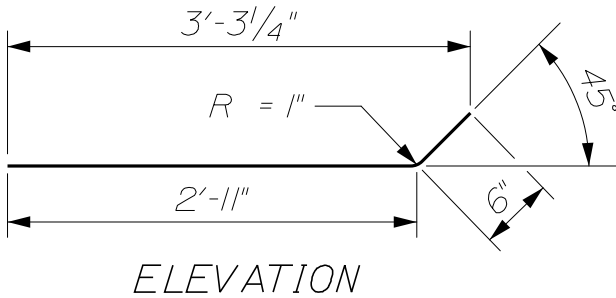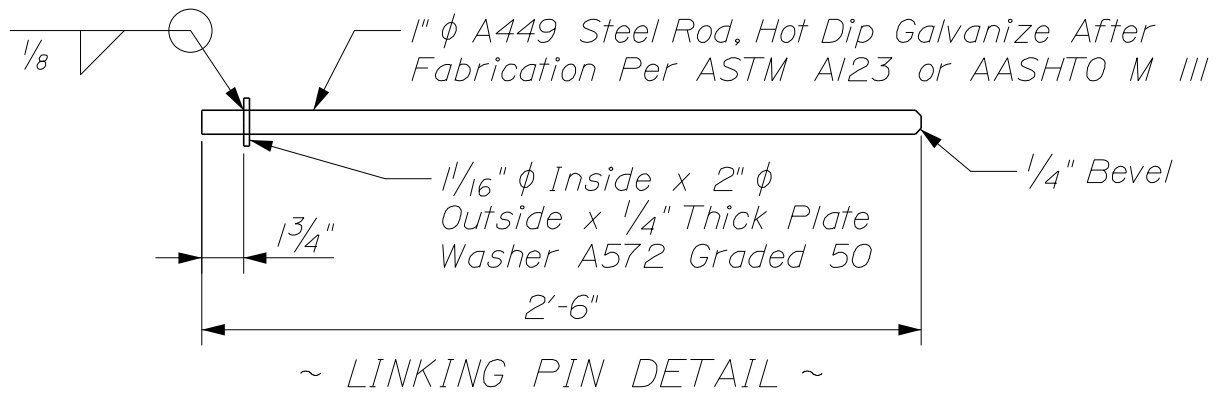

3/4" ϕ A36 Loop Bar
(Hot Dip Galvanized After Fabrication
Per ASTM A123 or AASHTO M III)

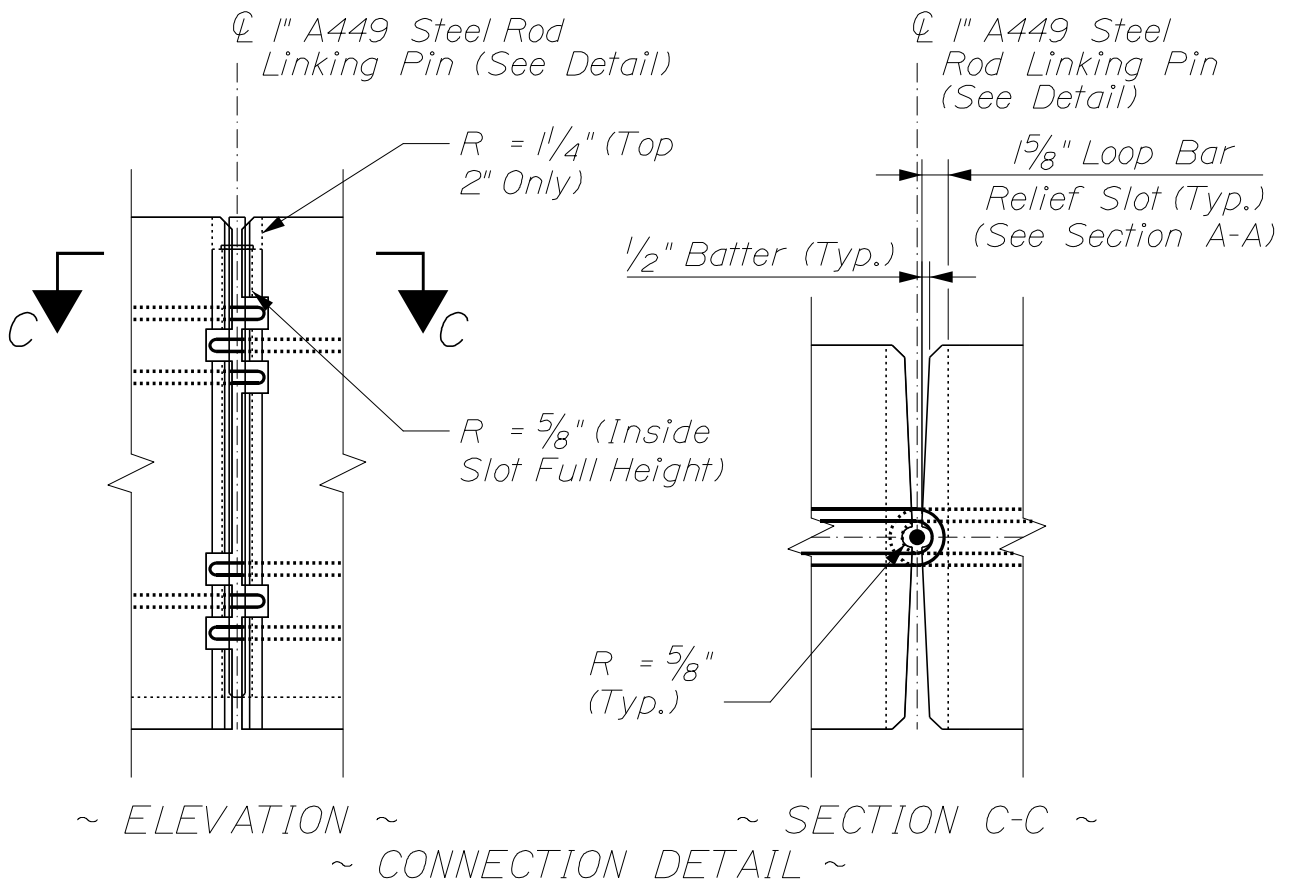

PORTABLE CONCRETE BARRIER
526(04)

GENERAL NOTES:

- 1. Alternate barrier designs may be selected from the appropriate MaineDOT Qualified Products List.*
- 2. The portable concrete barrier details as shown on these sheets are in compliance with the Manual for Assessing Safety Hardware (MASH-16). See the Roadside Safety Research Program Pooled Fund Study No. TPF-5 (114), May 2017.*
- 3. Barrier weighs approximately 2.84 tons/unit.*
- 4. Freestanding barrier has been TL-3 crash tested with a 5.28 foot dynamic deflection.*
- 5. Barrier concrete shall have a minimum 28 day compressive strength of 5,000 psi.*
- 6. Reinforcing steel shall be AASHTO M31 (ASTM-A615) Grade 60.*
- 7. Each barrier shall include one linking pin.*
- 8. Lifting options shown are advisory only. The contractor shall provide adequate lifting points on each barrier.*
- 9. Form a $\frac{3}{4}$ -inch chamfer or radius on all exposed edges.*
- 10. Barrier shall be supplemented with standard delineators, channelizing devices, or pavement markings when it serves to channelize traffic.*



REINFORCEMENT BAR NOTES:

- 1. The first two digits following the letter(s) of the mark indicate the size of the bar:*

Mark "TB450" = bar size #4


- 2. All dimensions are out-to-out of bar.*

PORTABLE CONCRETE BARRIER
526(04A)

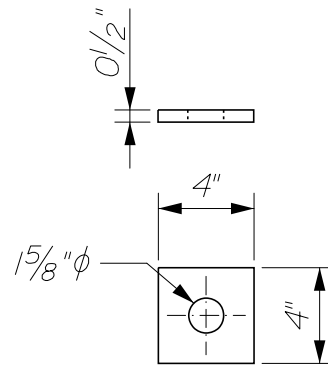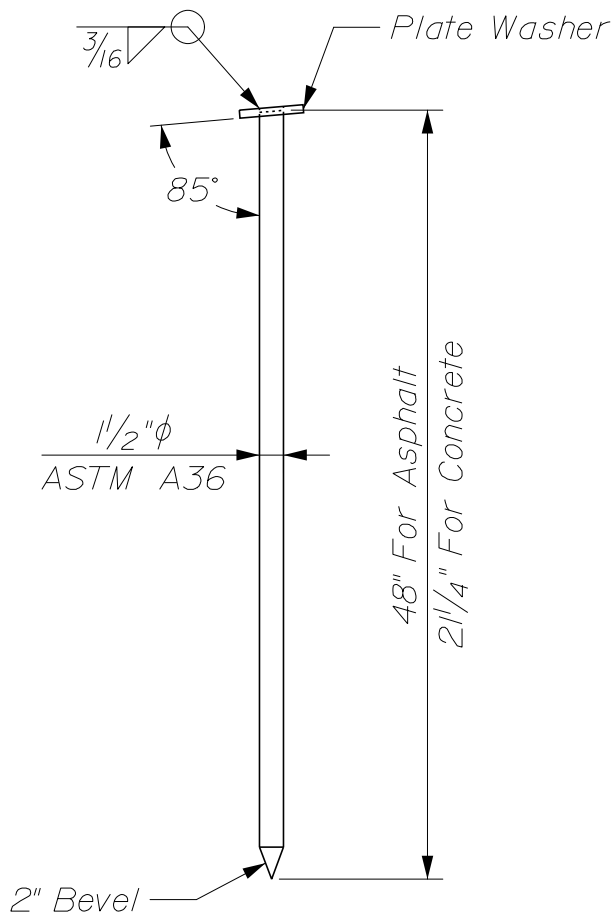


~ PLATE WASHER DETAIL ~


~ ANCHOR PIN DETAIL ~

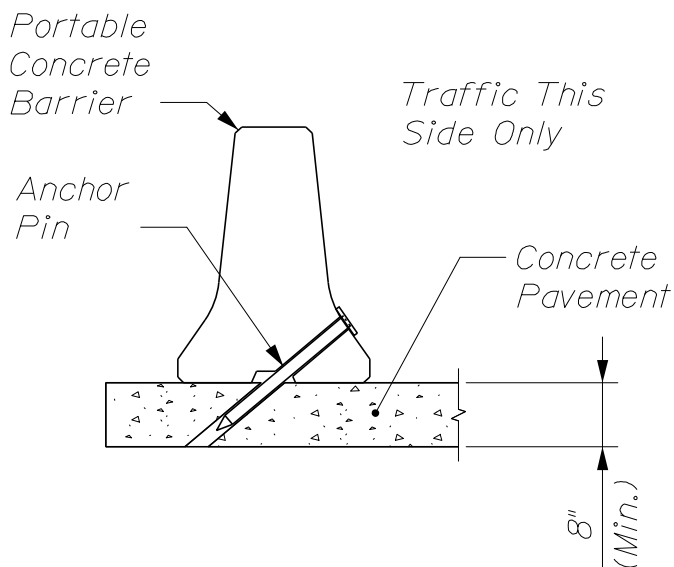


~ BARRIER ANCHOR PINNED TO CONCRETE PAVEMENT ~

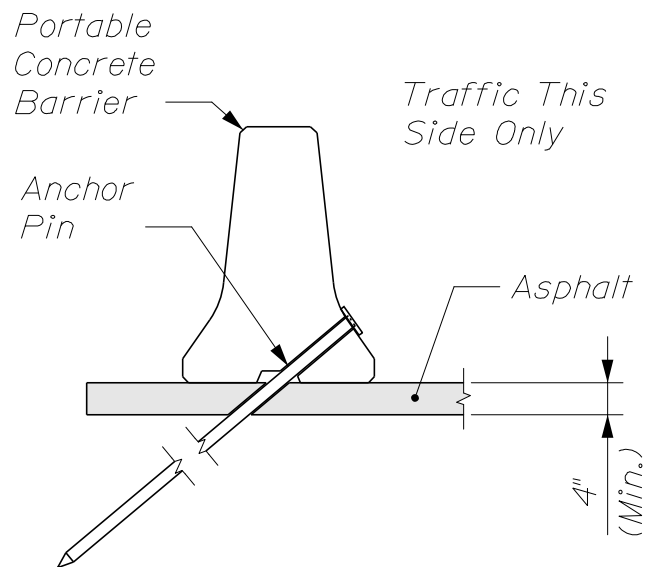

~ BARRIER ANCHOR PINNED TO ASPHALT PAVEMENT ~

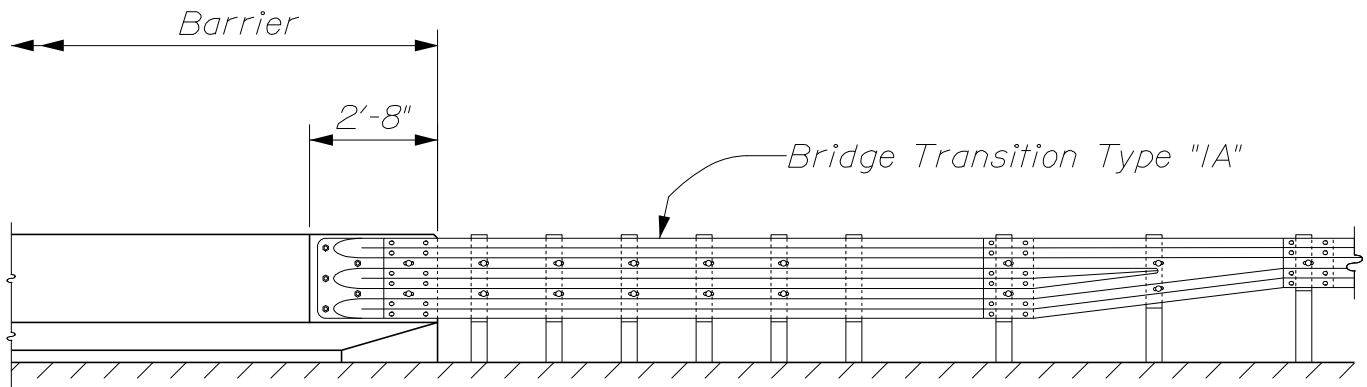


~ PERMANENT CONCRETE BARRIER TYPE IIIA ~

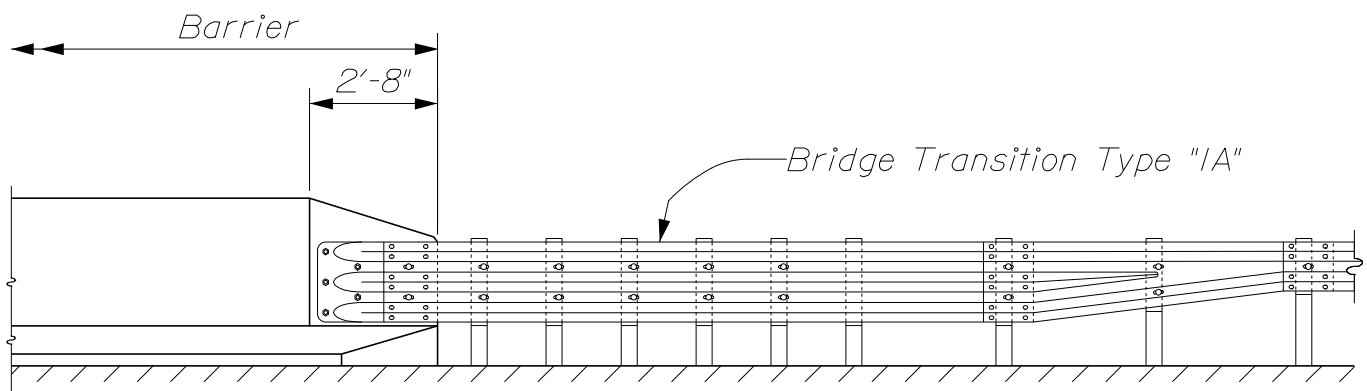


~ PERMANENT CONCRETE BARRIER TYPE IIIB ~

PERMANENT CONCRETE BARRIER
526(05)

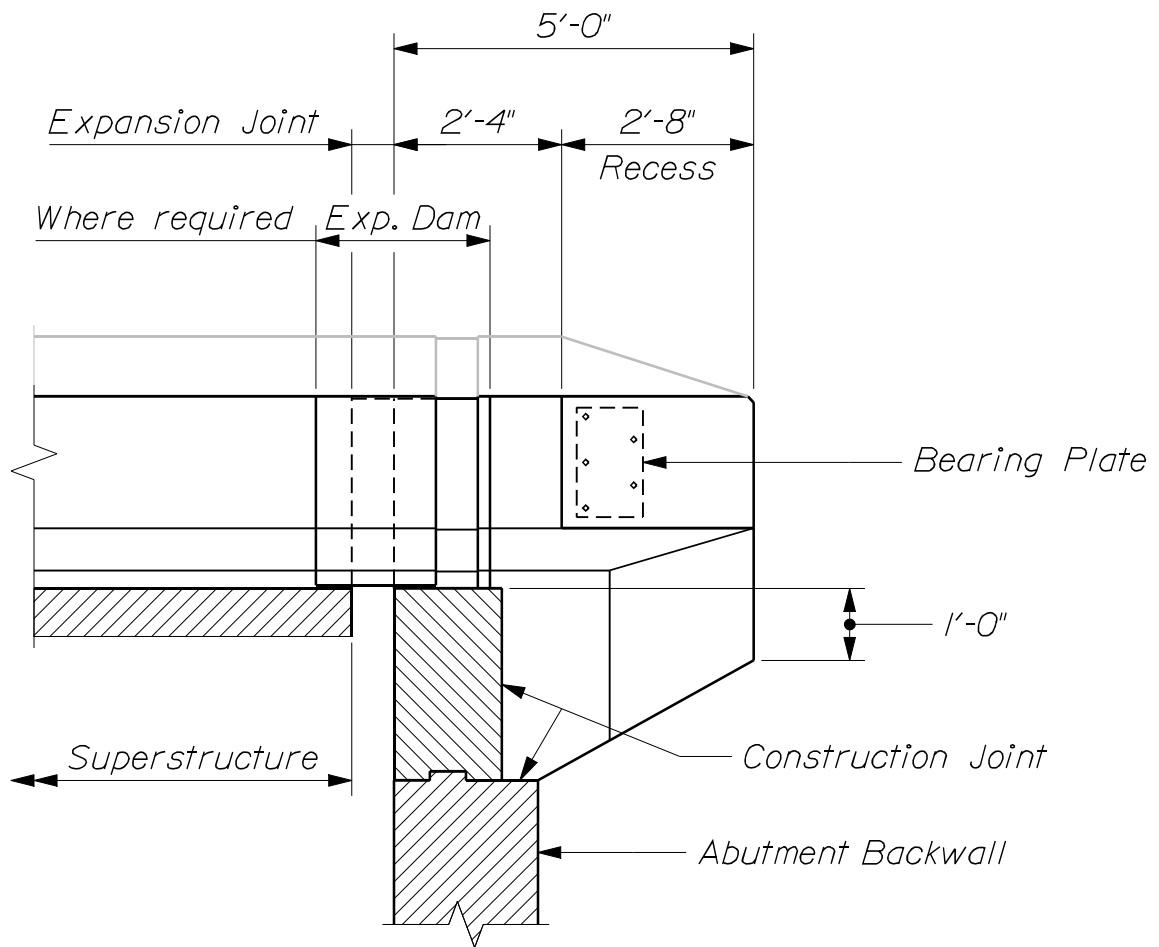


~ CANTILEVERED END AT EXPANSION JOINT ~

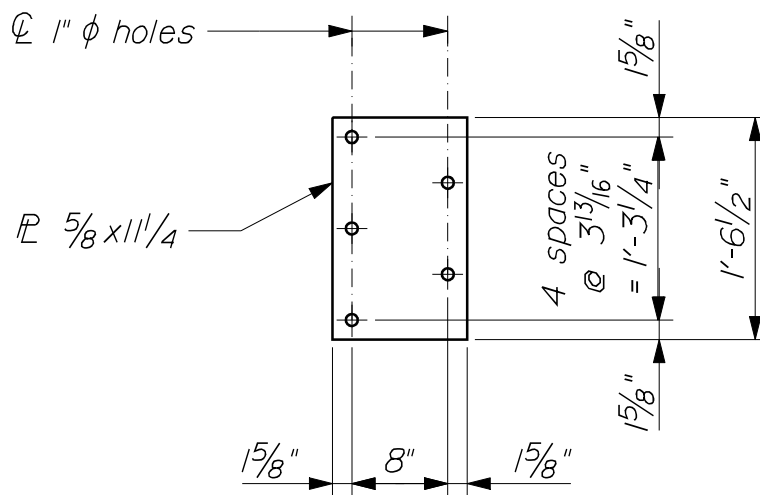


~ BEARING PLATE ~


PERMANENT CONCRETE BARRIER
526(06)

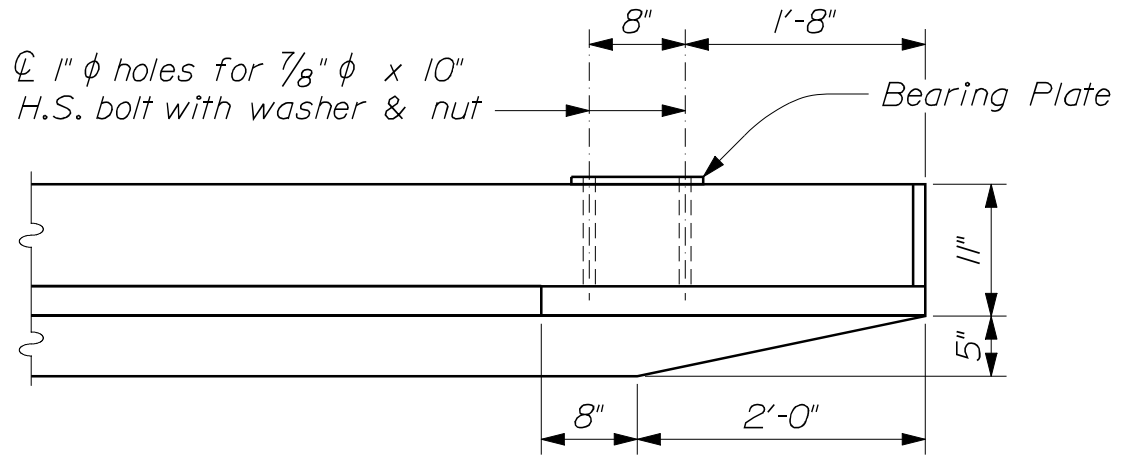

~ PLAN ~
(Type IIIA)

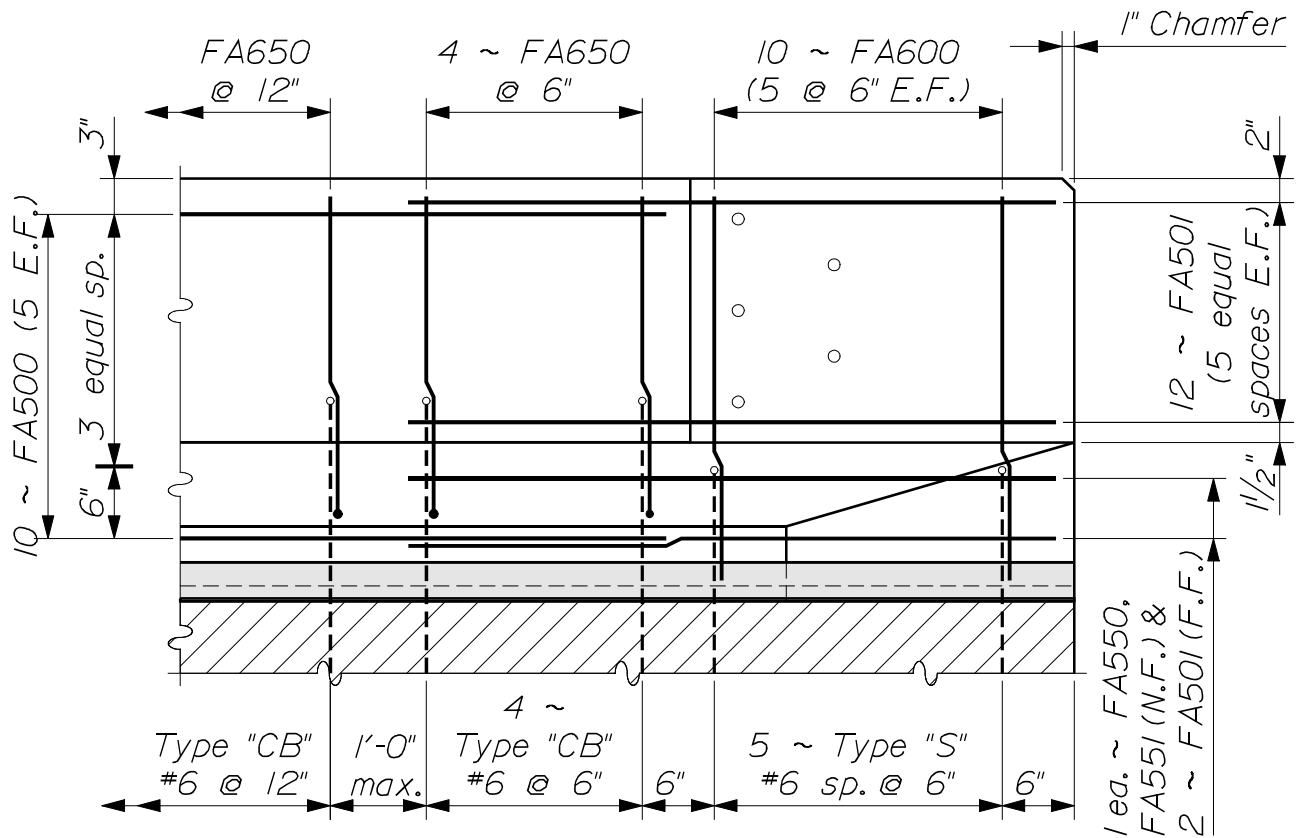

~ ELEVATION ~
(Type IIIA)

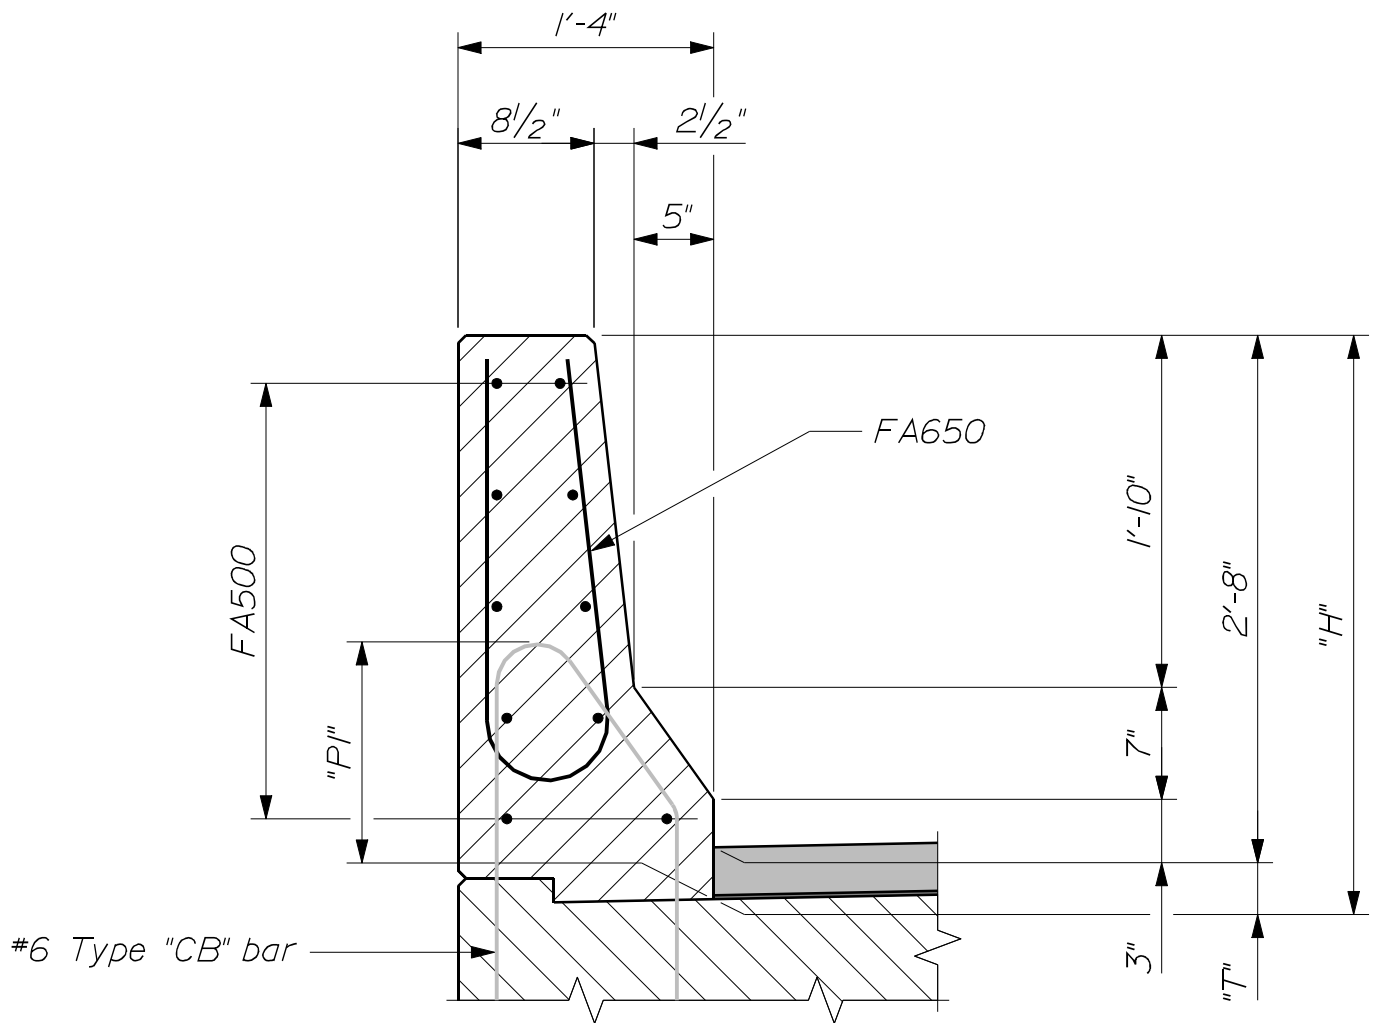


~ TYPICAL BARRIER SECTION ~
(Type IIIA)

For Wearing Surface ("T") details, refer to Section 502 ~ Concrete Curb


TABLE OF DIMENSIONS - TYPE IIIA				
Wearing Surface Type	"P1"	"P2"	"T"	"H"
Bituminous	1'-4 1/4"	11 1/4"	3 1/4"	2'-11 1/4"
Unreinforced Concrete	1'-3"	10"	2"	2'-10"
Integral	1'-1"	8"	0"	2'-8"

PERMANENT CONCRETE BARRIER
526(08)

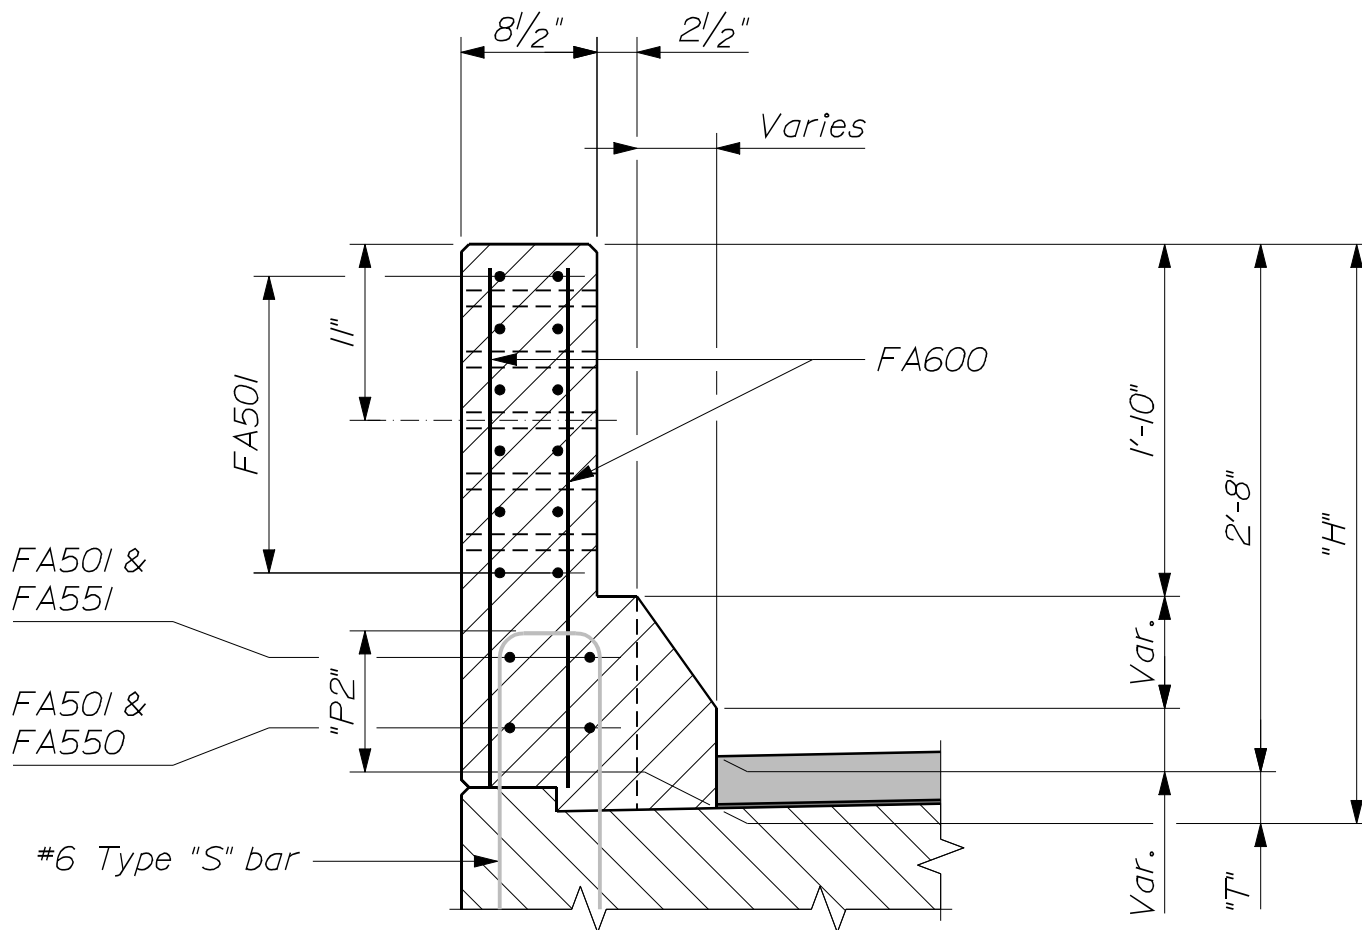


~ BARRIER RECESS SECTION ~
(Type IIIA)

For Wearing Surface ("T") details, refer to Section 502 ~ Concrete Curb

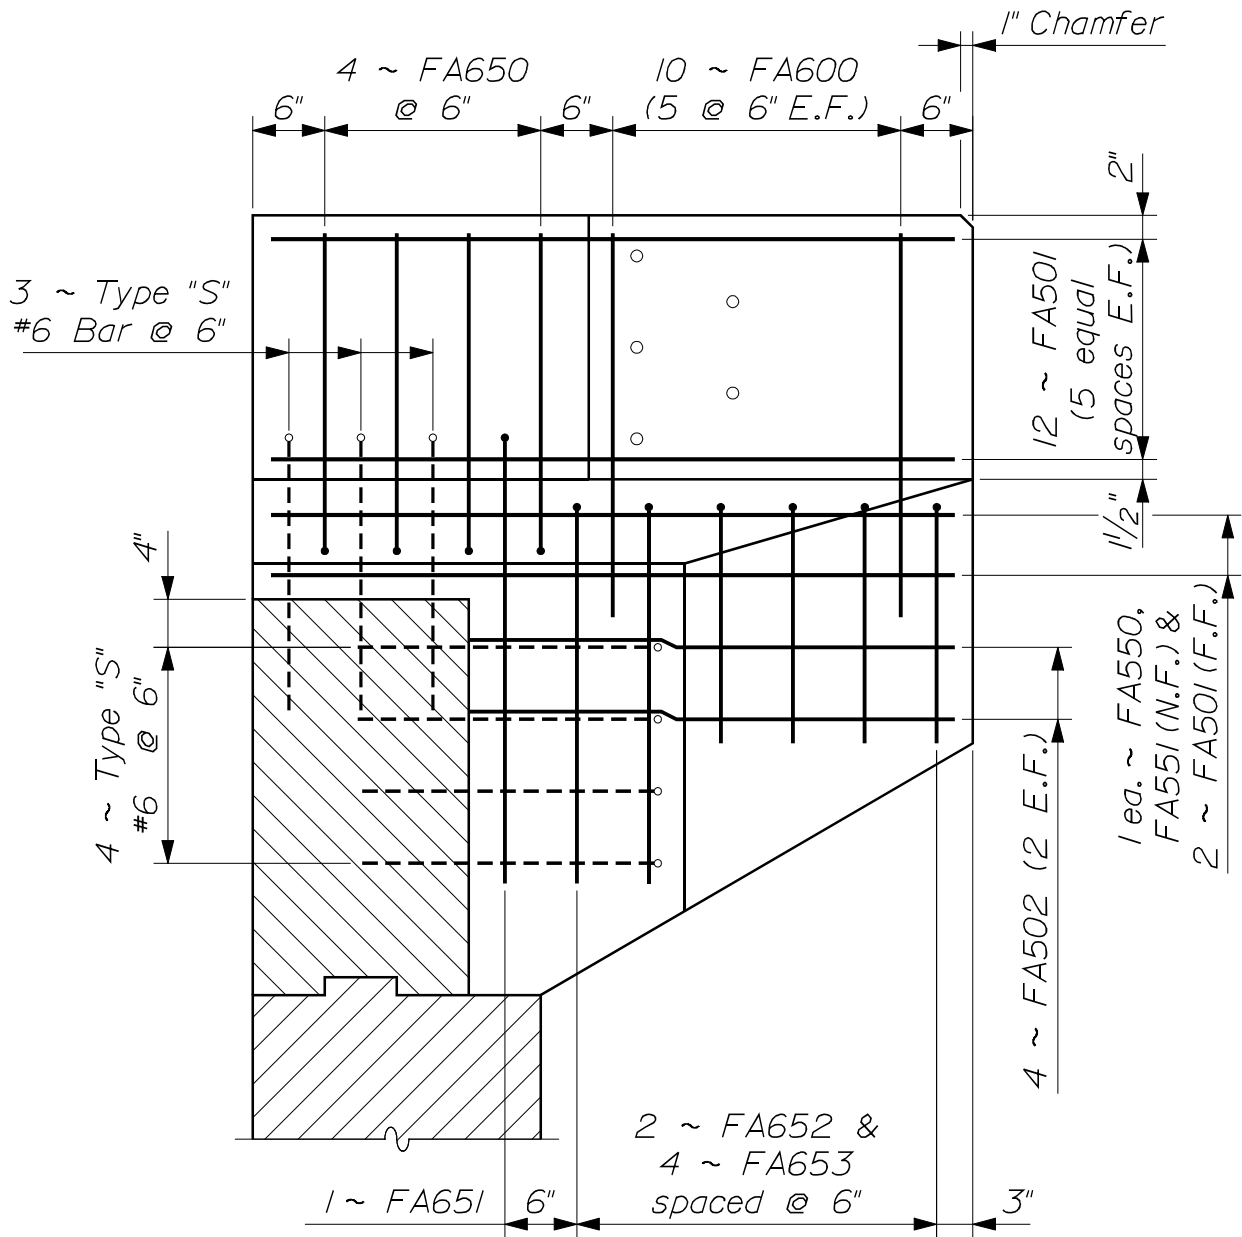


~ CANTILEVERED REINFORCING ELEVATION ~
(Type IIIA)

PERMANENT CONCRETE BARRIER
526(10)

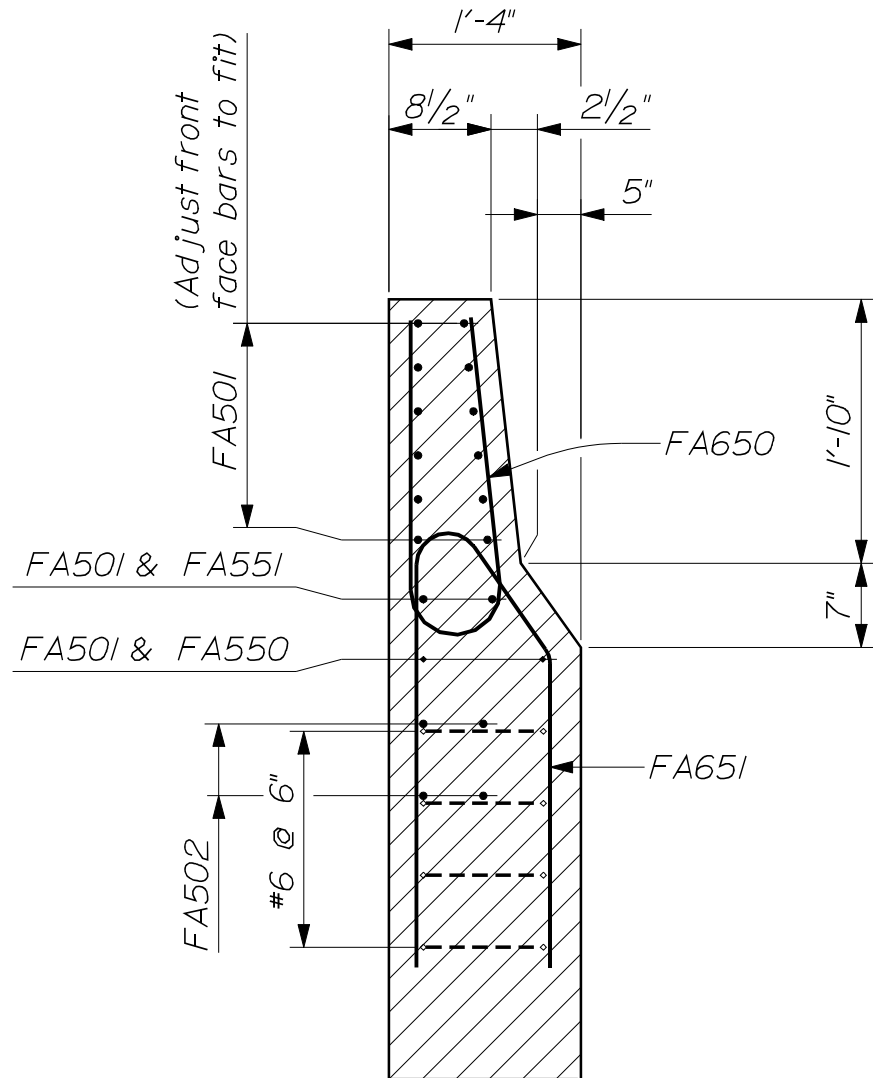


~ CANTILEVERED SECTION ~
(Type IIIA)

PERMANENT CONCRETE BARRIER
526(II)

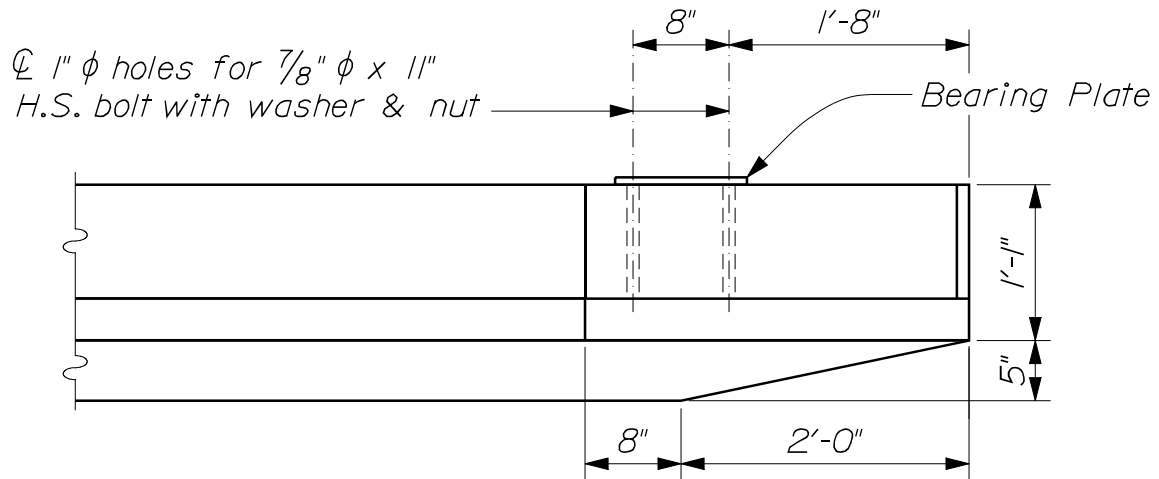


~ PLAN ~
(Type IIIB)

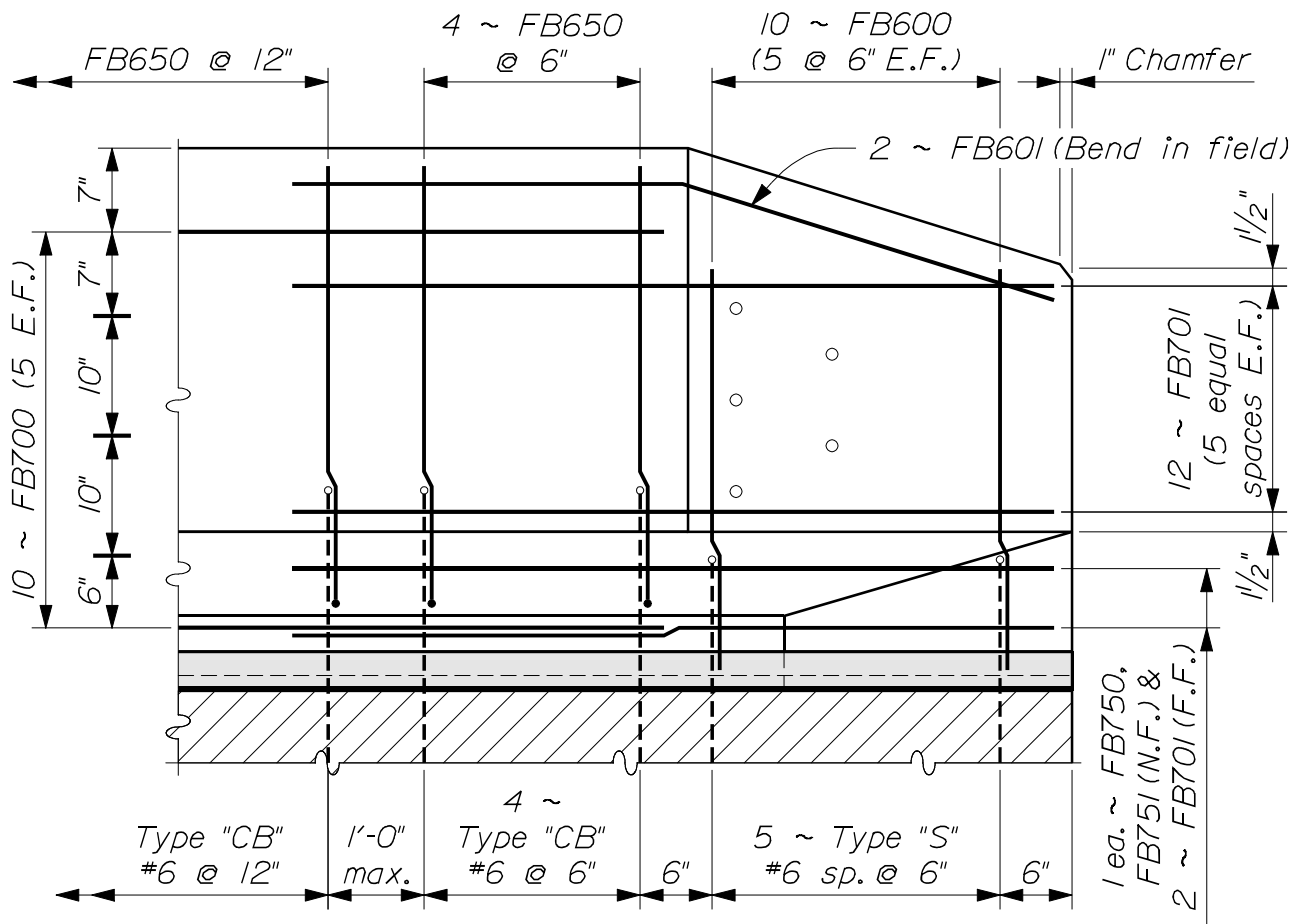


~ ELEVATION ~
(Type IIIB)

PERMANENT CONCRETE BARRIER 526(13)

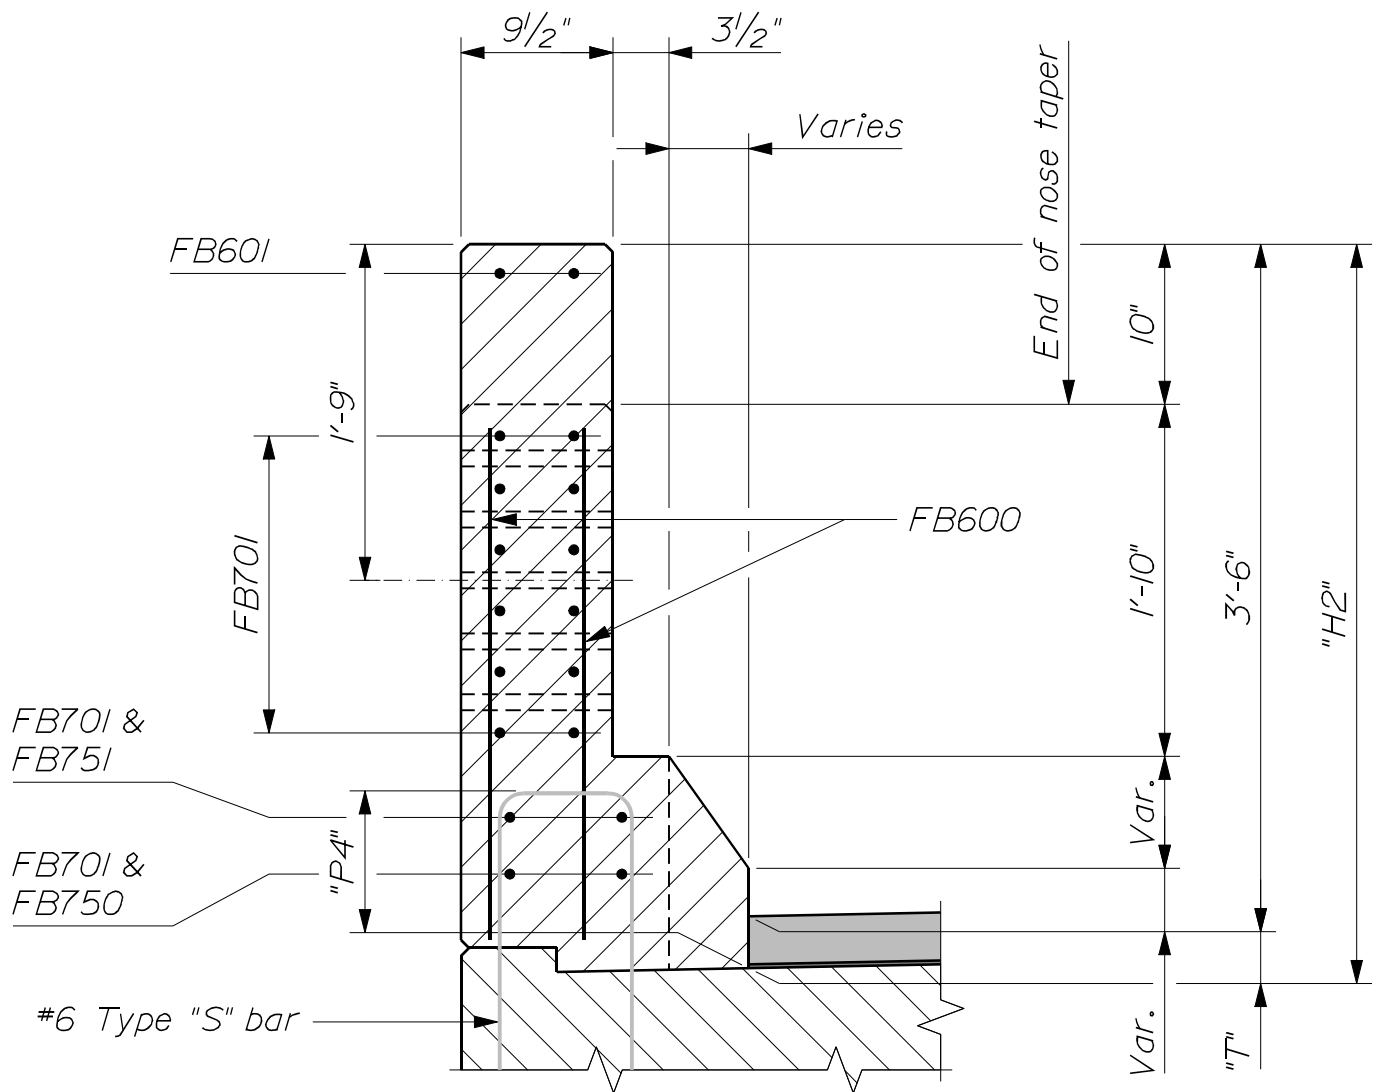


~ TYPICAL END SECTION ~
(Type IIIB)

For Wearing Surface ("T") details, refer to Section 502 ~ Concrete Curb

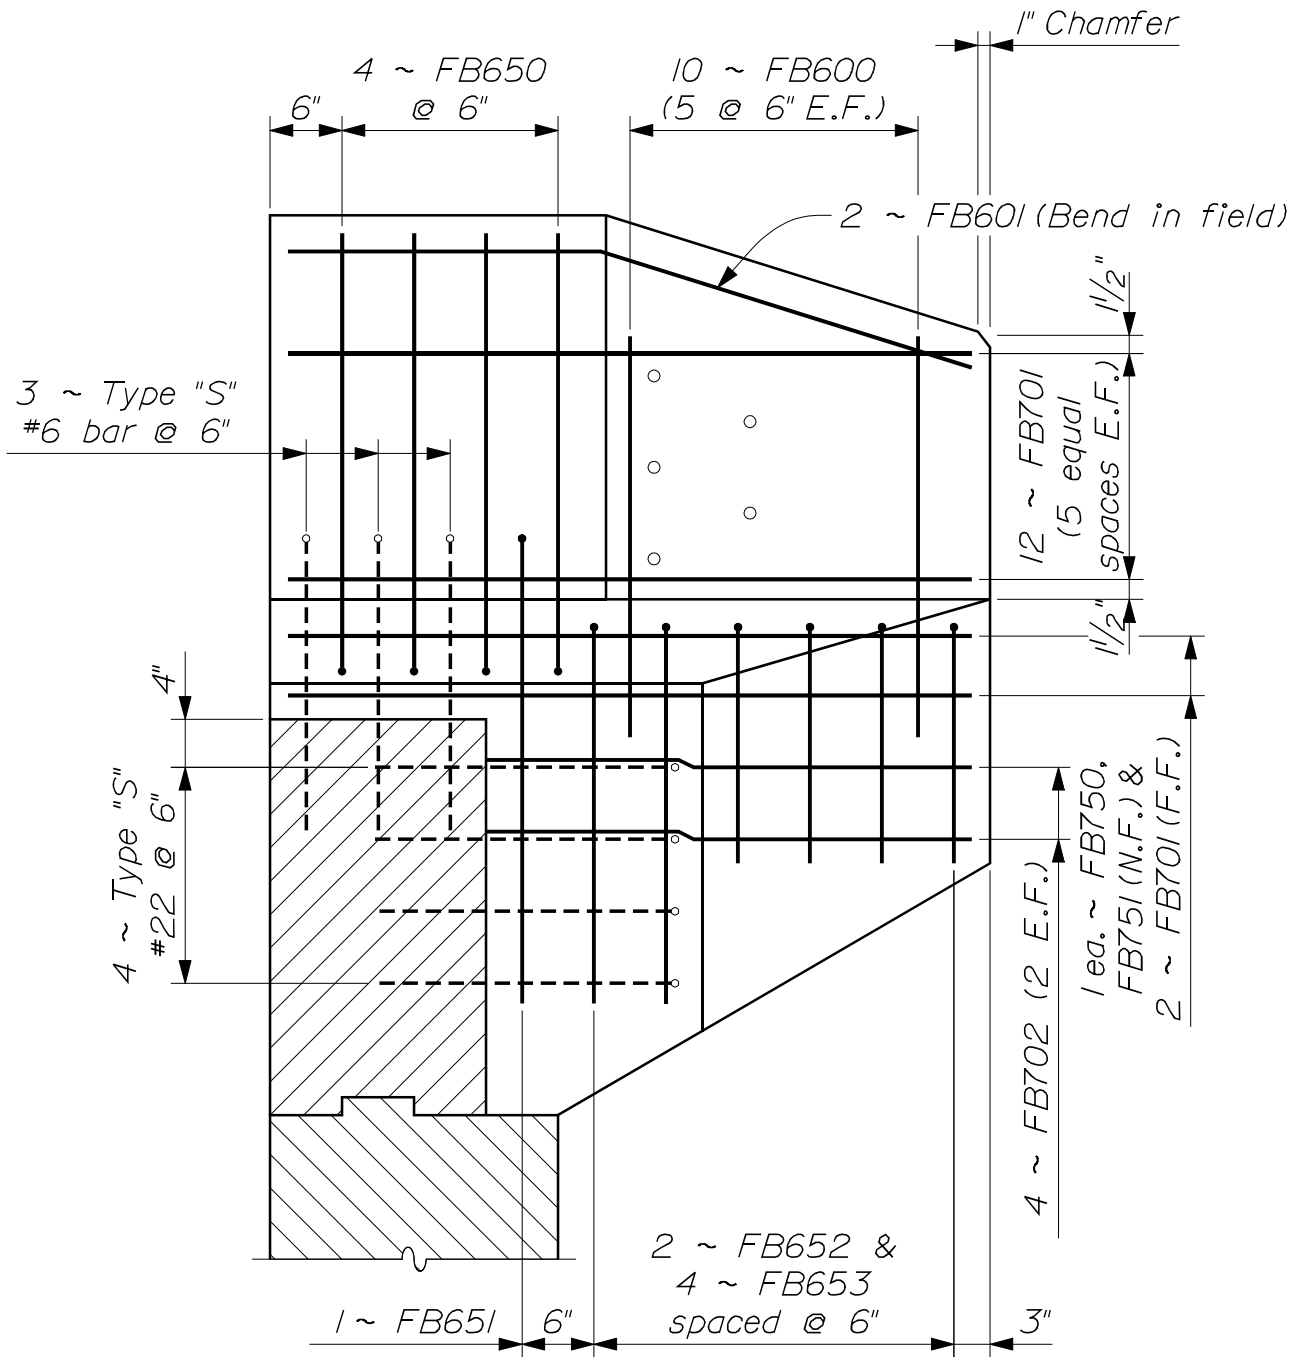


~ CANTILEVER REINFORCING ELEVATION ~
(Type IIIB)

PERMANENT CONCRETE BARRIER
526(16)

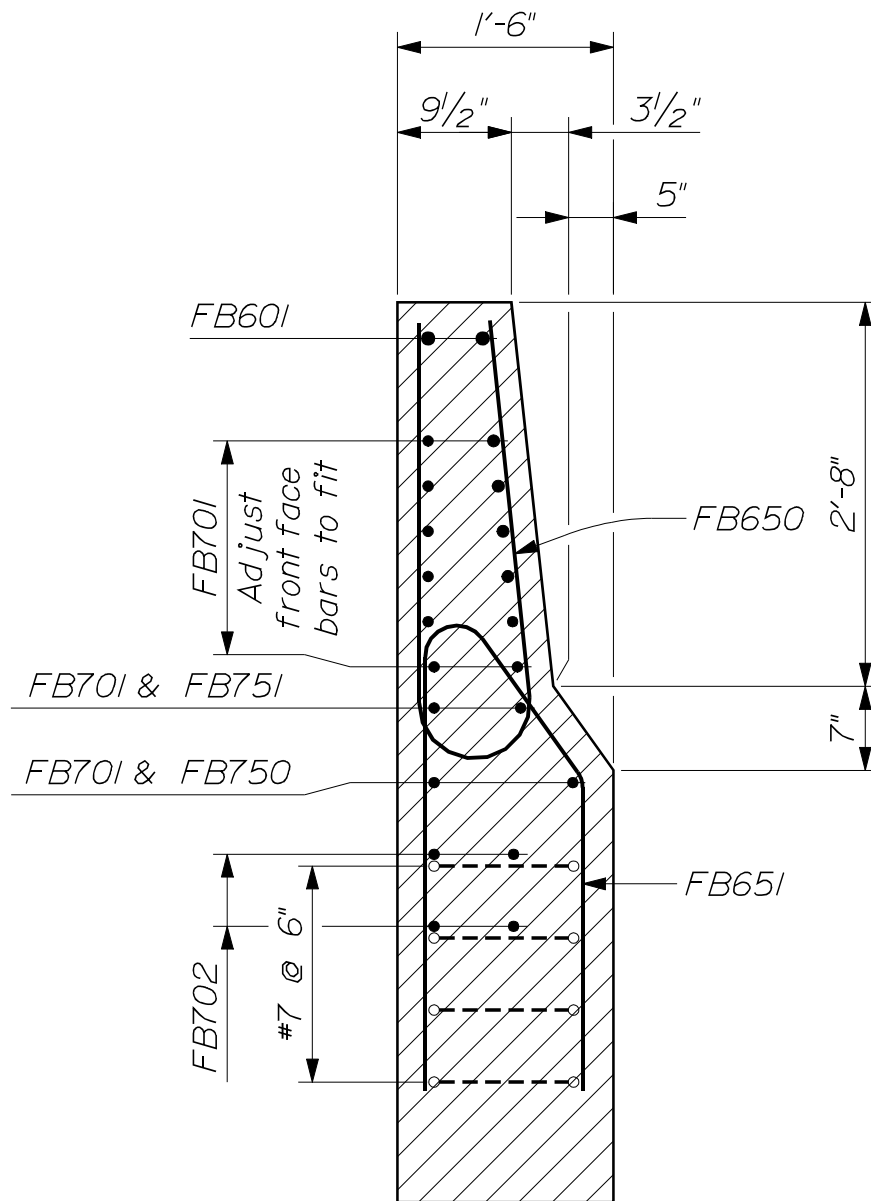

~ CANTILEVERED SECTION ~
(Type IIIB)

PERMANENT CONCRETE BARRIER
526(17)

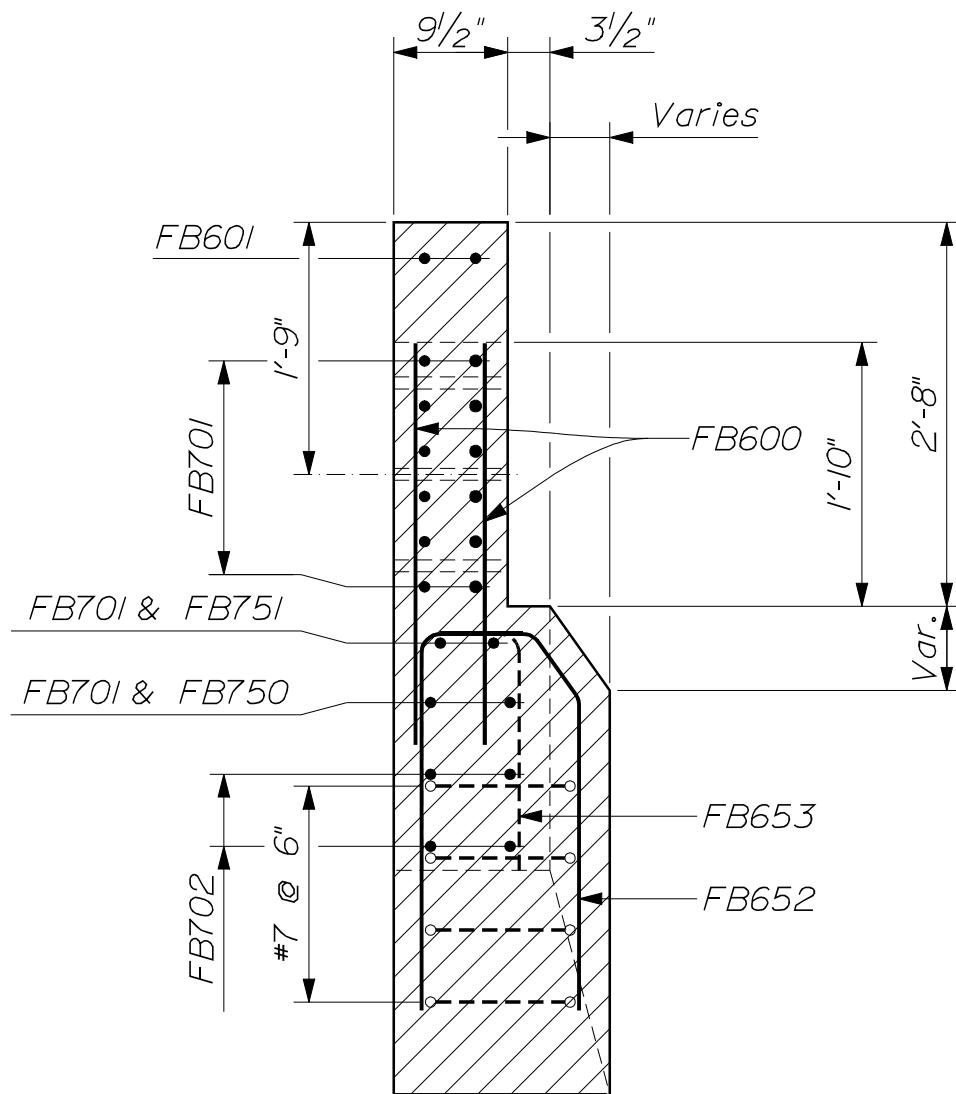


~ CANTILEVERED END SECTION ~
(Type IIIB)

PERMANENT CONCRETE BARRIER
526(18)

BARRIER TYPE IIIA REINFORCING STEEL

Mark	With Normal End		With Cantilevered End	
	Quantity	Length	Quantity	Length
FA500	As req'd	30'-0" max.	As req'd	30'-0" max.
FA501	14	4'-6"	14	4'-8"
FA550	1	4'-7"	1	4'-10"
FA551	1	4'-7"	1	4'-10"
FA600	10	2'-8"	10	2'-8"
FA650	As req'd	4'-10"	As req'd	4'-11"
FA651	--	--	1	6'-6"
FA652	--	--	2	6'-1"
FA653	--	--	4	3'-11"

(X) denotes cantilevered end dimension

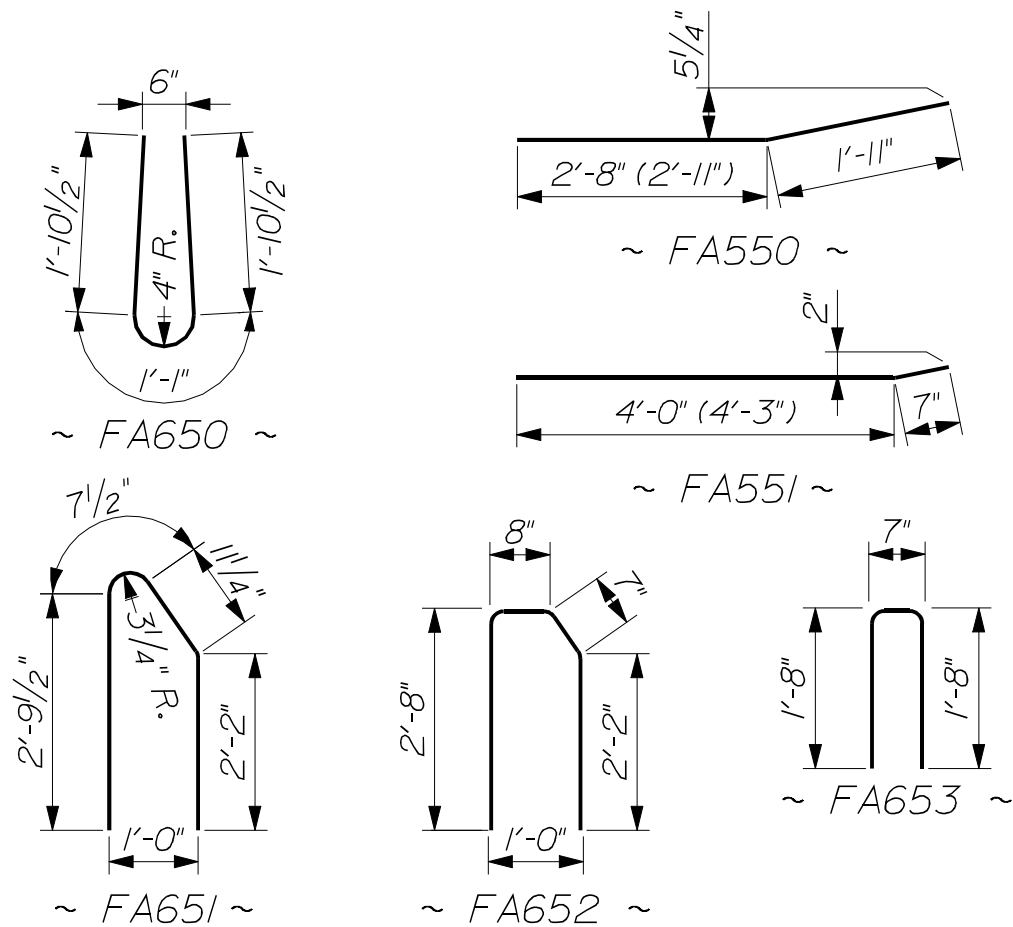


PERMANENT CONCRETE BARRIER

526(19)

BARRIER TYPE IIIB REINFORCING STEEL

Mark	With Normal End		With Cantilevered End	
	Quantity	Length	Quantity	Length
FB600	10	2'-10"	10	2'-10"
FB601	2	5'-5"	2	4'-9"
FB650	As req'd	6'-7"	As req'd	6'-7"
FB651	--	--	1	7'-0"
FB652	--	--	2	6'-3"
FB653	--	--	4	4'-1"
FB700	As req'd	60'-0" max.	As req'd	60'-0" max.
FB701	16	5'-4"	16	4'-8"
FB702	--	--	4	3'-4"
FB750	1	5'-5"	1	4'-10"
FB751	1	5'-5"	1	4'-10"

(X) denotes cantilevered end dimension

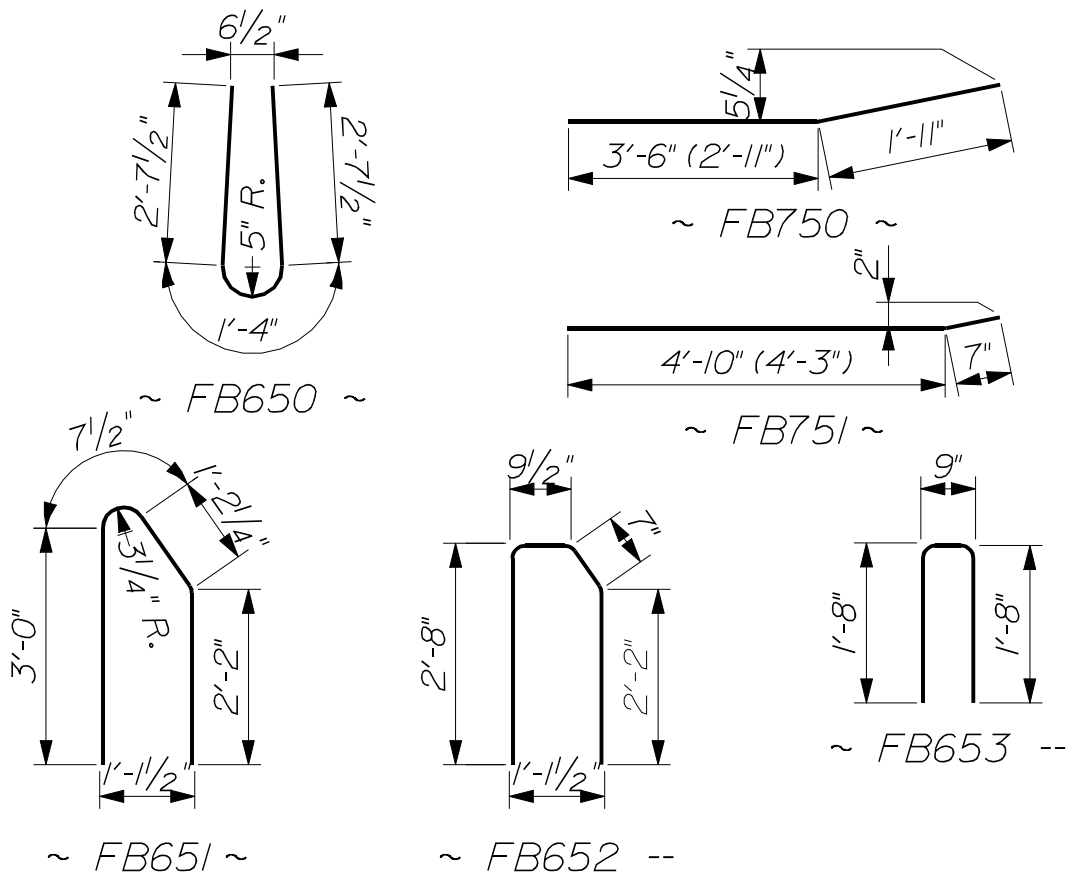

NOTES:


1. All work and materials shall conform to the provisions of Standard Specifications Section 526 - Concrete Barrier.
2. Reinforcing bar designations Type "S" and "CB" refer to type - bending diagrams as shown on the main Reinforcing Steel Schedule. These bars are detailed on the Design Drawings and are included for payment in the Reinforcing Steel pay items.
3. Reinforcing steel shall have a minimum concrete cover of $1\frac{1}{2}$ inches, except that stirrups Type "S" and "CB" shall have a minimum concrete cover of 2 inches.
4. The first digit following the letters of the mark indicates the size of the reinforcing bar. (FA600 = #6 bar.) All dimensions are out - to - out of bar.
5. Minimum lap splice lengths for FA500 and FB700 shall be in accordance with Standard Specifications Subsection 503.07, Splicing.
6. The quantities of reinforcing bars shown are for one barrier end only.
7. Bolt holes in concrete shall be formed by a method approved by the Resident.
8. Payment for threaded rods and bearing plates will be considered incidental to the concrete barrier pay item.
9. Permanent Concrete Barrier is designed for attachment of Bridge Transition Type "IA" unless otherwise indicated on the Plans. Refer to Section 606 for details.
10. After installation of the guardrail is complete, upset the threads on the threaded rods in 3 places around each rod, at the junction of the nut and the exposed thread, with a center punch or similar tool.

MATERIALS:


Concrete Class "LP"
Reinforcing Steel AASHTO M 31M/M 31, Grade 60
Bearing Plate AASHTO M 270M/M 270, Grade 36 (Galvanized)
Threaded rods AASHTO M 314, Grade 105 (Galvanized)

PERMANENT CONCRETE BARRIER


526(21)

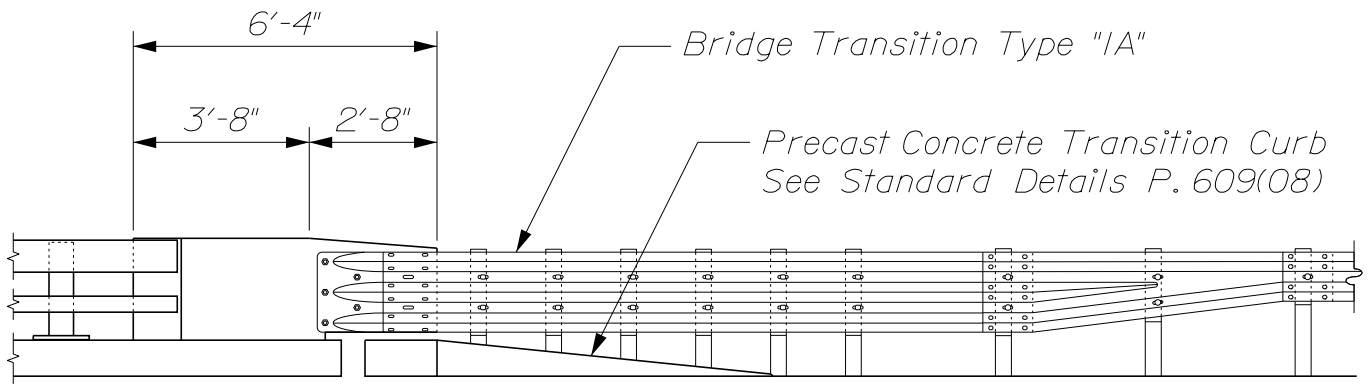

~ CONCRETE TRANSITION BARRIER ~
(2 - Bar Traffic Railing)

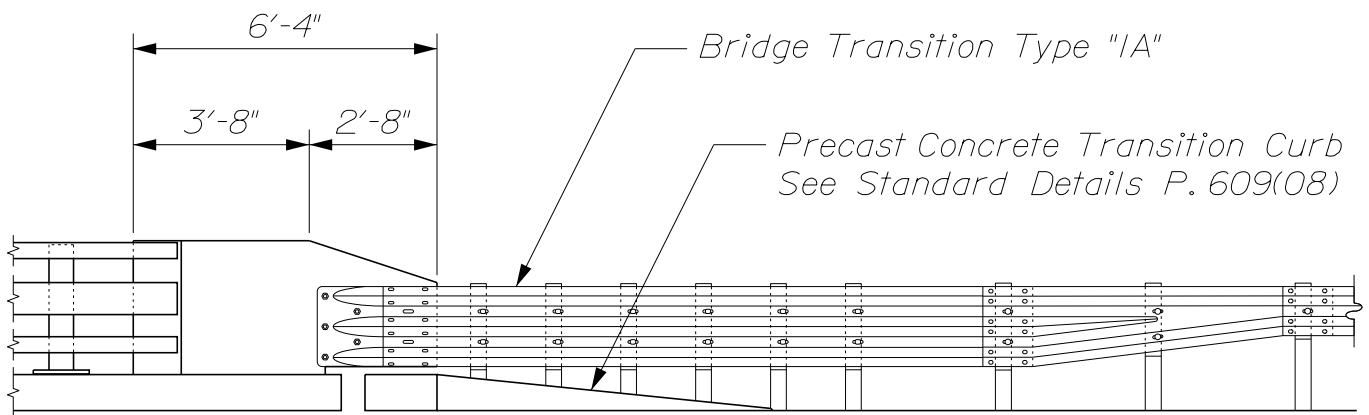


~ CONCRETE TRANSITION BARRIER ~
(3 - Bar Traffic / Bicycle Railing)
(4 - Bar Traffic / Bicycle Railing similar)

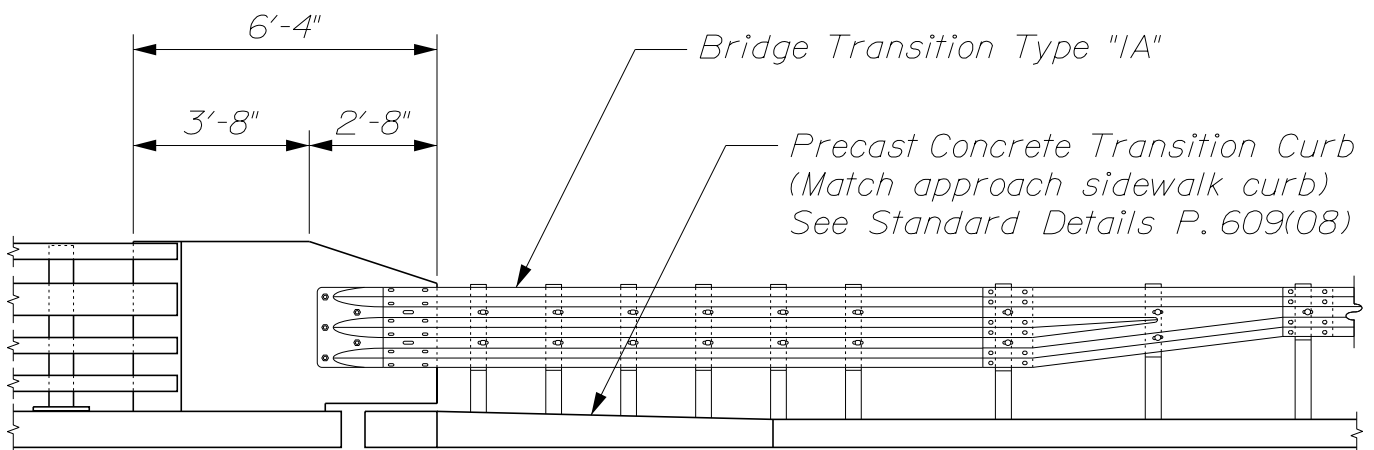


~ CONCRETE TRANSITION BARRIER ~
(4 - Bar Traffic / Pedestrian Railing)

CONCRETE TRANSITION BARRIER
526(22)

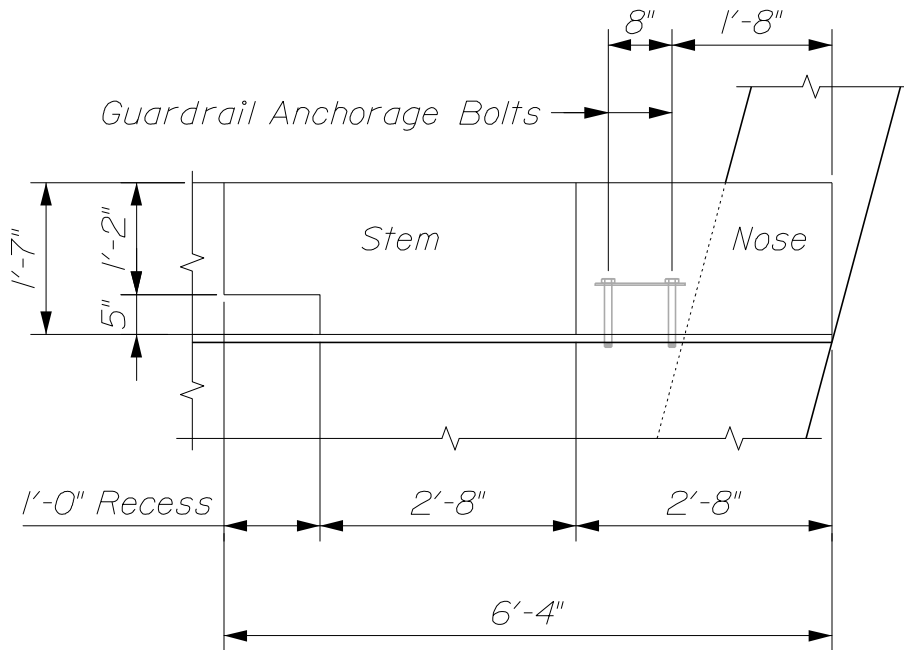


~ TRANSITION BARRIER PLAN ~

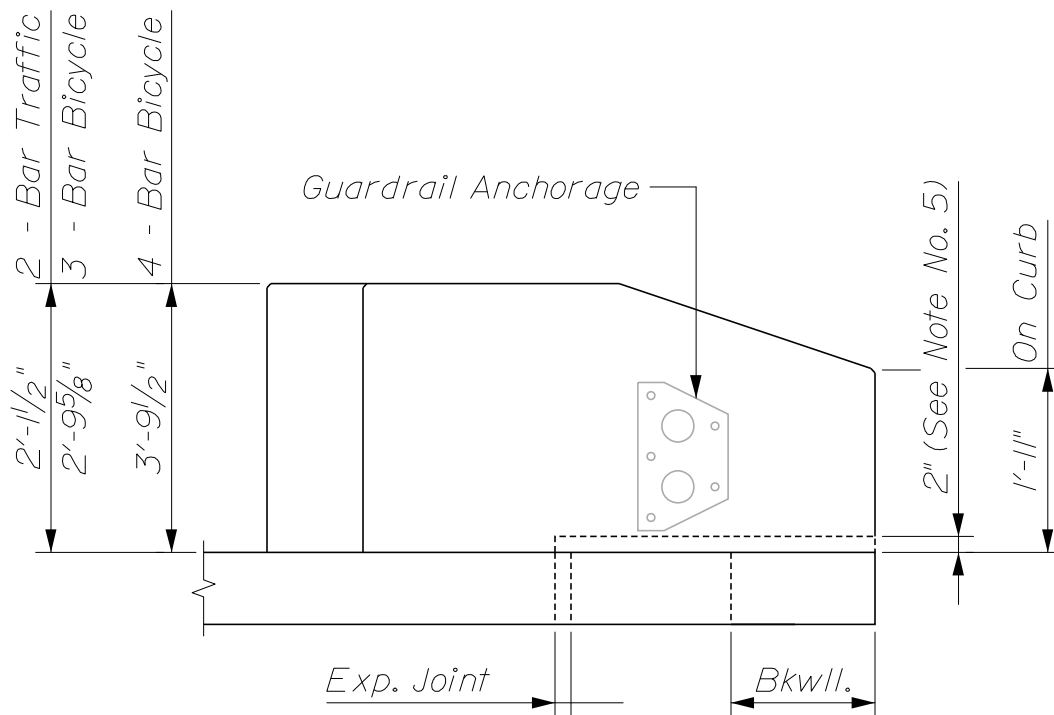


~ TRANSITION BARRIER ELEVATION ~

CONCRETE TRANSITION BARRIER
526(23)

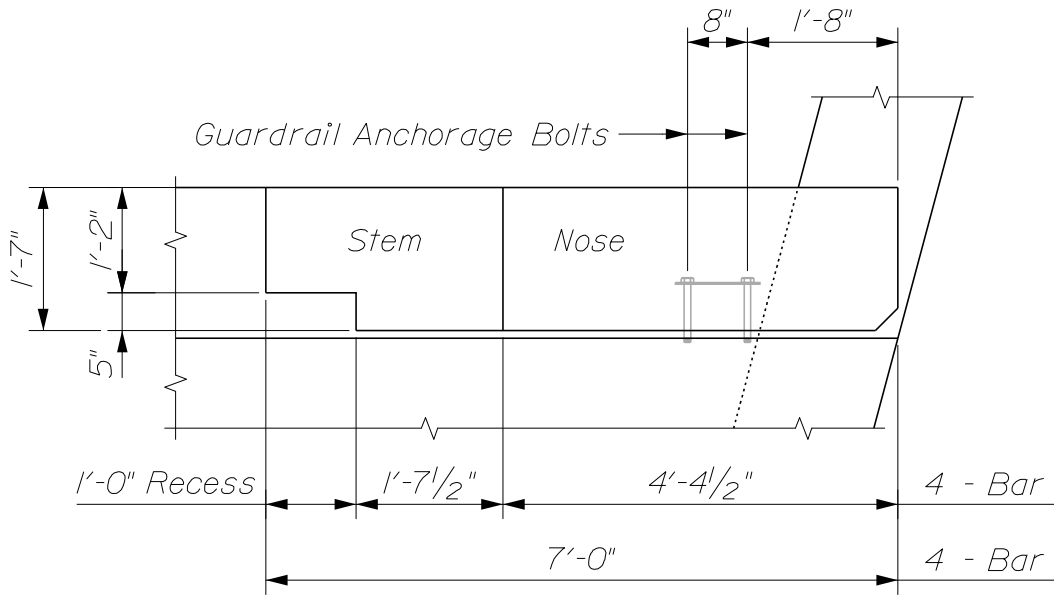


~ TRANSITION BARRIER PLAN ~

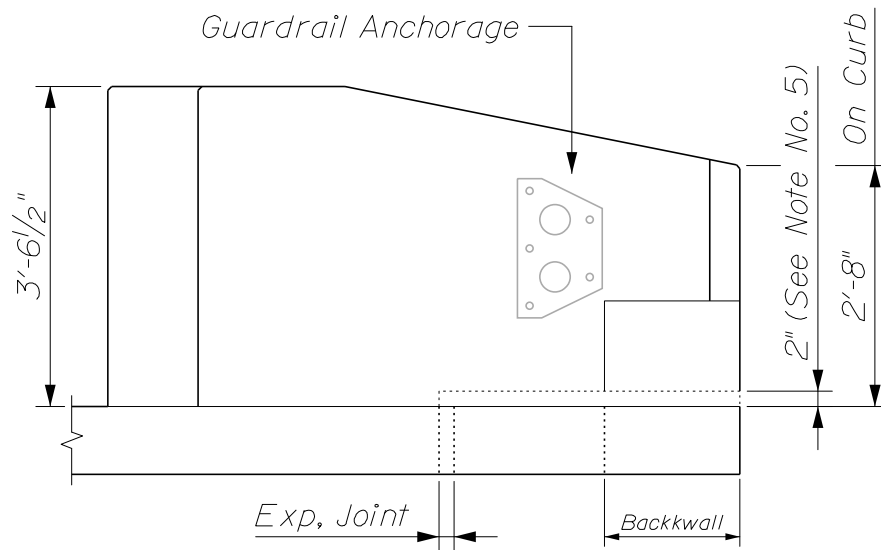


~ TRANSITION BARRIER ELEVATION ~
4 - Bar Traffic & Pedestrian Railing On Sidewalk

CONCRETE TRANSITION BARRIER
526(23)A

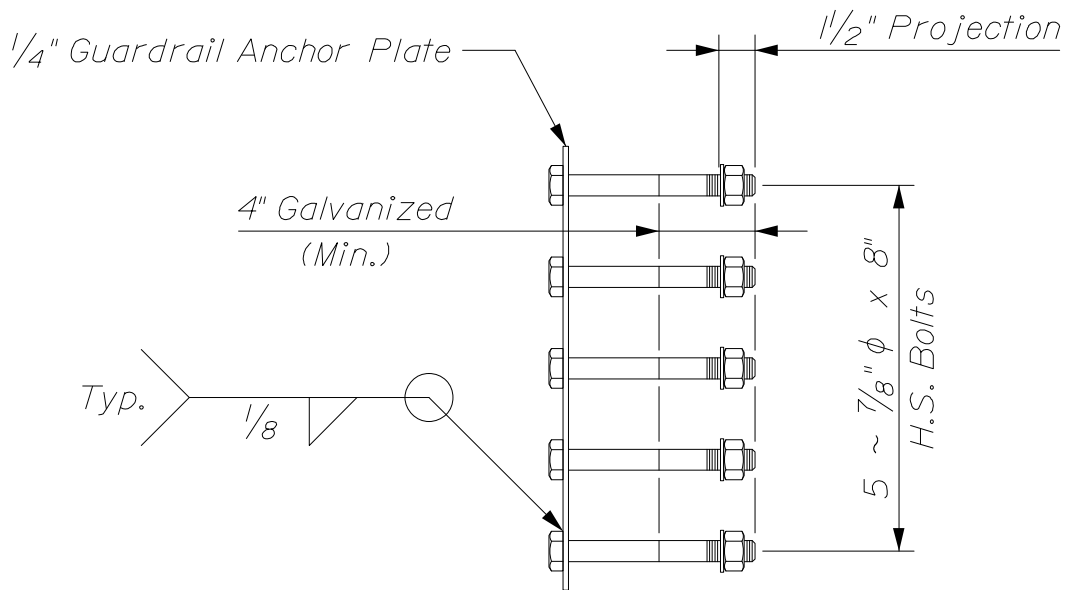


~ GUARDRAIL ANCHORAGE SECTION ~


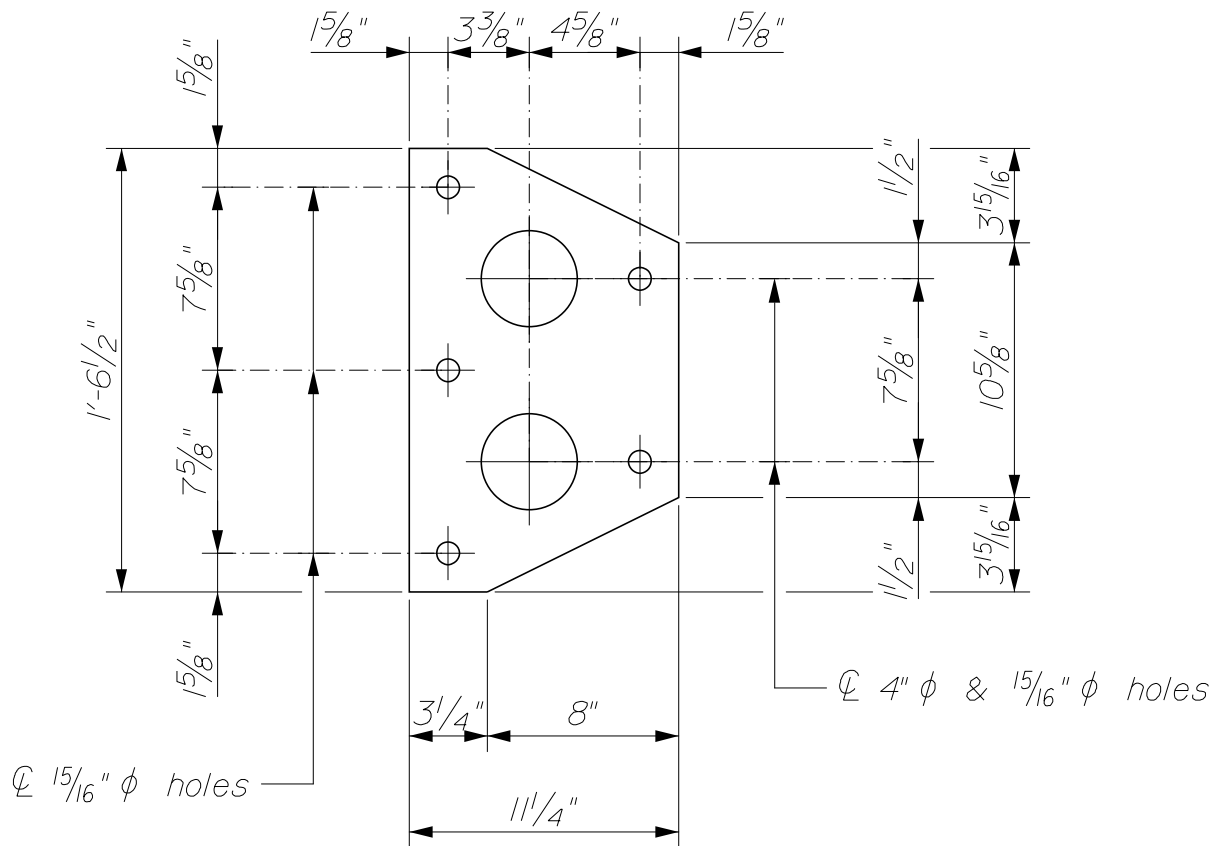


~ GUARDRAIL ANCHOR PLATE ~


CONCRETE TRANSITION BARRIER
526(24)

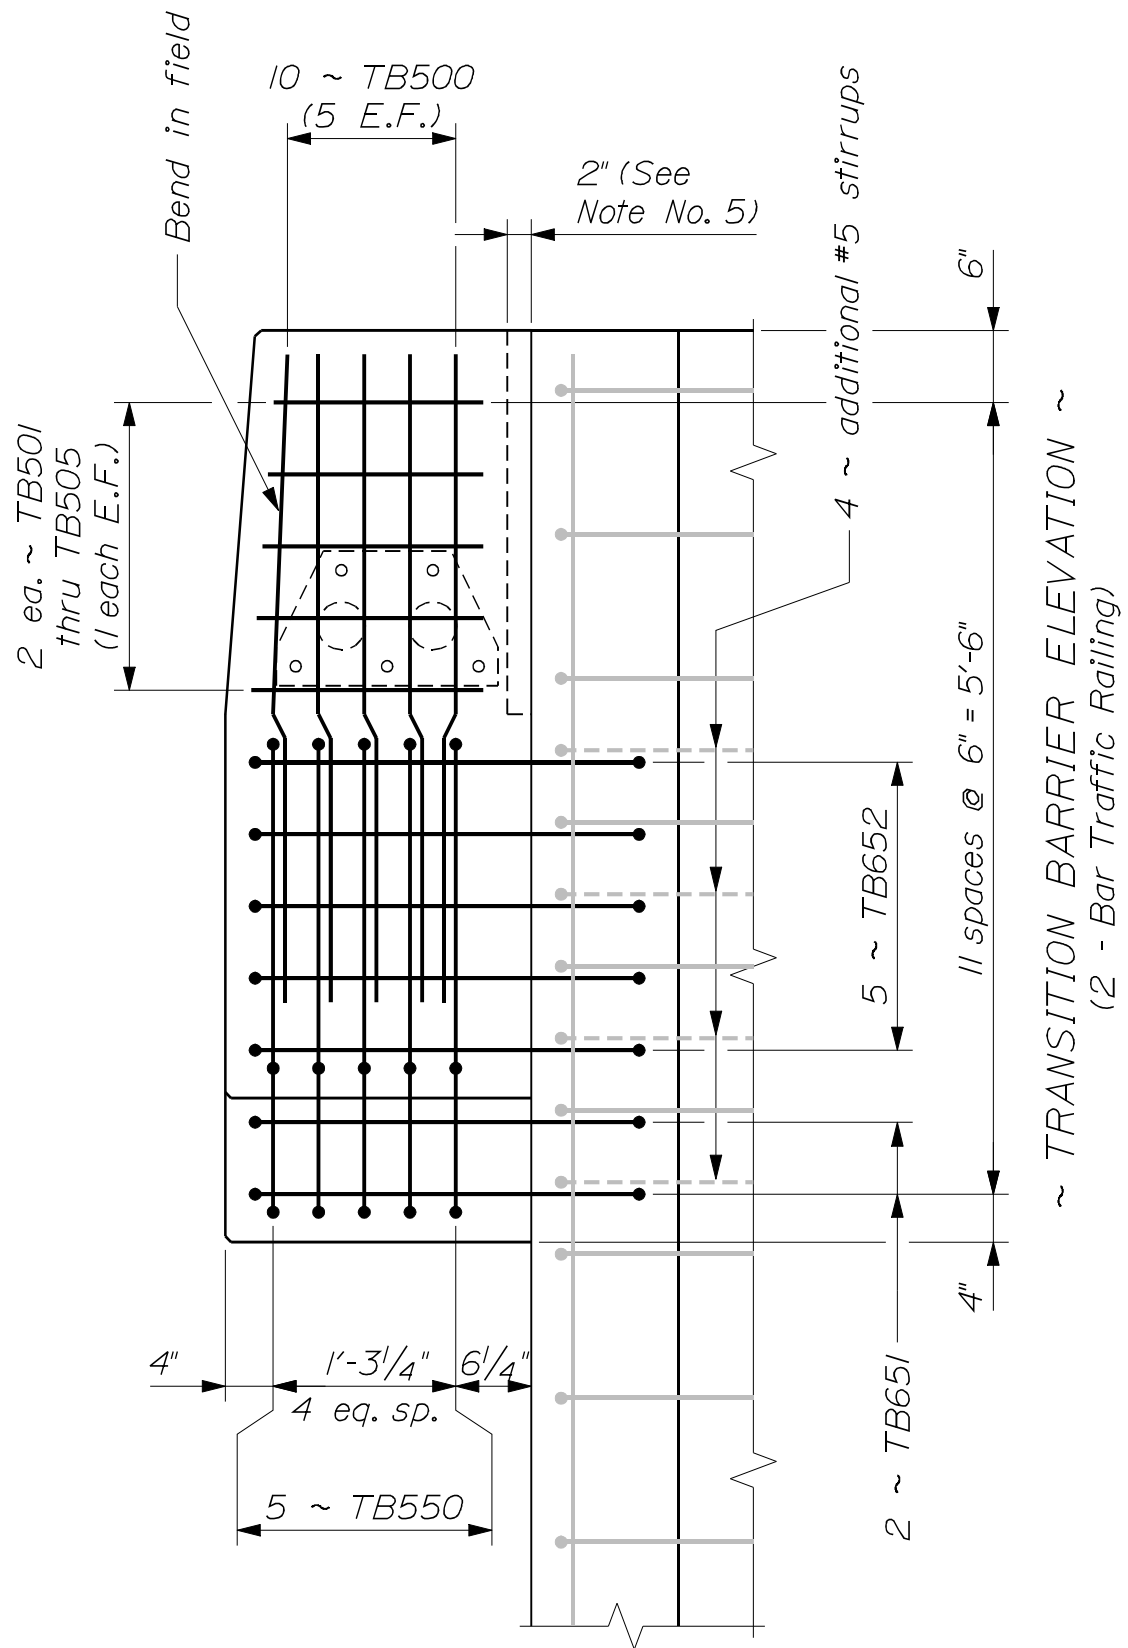

CONCRETE TRANSITION BARRIER
526(25)

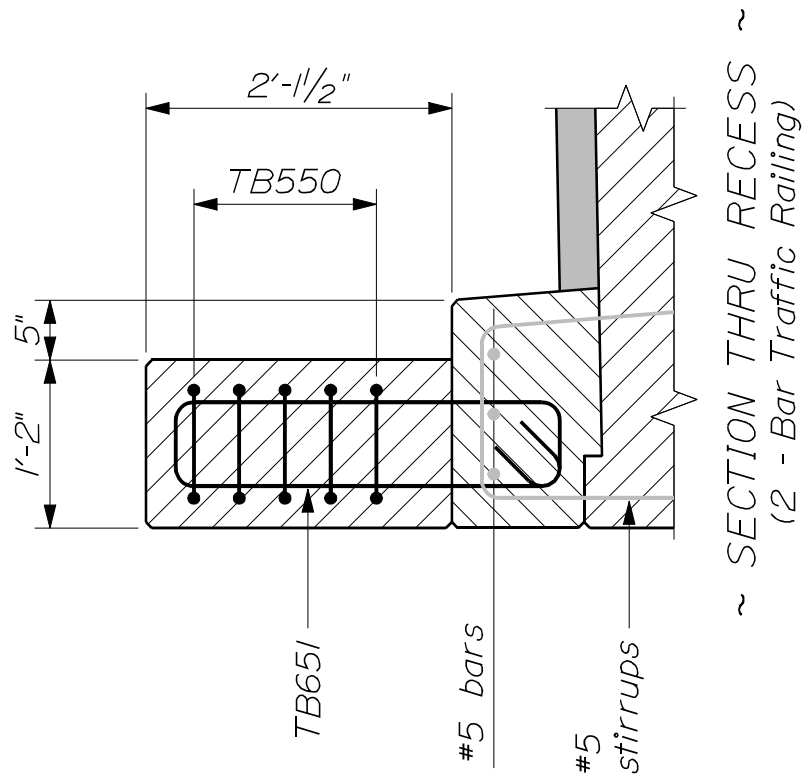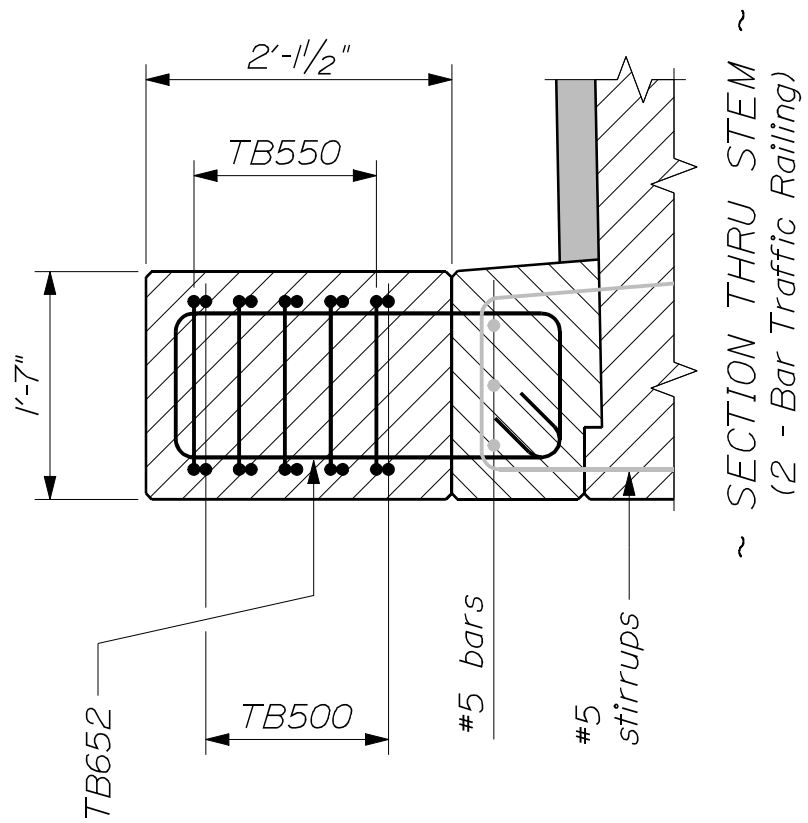


CONCRETE TRANSITION BARRIER
526(26)

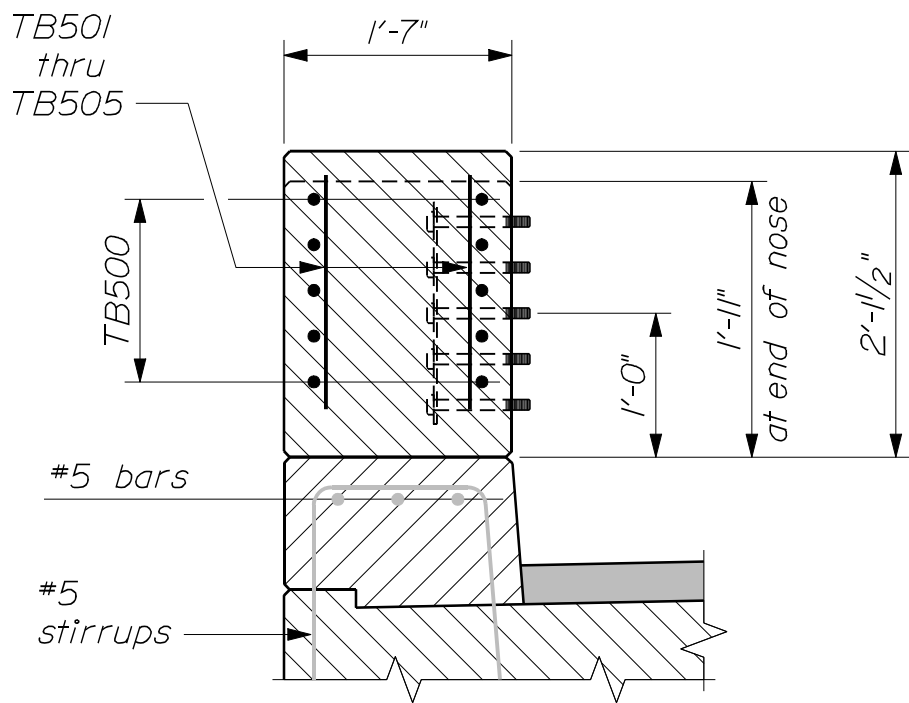


~ SECTION THRU NOSE ~
(2 - Bar Traffic Railing)


CONCRETE TRANSITION BARRIER 526(27)

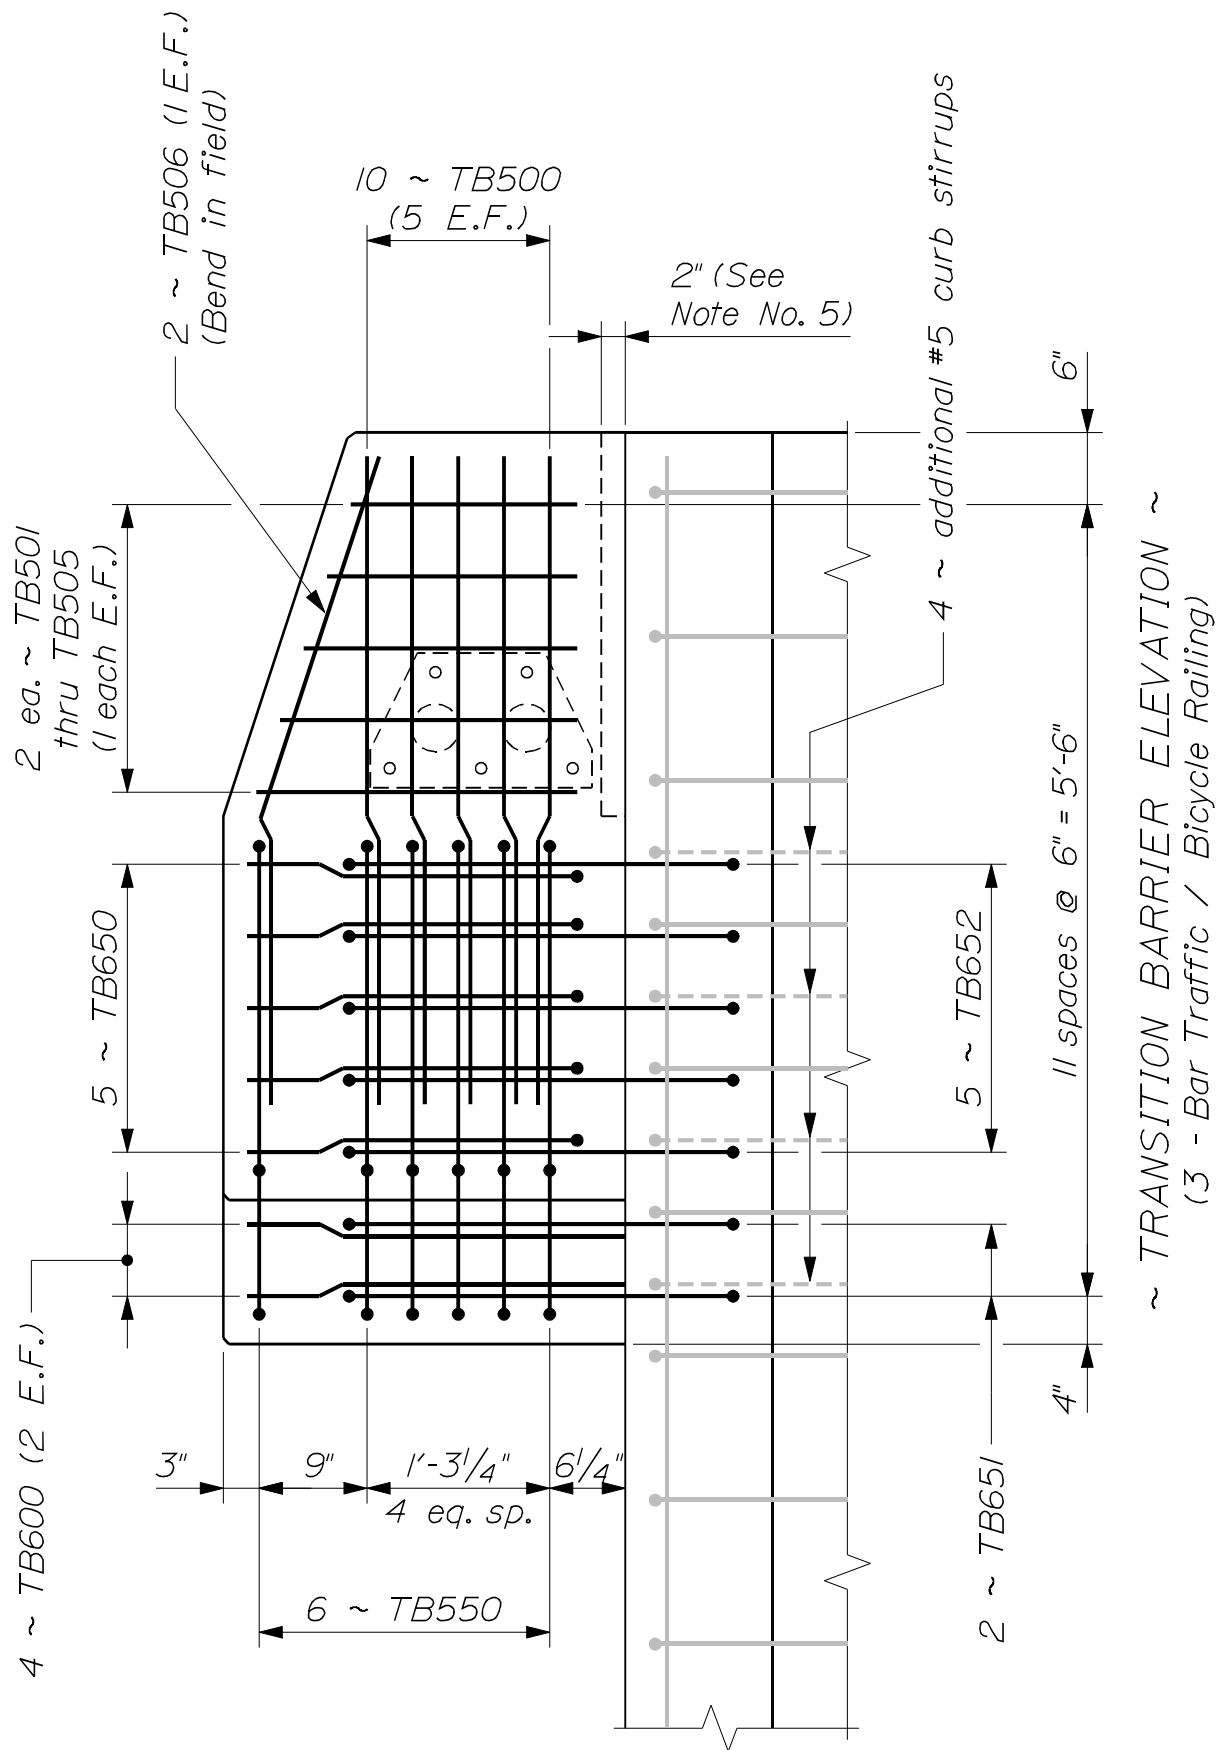

CONCRETE TRANSITION BARRIER
526(28)

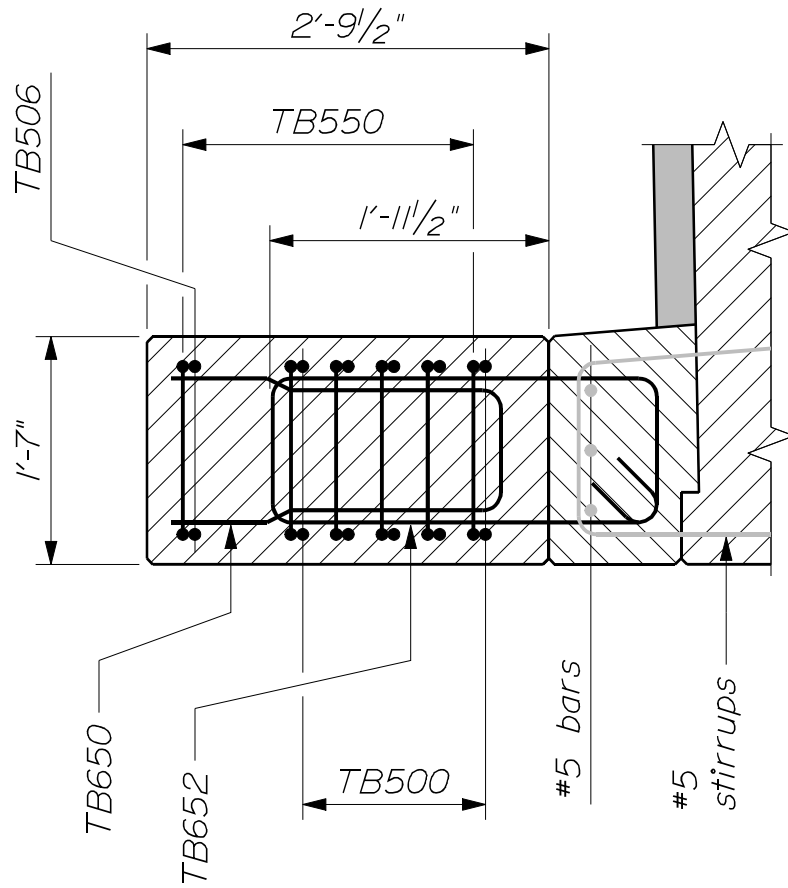


~ SECTION THRU STEM ~
(3 - Bar Traffic / Bicycle Railing)

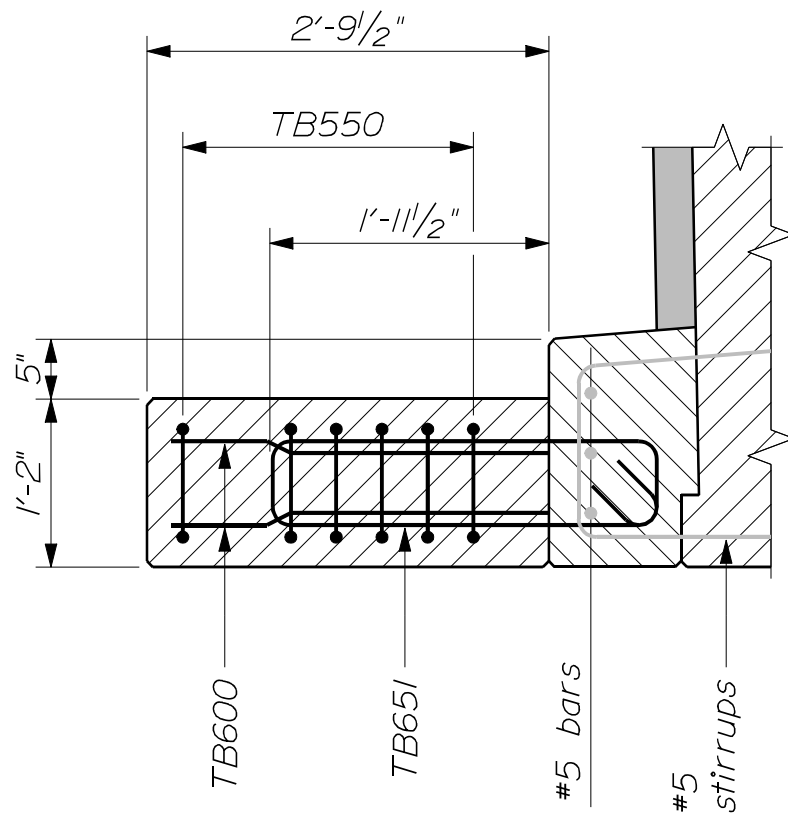


~ SECTION THRU RECESS ~
(3 - Bar Traffic / Bicycle Railing)

CONCRETE TRANSITION BARRIER 526(29)

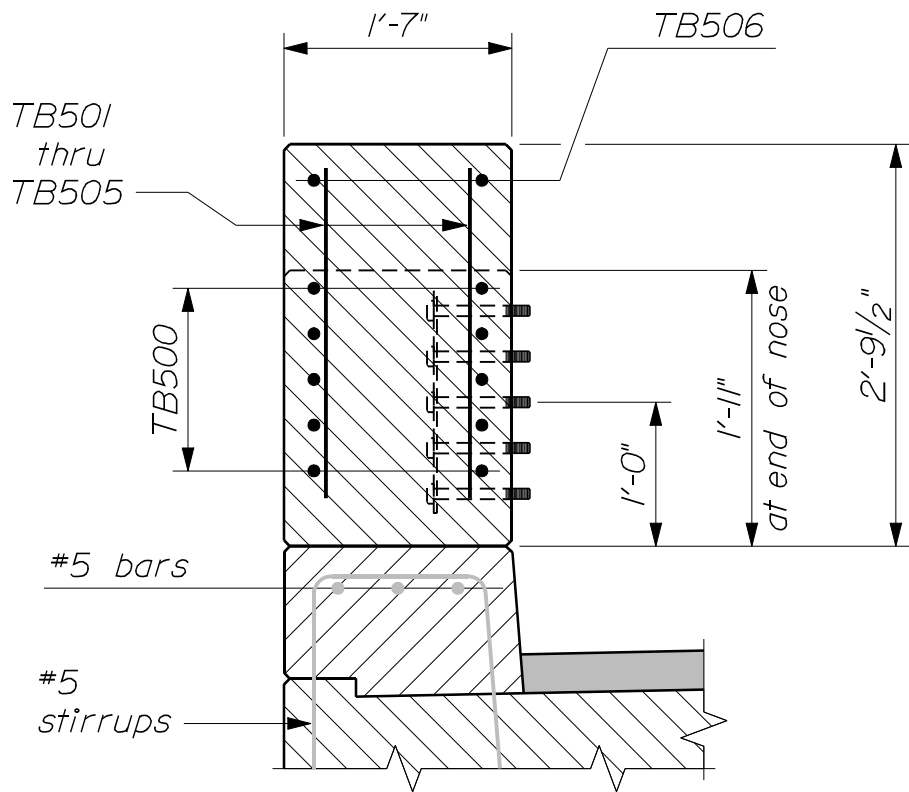


~ SECTION THRU NOSE ~
(3 - Bar Traffic / Bicycle Railing)


CONCRETE TRANSITION BARRIER
526(30)

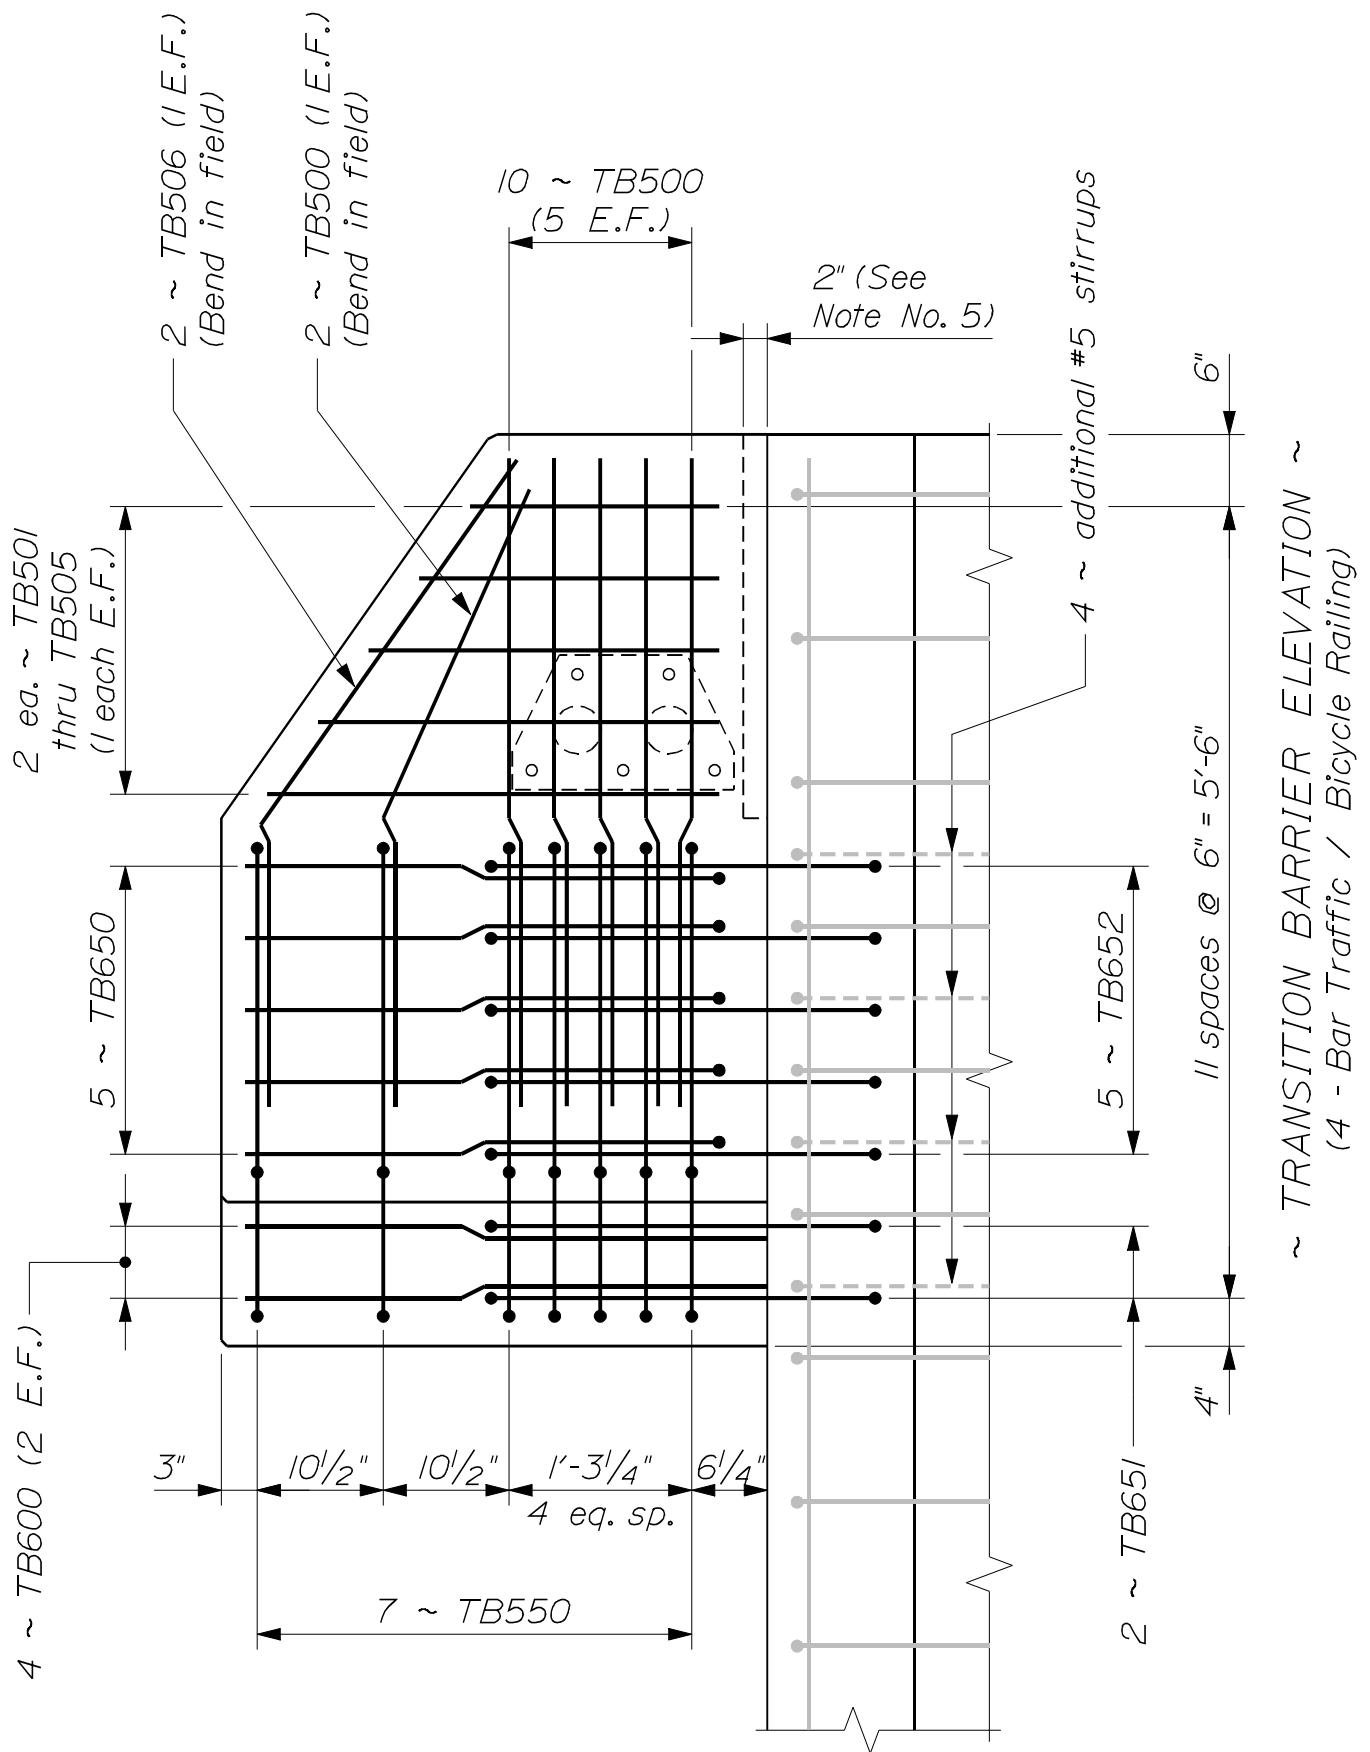

CONCRETE TRANSITION BARRIER
526(31)

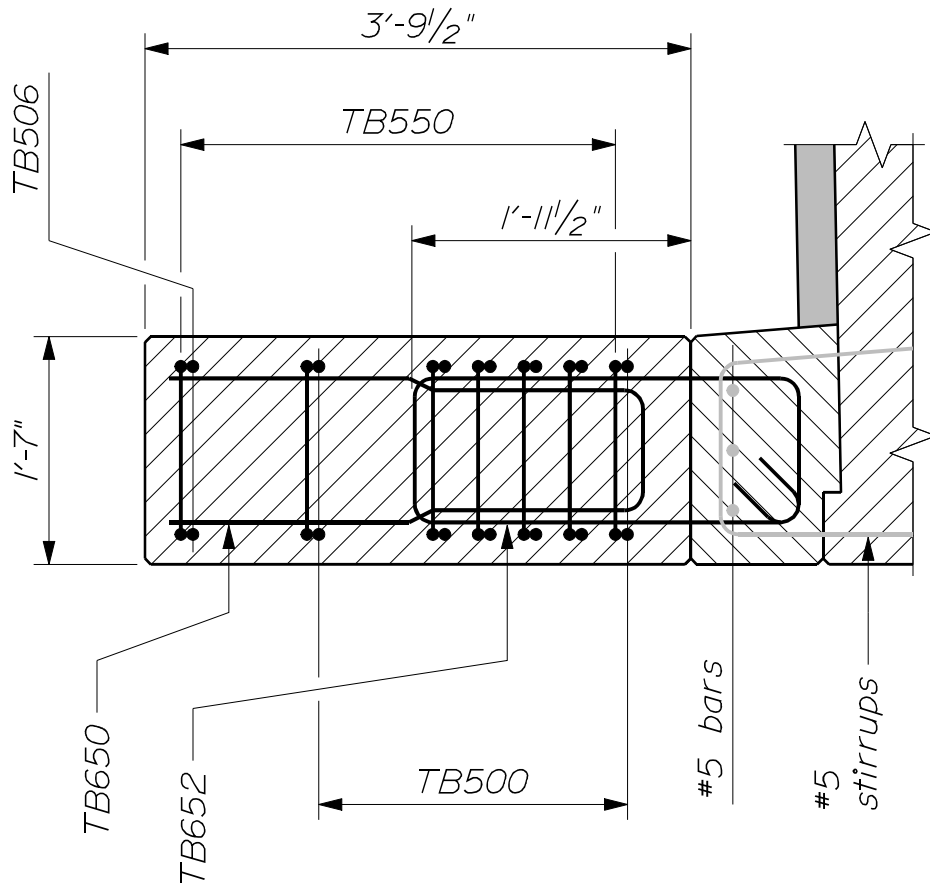


~ SECTION THRU STEM ~
(4 - Bar Traffic / Bicycle Railing)

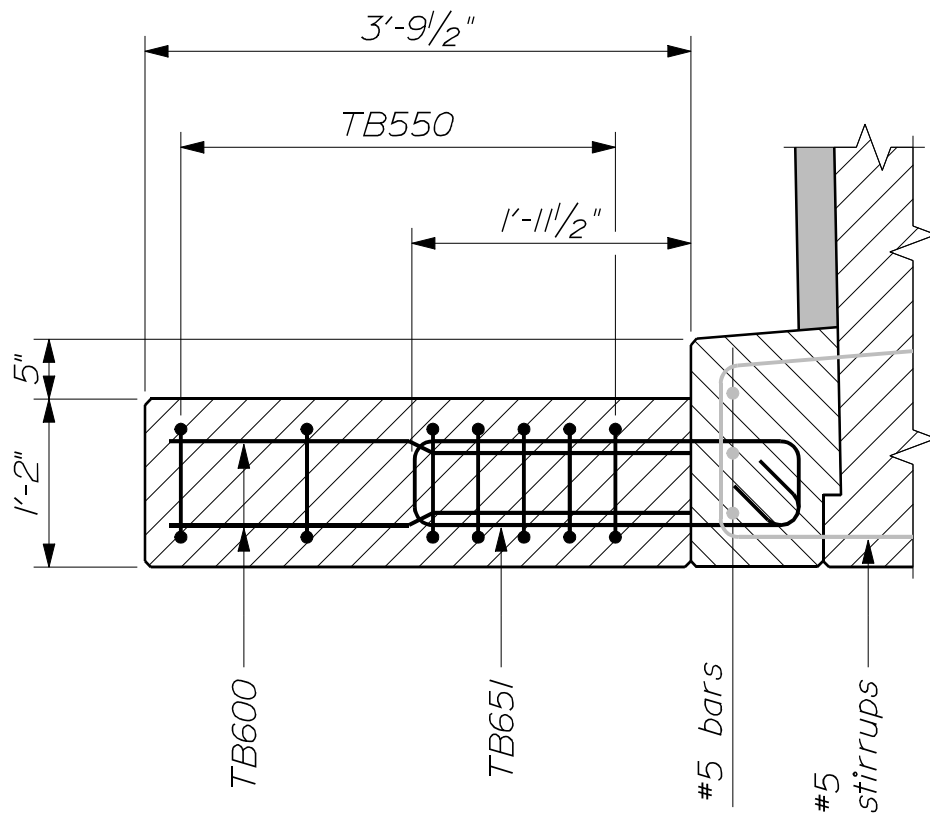


~ SECTION THRU RECESS ~
(4 - Bar Traffic / Bicycle Railing)

CONCRETE TRANSITION BARRIER 526(32)

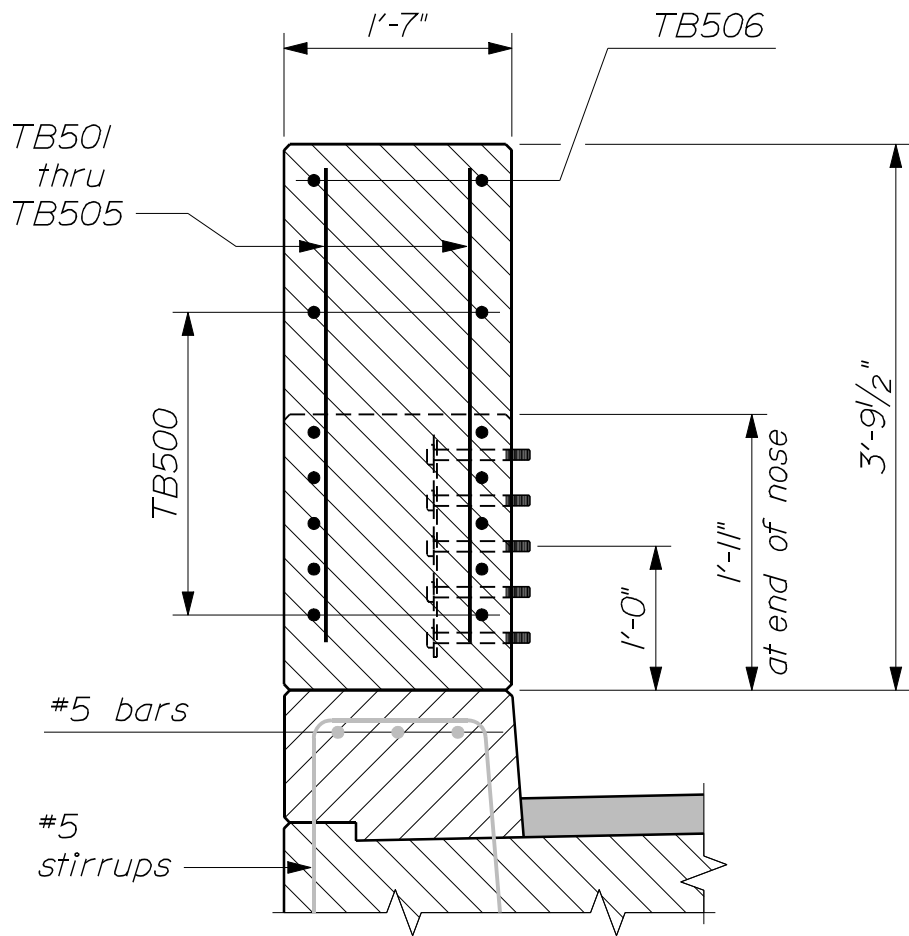


~ SECTION THRU NOSE ~
(4 - Bar Traffic / Bicycle Railing)

CONCRETE TRANSITION BARRIER 526(33)

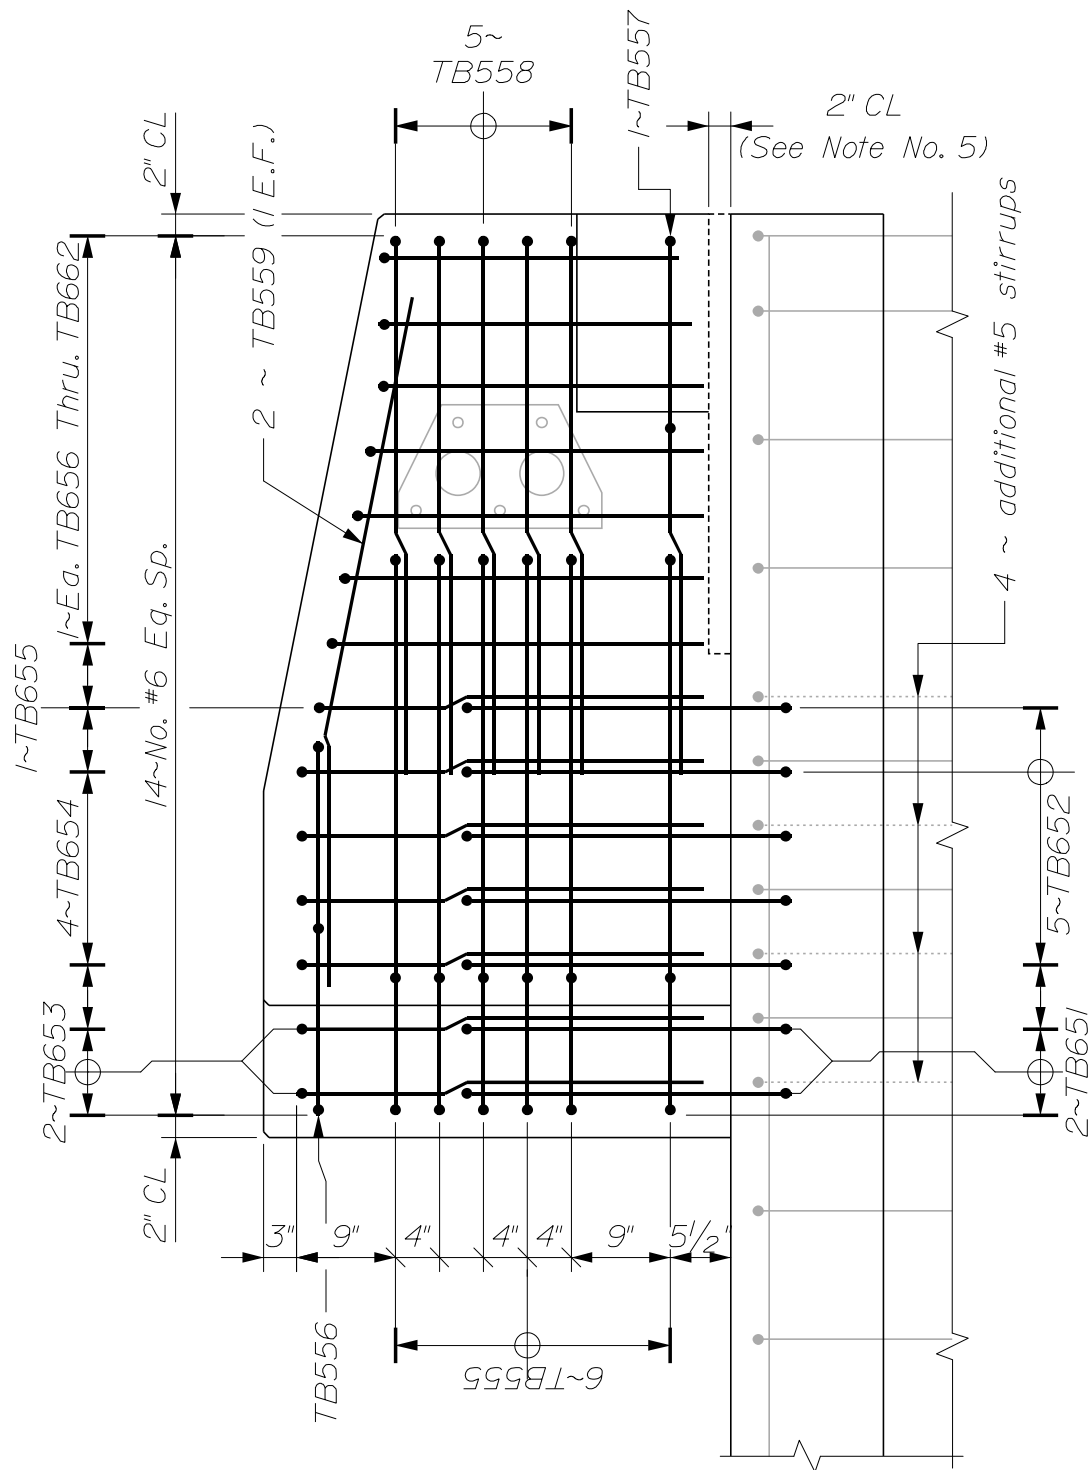


CONCRETE TRANSITION BARRIER
526(34)

~ TRANSITION BARRIER ELEVATION ~
4 - Bar Traffic & Pedestrian Railing

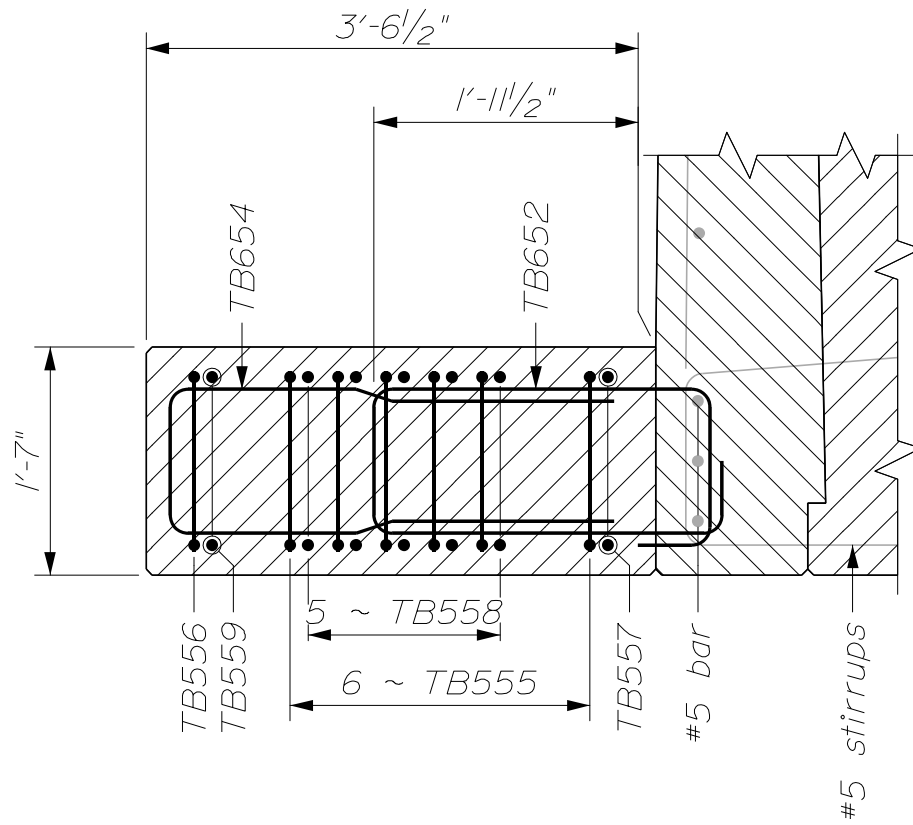


~ SECTION THRU STEM ~
4 - Bar Traffic & Pedestrian Railing

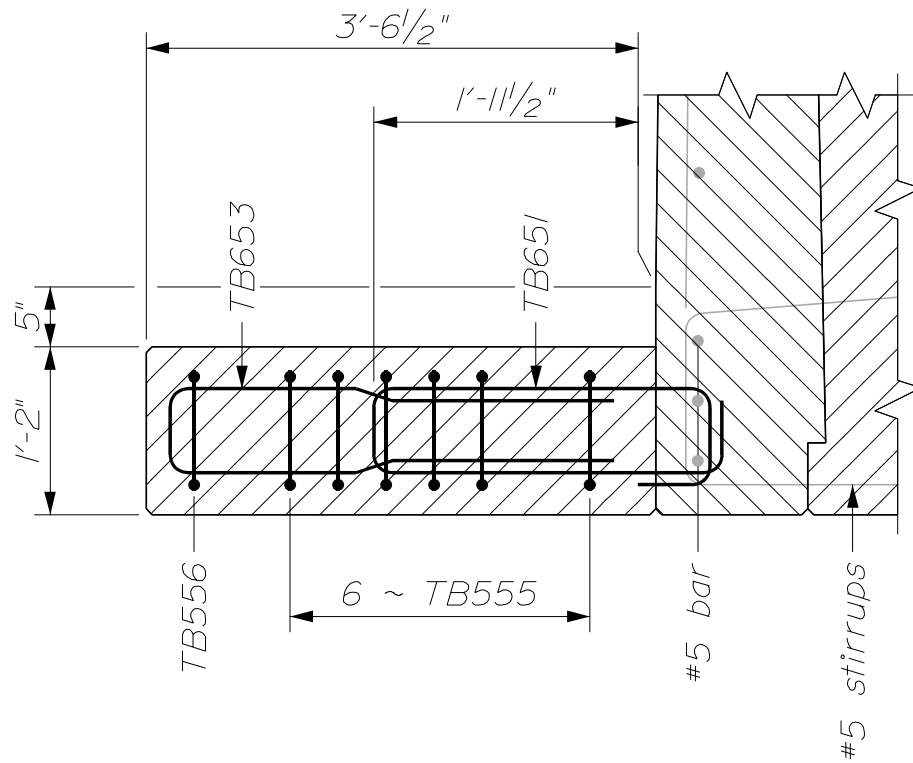

~ SECTION THRU RECESS ~
4 - Bar Traffic & Pedestrian Railing

CONCRETE TRANSITION BARRIER
526(35)

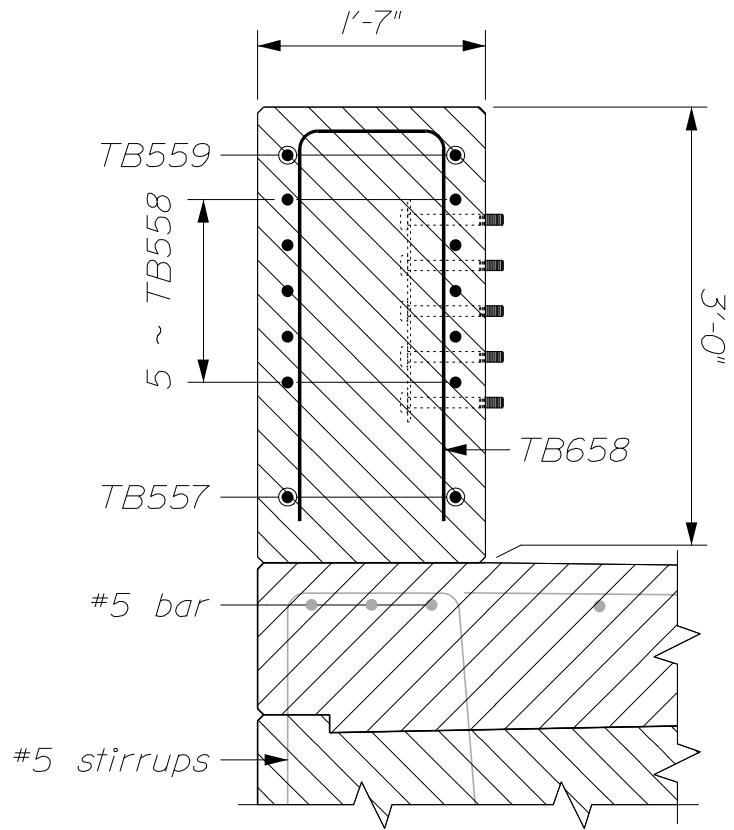

~ SECTION THRU NOSE ~
4 - Bar Traffic & Pedestrian Railing


CONCRETE TRANSITION BARRIER 526(36)

REINFORCING STEEL SCHEDULE						
	2 - Bar Traffic		3 - Bar Bike		4 - Bar Bike	
	Qty.	Length	Qty.	Length	Qty.	Length
TB500	10	4'-6"	10	4'-6"	12	4'-6"
TB501	2	1'-8"	2	2'-2"	2	3'-2"
TB502	2	1'-7"	2	2'-0"	2	2'-10"
TB503	2	1'-7"	2	1'-10"	2	2'-6"
TB504	2	1'-6"	2	1'-8"	2	2'-2"
TB505	2	1'-6"	2	1'-6"	2	1'-10"
TB506	--	--	2	4'-8"	2	5'-1"
TB550	5	10'-2"	6	10'-2"	7	10'-2"
TB600	--	--	4	2'-7"	4	3'-7"
TB650	--	--	5	5'-10"	5	7'-10"
TB651-A*	2	7'-11"	2	7'-11"	2	7'-11"
TB651-C*	2	7'-5"	2	7'-5"	2	7'-5"
TB652-A*	5	8'-9"	5	8'-9"	5	8'-9"
TB652-C*	5	8'-3"	5	8'-3"	5	8'-3"


Notes:

The first digit following the letters of the mark indicate the size of the reinforcing bar. (TB500 = bar size #5.) All dimensions are out - to - out of bar.

Quantities given are for one Transition Barrier.

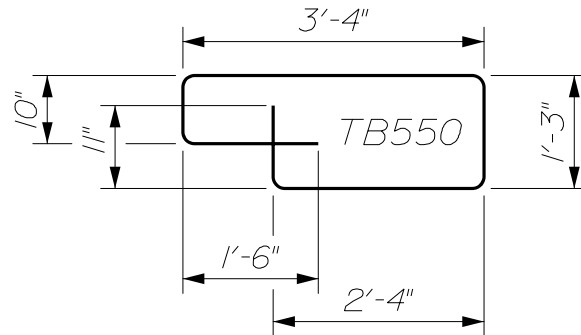

- *TB65x-A is used with Asphalt Wearing Surface.
- *TB65x-C with Integral Concrete Wearing Surface.

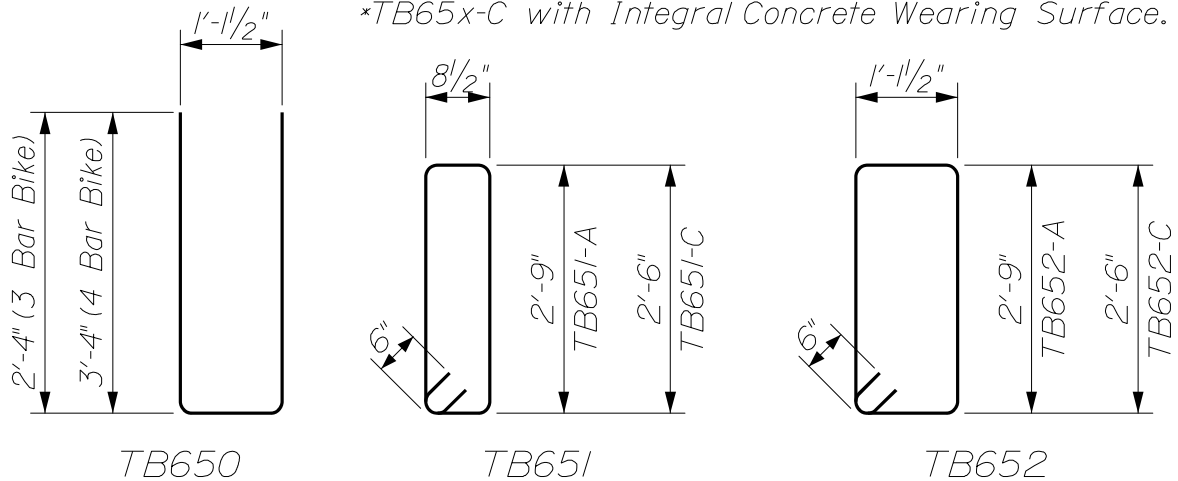

REINFORCING STEEL SCHEDULE


4 - Bar Traffic & Pedestrian Railing

Mark	Qty.	Length	Type	A	B	C	D	E	F
TB555	6	12'-0"	1TB	1'-6"	0'-10"	4'-3"	1'-3"	3'-3"	0'-11"
TB556	1	9'-2"	1TB	1'-6"	0'-10"	2'-10"	1'-3"	1'-10"	0'-11"
TB557	1	9'-1 1/2"	2TB	4'-1"	0'-11"	1'-4 1/2"	2'-9"		
TB558	5	9'-5"	3TB	4'-1"	1'-3"	4'-1"			
TB559	2	5'-4"	6TB	1'-6"	3'-10"				
TB651	2	7'-1"	4TB	2'-4"	0'-8 1/2"	2'-4"	0'-8 1/2"	0'-6"	0'-6"
TB652	5	7'-11"	4TB	2'-4"	1'-1 1/2"	2'-4"	1'-1 1/2"	0'-6"	0'-6"
TB653	2	6'-10 1/2"	3TB	3'-1"	0'-8 1/2"	3'-1"			
TB654	4	7'-3 1/2"	3TB	3'-1"	1'-1 1/2"	3'-1"			
TB655	1	7'-1 1/2"	3TB	3'-0"	1'-1 1/2"	3'-0"			
TB656	1	6'-7 1/2"	3TB	2'-9"	1'-1 1/2"	2'-9"			
TB657	1	6'-5 1/2"	3TB	2'-8"	1'-1 1/2"	2'-8"			
TB658	1	6'-3 1/2"	3TB	2'-7"	1'-1 1/2"	2'-7"			
TB659	1	6'-1 1/2"	3TB	2'-6"	1'-1 1/2"	2'-6"			
TB660	1	5'-10 1/2"	5TB	0'-11"	0'-3 3/4"	1'-5"	1'-1 1/2"	2'-4"	
TB661	1	5'-10"	5TB	1'-0"	0'-2 1/4"	1'-3"	1'-1 1/2"	2'-3"	
TB662	1	5'-9"	5TB	1'-0"	0'-3 3/4"	1'-2"	1'-1 1/2"	2'-2"	

Notes:

The first digit following the letters of the mark indicate the size of the reinforcing bar. (TB500 = bar size #5.) All dimensions are out - to - out of bar.

Quantities given are for one Transition Barrier.

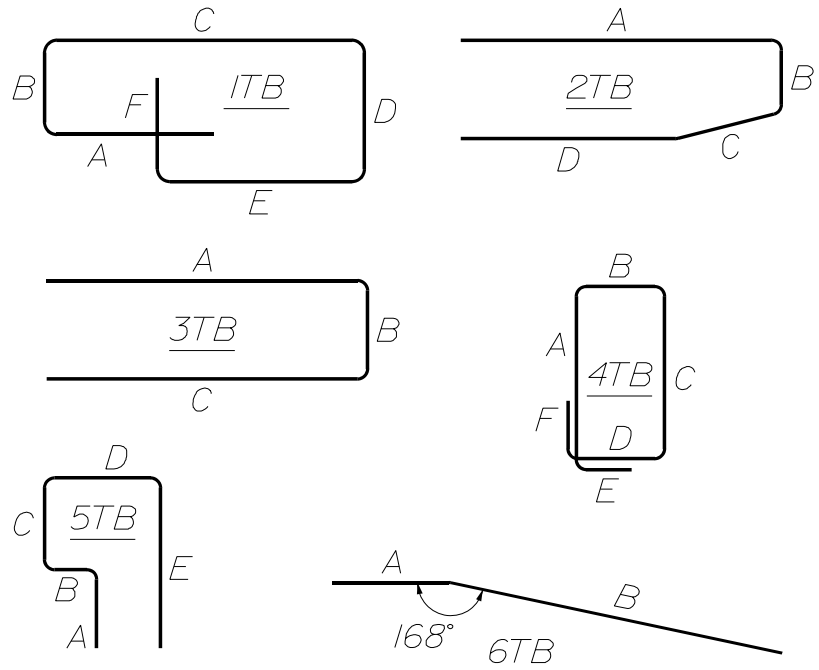

CONCRETE TRANSITION BARRIER

526(37)A


NOTES:

1. All work and materials shall conform to the provisions of Standard Specifications Section 526 - Concrete Barrier.
2. The Contractor is responsible for ensuring that vertical reinforcing bars TB651 and TB652 are installed prior to placement of the curb or sidewalk concrete. Payment for these bars will be considered incidental to Item No. 526.34, Permanent Concrete Transition Barrier.
3. Reinforcing steel shall have a minimum concrete cover of 2 inches.
4. Quantities of reinforcing bars shown are for one transition barrier only.
5. When the Concrete Transition Barrier is cantilevered over an expansion joint, the nose shall be blocked out as shown.
6. Payment for guardrail anchorage will be considered incidental to the transition barrier pay item.
7. Precast Concrete Transition Curb shall meet the requirements of Standard Specifications Section 609 - Curb. The bridge end of the curb shall be saw cut in the field to fit flush against the backwall, as dictated by the bridge skew angle and the profile grade. Where curbing is specified on the adjacent highway, the transition shall be modified accordingly. Payment for transition curb will be considered incidental to the Concrete Transition Barrier pay item.
8. Concrete Transition Barrier is designed for attachment of Bridge Transition Type "IA" unless otherwise indicated on the Plans. Refer to Section 606 for details.
9. After installation of the guardrail is complete, upset the threads on the anchor bolts in three (3) places around each bolt, at the junction of the nut and the exposed thread, with a center punch or similar tool.


MATERIALS:

ConcreteClass "LP"
Reinforcing Steel..... AASHTO M 31M/M 31, Grade 60
Anchor Plate..... AASHTO M 270M/M 270, Grade 36 (Galvanized)
Bolts AASHTO M 314, Grade 105 (Galvanized)


CONCRETE TRANSITION BARRIER
526(38)

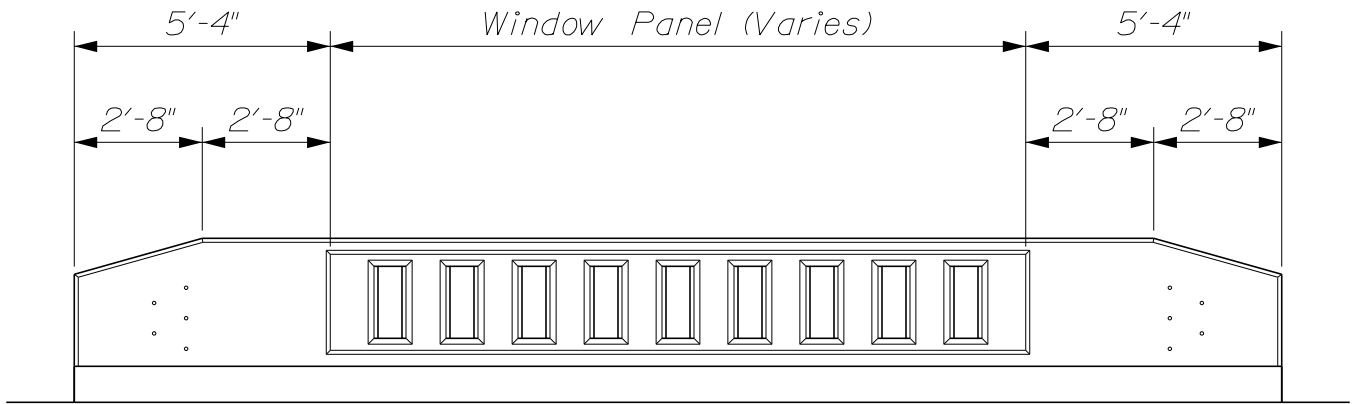


~ RAIL ELEVATION ~
(Traffic Rail shown; Sidewalk Rail similar)

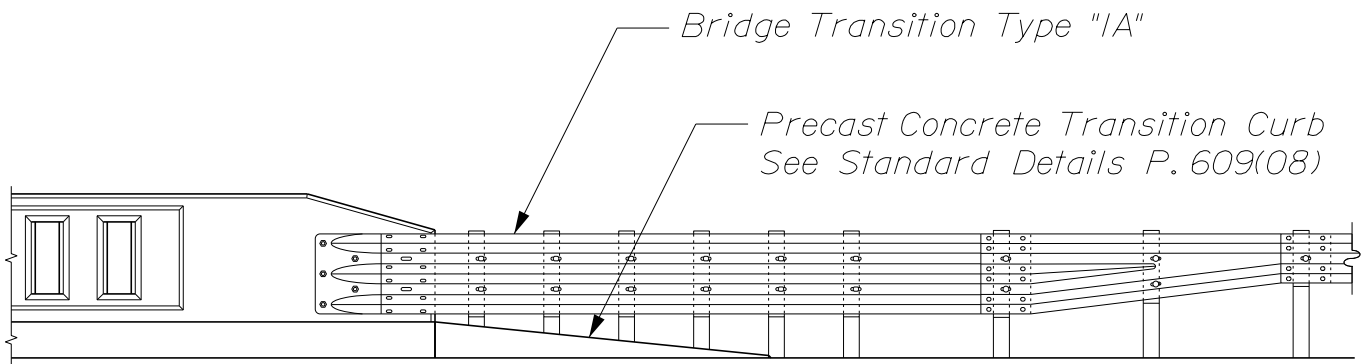

~ GUARDRAIL CONNECTION ~
(Traffic Rail)

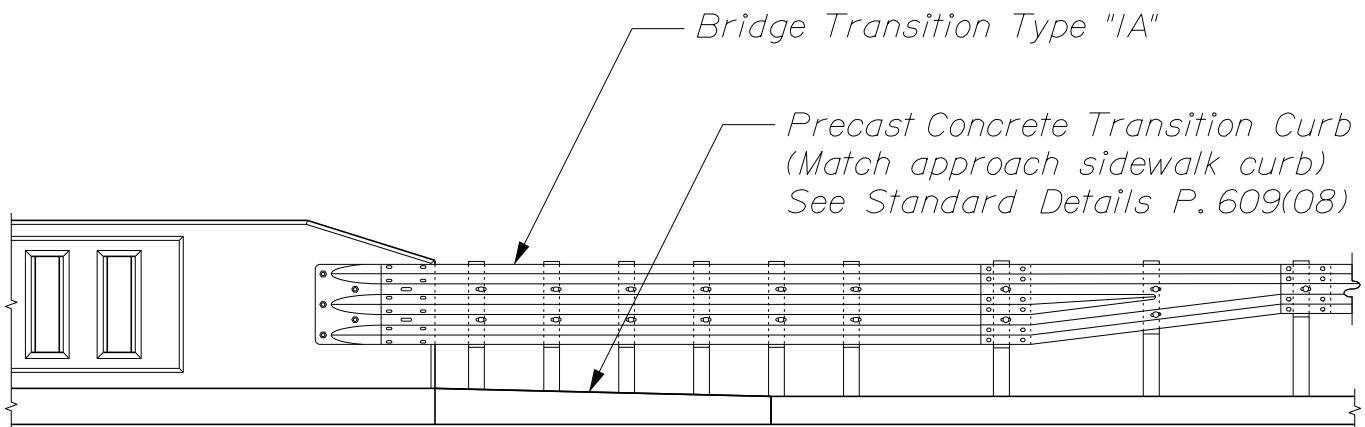


~ GUARDRAIL CONNECTION ~
(Sidewalk Rail)

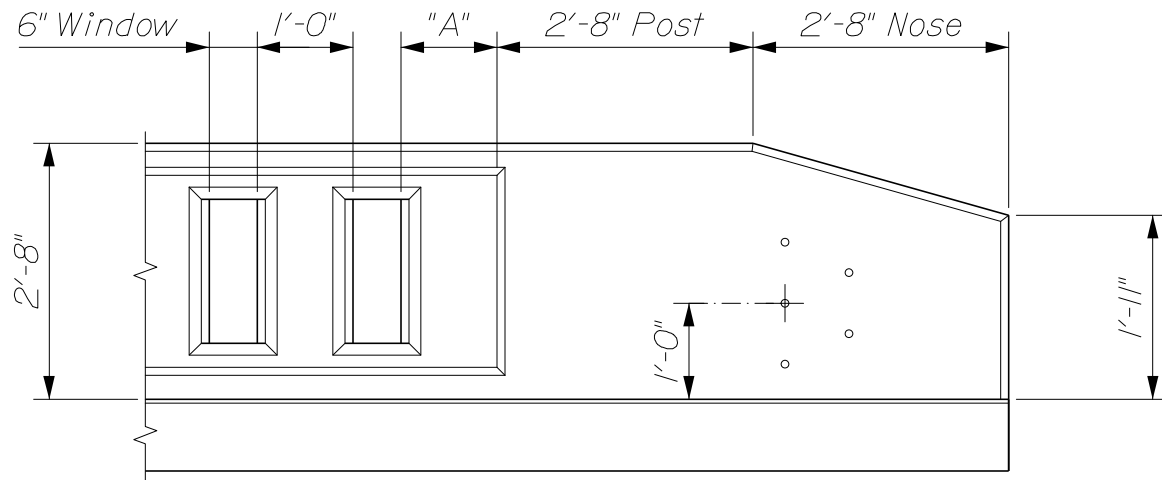


~ TRAFFIC RAIL END ELEVATION ~
(Non - cantilevered)

Dim. "A" shall be 6" min., 15" max. and approximately equal at all locations in any length of railing.

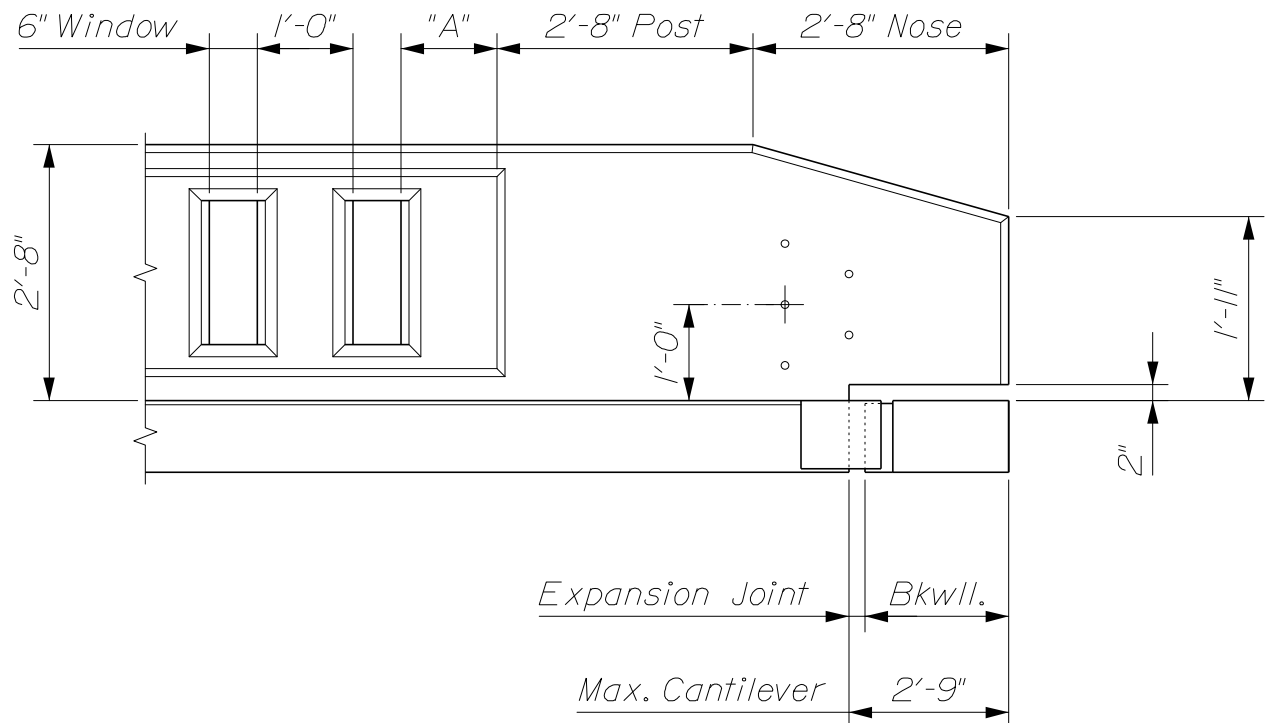


~ TRAFFIC RAIL END ELEVATION ~
(Cantilevered)

TEXAS CLASSIC RAIL
526(40)

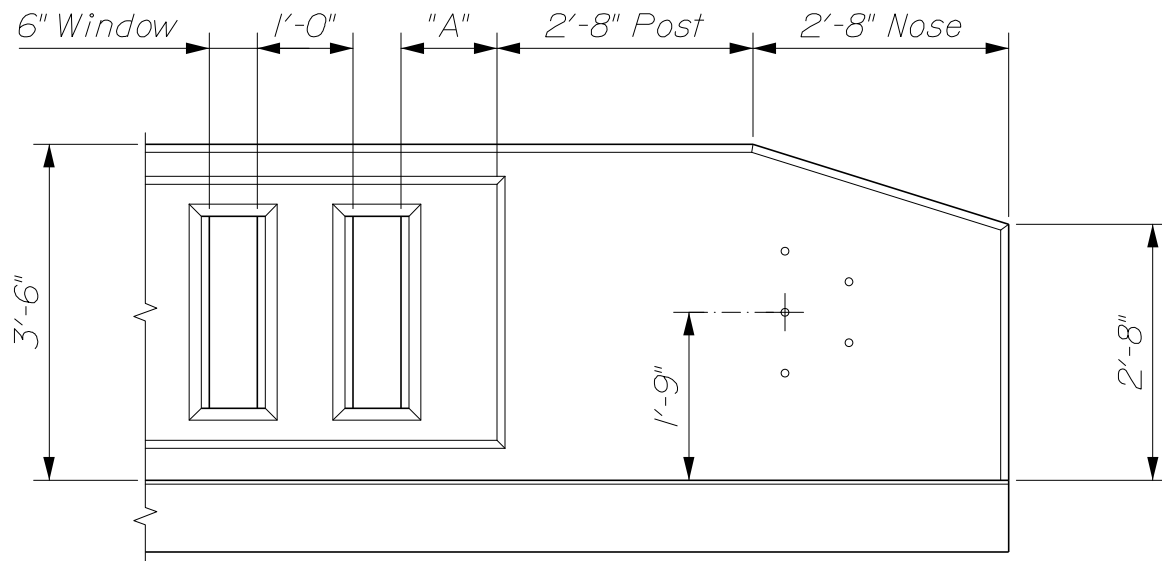


~ SIDEWALK RAIL END ELEVATION ~
(Non - cantilevered)

Dim. "A" shall be 6" min., 15" max. and approximately equal at all locations in any length of railing.

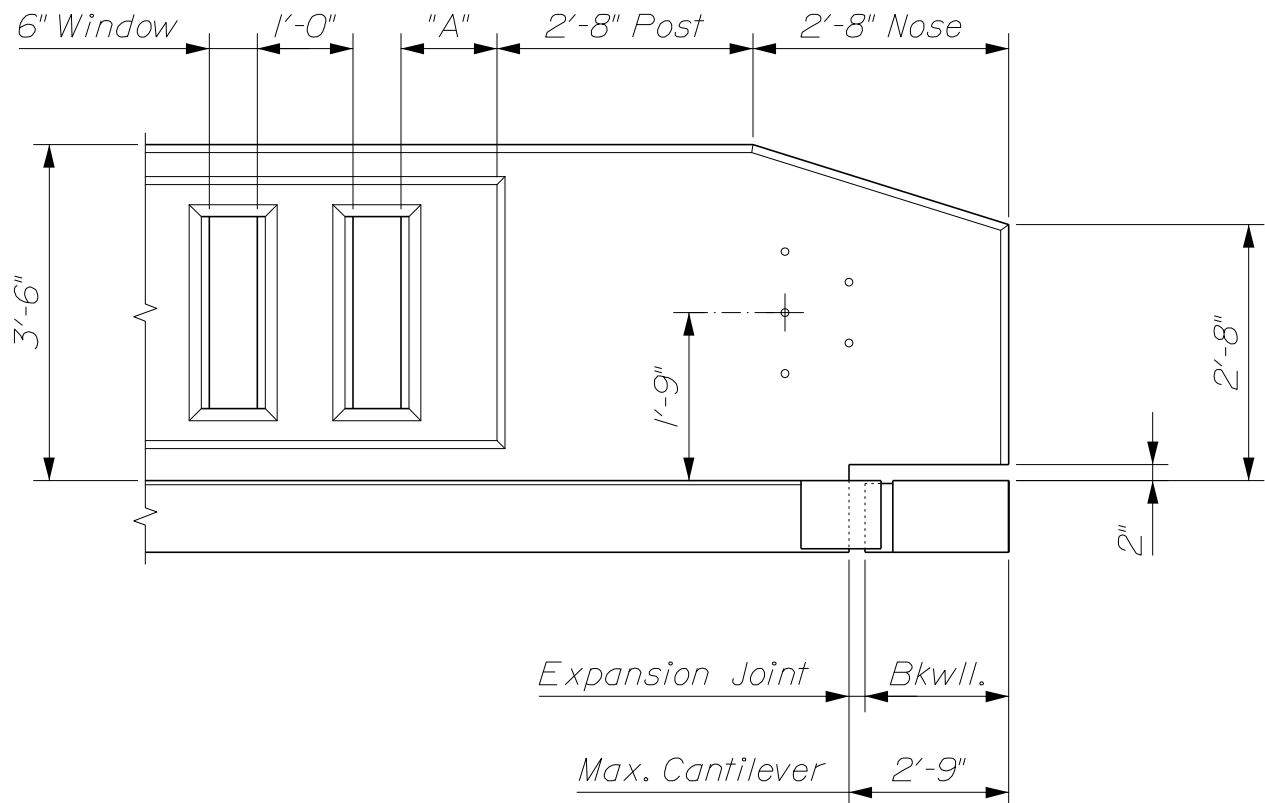


~ SIDEWALK RAIL END ELEVATION ~
(Cantilevered)

TEXAS CLASSIC RAIL
526(41)

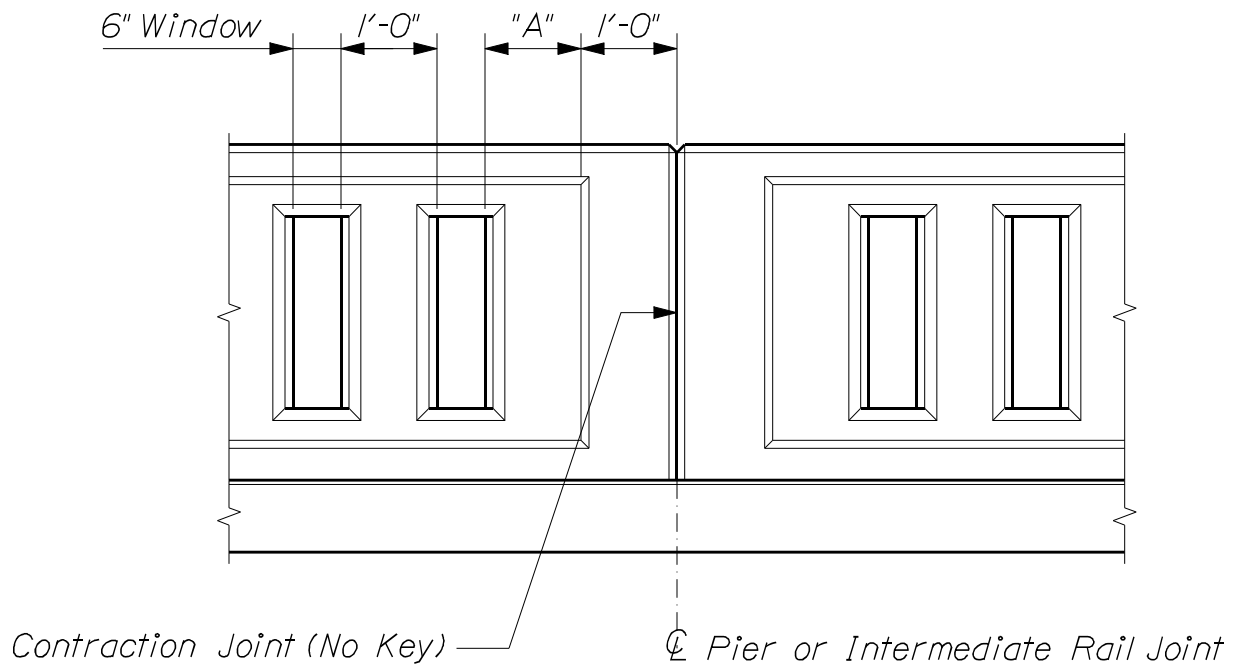


~ CONTRACTION JOINT ELEVATION ~
(Sidewalk Rail shown)

Dim. "A" = 6" min., 15" max.

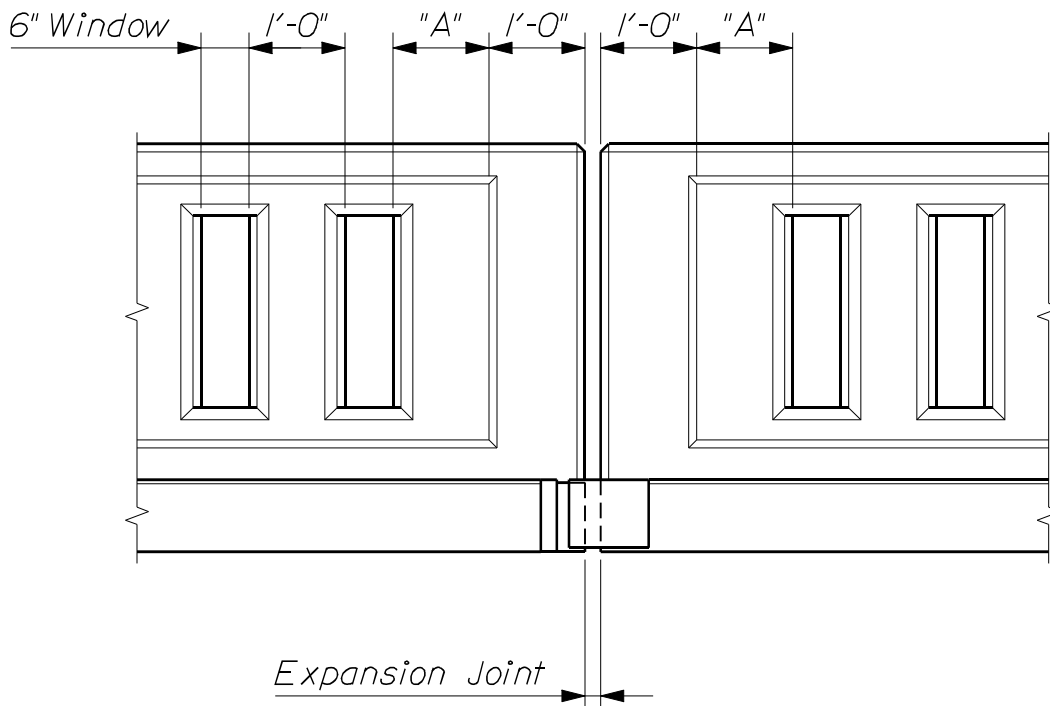


~ EXPANSION JOINT ELEVATION ~
(Sidewalk Rail shown)

TEXAS CLASSIC RAIL
526(42)

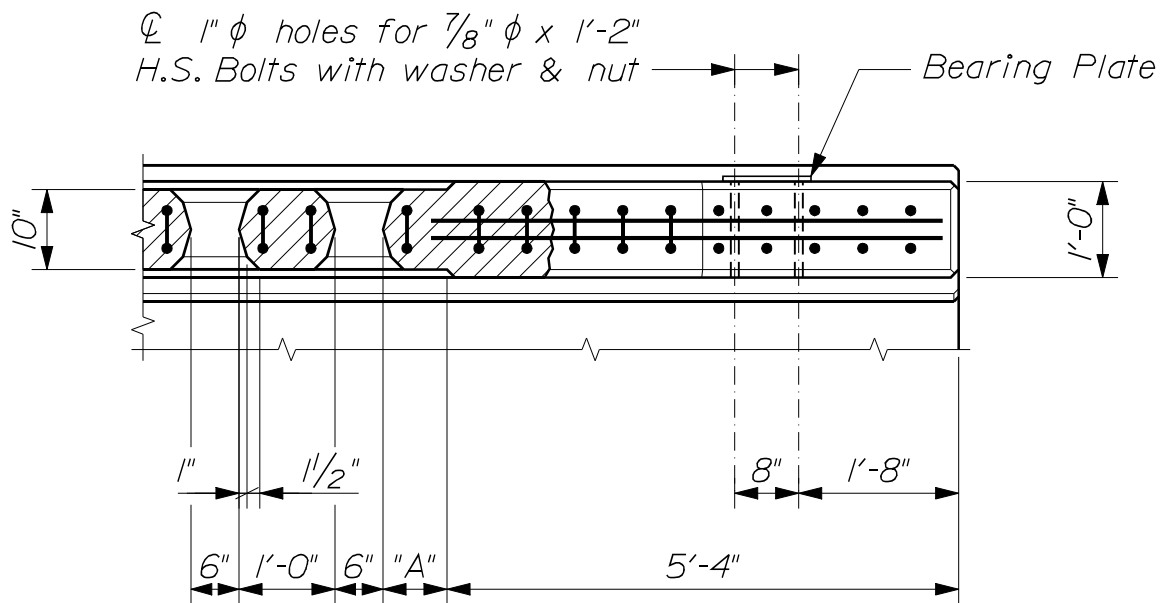

~ TRAFFIC RAIL PLAN ~

E.F. = Each Face

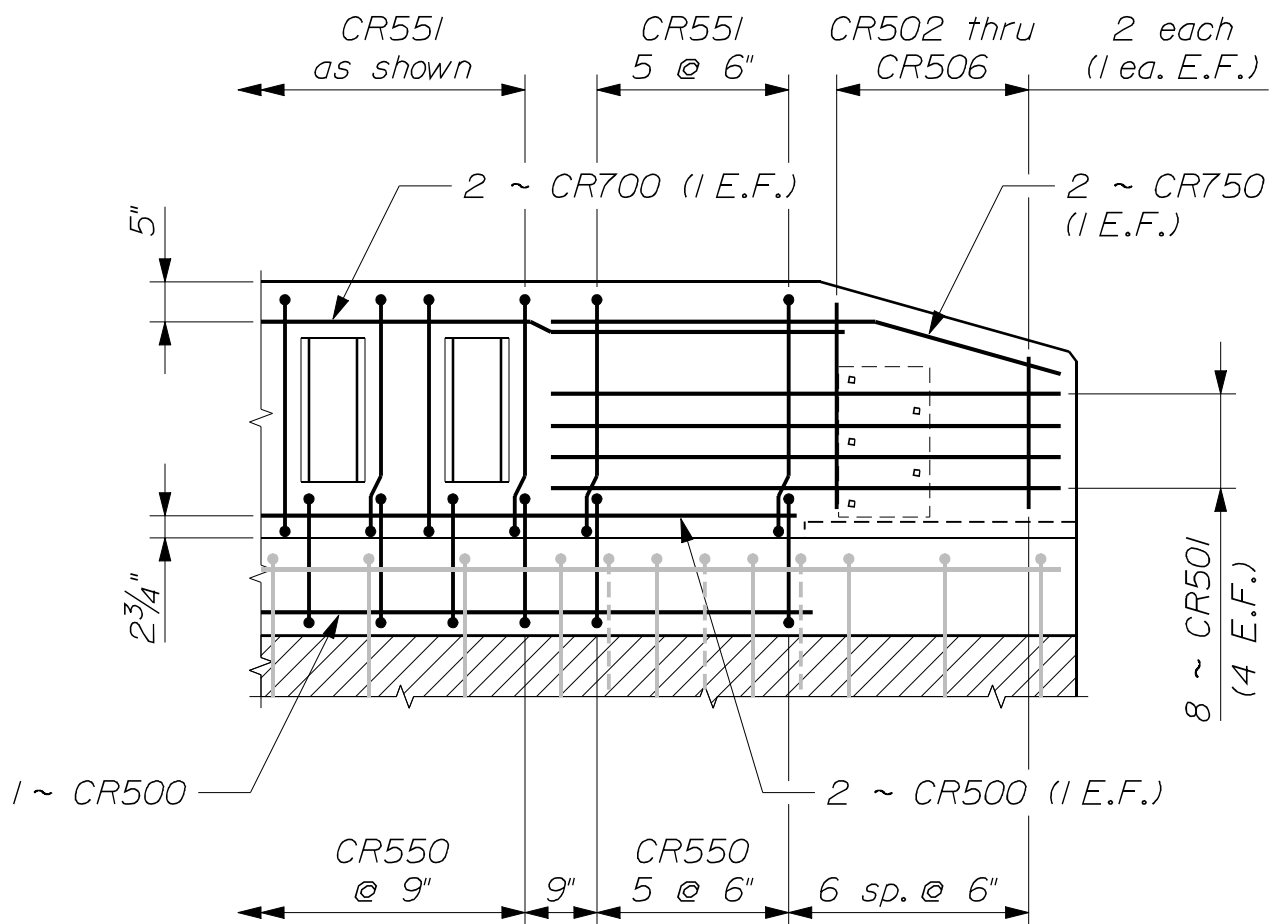


~ TRAFFIC RAIL ELEVATION ~

TEXAS CLASSIC RAIL
 526(43)







TEXAS CLASSIC RAIL
526(45)

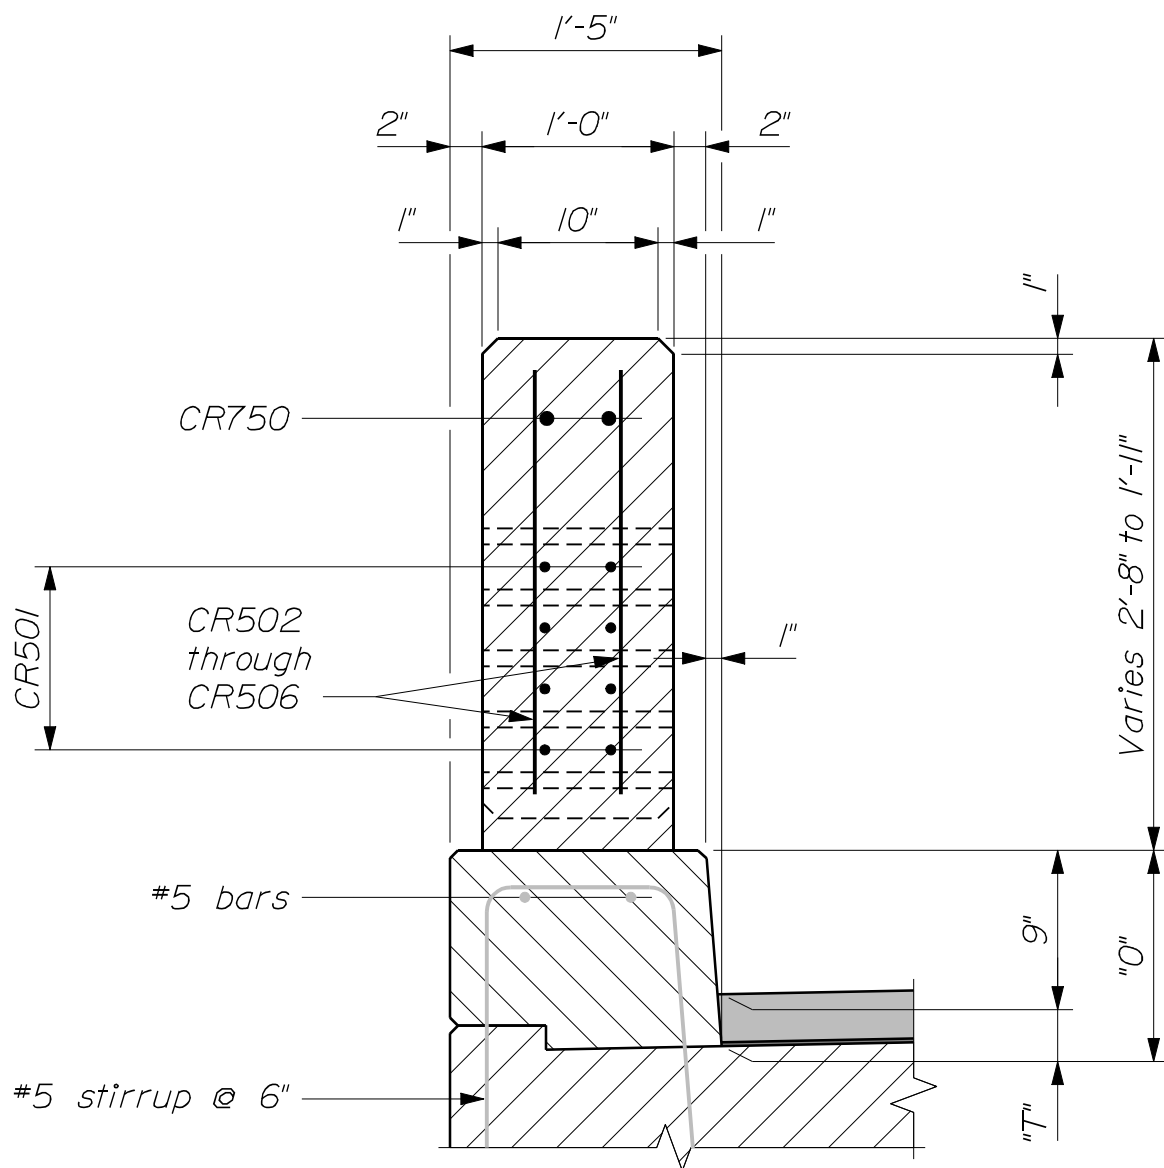


~ SECTION THROUGH NOSE ~
(Traffic Rail)

For Wearing Surface ("T") details, refer to Section 502 - Concrete Curb


TEXAS CLASSIC RAIL
526(47)

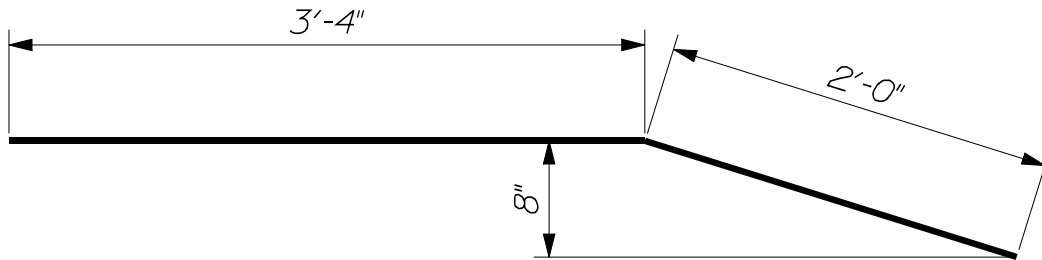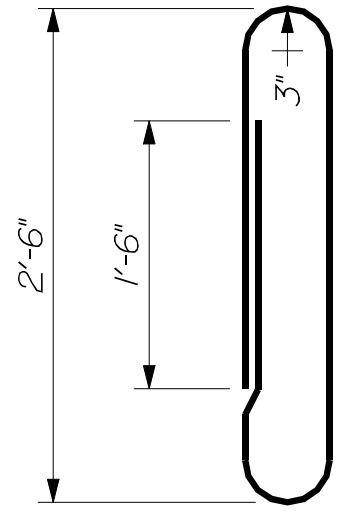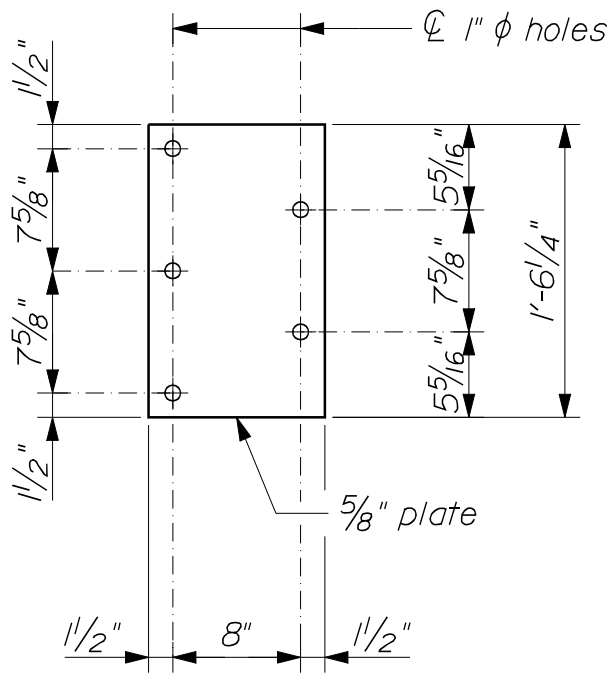

TRAFFIC RAIL REINFORCING STEEL SCHEDULE					
Horizontal			Vertical		
Mark	Length	Location	Mark	Length	Location
CR500	30' max.	Rail Bot. & Curb	CR502	2'-2"	Nose
CR501	5'-3"	Nose/Post	CR503	2'-0"	Nose
			CR504	1'-10"	Nose
CR700	30' max.	Rail Top	CR505	1'-8"	Nose
CR750	5'-4"	Nose	CR506	1'-6"	Nose
			CR550	3'-9"	Rail & Post
			CR551	7'-1"	Rail & Post

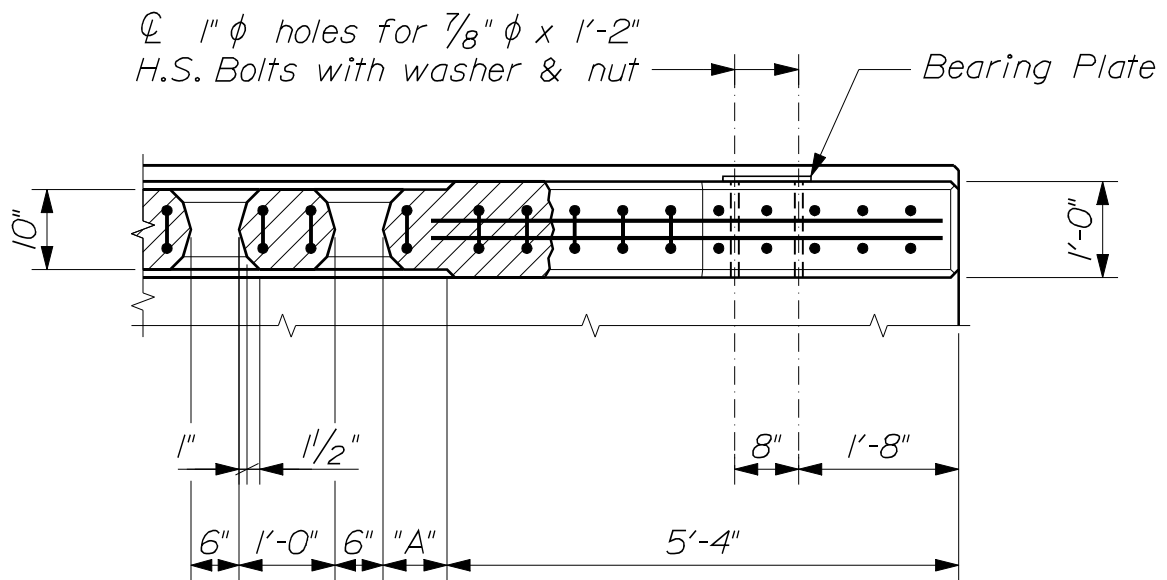


~ SIDEWALK RAIL PLAN ~

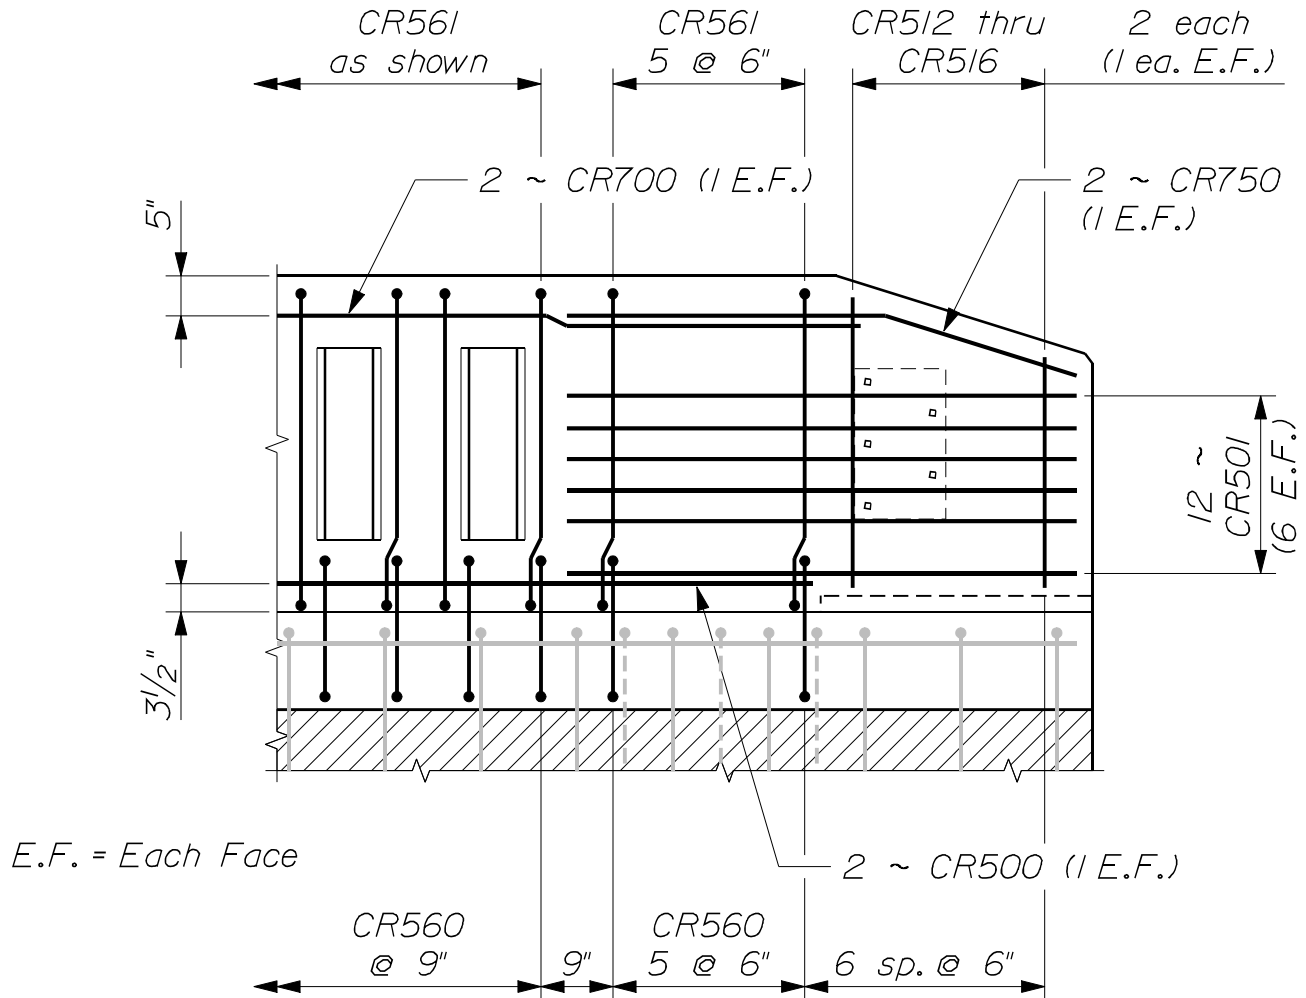


~ SIDEWALK RAIL ELEVATION ~

TEXAS CLASSIC RAIL
 526(49)

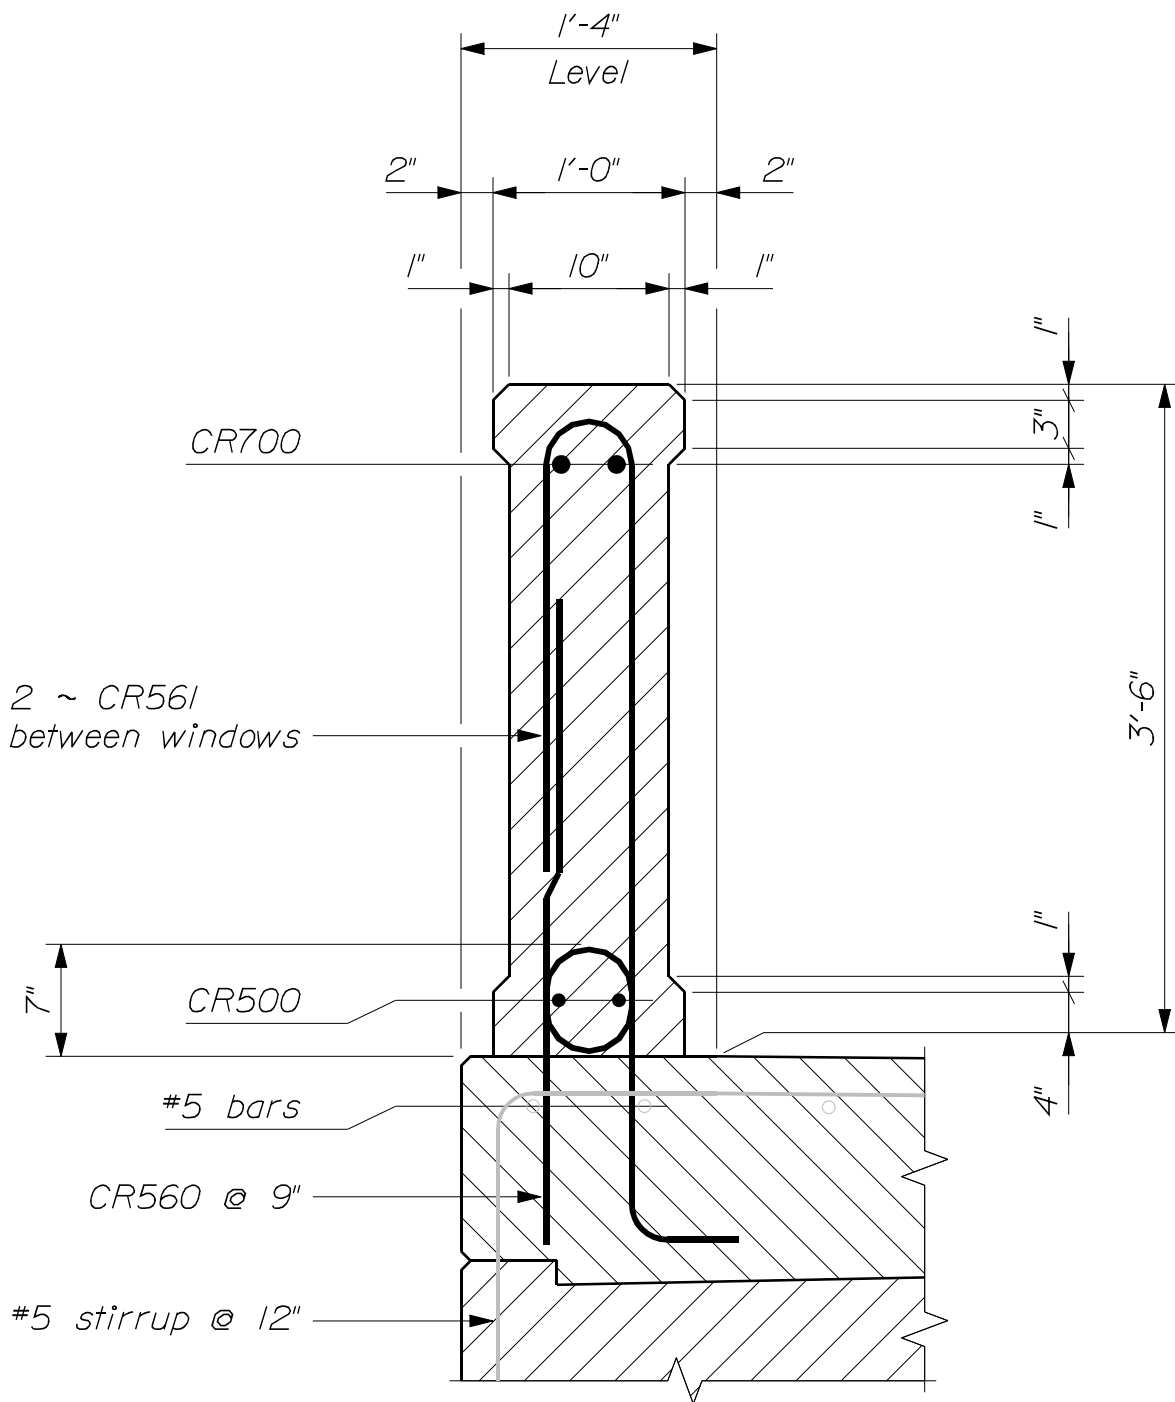


~ SECTION BETWEEN WINDOWS ~
(Sidewalk Rail)

TEXAS CLASSIC RAIL
526(50)

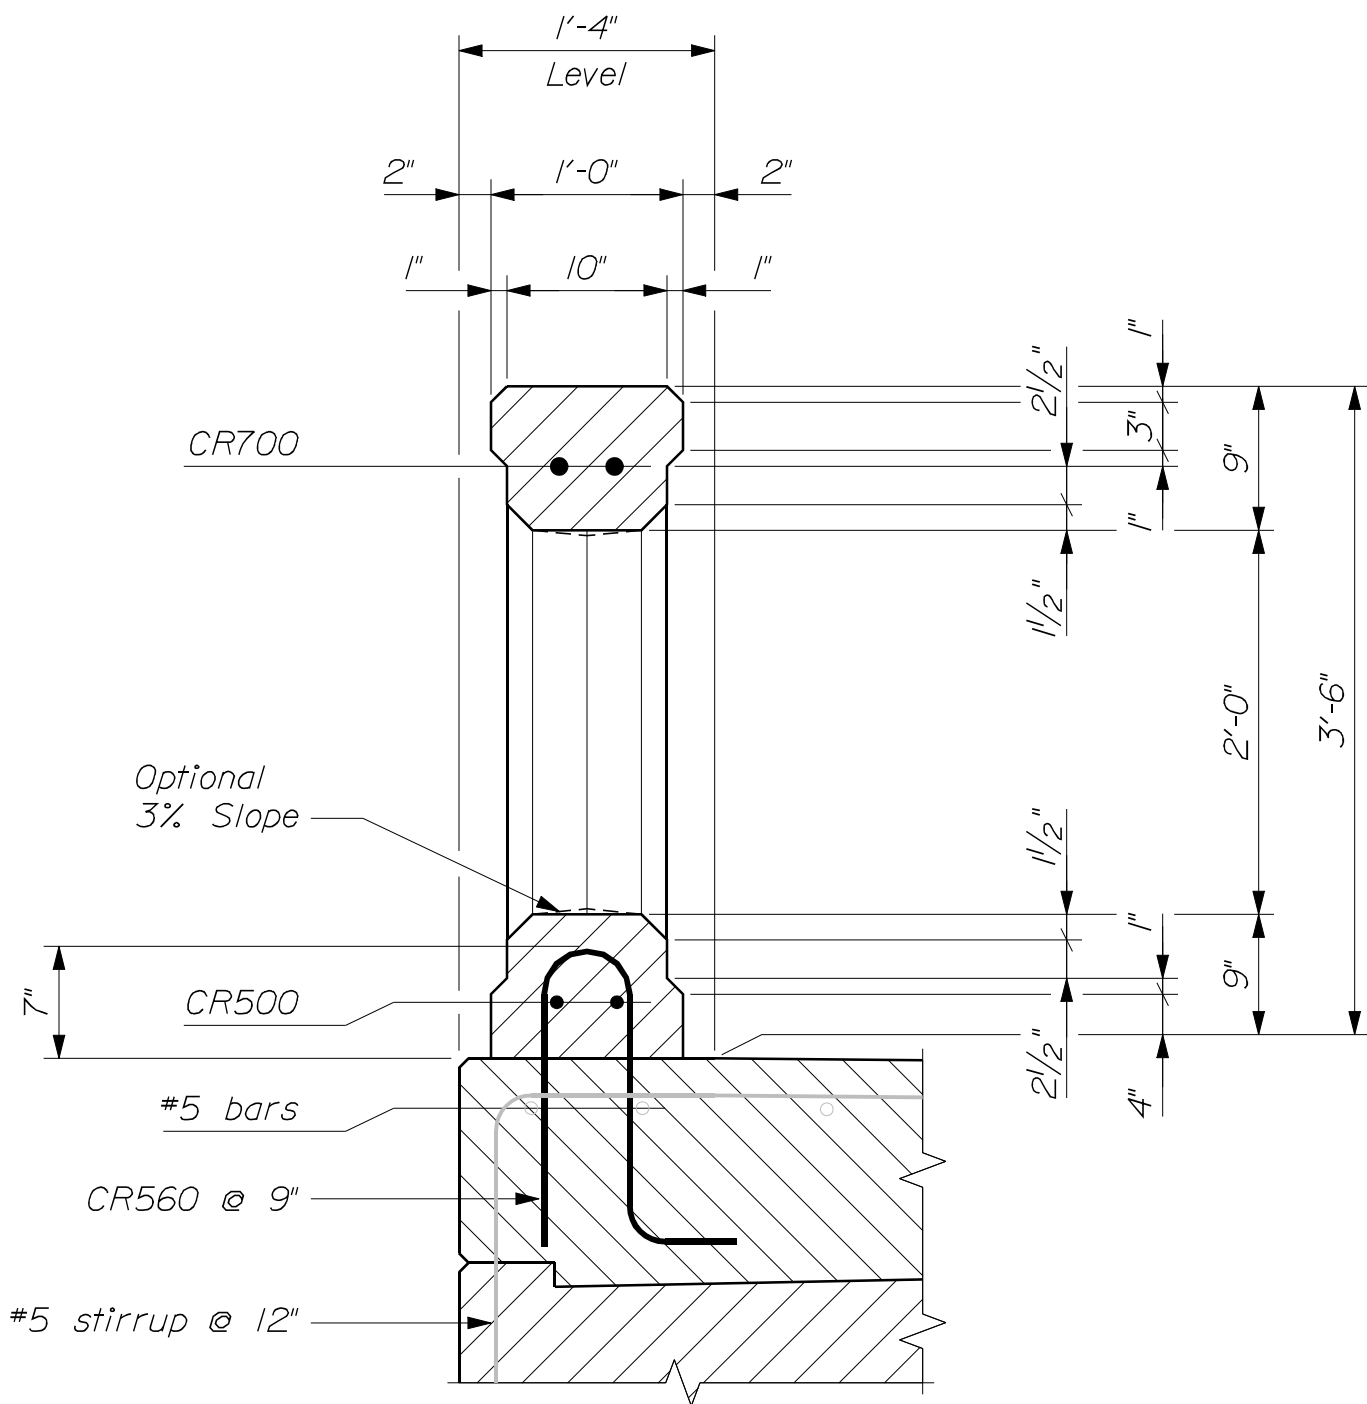


~ SECTION THROUGH WINDOW ~
(Sidewalk Rail)

TEXAS CLASSIC RAIL
526(51)

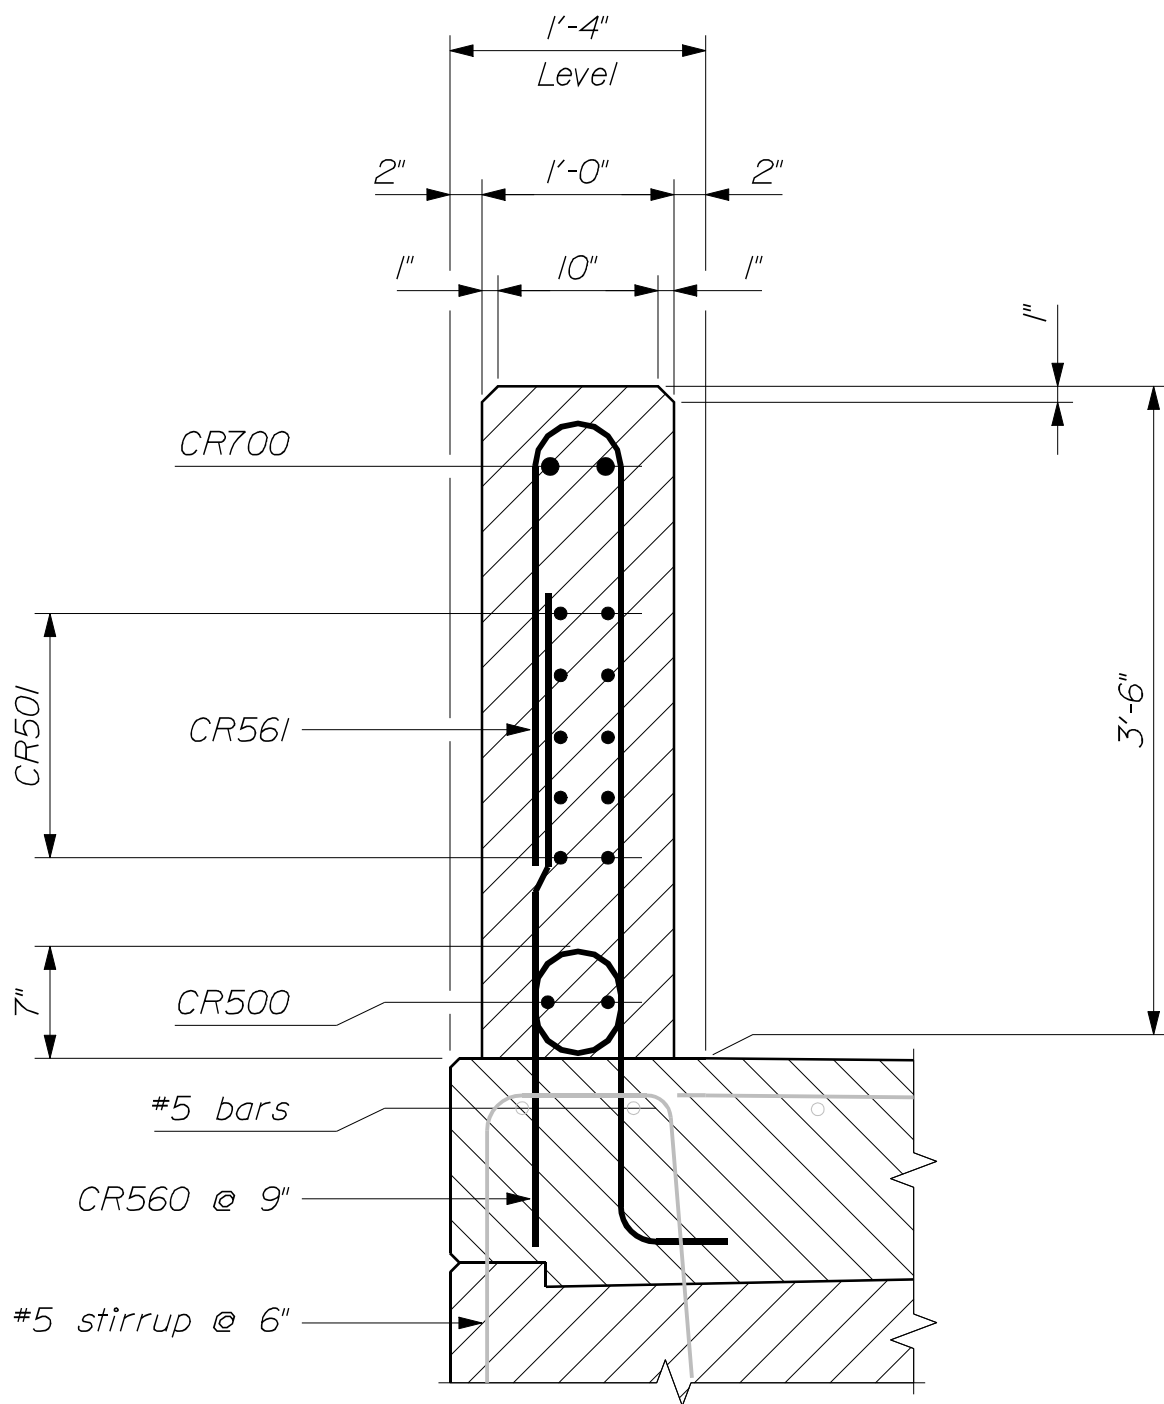


~ SECTION THROUGH POST ~
(Sidewalk Rail)


TEXAS CLASSIC RAIL
526(52)

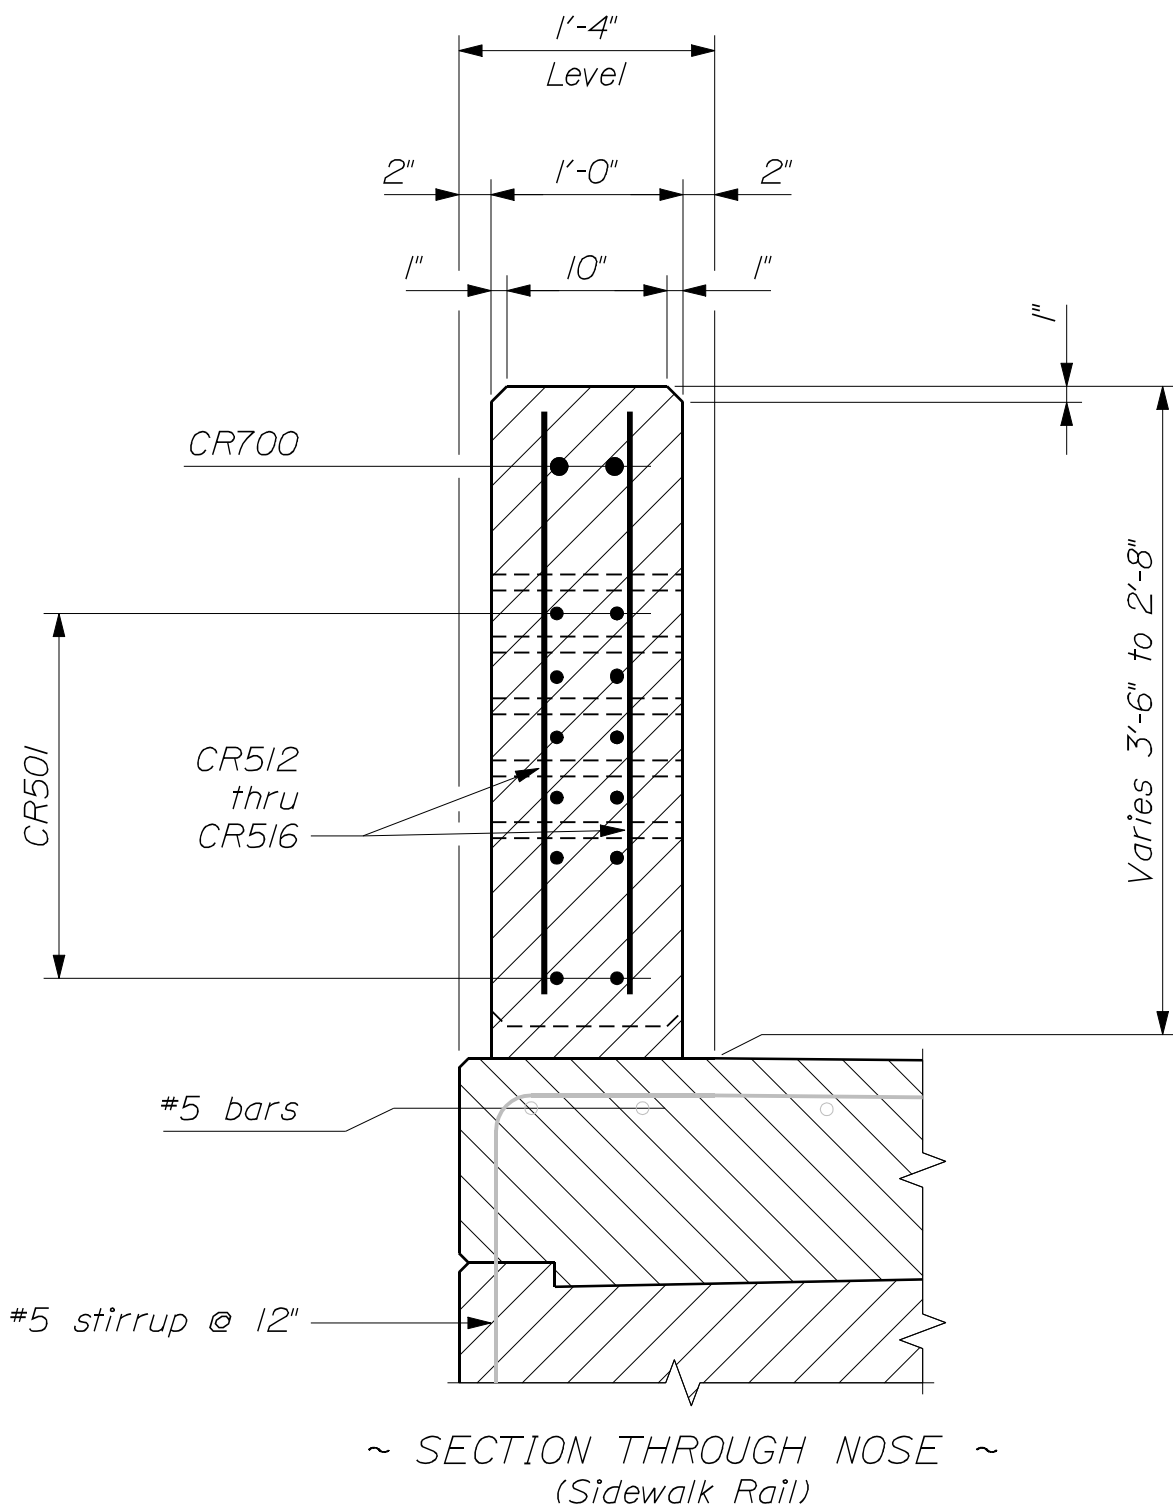

TEXAS CLASSIC RAIL
526(53)

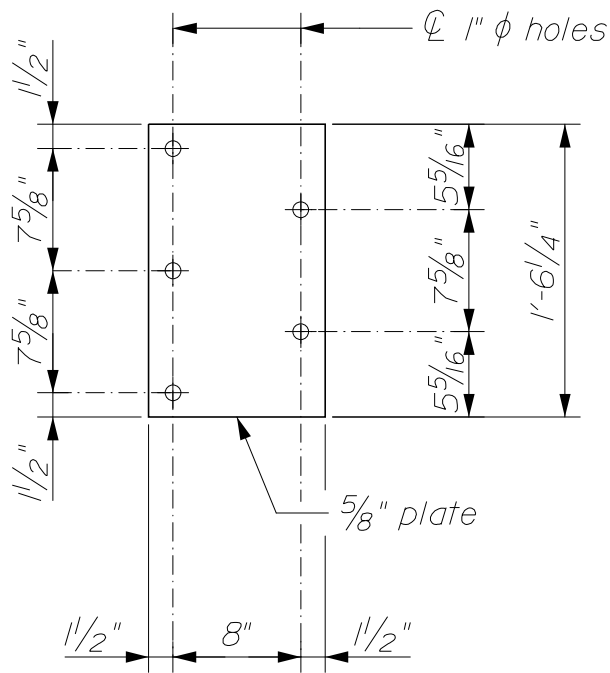


~ BEARING PLATE ~

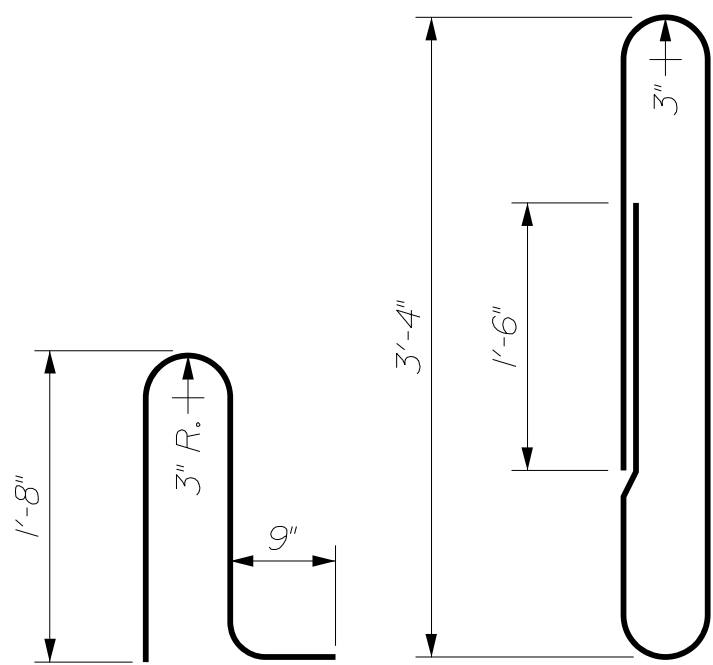

~ CR560 ~

~ CR56I ~

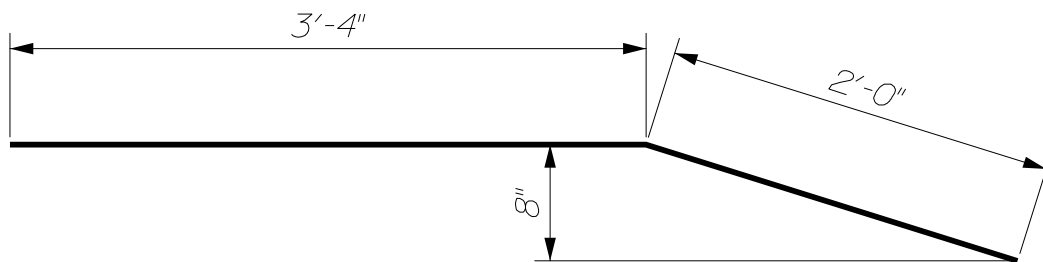

~ CR750 ~


SIDEWALK RAIL REINFORCING STEEL SCHEDULE					
Horizontal			Vertical		
Mark	Length	Location	Mark	Length	Location
CR500	30' max.	Rail Bot. & Curb	CR512	2'-11"	Nose
CR501	5'-3"	Nose/Post	CR513	2'-9"	Nose
			CR514	2'-7"	Nose
CR700	30' max.	Rail Top	CR515	2'-5"	Nose
CR750	5'-4"	Nose	CR516	2'-3"	Nose
			CR560	4'-0"	Rail & Post
			CR56I	8'-9"	Rail & Post

NOTES:

1. All work and materials shall conform to the provisions of Standard Specifications Section 526 - Concrete Barrier.
2. Vertical surfaces and recesses shall be plumb. Tops and bottoms of window openings may be level or parallel to the grade of the rail.
3. Contraction joints shall be located over piers on continuous structures and at 30-ft ± intervals along the length of all bridges. Do not extend reinforcing steel through the contraction joints.
4. Reinforcing steel shall have a minimum concrete cover of 2 inches.
5. The first digit following the letters of the bar mark indicates the size of the reinforcing bar. (CR500 = #5 bar.) All dimensions are out - to - out of bar.
6. Minimum lap splice lengths for CR500 and CR700 shall be in accordance with Standard Specifications Subsection 503.07, Splicing.
7. When the end post is cantilevered over an expansion joint, provide a block - out as shown.
8. For details of curb / sidewalk expansion dams where necessary, refer to the Standard Detail for the appropriate Expansion Device.
9. Bolt holes in concrete shall be formed by a method approved by the Resident.
10. Payment for threaded rods, nuts, washers and bearing plates will be considered incidental to the Texas Classic Rail pay item.
11. For details of the Concrete Transition Curb, refer to Standard Details Section 609, Precast Concrete Transition Curb. Payment for the transition curb will be considered incidental to the Texas Classic Rail pay item.


MATERIALS:

Concrete Class "LP"
Reinforcing Steel AASHTO M 31M/M 31, Grade 60
Bearing Plate AASHTO M 270M/M 270, Grade 36 (Galvanized)
Threaded rods AASHTO M 314, Grade 105 (Galvanized)

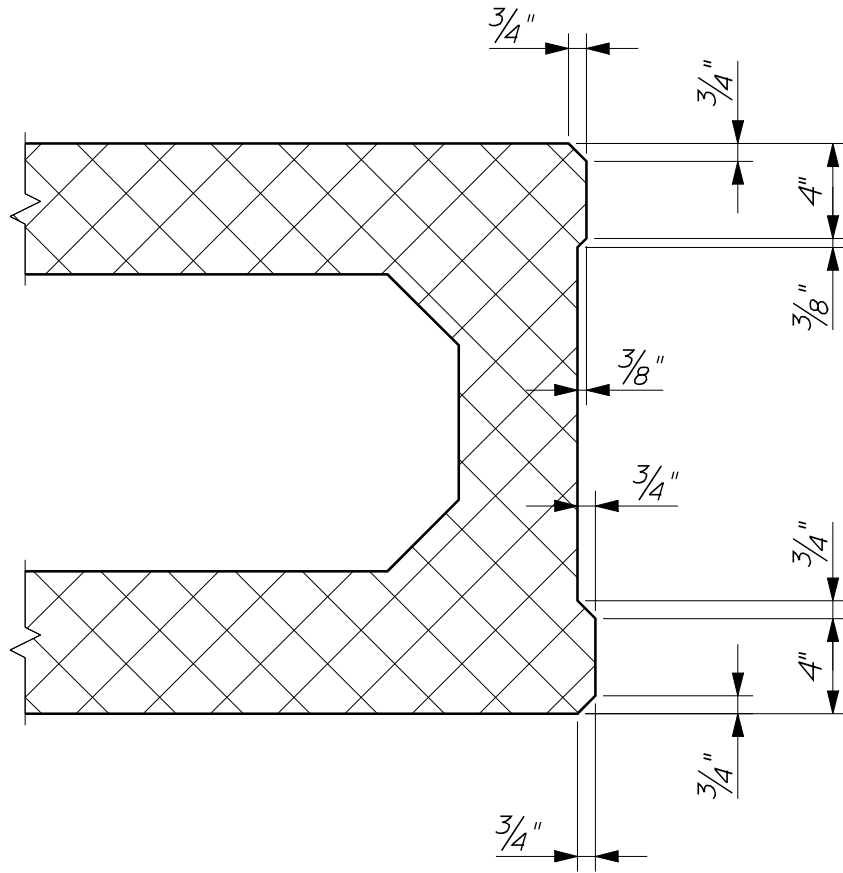

~ SHEAR KEY DIMENSIONS ~
(Typical for all precast slabs and box beams)


PRECAST SUPERSTRUCTURE
535(01)

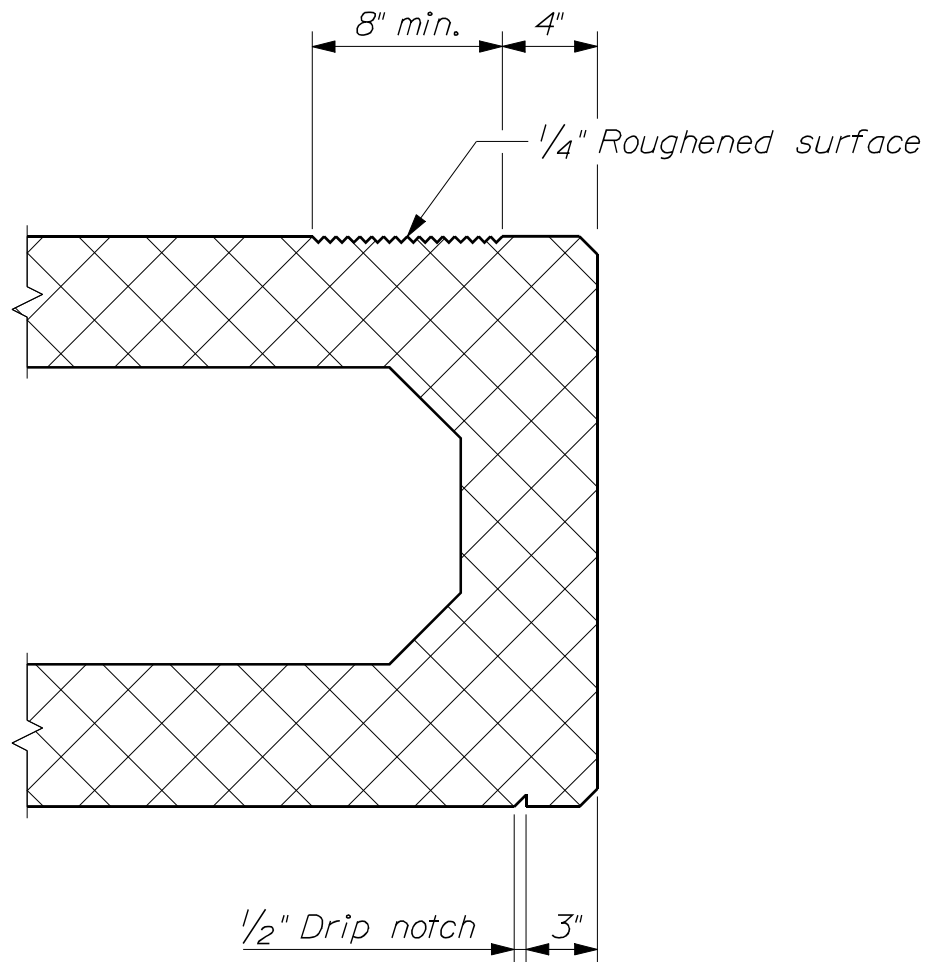


~ FASCIA DETAILS ~
 (Exterior units only)

(Entire top surface is roughened with reinforced C.I.P. slab)

PRECAST SUPERSTRUCTURE
 535(02)

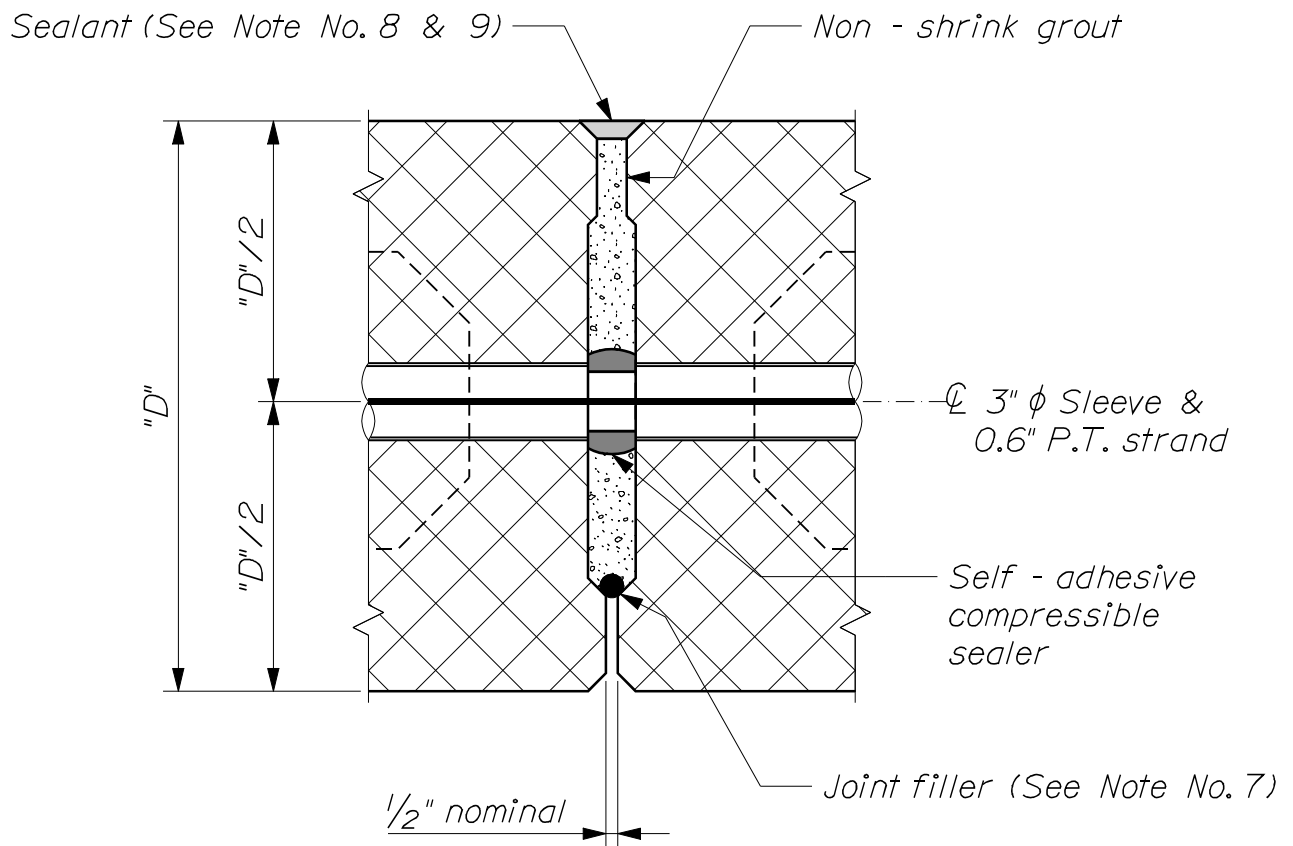


~ SHEAR KEY DETAIL ~
 (For precast slabs and box beams where "D" $\leq$ 24")

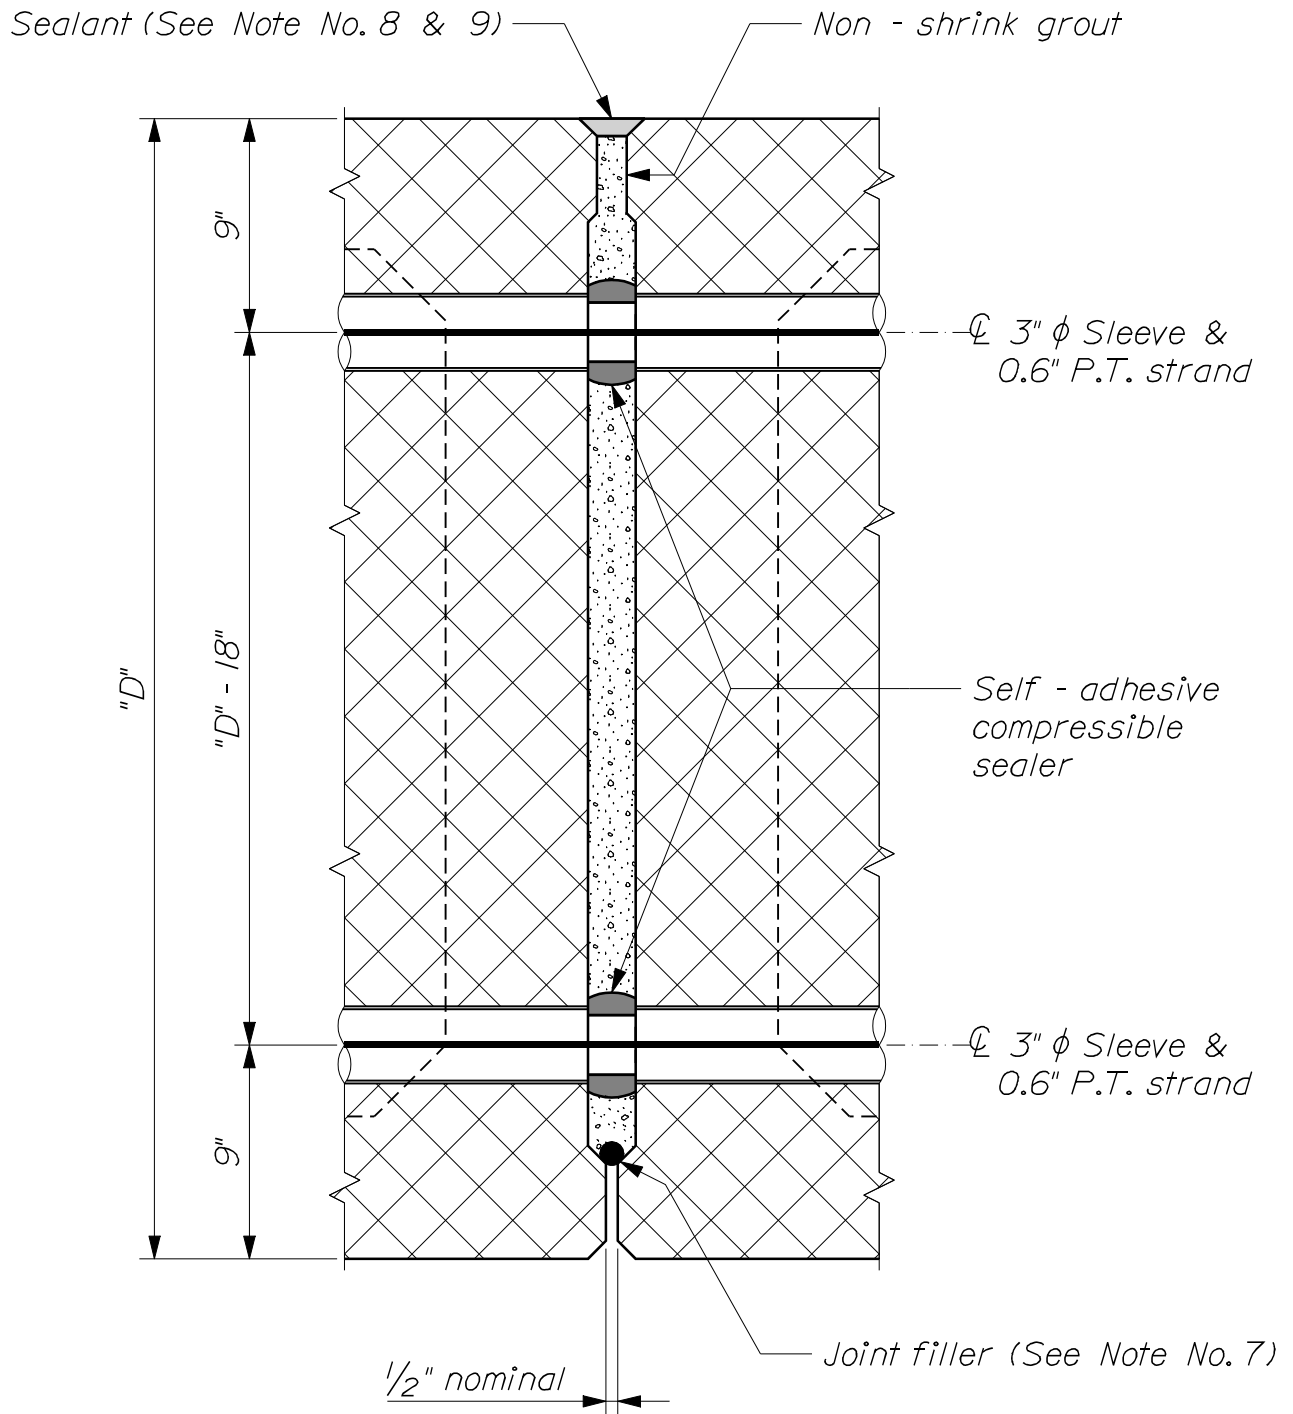


~ SHEAR KEY DETAIL ~
 (For precast box beams where "D" $\geq$ 27")

PRECAST SUPERSTRUCTURE
 535(04)

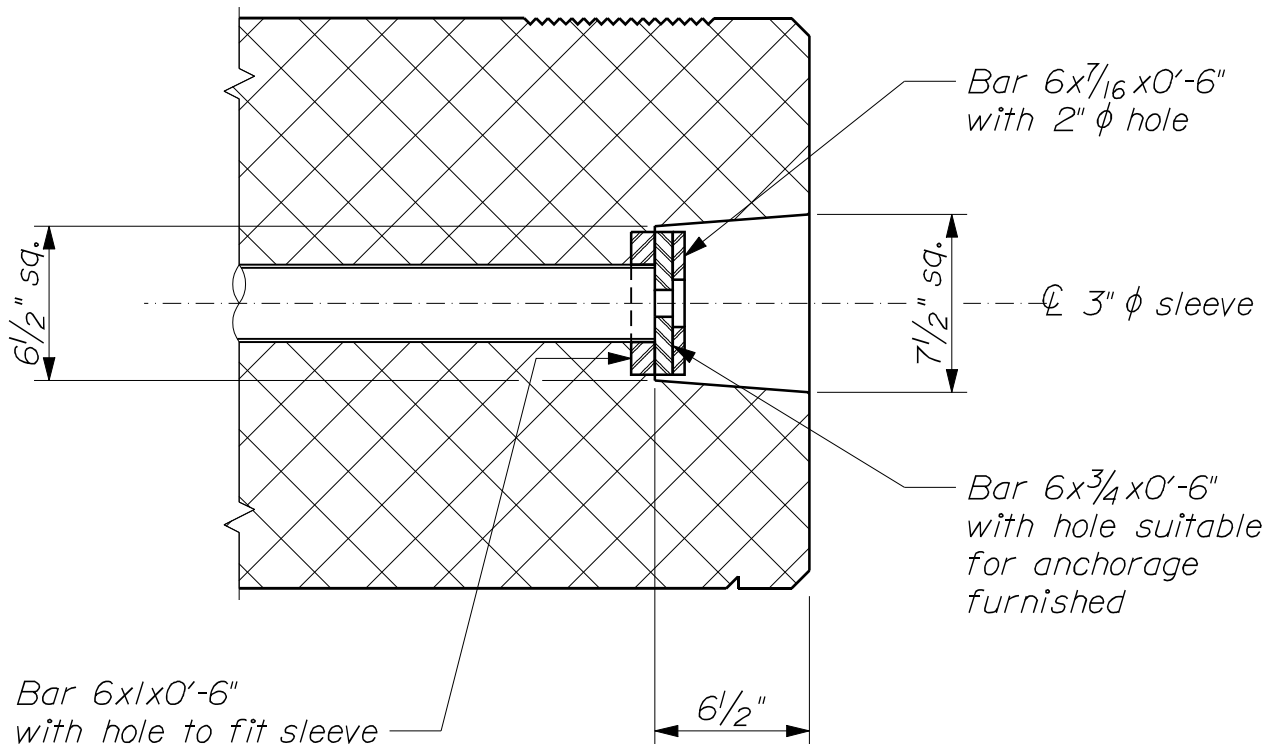

-- POST - TENSIONING BLOCK - OUT DETAIL --

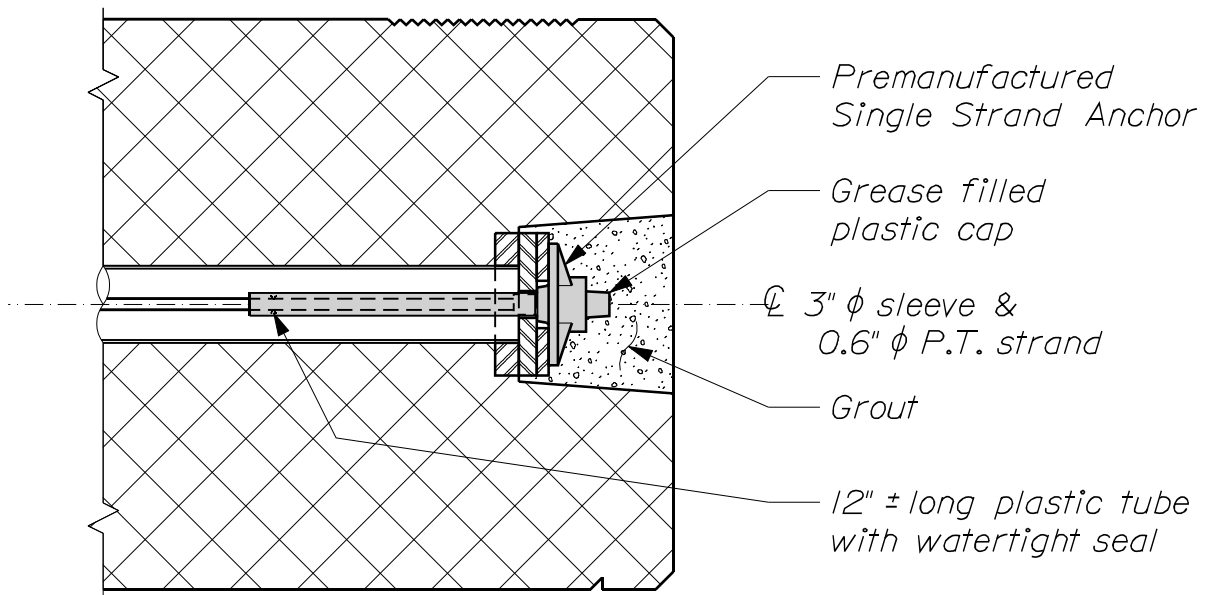


-- POST - TENSIONING ANCHORAGE DETAIL --


PRECAST SUPERSTRUCTURE
535(05)

* Anchoring Material = Fixed
Sealant = Expansion

℄ Bearing, Abutment

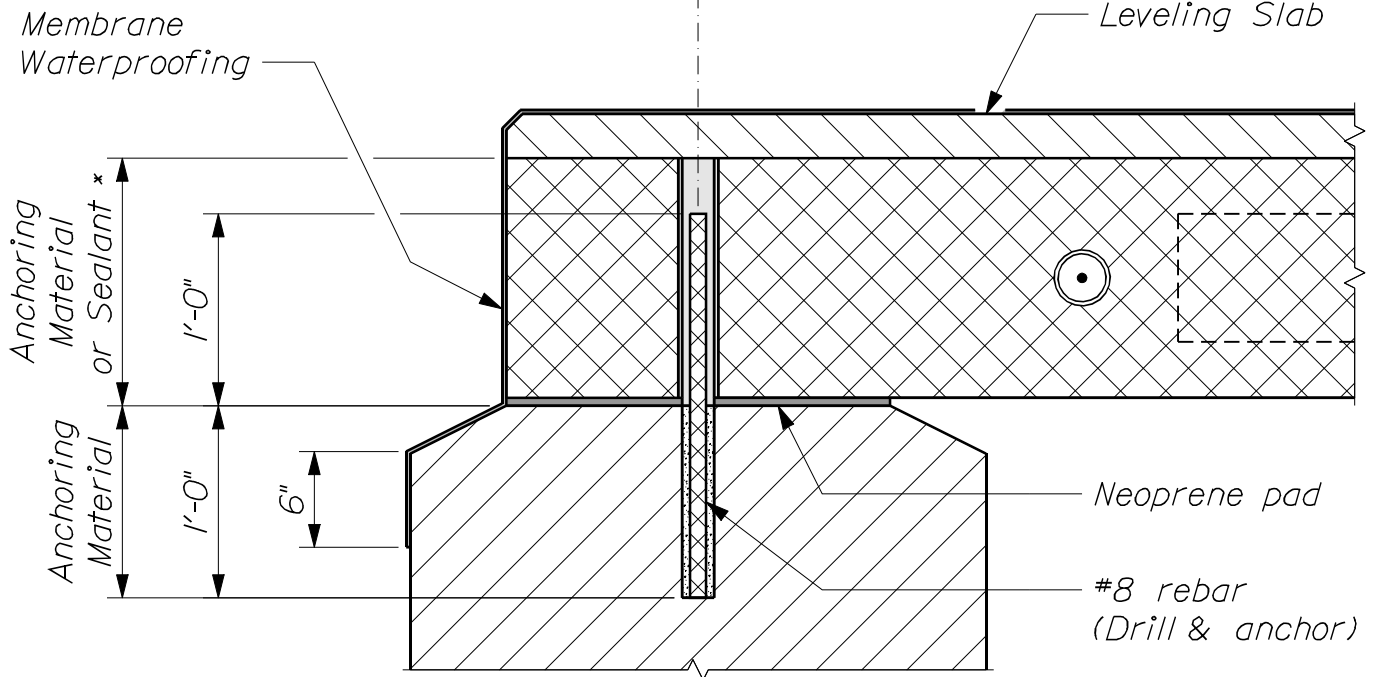

~ LONGITUDINAL SECTION ~

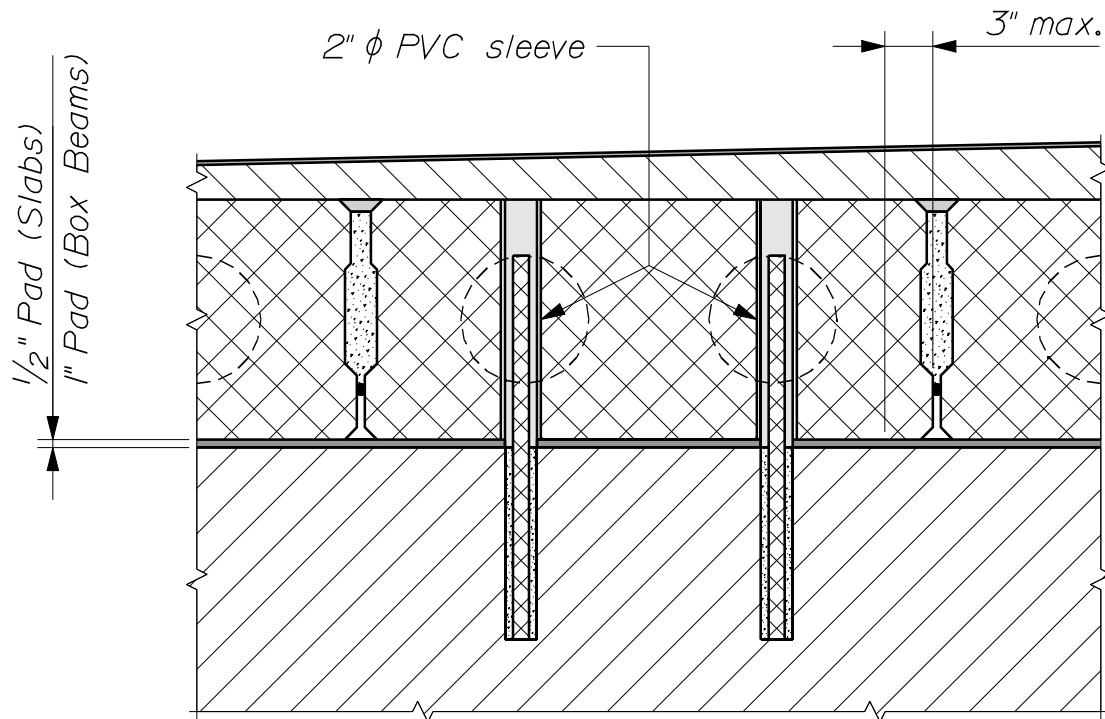


~ TRANSVERSE SECTION ~

PRECAST SUPERSTRUCTURE


535(06)

<i>PRECAST SLABS</i>						
<i>Slab Type</i>	<i>Nom. Width</i>	<i>Depth "D"</i>	<i>Void "ϕ_1"</i>	<i>Void "ϕ_2"</i>	<i>Spacing "X_1"</i>	<i>Spacing "X_2"</i>
<i>S36-12</i>	<i>36"</i>	<i>12"</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>
<i>S36-15</i>	<i>36"</i>	<i>15"</i>	<i>8"</i>	<i>--</i>	<i>10"</i>	<i>15$\frac{1}{2}$"</i>
<i>S36-18</i>	<i>36"</i>	<i>18"</i>	<i>10"</i>	<i>--</i>	<i>10"</i>	<i>15$\frac{1}{2}$"</i>
<i>S36-21</i>	<i>36"</i>	<i>21"</i>	<i>12"</i>	<i>--</i>	<i>10"</i>	<i>15$\frac{1}{2}$"</i>
<i>S48-12</i>	<i>48"</i>	<i>12"</i>	<i>--</i>	<i>--</i>	<i>--</i>	<i>--</i>
<i>S48-15</i>	<i>48"</i>	<i>15"</i>	<i>8"</i>	<i>8"</i>	<i>10"</i>	<i>13$\frac{3}{4}$"</i>
<i>S48-18</i>	<i>48"</i>	<i>18"</i>	<i>10"</i>	<i>10"</i>	<i>9$\frac{1}{2}$"</i>	<i>14$\frac{1}{4}$"</i>
<i>S48-21</i>	<i>48"</i>	<i>21"</i>	<i>12"</i>	<i>10"</i>	<i>9$\frac{1}{2}$"</i>	<i>14$\frac{1}{4}$"</i>


<i>PRECAST BOX BEAMS</i>					
<i>Box Type</i>	<i>Nom. Width</i>	<i>Depth "D"</i>	<i>Box Type</i>	<i>Nom. Width</i>	<i>Depth "D"</i>
<i>B36-24</i>	<i>36"</i>	<i>24"</i>	<i>B48-24</i>	<i>48"</i>	<i>24"</i>
<i>B36-27</i>	<i>36"</i>	<i>27"</i>	<i>B48-27</i>	<i>48"</i>	<i>27"</i>
<i>B36-30</i>	<i>36"</i>	<i>30"</i>	<i>B48-30</i>	<i>48"</i>	<i>30"</i>
<i>B36-33</i>	<i>36"</i>	<i>33"</i>	<i>B48-33</i>	<i>48"</i>	<i>33"</i>
<i>B36-36</i>	<i>36"</i>	<i>36"</i>	<i>B48-36</i>	<i>48"</i>	<i>36"</i>
<i>B36-39</i>	<i>36"</i>	<i>39"</i>	<i>B48-39</i>	<i>48"</i>	<i>39"</i>
<i>B36-42</i>	<i>36"</i>	<i>42"</i>	<i>B48-42</i>	<i>48"</i>	<i>42"</i>
<i>B36-45</i>	<i>36"</i>	<i>45"</i>	<i>B48-45</i>	<i>48"</i>	<i>45"</i>
<i>B36-48</i>	<i>36"</i>	<i>48"</i>	<i>B48-48</i>	<i>48"</i>	<i>48"</i>

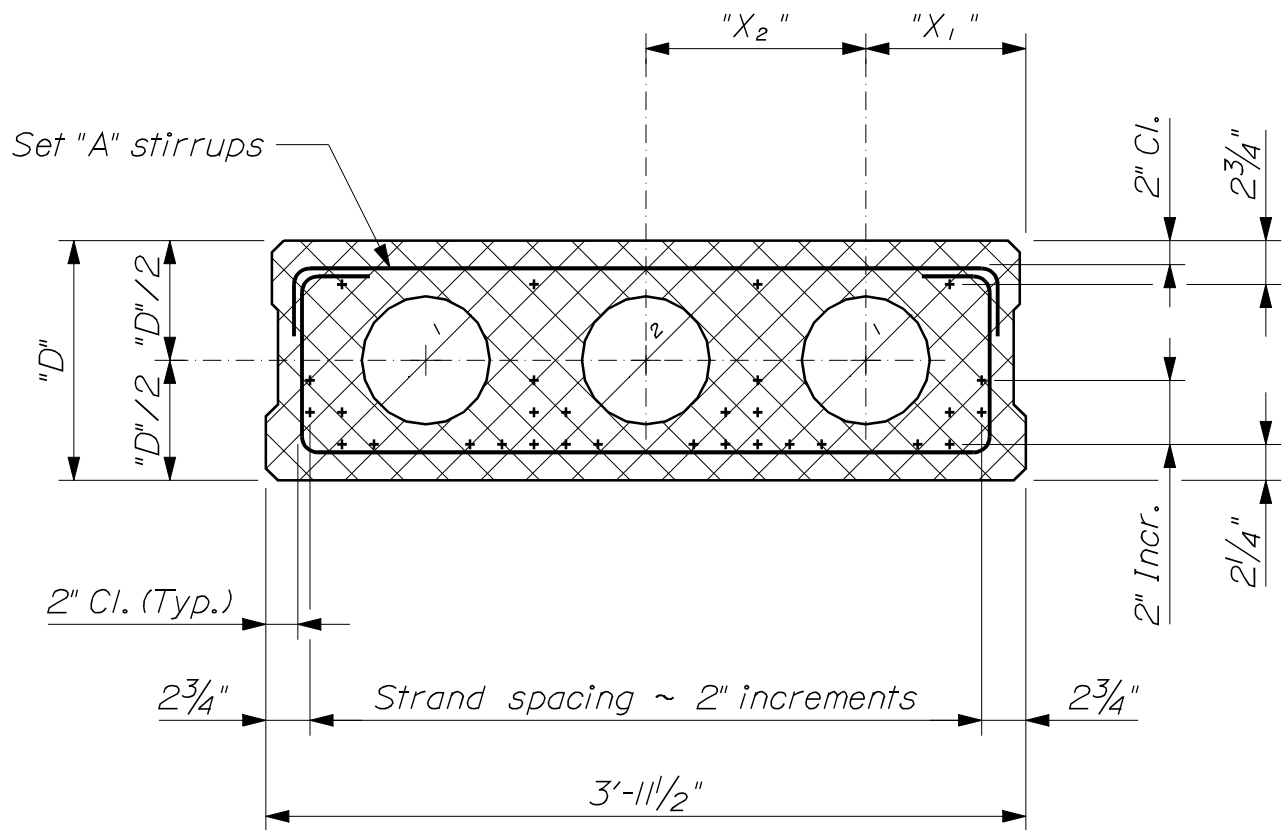

~ TYPICAL SECTION ~
(48" Wide Precast Slab)

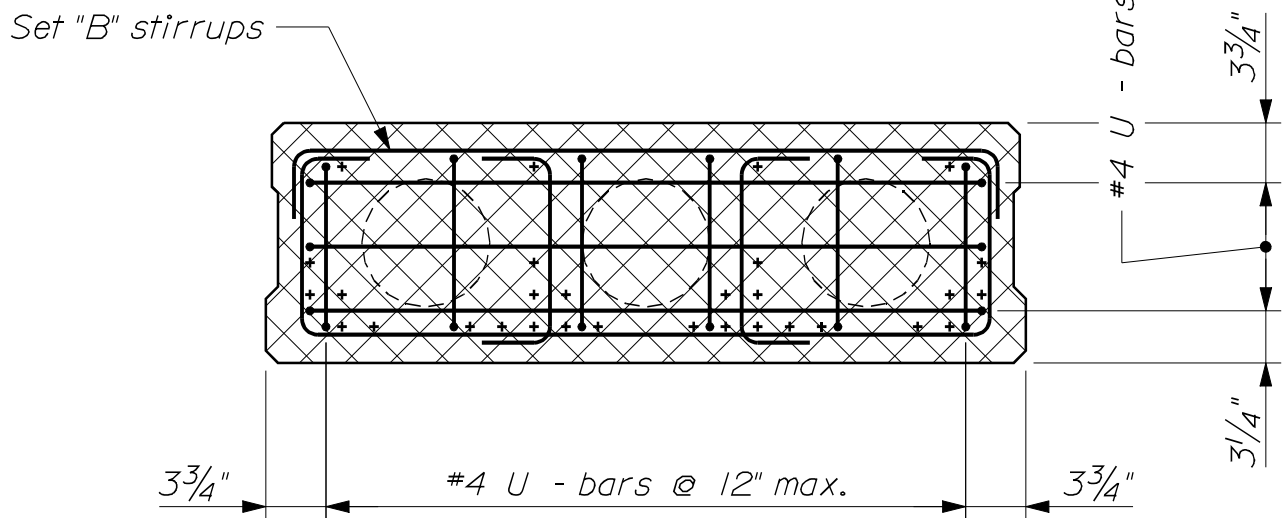


~ END BLOCK SECTION ~
(48" Wide Precast Slab)

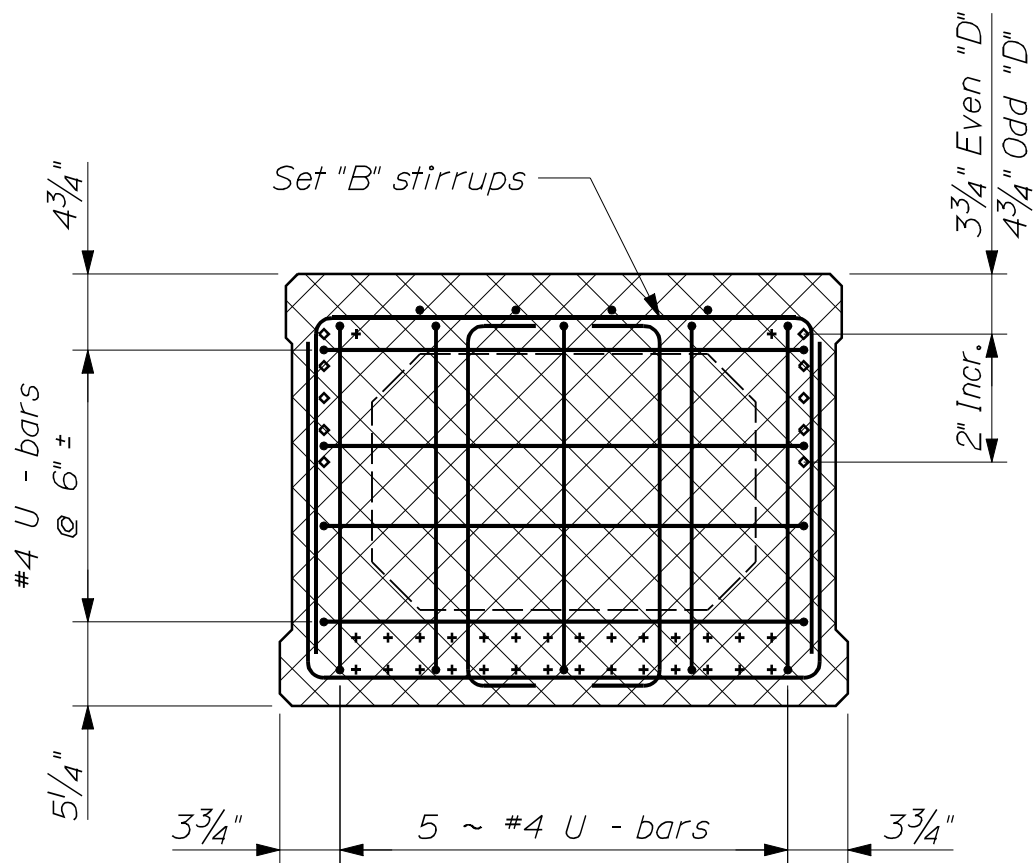

~ END BLOCK SECTION ~
(36" Wide Precast Box Beam)


- + Straight Strands
- ◇ Draped Strands

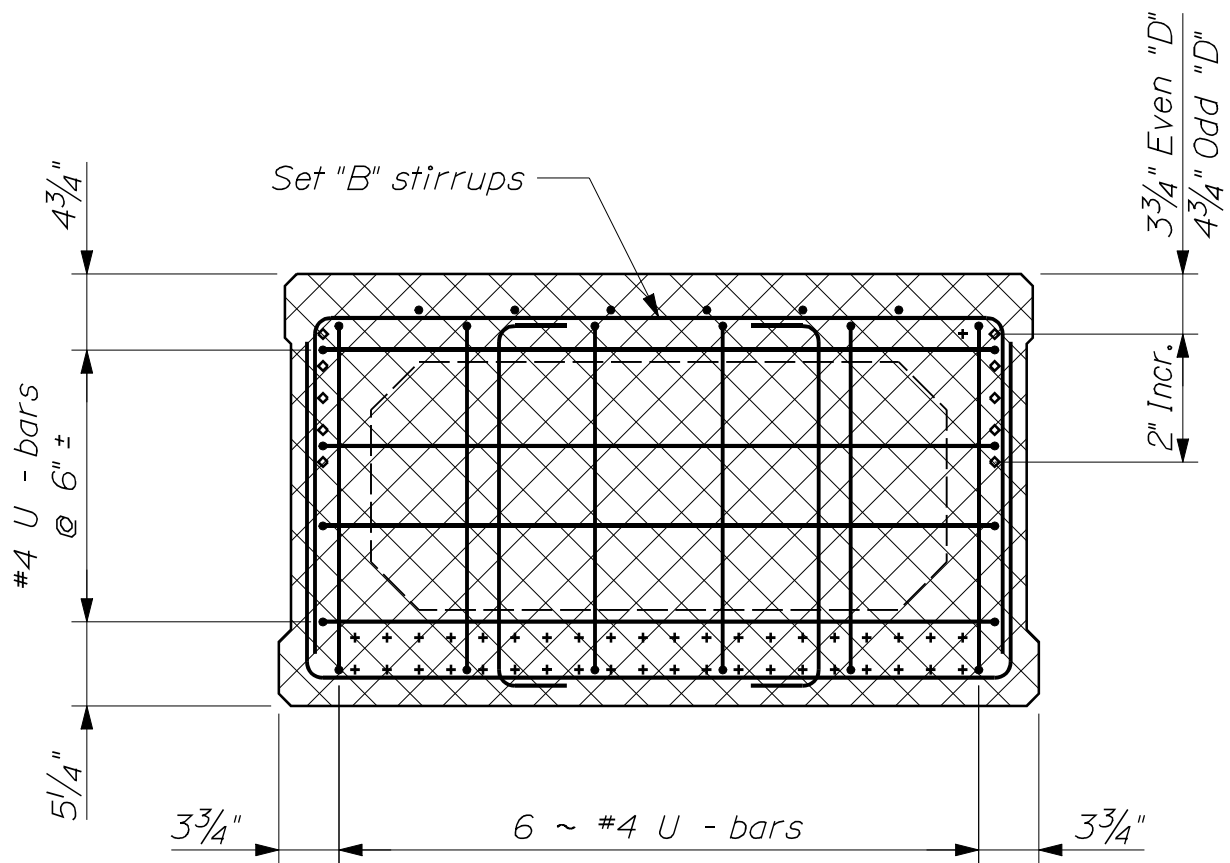


~ END BLOCK SECTION ~
(48" Wide Precast Box Beam)

- + Straight Strands
- ◇ Draped Strands


PRECAST SUPERSTRUCTURE
535(13)

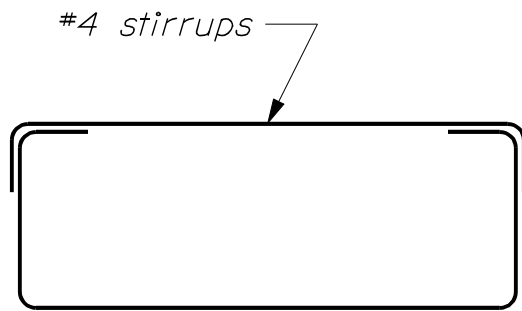

~ SET "A" STIRRUPS ~
(Precast Slab)

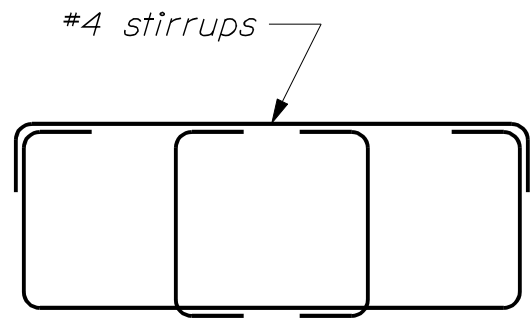


~ SET "B" STIRRUPS ~
(Precast Slab)

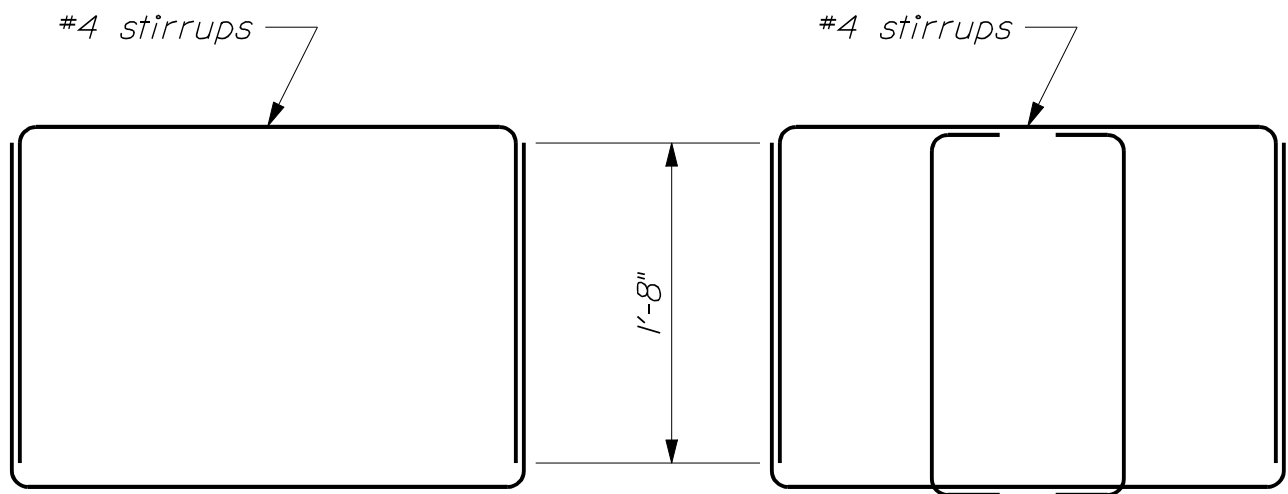


~ SET "A" STIRRUPS ~
(Precast Box Beam)


~ SET "B" STIRRUPS ~
(Precast Box Beam)

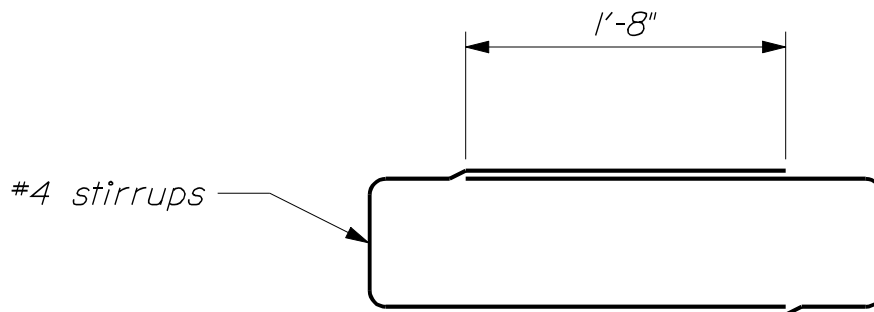


~ ALTERNATE STIRRUP CONFIGURATION ~
(Always use for S36-12 and S48-12 slabs)

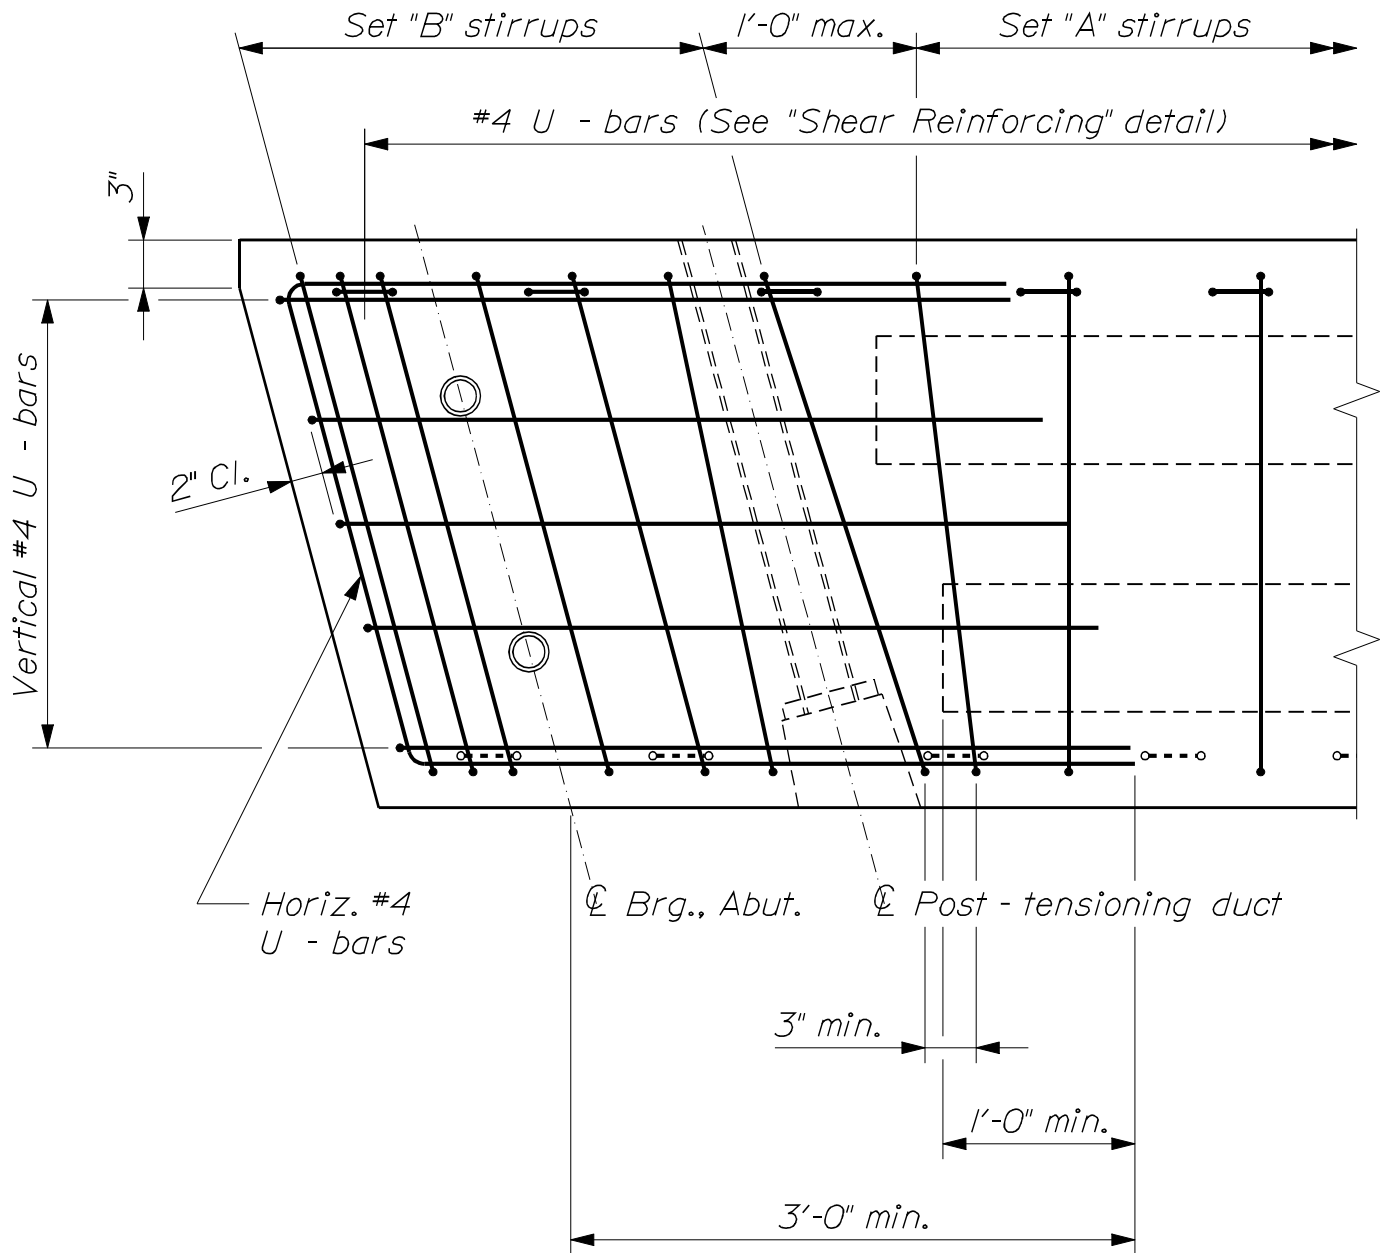

~ TYPICAL PRECAST UNIT PLAN ~
 (Voided Slab shown; Box Beam similar)

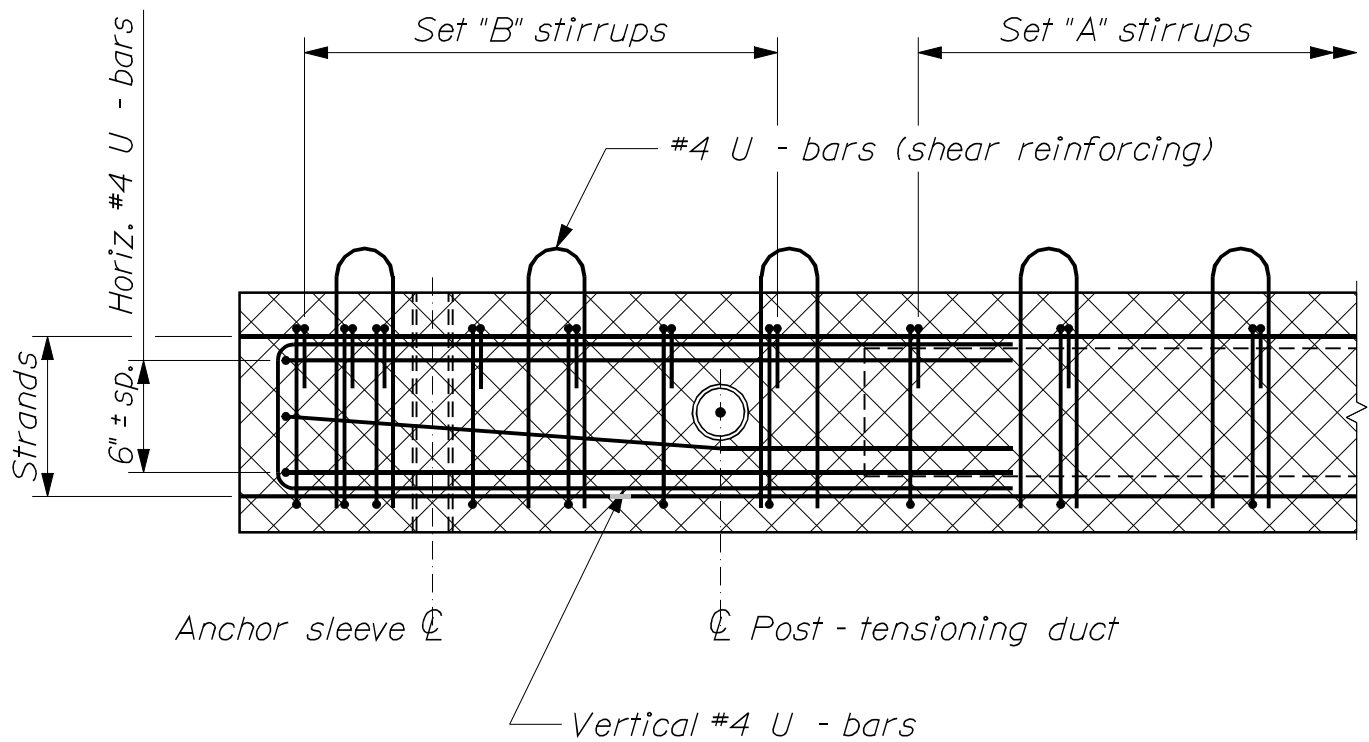

~ TYPICAL LONGITUDINAL SECTION ~

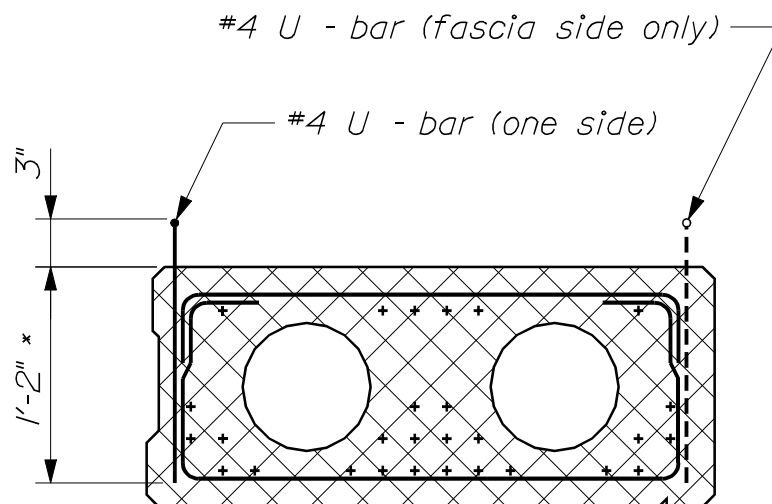

~ SHEAR REINFORCING ~
(For use with reinforced C.I.P. slab)


* 10" for S12 slabs
12" for S15 slabs

PRECAST SUPERSTRUCTURE
535(16)

NOTES:


- 1. Prestressing strands shown in the various details are schematic in nature and do not represent any specific design requirements.*
- 2. Reinforcing steel shown is the required minimum. Individual designs may vary. Bending details and hooks shall conform to the recommendations of the current revision of ACI Standards 315 and 318.*
- 3. For box beams, unless the design drawings specify a separate reinforced concrete slab to be constructed over the box beams, additional upper #4 stirrups shall be provided such that the maximum spacing of the upper stirrups over the voided areas is 12 inches.*
- 4. All plates in the post - tensioning block - out detail shall be galvanized in accordance with ASTM A 123.*
- 5. Concrete around lifting devices shall be recessed a minimum of one inch below the surface. The recess shall be patched with an approved grout after removal of the lifting device.*
- 6. For bridge skew angles up to 15°, the neoprene pad at the bearing area shall cover the entire bridge seat. Seams perpendicular to the centerline of bearing will be allowed provided that the seam occurs near the center of a precast unit with the unit bearing approximately equally on both pad pieces. For bridge skew angles greater than 15°, other bearing area treatment may be shown on the design drawings.*
- 7. The Contractor will be responsible for providing a joint filler system adequate to contain the keyway grout during placement. No extra payment will be made for such system or for necessary repairs or other extra work if the joint filler system fails.*
- 8. The shear key sealant shall be one of the polyurethane - based products listed on the MaineDOT Qualified Products List of Pour - In - Place Joint Sealant.*
- 9. When a high - performance waterproofing membrane is to be applied directly to the top of the precast units, eliminate the shear key sealant and fill the shear key to the top of the unit with non - shrink grout.*
- 10. If there is a conflict between these Standard Details and the Design Drawings, the requirements of the Design Drawings shall be followed.*

DIVISION 600
MISCELLANEOUS
CONSTRUCTION

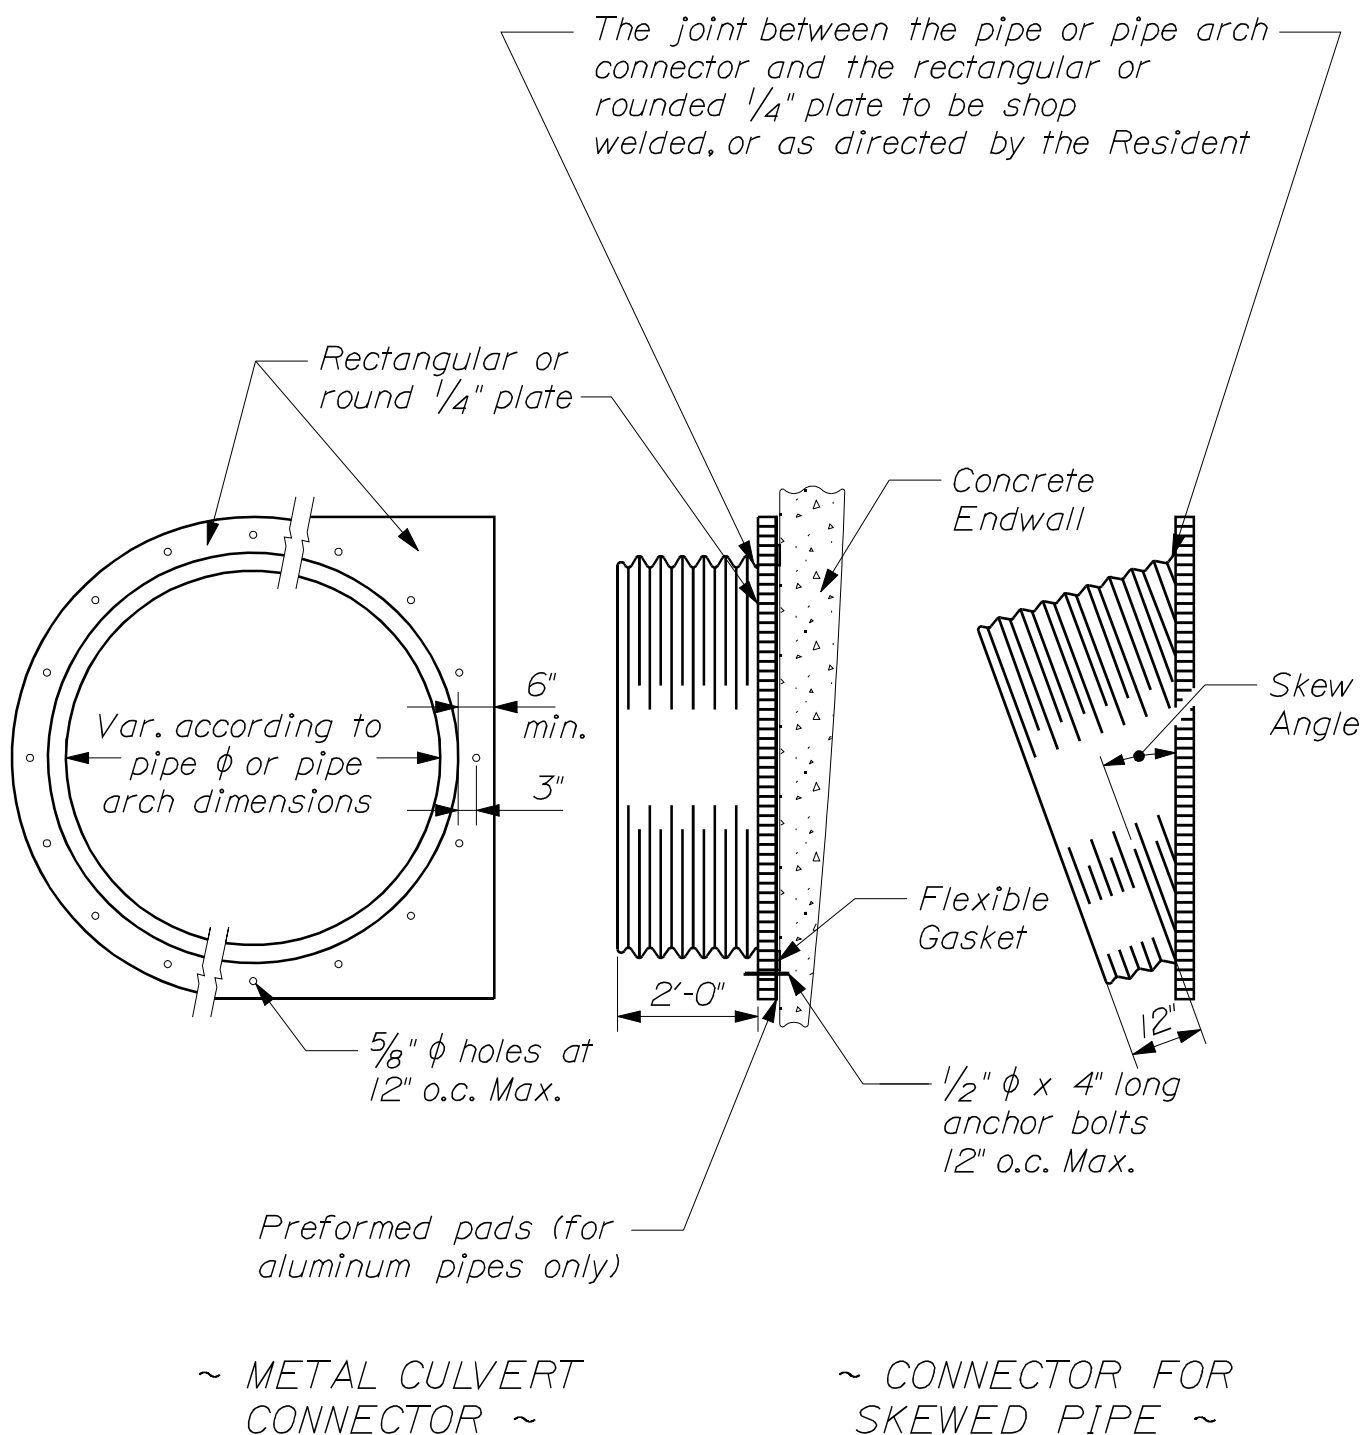

CONCRETE BOX CULVERT EXTENSION USING
CORRUGATED METAL PIPE & PIPE ARCHES

603(01)

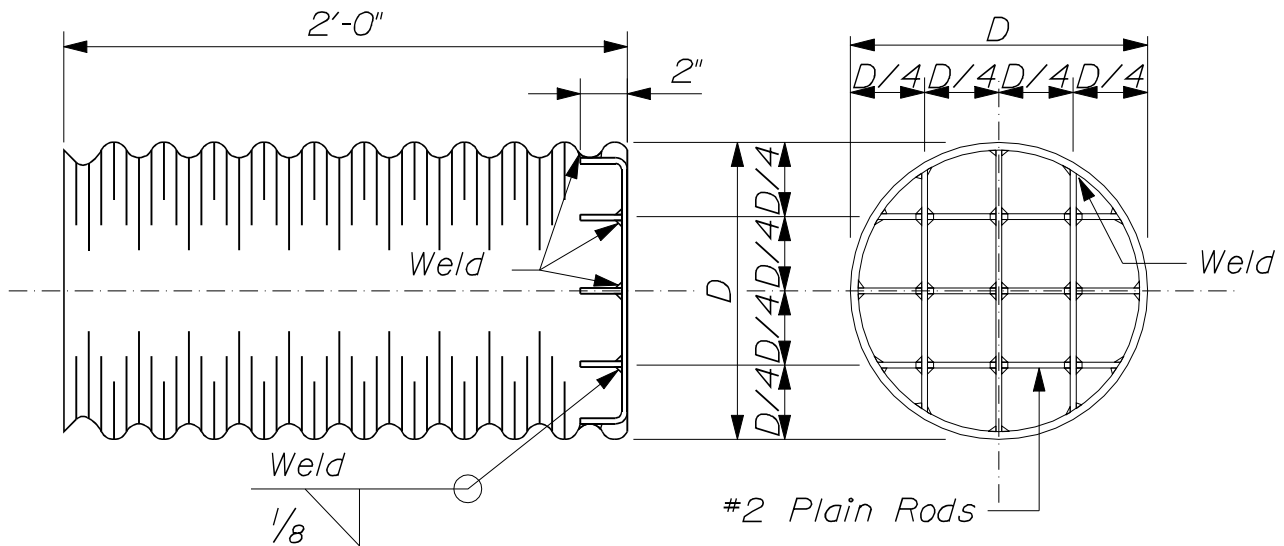


~ INLET GRATE UNIT ~


NOTES:

1. All units to be complete shop assembly.
2. All units to have one shop coat of approved aluminum paint.
3. An elbow shall be installed if directed by the Resident to provide a horizontal grate, it shall be paid for as 3 additional feet of the type and size of pipe involved. (In addition to the length measured through the elbow which shall be measured along the top of the pipe.)
4. Rods shall conform to the requirements of Section 709.01 of the Standard Specifications.
5. Pipe for inlet grate unit shall be the same type that is used to connect into the catch basin.

* 24" Inlet Grate Unit.

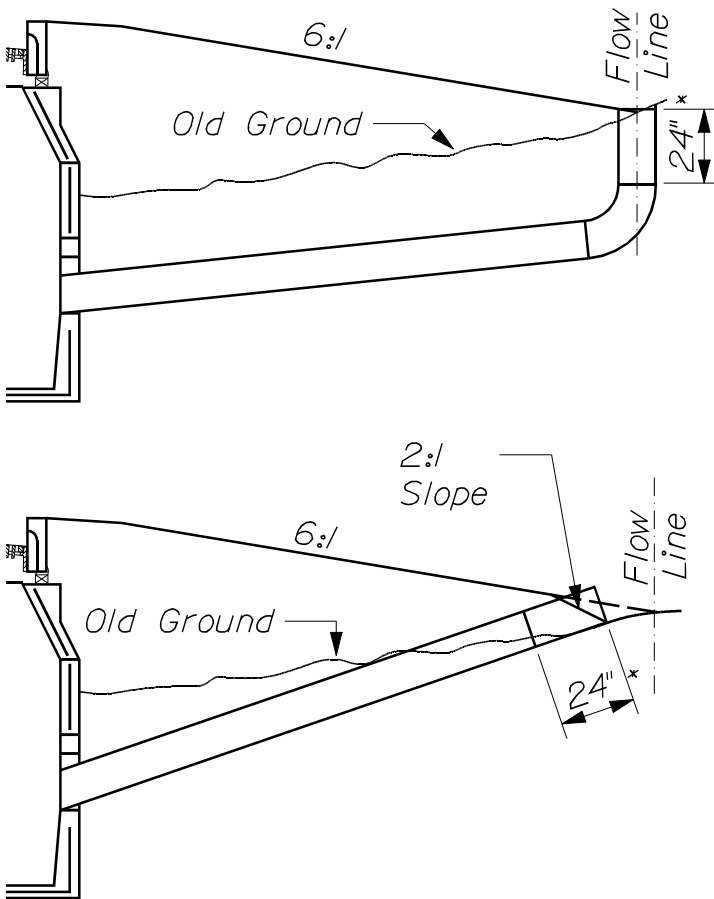


~ INLET UNITS IN FILL AREAS ~

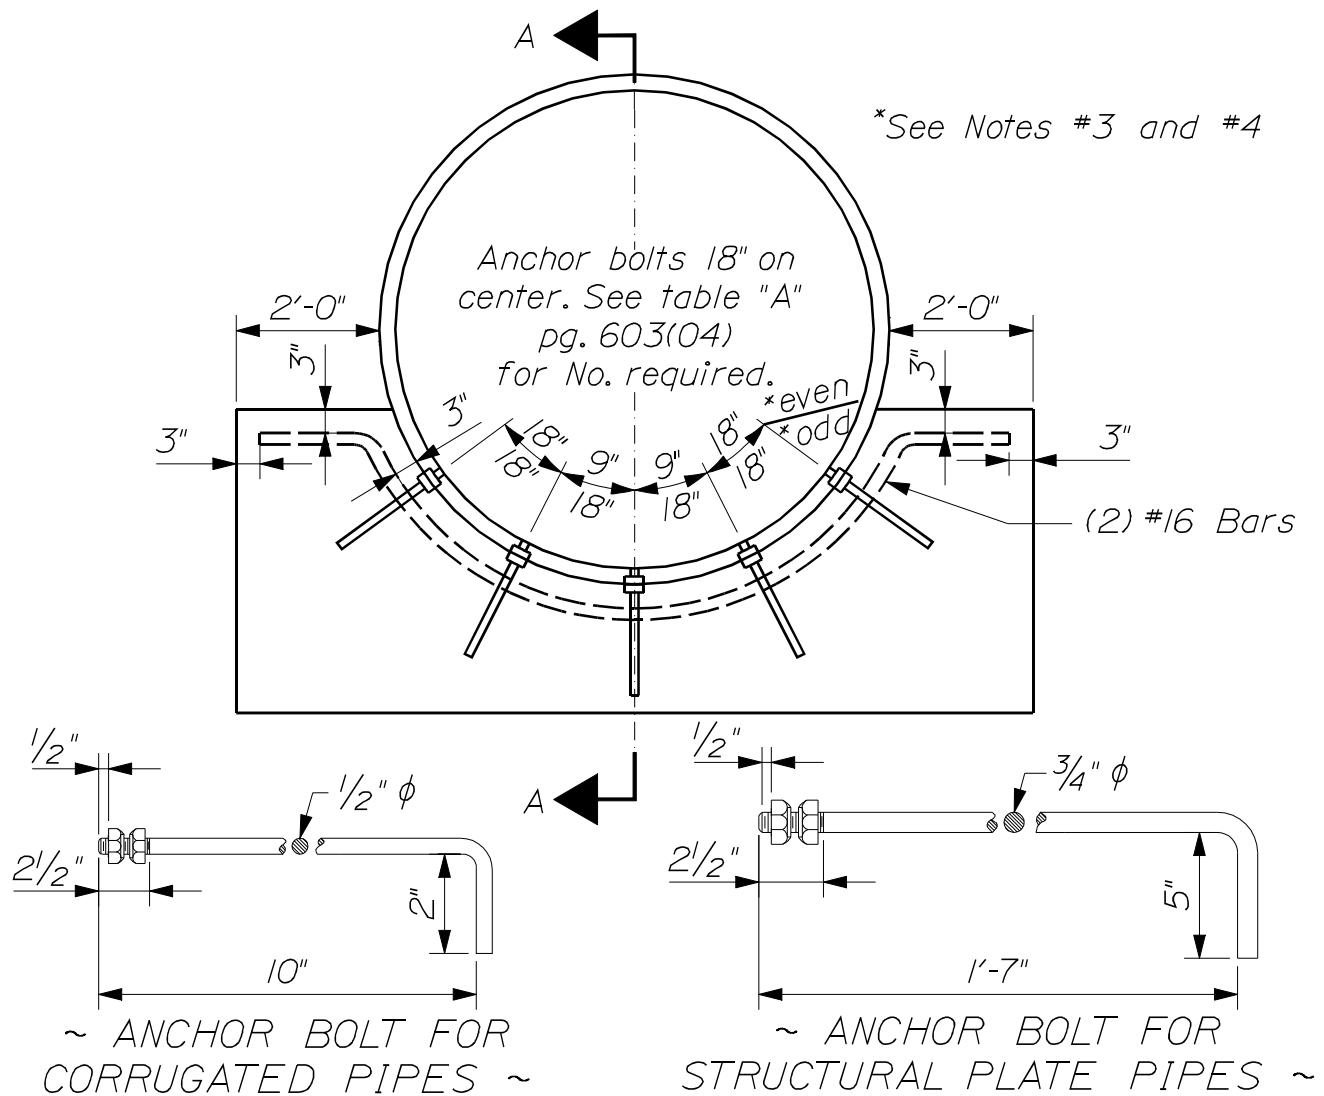

NOTES:

1. For corrugated pipe, anchor bolt shall be placed in the second valley.
2. See Table "A" for "X" dimension.
3. For pipes with an even number of bolts no bolt shall be placed on CL, & x Dimension shall be split and measured from CL for initial bolt placement. The X dimension shall then be measured from the CL of the established bolt holes.
4. Pipes with an odd number of bolts shall have the first bolt placed on bottom @ CL & X dimension shall be measured from CL for all other bolt placements.

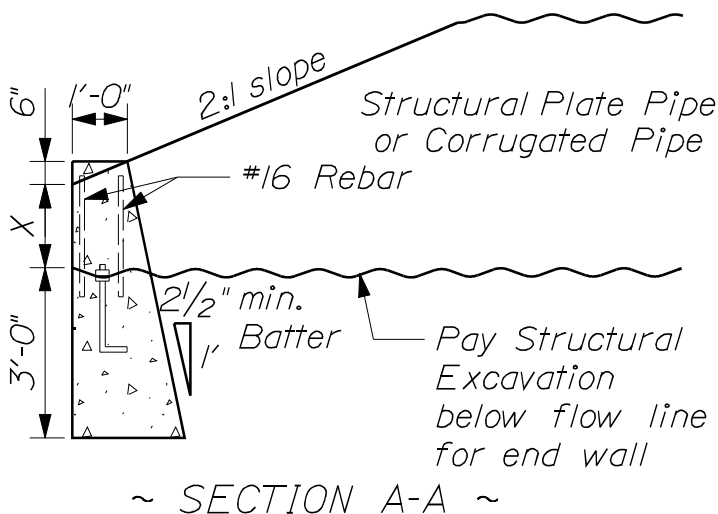

CONCRETE INLET ENDWALL
603(03)

TABLE A


CORRUGATED PIPES		
PIPE I.D.	NO. OF BOLTS REQUIRED	"X" DIMENSION
60"	4	1'-6"
66"	4	1'-6"
72"	4	1'-6"
78"	5	1'-6"
84"	5	1'-6"
STRUCTURAL PLATE PIPE		
PIPE I.D.	NO. OF BOLTS REQUIRED	"X" DIMENSION
72"	4	1'-6"
78"	5	1'-7 $\frac{1}{2}$ "
84"	5	1'-9"
90"	5	1'-10 $\frac{1}{2}$ "
96"	6	2'-0"
102"	6	2'-1 $\frac{1}{2}$ "
108"	6	2'-3"
114"	7	2'-4 $\frac{1}{2}$ "
120"	7	2'-6"
126"	7	2'-7 $\frac{1}{2}$ "
132"	8	2'-9"
138"	8	2'-10 $\frac{1}{2}$ "
144"	9	3'-0"
150"	9	3'-1 $\frac{1}{2}$ "
156"	9	3'-3"
162"	10	3'-4 $\frac{1}{2}$ "
168"	10	3'-6"
174"	10	3'-7 $\frac{1}{2}$ "
180"	11	3'-9"

NOTES:

1. Culverts installed under 2:1 slopes shall have Riprap laid on 2:1 slope with no ditch transitions.
2. Excavation required to grade culvert inlets and outlets as shown will not be paid separately, but will be incidental to the culvert.
3. Anchor bolts will be incidental to the concrete items.
4. Concrete endwall shall be structural concrete class "A" and shall be paid for as Item 502.32 or Item 502.329, Structural Concrete Culvert Endwall. Reinforcing steel will not be paid for separately but will be considered incidental to Item 502.32 or Item 502.329.
5. Standard galvanized carriage or machine bolts $\frac{1}{2}$ " x 1' long or $\frac{3}{4}$ " x 2' long with minimum 2 $\frac{1}{2}$ " thread may be furnished in place of anchor bolts. Washers shall be furnished at the head of each bolt.
6. Bolt material shall conform to ASTM F568 Class 4.6. Nuts shall conform to ASTM A563M. Bolts, nuts, and washers shall be hot dip galvanized after fabrication to meet ASTM A153.

CONCRETE INLET ENDWALL

603(04)

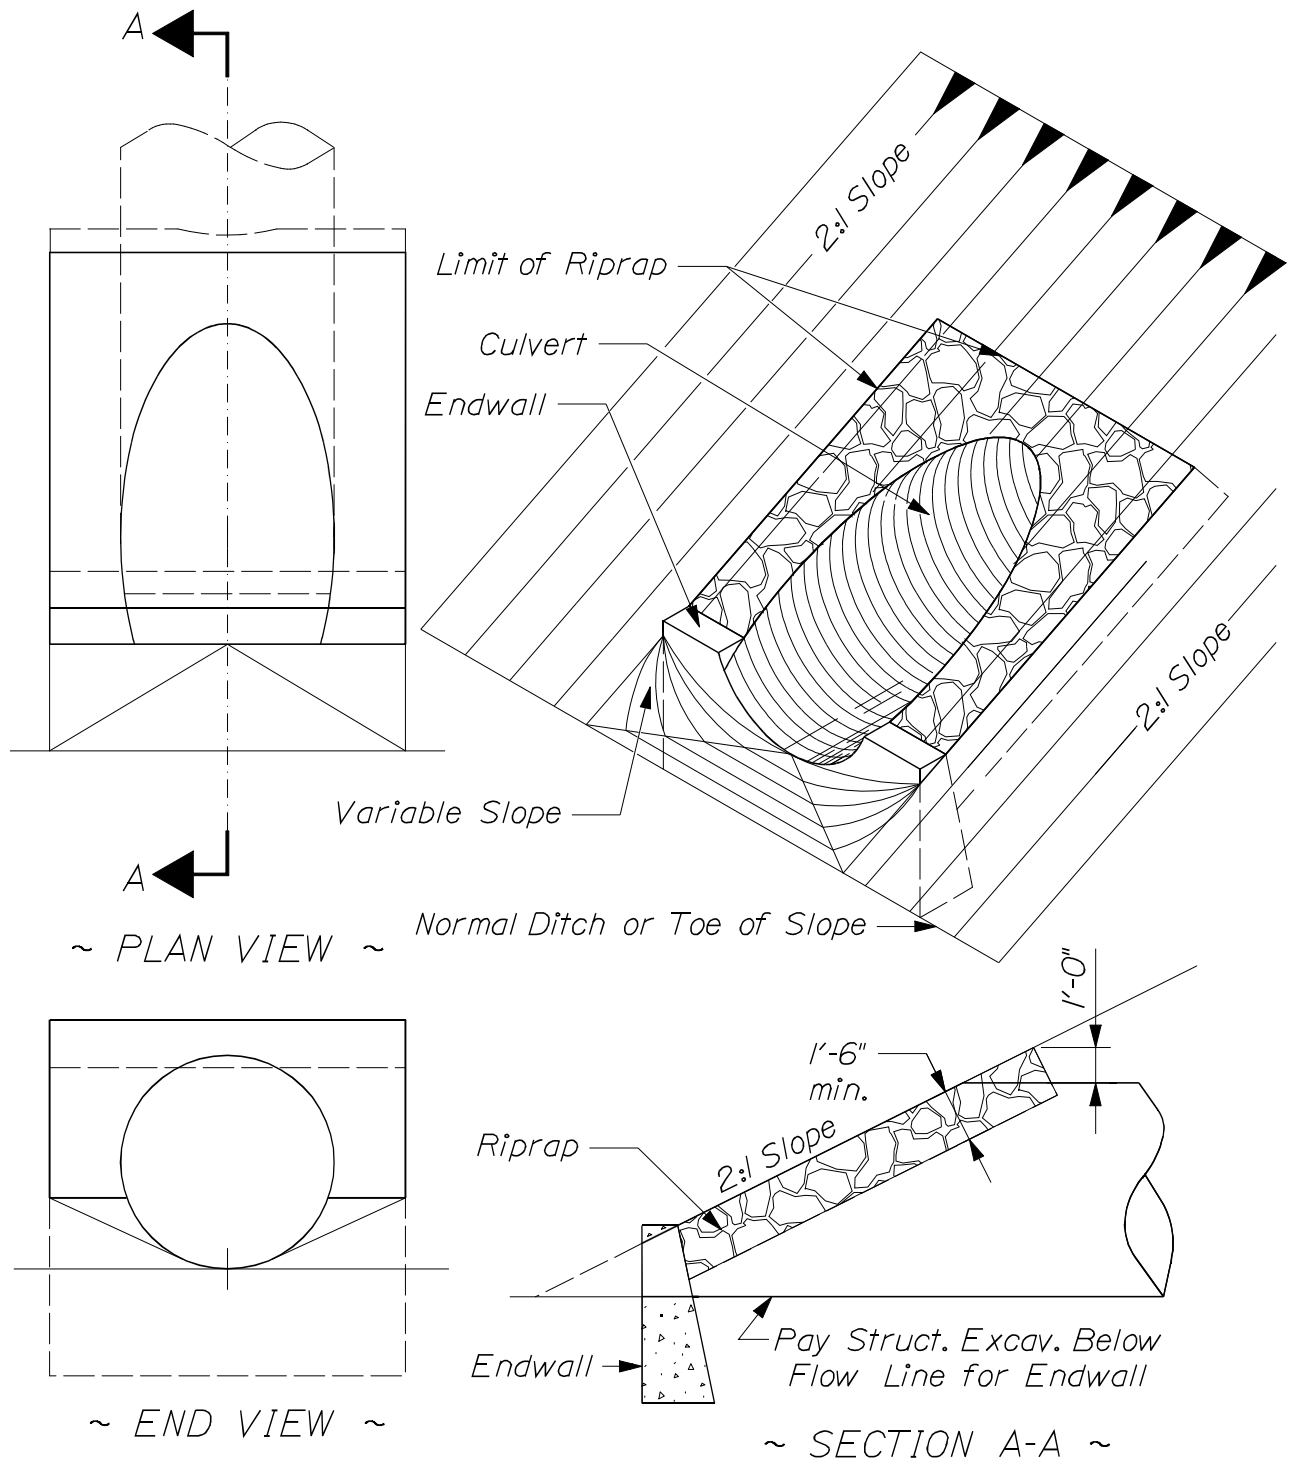

CONCRETE INLET ENDWALLS FOR RIVETED AND
STRUCTURAL PLATE PIPES 60" TO 180" IN 2:1 SLOPES
603(05)

CIRCULAR CULVERT PIPE (NOMINAL WALL THICKNESS IN INCHES EXCEPT M294 PIPE)												
DIAMETER	CORRUGATED METAL PIPE			SPIRAL RIB (TYPE IR) (B)	PLASTIC PIPE		REINFORCED CONCRETE PIPE					
	OPTION I / III				OPTION I / III	OPTION III	OPTION I / III					
	M218	M274 (A)	M246				M197	M274 (A)	M197	M294 DUAL-WALL PIPE STIFFNESS KPa @5% DEFL.	M278 PIPE STIFFNESS KPa	M170 CLASS III WALL A
12"	0.079	0.064	0.064	0.075			345		320	1 3/4	2	2 3/4
15"	0.079	0.064	0.064	0.075			290		320	1 7/8	2 1/4	3
18"	0.109	0.079	0.079	0.075	0.079	0.106	275			2	2 1/2	3 1/4
21"	0.109	0.079	0.079	0.075	0.079	0.106	260			2 1/4	2 3/4	3 1/2
24"	0.109	0.079	0.079	0.075	0.079	0.106	235			2 1/2	3	3 3/4
27"	0.109	0.079	0.079	0.105			205			2 5/8	3 1/4	4
30"	0.109	0.079	0.079	0.105	0.110	0.134	195			2 3/4	3 1/2	4 1/4
33"	0.109	0.079	0.079	0.105						2 7/8	3 3/4	4 1/2
36"	0.109	0.079	0.079		0.110	0.134	150			3	4	4 3/4
36" (I)		0.079	0.079	0.075								
42"	0.138	0.109	0.109				140			3 1/2	4 1/2	5 1/4
42" (I)		0.079	0.079	0.105	0.110							
48"	0.138	0.109	0.109				125			4	5	5 3/4
48" (I)		0.079	0.079	0.105	0.110							
54"	0.168	0.138	0.138				110			4 1/2	5 1/2	6 1/4
54" (I)		0.079	0.079	0.105	0.110							
60"	0.168	0.138	0.138				95			5	6	6 3/4
60" (I)		0.079	0.079	0.105	0.110							
66" (I)			0.079	0.135						5 1/2	6 1/2	7 1/4
72" (I)			0.109	0.135						6	7	7 3/4
78" (I)			0.109	0.164							7 1/2	8 1/4
84" (I)			0.109	0.164							8	8 3/4

Metal Pipe values are for 2-2/3" x 1/2" Corrugations unless diameter is followed by (I) which requires 3" x 1" Corrugations for Aluminum Pipes and 3" x 1" or 5" x 1" Corrugations for Steel Pipes.

Option I Pipes shall only be used for entrances.

Fill heights over 15' may require larger metal gages.

M218 = zinc coated (galvanized) corrugated steel pipe

M274 = aluminum coated (type 2) corrugated steel pipe

M246 = polymer pre-coated galvanized corrugated steel pipe

(A) Option I, M274 can be used for closed drainage Option III Pipe


(B) Spiral Rib Type IR can be used for Smoothlined Pipe

M197 = Corrugated Aluminum Alloy Pipe

M278 = Polyvinyl Chloride Pipe PVC

M170 = Reinforced Concrete Pipe

M294 = High Density Polyethylene Pipe

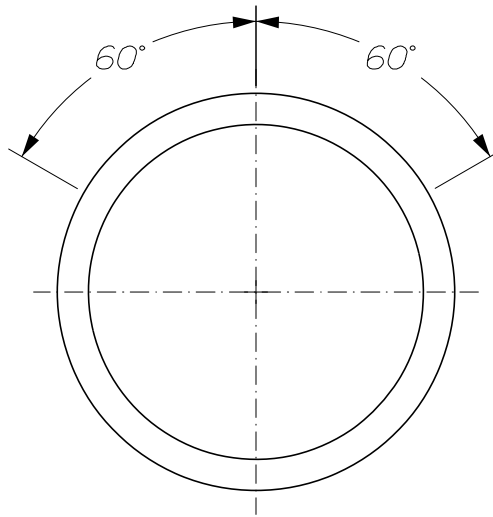

~ PLACEMENT OF ANCHORS ~

Anchors shall be installed as shown on figure above at 60° down from Top Dead Center (TDC) to the nearest inch measured from the outside. For pipe diameters not listed below, divide the circumference by 6.

Holes for anchors shall be drilled larger than the anchor bolt diameter specified in the table below to allow for anchoring materials.


ANCHOR PLACEMENT TABLE	
18" ϕ Pipes	60° from TDC = 12"
24" ϕ Pipes	60° from TDC = 15"
30" ϕ Pipes	60° from TDC = 19"
36" ϕ Pipes	60° from TDC = 22"

NOTES:


- 1. For new concrete pipe or pipe designated to be removed and reset, ties shall be used at the last two joints at each end unless otherwise specified in the construction notes. Ties shall not be used at catch basin locations.*
- 2. Ties shall be used only to hold pipe sections laterally together, not for pulling the pipe section together.*
- 3. Tie rods and connections shall be placed on the outside of all pipe sections unless otherwise directed.*
- 4. Tie rod shall be galvanized steel, including all hardware required. Any welded areas shall be treated with an approved galvanized paint. All welding shall meet current MaineDOT Specifications. Steel shall conform to ASTM A 307 or equivalent.*

CONCRETE PIPE TIES

603(10)

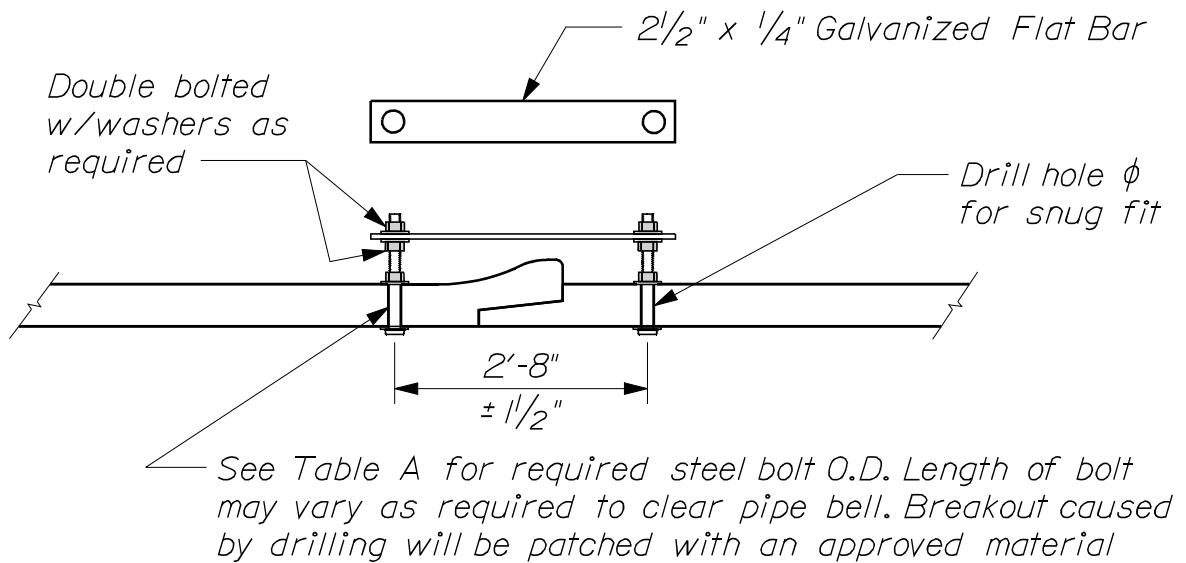



~ GALVANIZED BOLTED ANCHOR
W/GALVANIZED FLATBAR CONNECTION ~

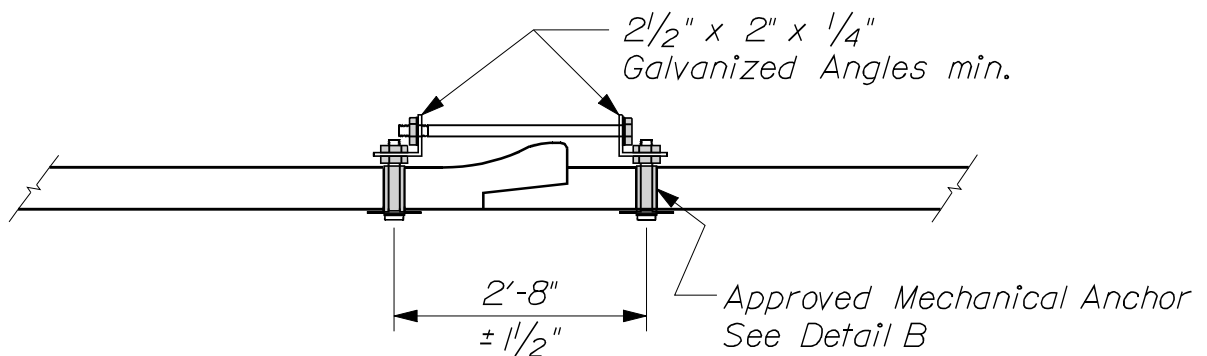

~ MECHANICAL ANCHOR W/ GALVANIZED PLATE
CORE DRILL HOLES ~


TABLE A	
PIPE SIZE (I.D.)	BOLT THREAD ϕ
12" - 26" I.D.	5/8"
27" - 66" I.D.	3/4"
67" - 132" I.D.	1"

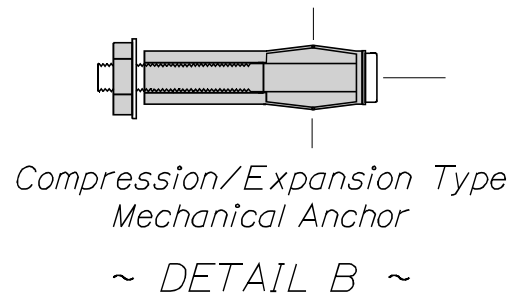

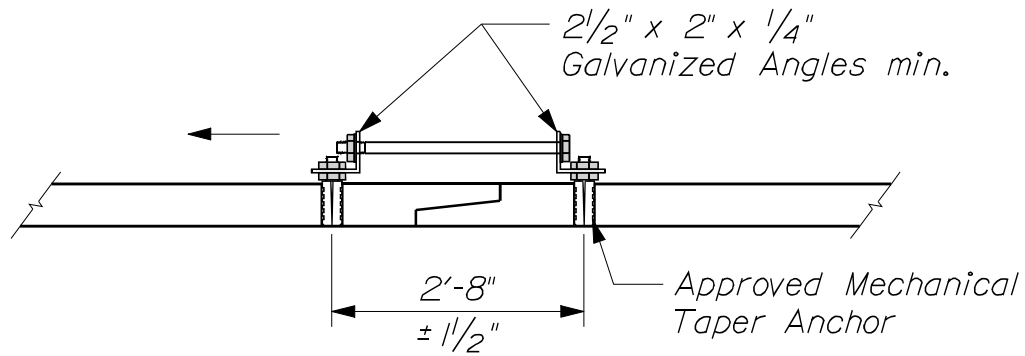


~ MECHANICAL ANCHOR W/GALVANIZED ANGLE PLATE ~

Reference Table B
for weld size. Fillet
welds must lap area
bolt contacts Pipe.

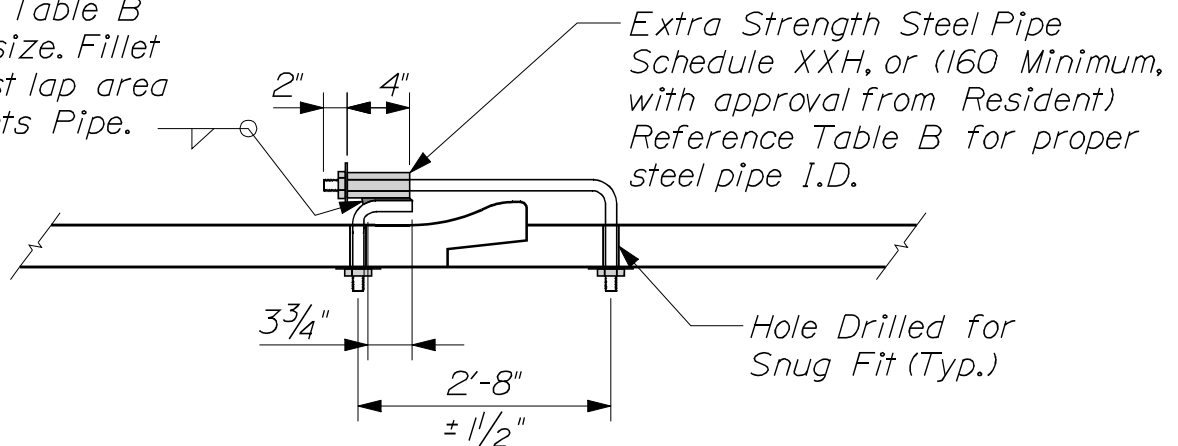

~ WELDED PIPE TIE ~

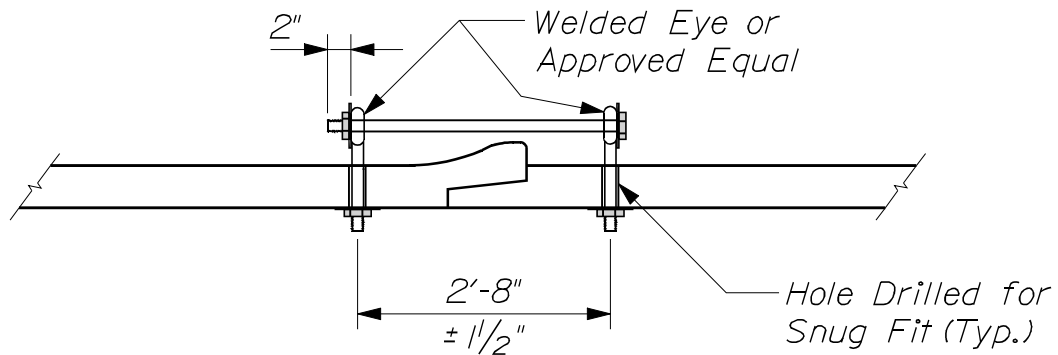

~ EYE BOLT TIE ~

TABLE B			
BOLT O.D.	STEEL PIPE I.D.	WELD SIZE	CRP PIPE I.D.
5/8"	3/4"	5/16"	12" - 26"
3/4"	1"	3/8"	27" - 66"
1"	1 1/4"	1/2"	67" - 132"

CONCRETE PIPE TIES

GENERAL NOTES

1. Catch basins in excess of 8' in depth shall, if directed, be provided with steps similar to those detailed for manholes.
2. Drain holes in precast sumps shall be less than or equal to 3" in diameter and shall be plugged with mortar when constructed.
3. All precast sections of less than 8" wall thickness shall have tongue and groove joints.
4. Cone and ring sections shall have a wall thickness of 4" minimum to 8" maximum.
5. Minimum wall thickness at the sump shall be 4" as specified in AASHTO M199.
6. The wall around inlet and outlet pipes shall be a pre-cast opening 2" larger than the outside diameter of the pipe.
7. Lift holes or lift handles shall be provided for installation of Catch Basins and Manholes.
8. Lift holes shall not exceed 3" in diameter and shall be plugged with mortar when constructed. Lift handles shall not exceed 3" in diameter and shall be cut off as directed by the Resident Engineer prior to back filling the structure.


Structure	Top					Shape				Grate
Catch Basin	A	B	D	A(P)	B(P)	1	2	5	6	
Type A										C
Type B										C
Type A Portland										P
Type B Portland										P
Type F										C*
Manhole										MHC

*Certain applications may allow for non-cascade grates.

~ TABLE OF CATCH BASIN TYPES ~
(combinations of tops and types)

CATCH BASINS

604(01)

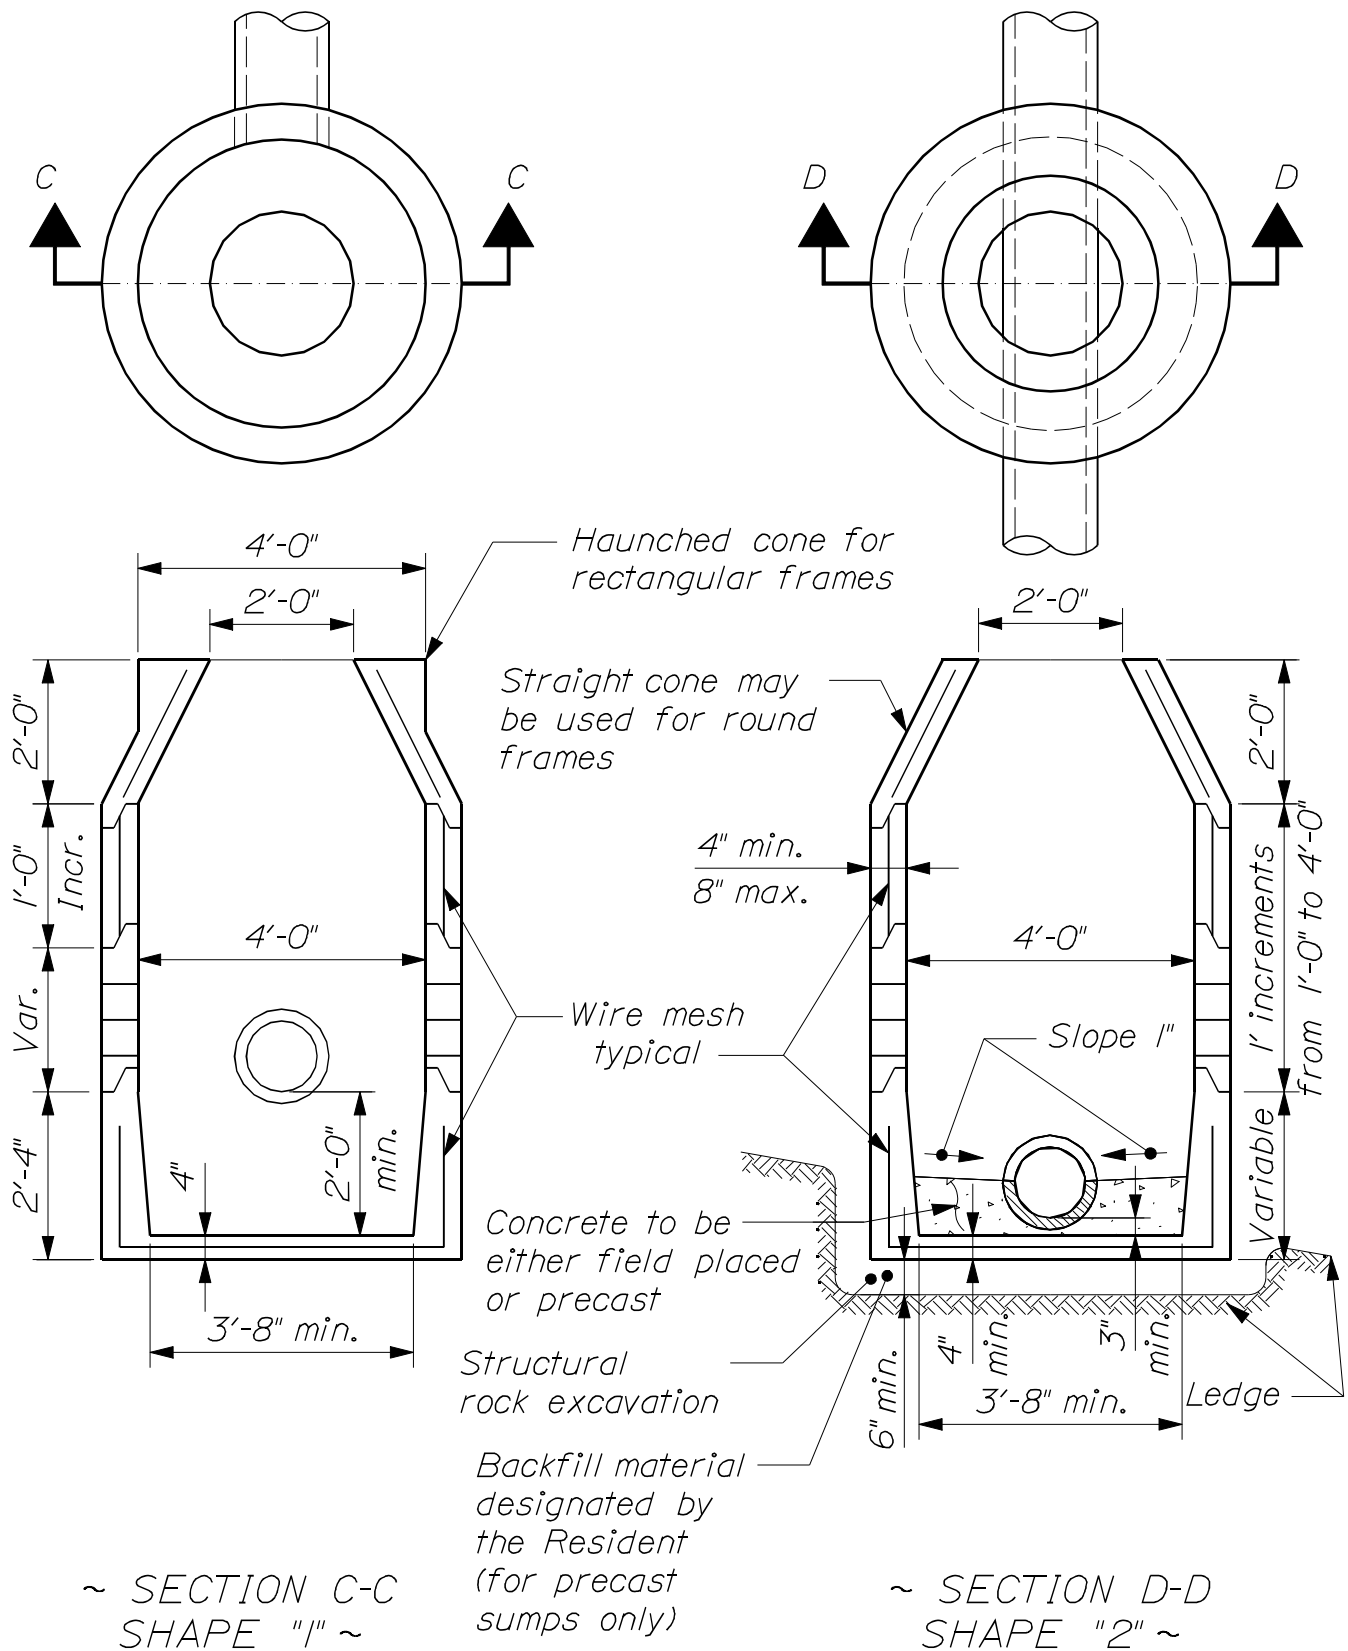


CATCH BASIN OR MANHOLE


604(02)

Exposure:
3 3/8" min.
6" max.


Straight for
Polypropylene,
Bent for Aluminum

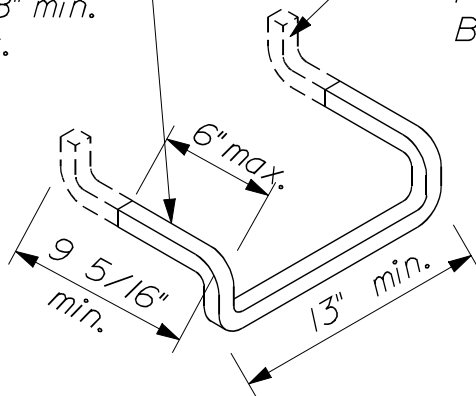

~ STEP ~



~ DETAIL "A" ~
Alternate Joint


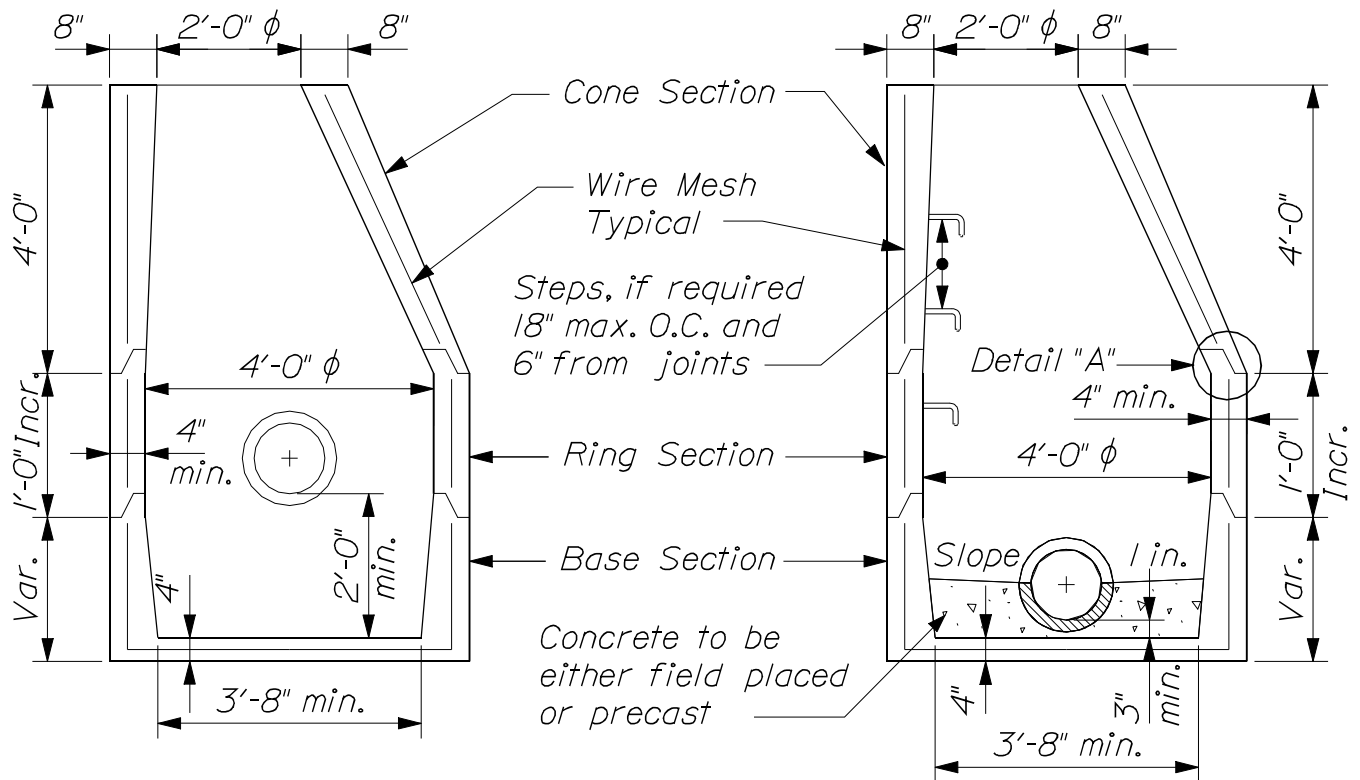


~ SHAPE "5" ~


~ SHAPE "6" ~

Dimensions are intended to be nominal.

CATCH BASIN OR MANHOLE
604(03)

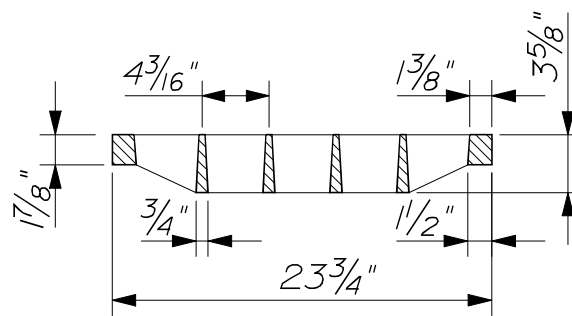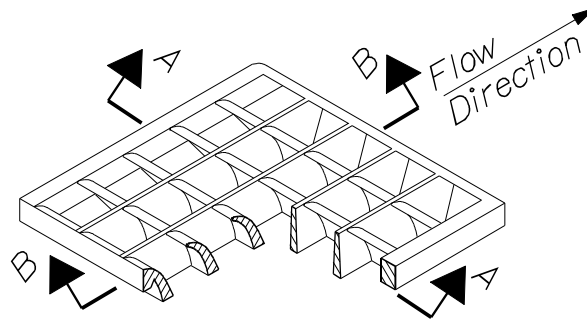

~ SECTION A-A ~

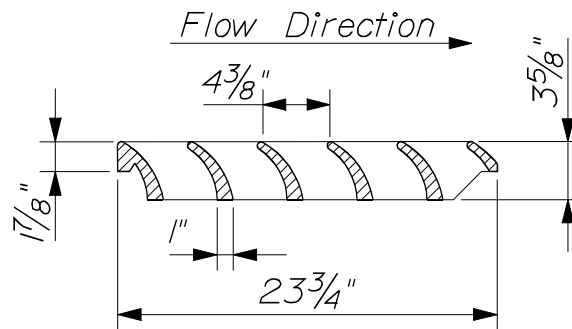

~ SECTION B-B ~


NOTES:

1. To be used where parallel bar grates would present a hazard to bicycle traffic.
2. For use on catch basin types: A1-C, A2-C, A5-C, B1-C, B2-C, B5-C, F3-C, F4-C, F5-C, F6-C.

"CASCADE - TYPE" GRATES

OR APPROVED EQUAL

604(04)B


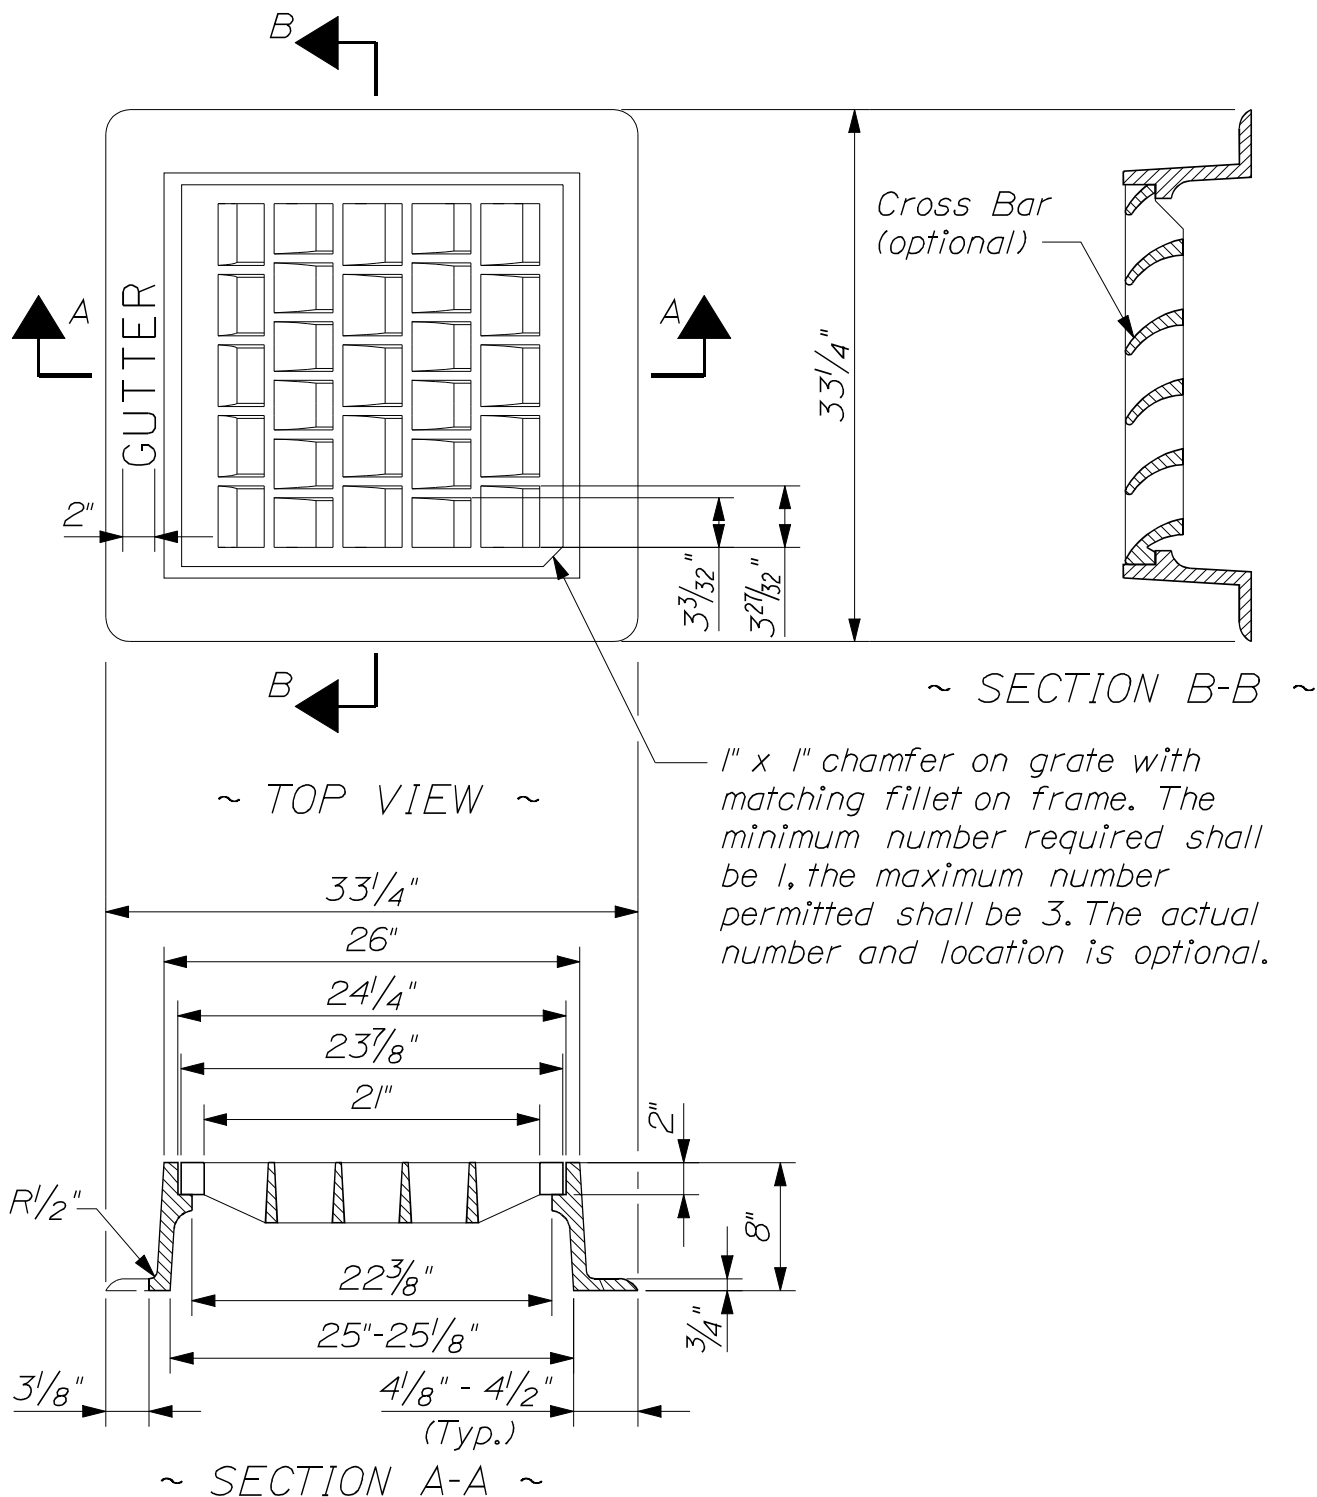


NOTES:

1. Type "A" frames are to have 3 flanges.
2. Type "B" frames are to have 4 flanges.
3. The word "gutter" is to be molded into the back flange - Type "B" only.
4. Frames and grates are to be of gray cast iron or ductile iron conforming to AASHTO M306.
5. Dimensions are nominal.

TYPE "A" & "B" CATCH BASIN TOPS


604(05)

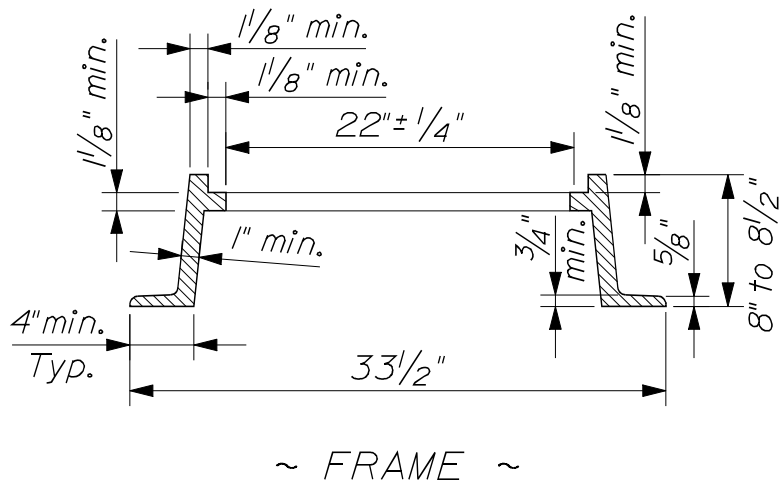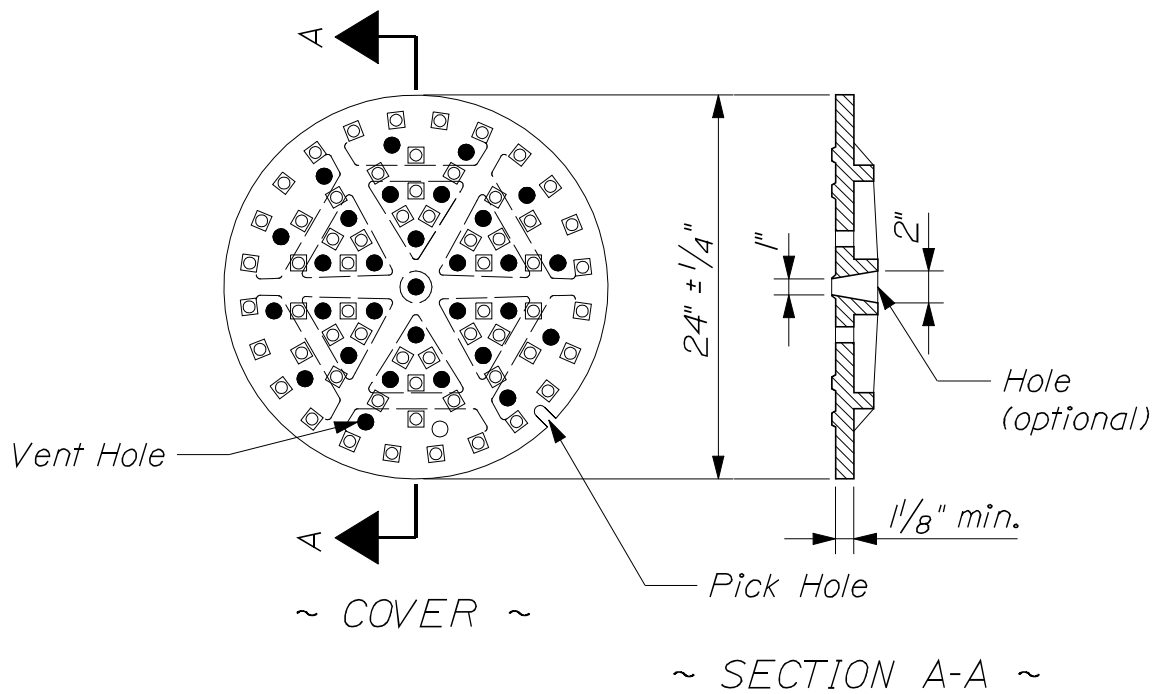

NOTES:

1. Manhole frames and covers are to be machined to a smooth fit and shall be of gray cast iron or ductile iron conforming to AASHTO M306.
2. Diamond top surface is optional.


MANHOLE TOP "D"
604(07)

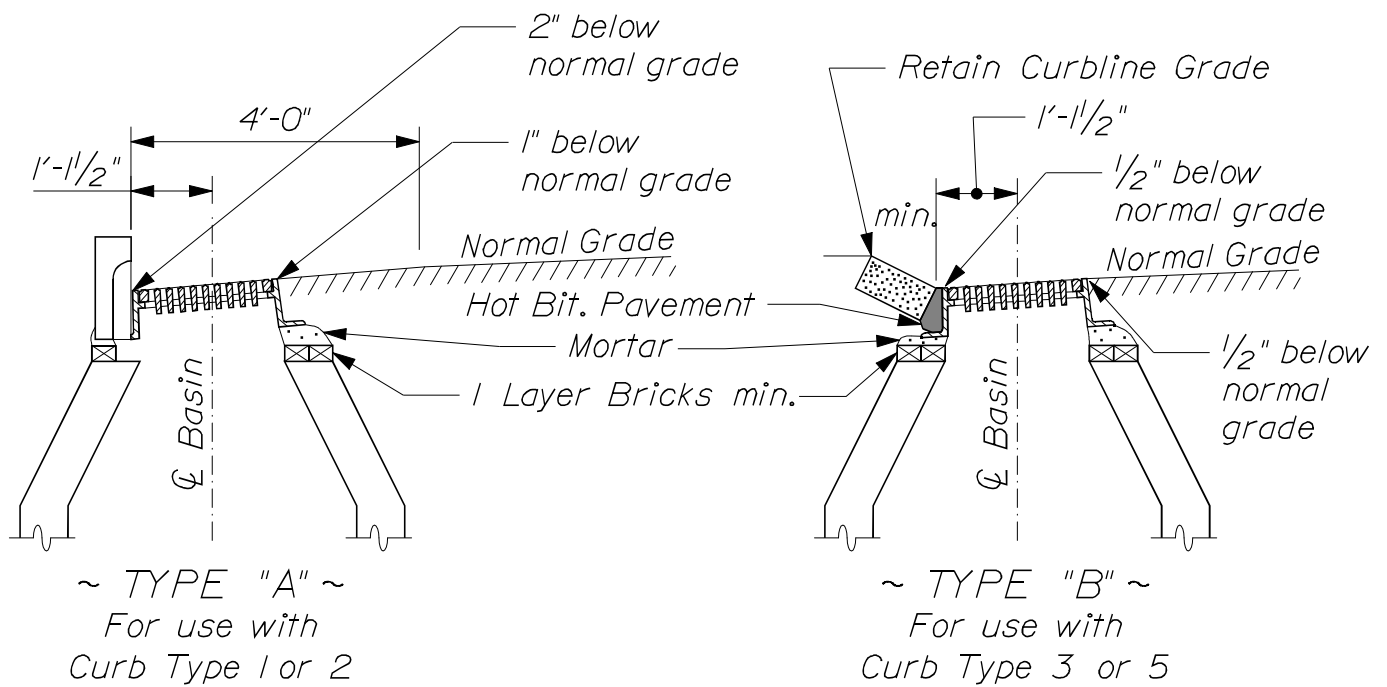

Dimensions are intended to be nominal.


CATCH BASIN TOP INSTALLATION

604(08)

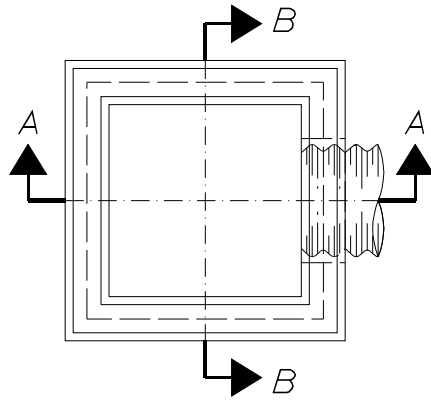

NOTE:
 Entire Catch Basin with exception
 of leveling brick frame and grate
 to be precast as a single Portland
 Cement concrete unit, #4 rebar
 Minimum 8" O.C., or equivalent
 with Residents approval.



~ TOP VIEW ~

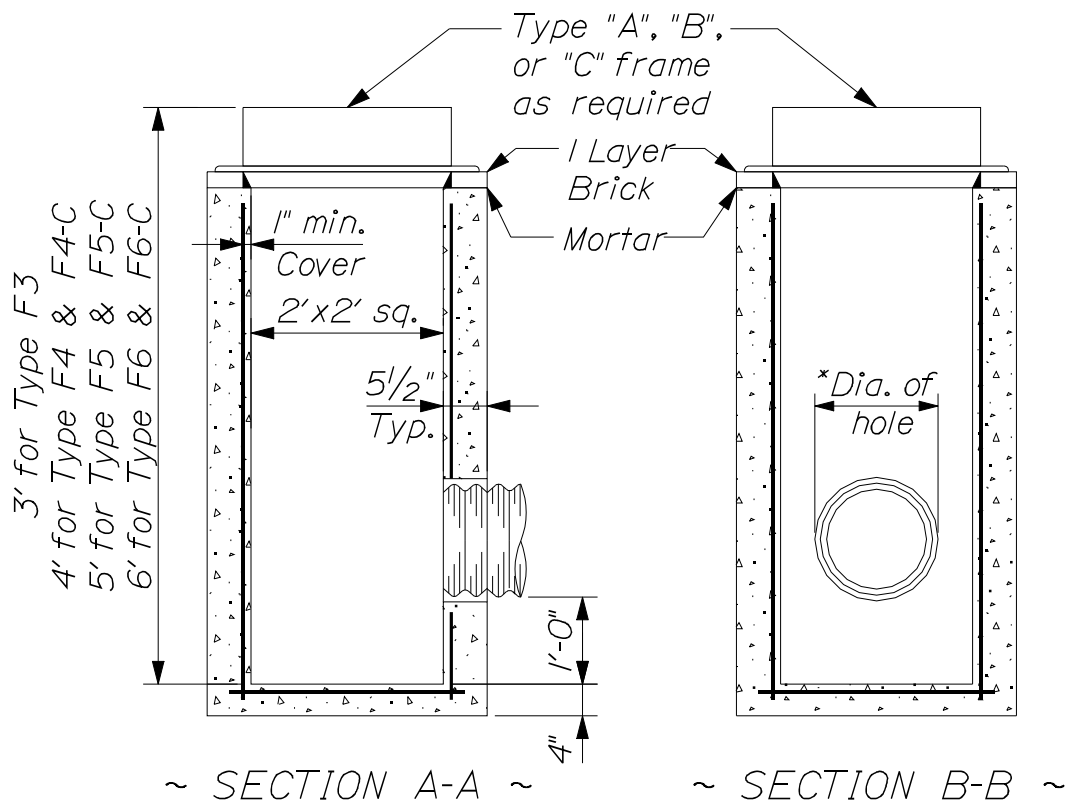

*Diameter of hole to be 3" larger than
 the inside diameter of flexible pipe or the
 outside diameter of rigid pipe.

CATCH BASIN TYPE "F"

604(10)

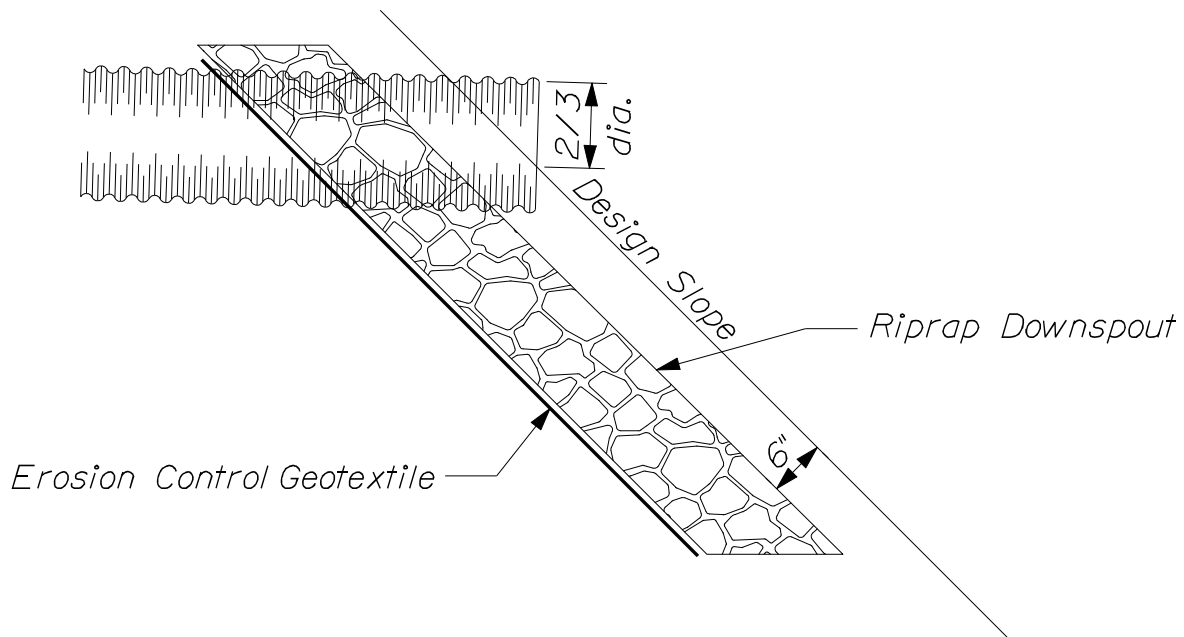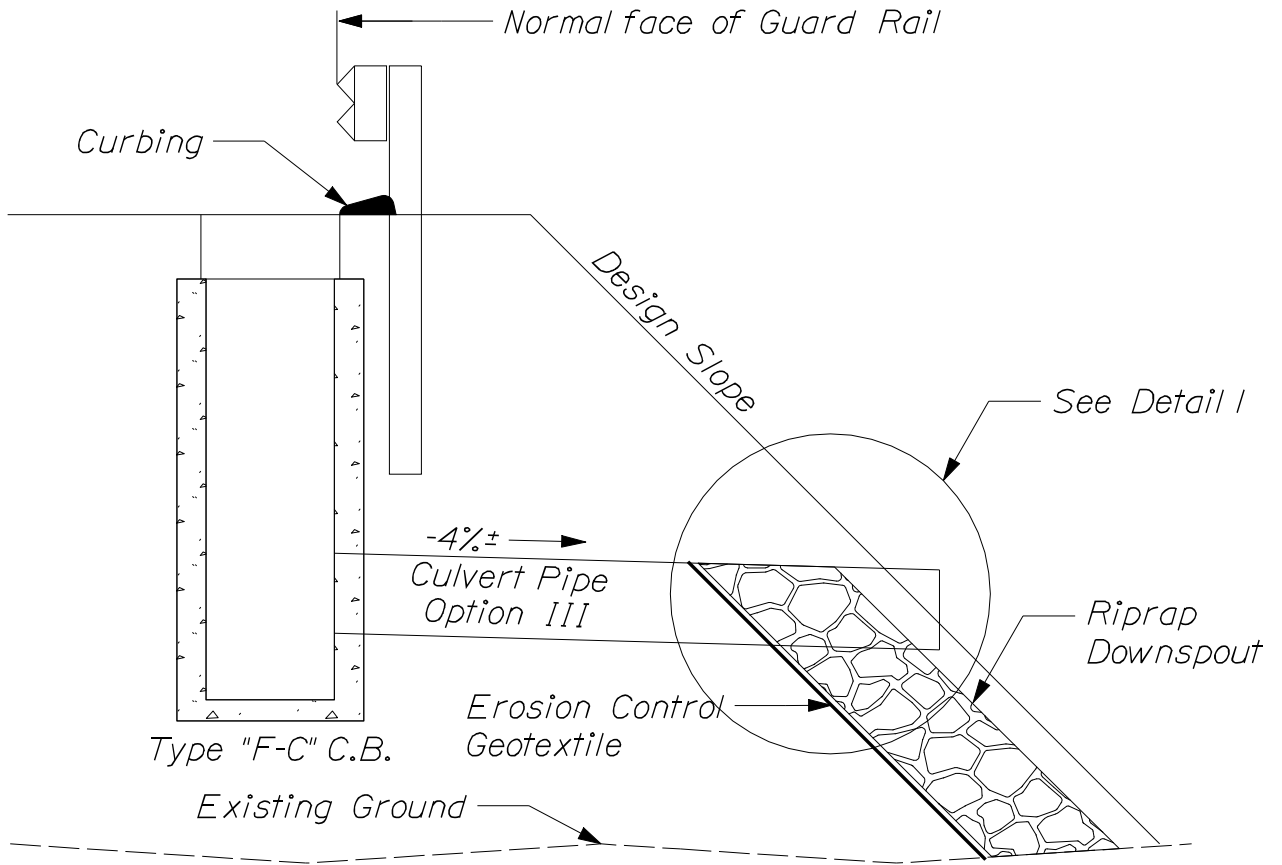

~ DETAIL I ~


TYPE "F" CATCH BASIN
WITH OUTLET PIPE AND RIPRAP
604(II)

GENERAL NOTES

1. *Sewer bricks to conform to ASTM Standard Specification Design #C 32-63, Grade M.A. or S.A.*
2. *Casting shall be of uniform quality, free from blowholes, porosity, hard spots, shrinkage, distortion, or other defects. They shall be smooth and well cleaned, trimmed and inspected, and approved asphalt paint. Material to be designated in ASTM Standard Specifications. 48-Class 35.*
3. *All concrete shall be class "A" having a minimum ultimate compressive strength of 4,000 lb/in² at the end of 28 days unless otherwise noted.*
4. *Plastic Manhole Steps 12" O.C. made of Co-Polymer Polypropylene with $\frac{3}{8}$ grade 60 steel rebar inside with 1st step 8" below top of cone.*
5. *Waterproofing - The outside surface of catch basins and manhole cones shall be given 2 coats of waterproofing material in accordance with the instructions of the Manufacturer. Time shall be allowed between coats to permit sufficient drying. This way the application of following coats has no effect on the previous coat(s).*
6. *Catch basins not in a system that connects into existing City of Portland drainage system may be constructed without flexible plastic gaskets and will have a minimum 3 foot sump.*


REINFORCED CONCRETE CATCH BASIN TYPE A-I-P & TYPE B-I-P

604(12)

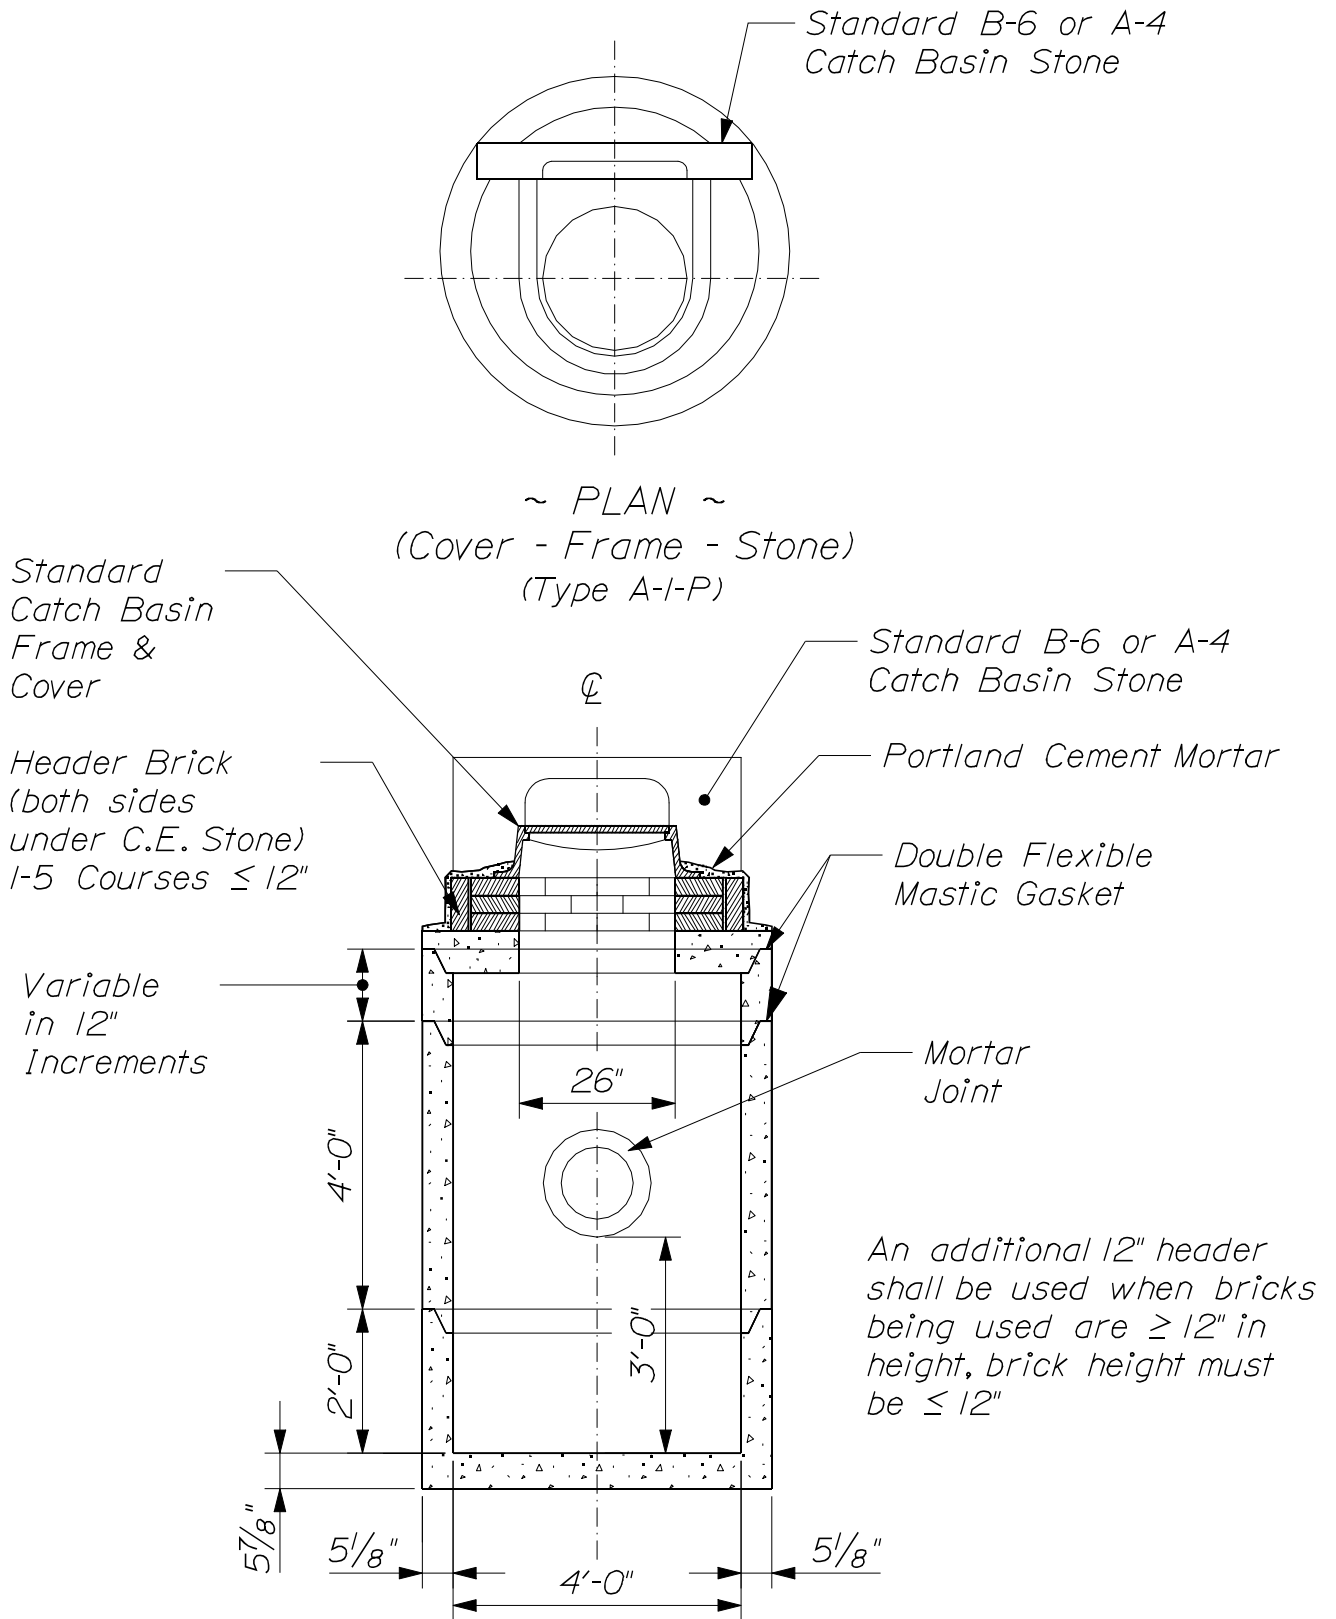


Construction Alternate "A"

REINFORCED CONCRETE CATCH BASIN
TYPE A-I-P
604(13)

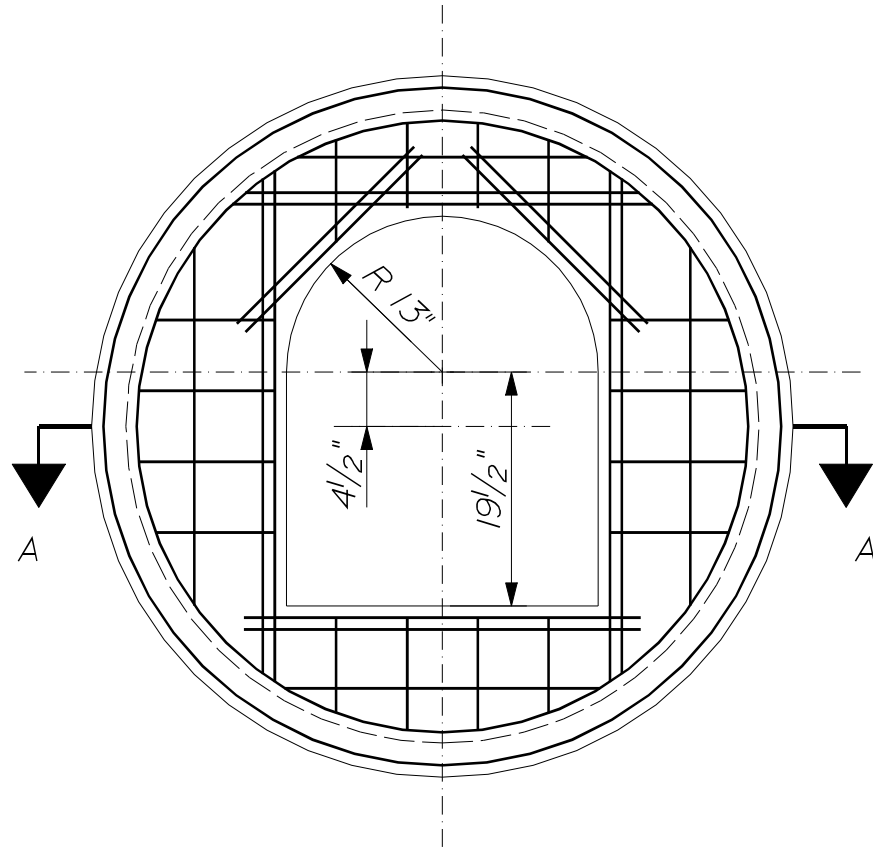

~ PLAN ~

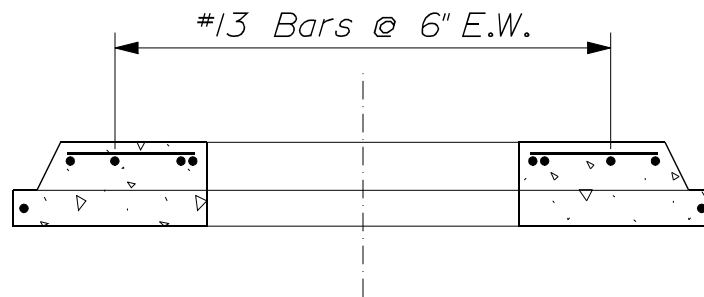


~ SECTION A-A ~


~ TOP SLAB DETAIL FOR TYPE A-I-P ~

REINFORCED CONCRETE CATCH BASIN
TYPE A-I-P TOP SLAB DETAIL

604(14)

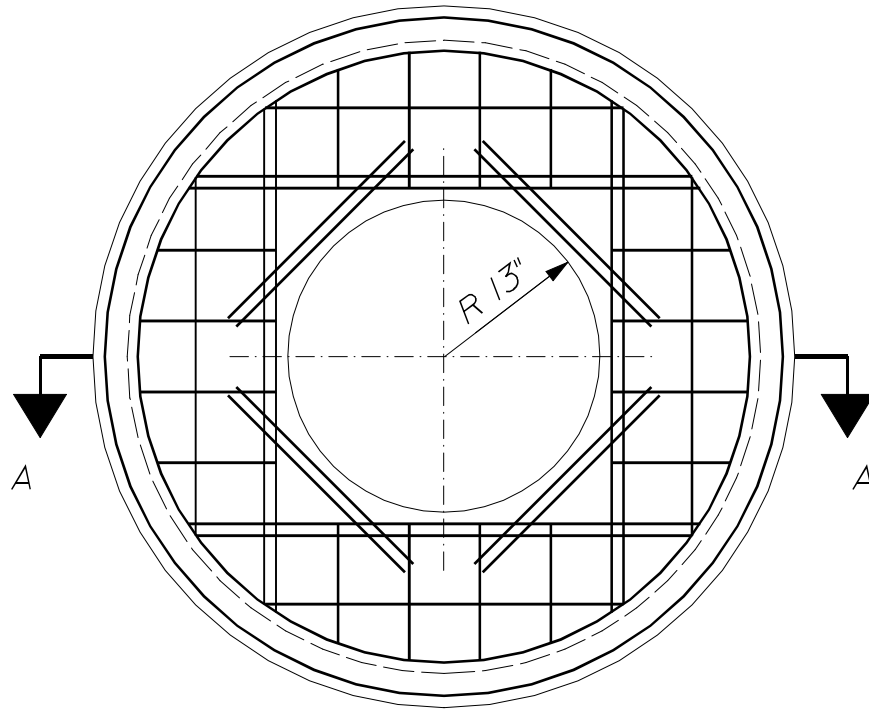

~ PLAN ~


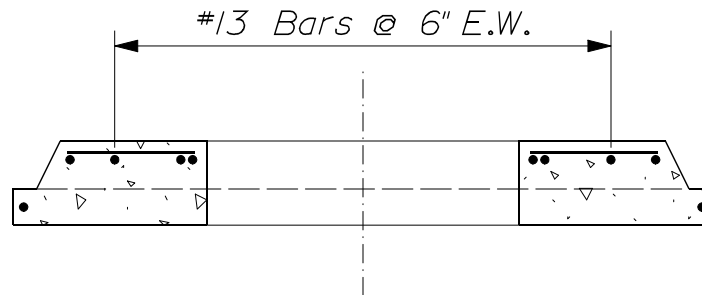


~ SECTION A-A ~


~ TOP SLAB DETAIL FOR TYPE B-I-P ~

REINFORCED CONCRETE CATCH BASIN
TYPE B-I-P TOP SLAB DETAIL


604(15)

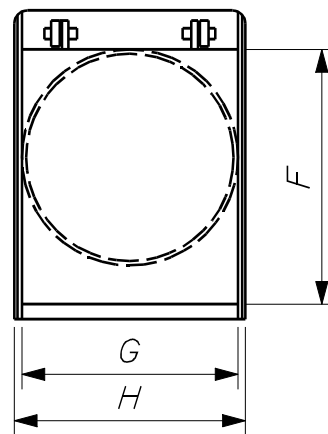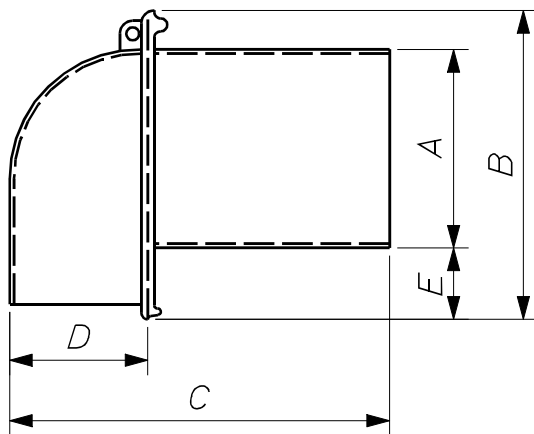

~ TRAP DETAIL ~

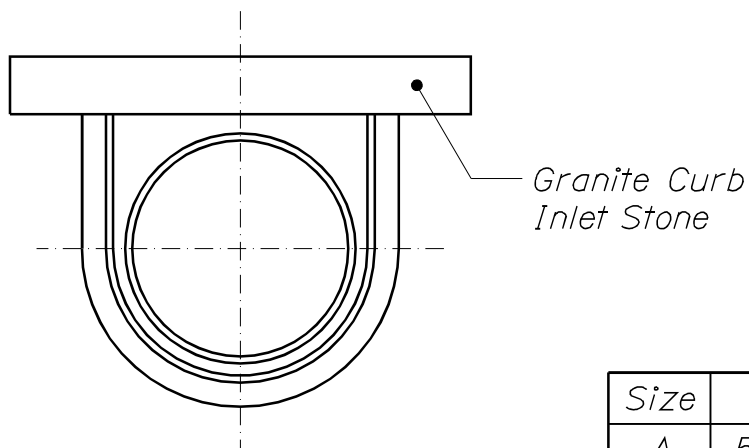


~ TYPE 'A' INLET ~

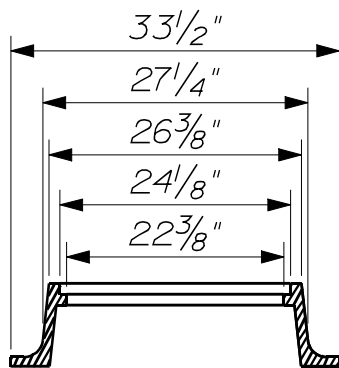


Size	6"	8"	10"	12"	15"
A	5 1/2"	7 1/2"	9 1/2"	11 1/2"	Similar to Designs at Left
B	13 3/8"	15"	16"	17"	
C	13 3/4"	15 3/8"	16 1/4"	22"	
D	5 3/8"	5 1/2"	6"	8"	
E	5 7/8"	5 3/8"	4 1/2"	3 1/4"	
F	11 5/8"	13 3/4"	14 1/8"	15 1/2"	
G	6 1/2"	8 3/4"	11 1/2"	12 1/2"	
H	7 1/4"	9 3/8"	12 3/8"	13 3/8"	

REINFORCED CONCRETE CATCH BASIN
TYPE A-I-P


604(16)

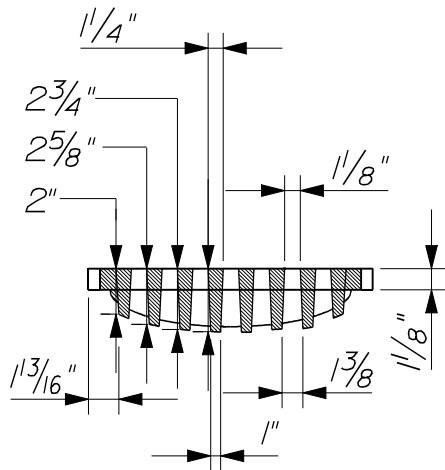


SECTION B-B

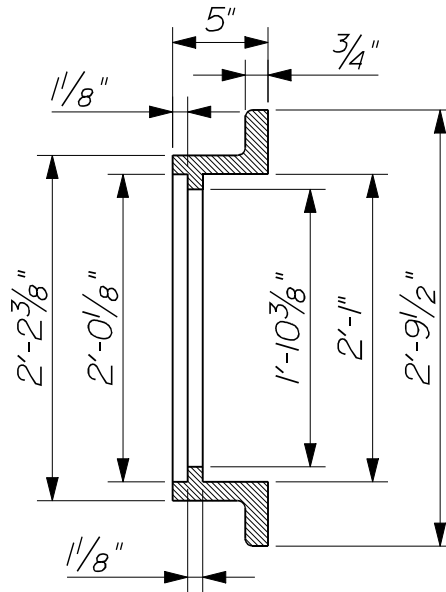


SECTION B-B

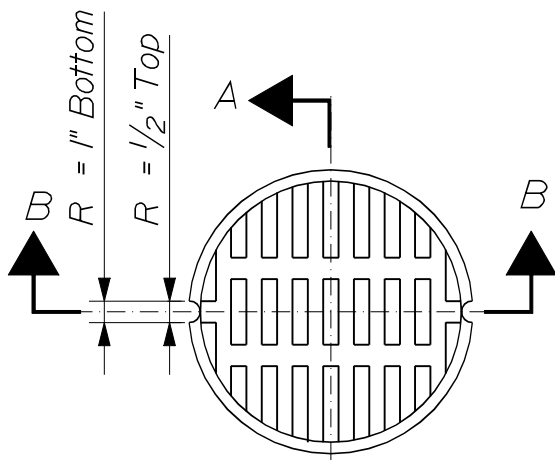


PLAN VIEW

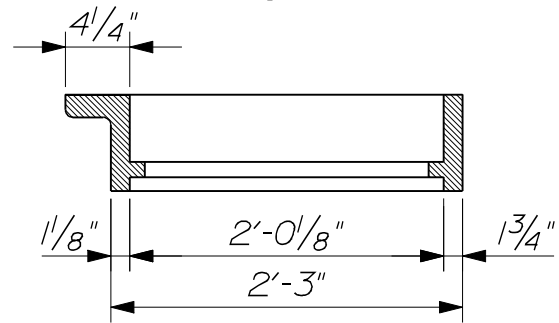

SECTION A-A

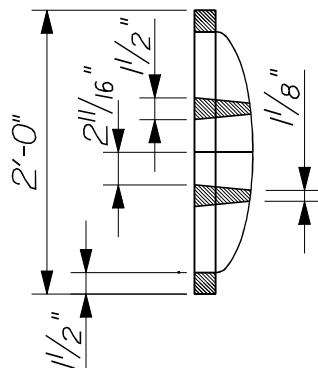

SECTION A-A

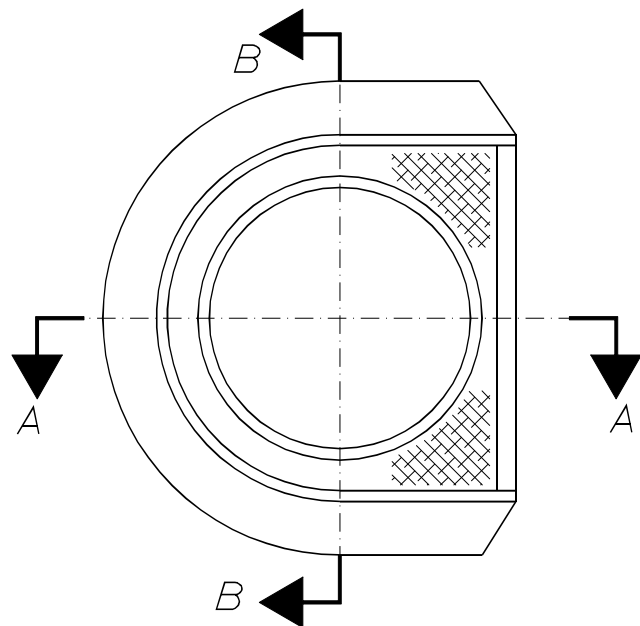

PLAN VIEW


~ GRATE DETAIL ~

~ FRAME DETAIL ~

REINFORCED CONCRETE CATCH BASIN TYPE B-I-P DETAILS

NOTES:

- 1) Manhole frames, valve boxes, and covers shall meet ASTM A48*

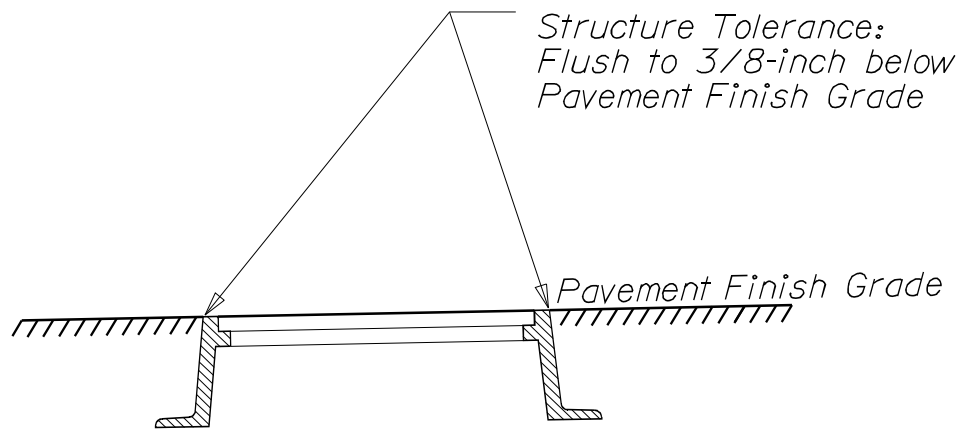


UTILITY STRUCTURE

(Manhole, Valve Box, Vault Cover)

UTILITY STRUCTURES

604(18)

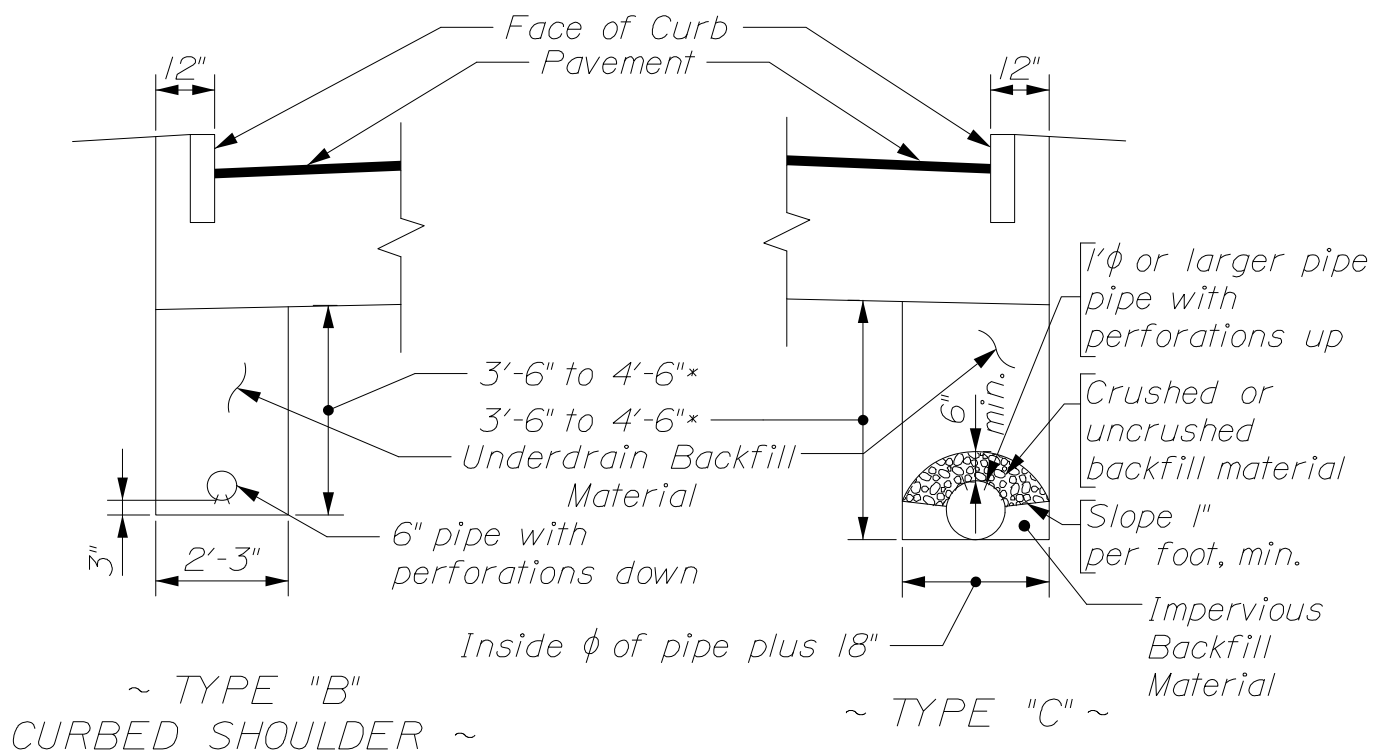

^{*}Unless otherwise shown on the plans

UNDERDRAIN
605(01)

UNDERDRAIN NOTES


- 1. The maximum vertical measurement of depth for payment of Structural Rock Excavation will be to a horizontal plane located 12 inches below the bottom of the invert of the pipe for Underdrain Type "B" and Underdrain Type "C".*
- 2. The material for Elbows, Tees, & Wyes for Underdrain Types "B" and "C" shall be at least as thick as the largest size pipe being connected.*
- 3. The invert elevation of Underdrain Type "B" outlets shall be a minimum of 6 inches above the flow line of a ditch or the original ground.*
- 4. Width of the trench for underdrain outlet will be the same as the underdrain trench.*
- 5. No allowance for payment will be made for excavating or material excavated beyond the horizontal dimensions shown for Types "B" or "C" Underdrain.*
- 6. In "Box Sections" the edge of the trench shall be in line with the edge of box section.*

UNDERDRAIN NOTES

605(02)

Type "B" and Type "C" Underdrain Pipe									
Underdrain Pipe Nominal Wall Thickness in Inches					Underdrain Stiffness in KPa				
Corrugated				Metal Pipe		PVC Pipe		Polyethylene Pipe	
Diameter	M 218	M 274 & M 246	M 197	Type IR 3/4 x 3/4 x 7 1/2"		M 278	ASTM F 949	M 294 SP	M 252 SP
				M 274	M 197				
Type "B" Underdrain Pipe									
6"	0.064	0.052	0.048			320	340		340
Type "C" Underdrain Pipe									
12"	0.079	0.064	0.075			320		345	
15"	0.079	0.064	0.075			320		290	
18"	0.079	0.064	0.075	0.079	0.106			275	
21"	0.079	0.064	0.075	0.079	0.106			260	
24"	0.079	0.064	0.075	0.079	0.106			235	
30"	0.109	0.064	0.105	0.079	0.106			195	
36"	0.109	0.064	0.105	0.079	0.106			150	

M 218 = Zinc Coated (Galvanized) Corrugated Steel Pipe
 M 274 = Aluminum Coated (Type 2) Corrugated Steel Pipe
 M 246 = Polymer Pre-coated Galvanized Corrugated Steel Pipe
 M 197 = Corrugated Aluminum Alloy Pipe
 M 278 = Smoothwall PVC pipe
 ASTM F 949 = PVC Corrugated Sewer Pipe with smooth interior
 M 294 SP = Corrugated Polyethylene Pipe with smooth inner liner
 M 252 SP = Corrugated Polyethylene Drainage Tubing with smooth inner liner

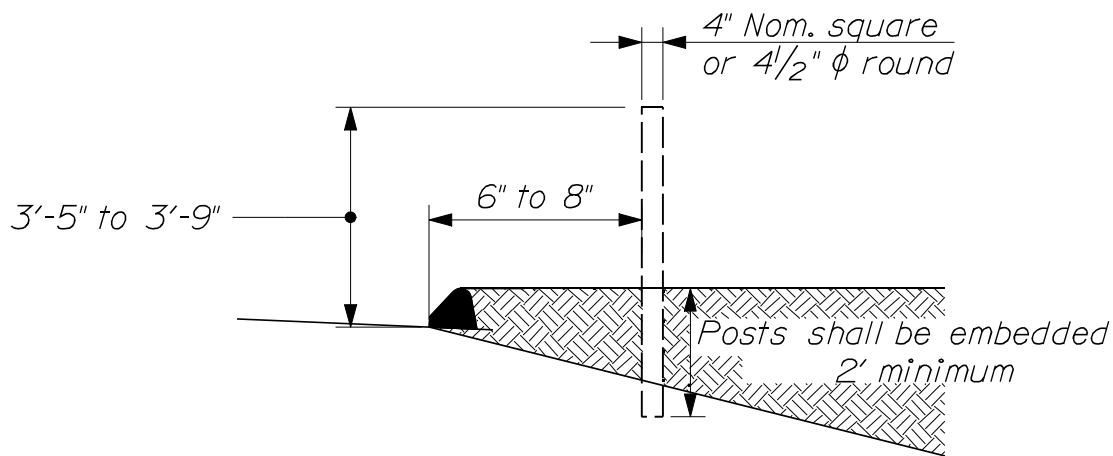


~ SINGLE WOOD POST ~

NOTES:

1. A post shall be provided for each mailbox.
2. Posts shall not be spaced closer than 30".
3. Posts should not be placed closer than 200' from an intersecting road.
4. When single wood posts exceed 4 1/2" diameter or square dimension, two 3/4" holes shall be drilled through the post at 90 degrees to each other, 4" above the finish grade.

MAILBOX POSTS



606(01)

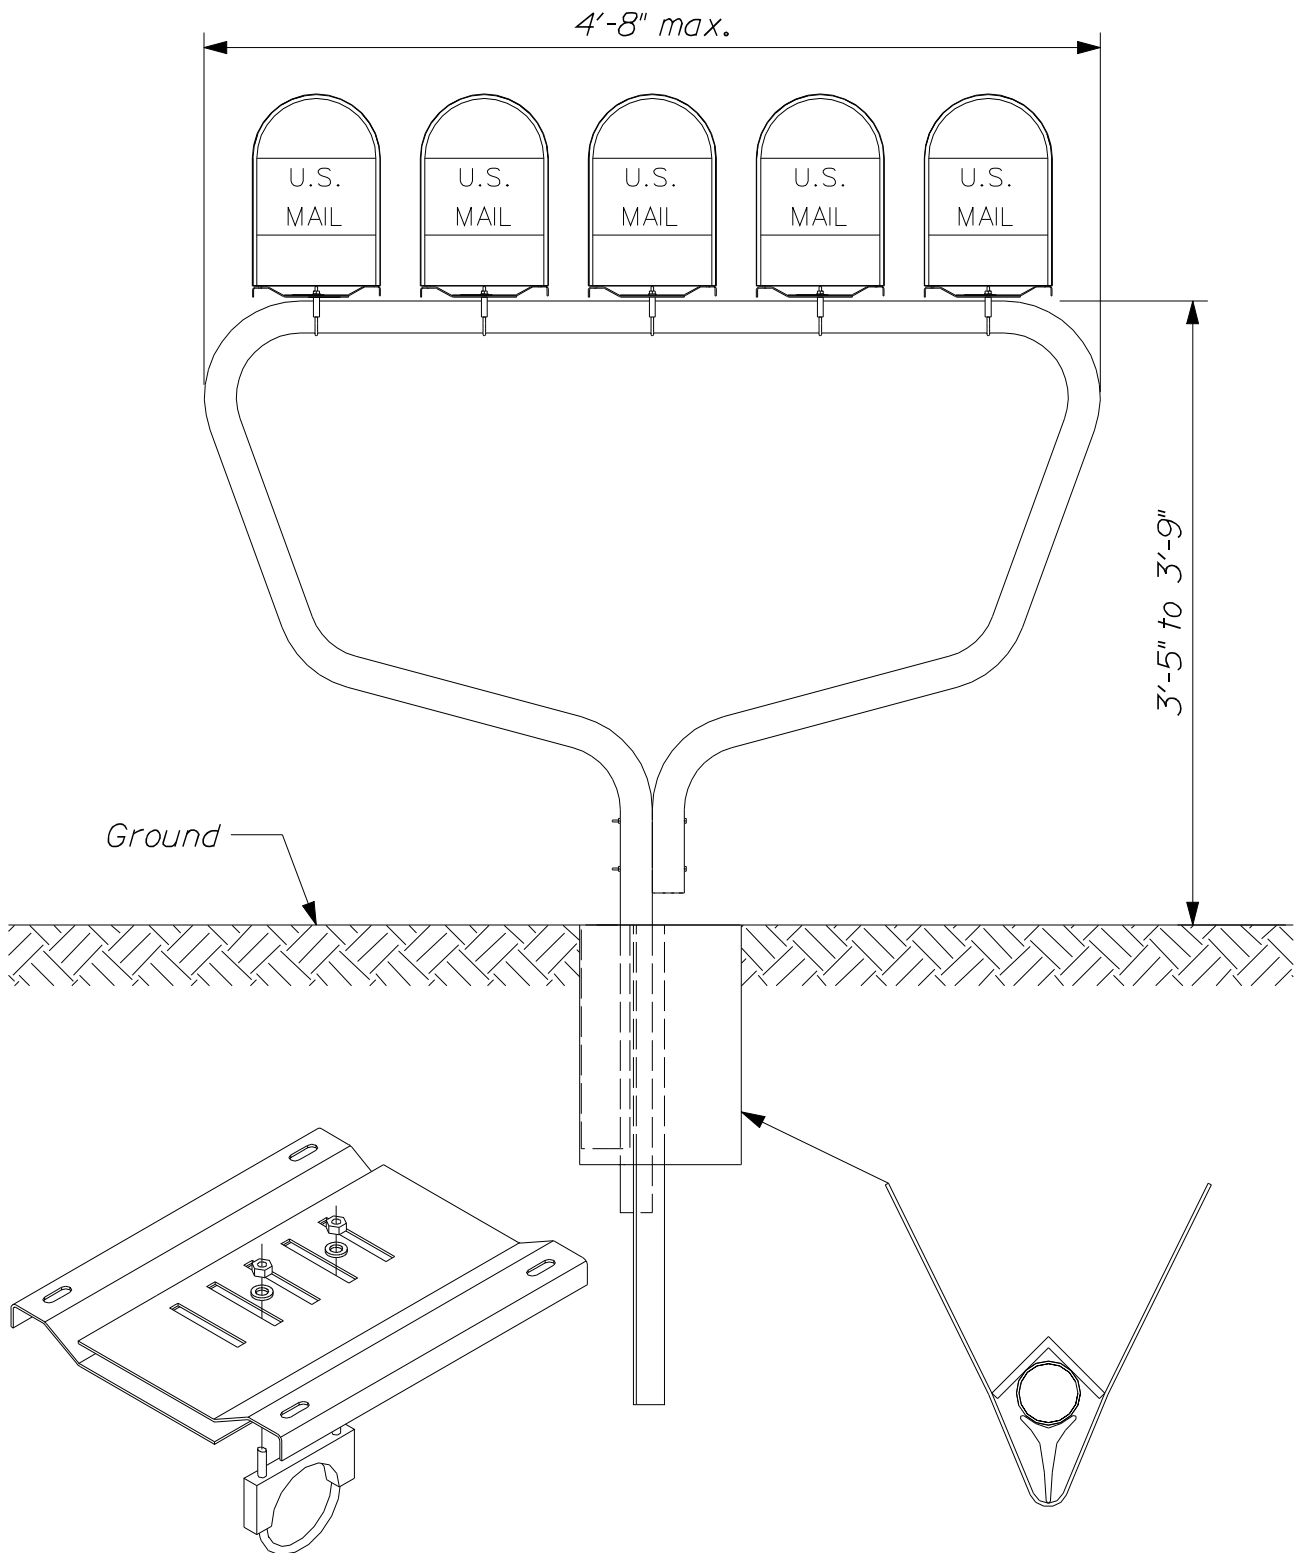


*Hardware may vary depending on particular approved system used.

MULTIPLE MAILBOX SUPPORT

606(02)

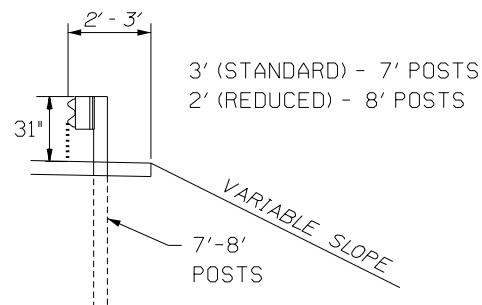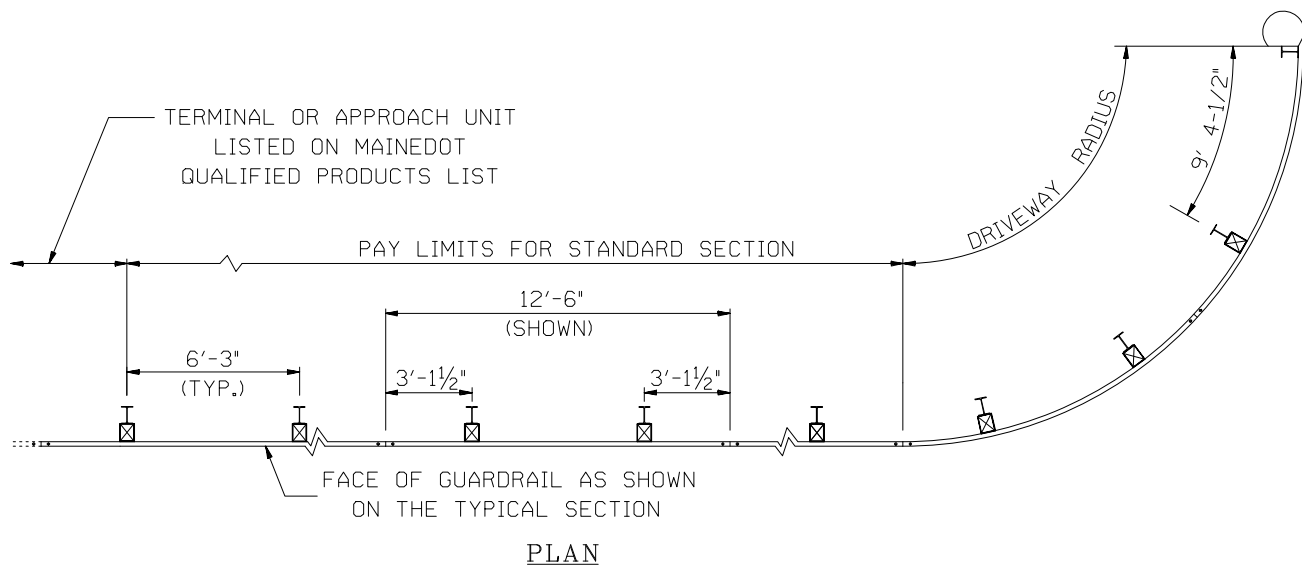


W 6x9.0 OR W 6x8.5 STEEL POST WITH 6" x 8" WOOD
OFFSET BLOCK OR OTHER 8" BLOCK LISTED ON
MAINEDOT QUALIFIED PRODUCTS LIST (TYP.)


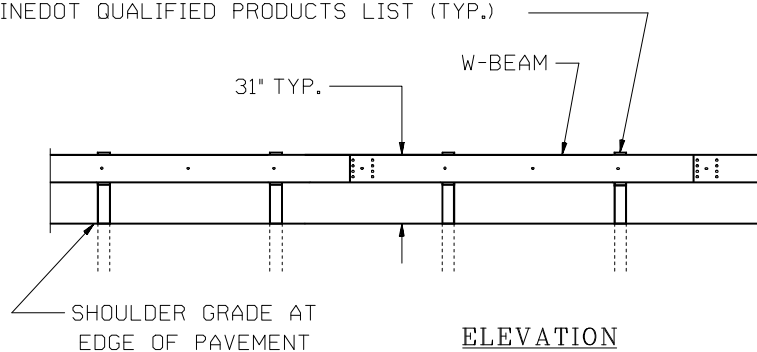


31" W-BEAM GUARDRAIL - MID-WAY SPLICE


*Identification letters and numbers on drawings refer to the standard detail
drawings shown in "A guide to Standardized Highway Barrier Hardware"
by AASHTO-AGC-ARTBA Joint Committee.*

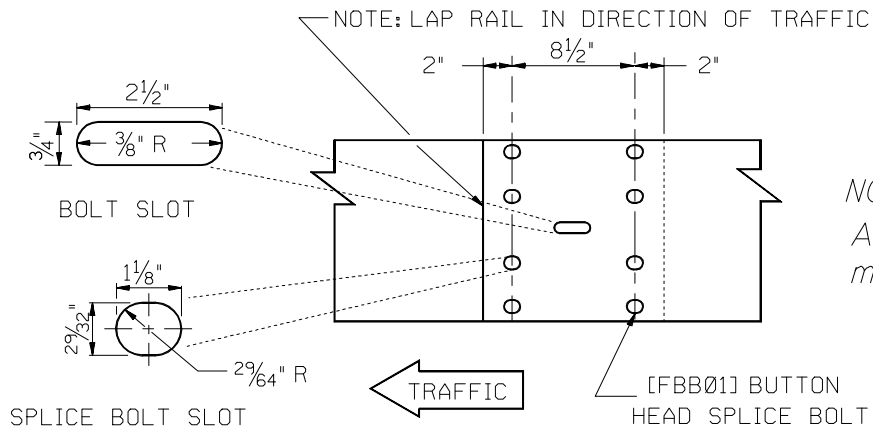


ELEVATION VIEW
AT BEAM SPLICE

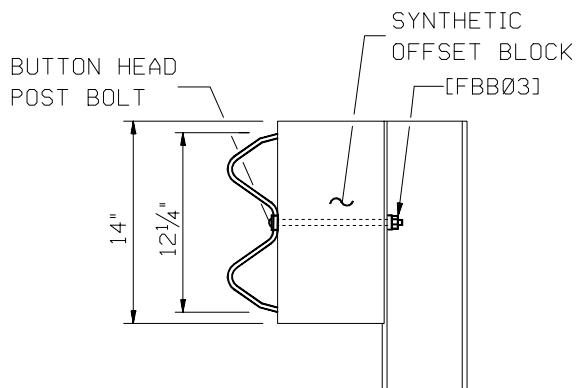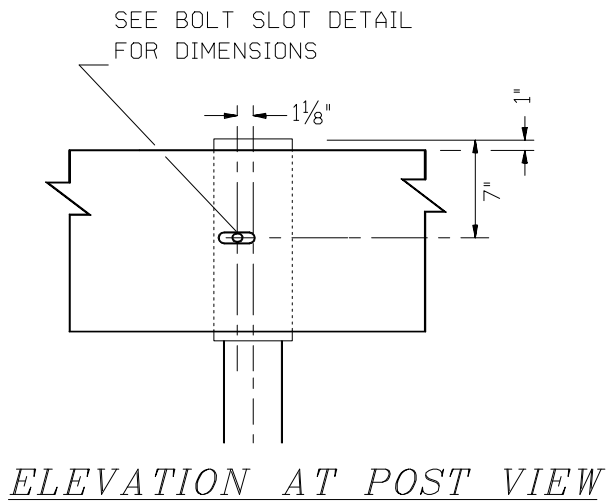

TYPICAL SIDE VIEW

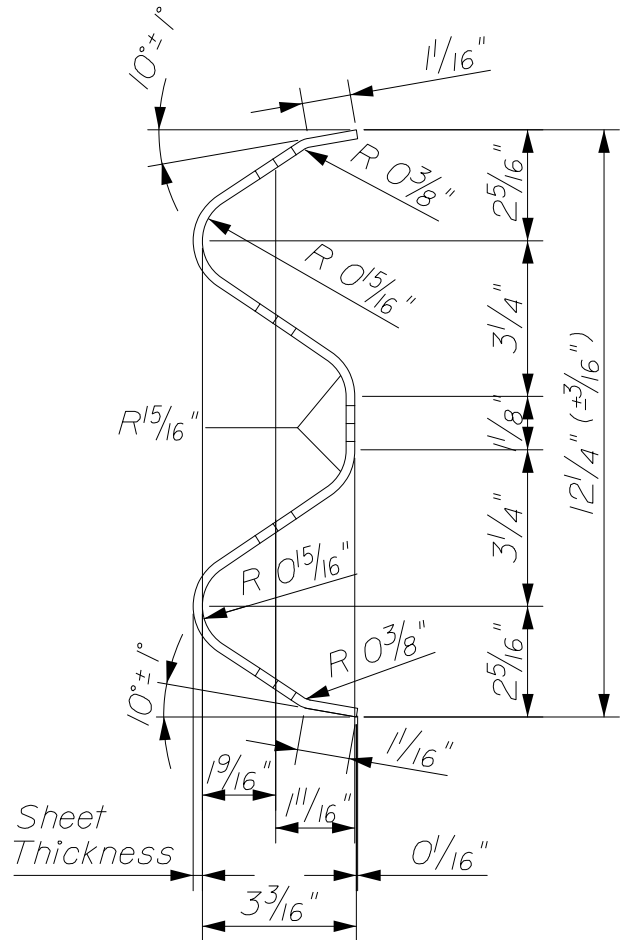


~ GUARDRAIL BEAM
DETAIL RWM02A ~

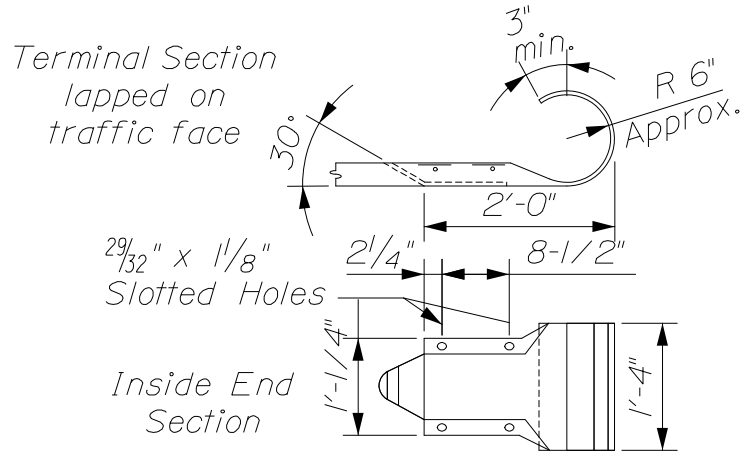




~ GUARDRAIL TERMINAL END - RWE03A ~

1. Use only on the end of circular guardrail at driveways.
2. Use only on the trailing end of guardrail on divided highways with washers (fwr03) installed on the last 9 posts.

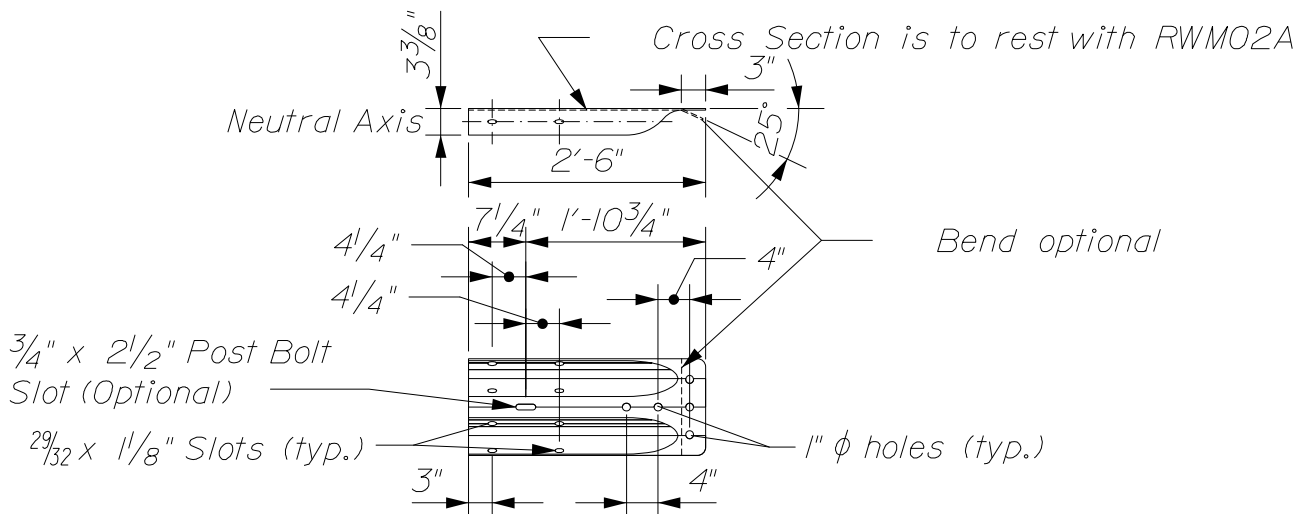

~ W-BEAM TERMINAL CONNECTOR RWE02A ~


~ OFFSET BLOCK DETAIL
FOR STEEL POST ~

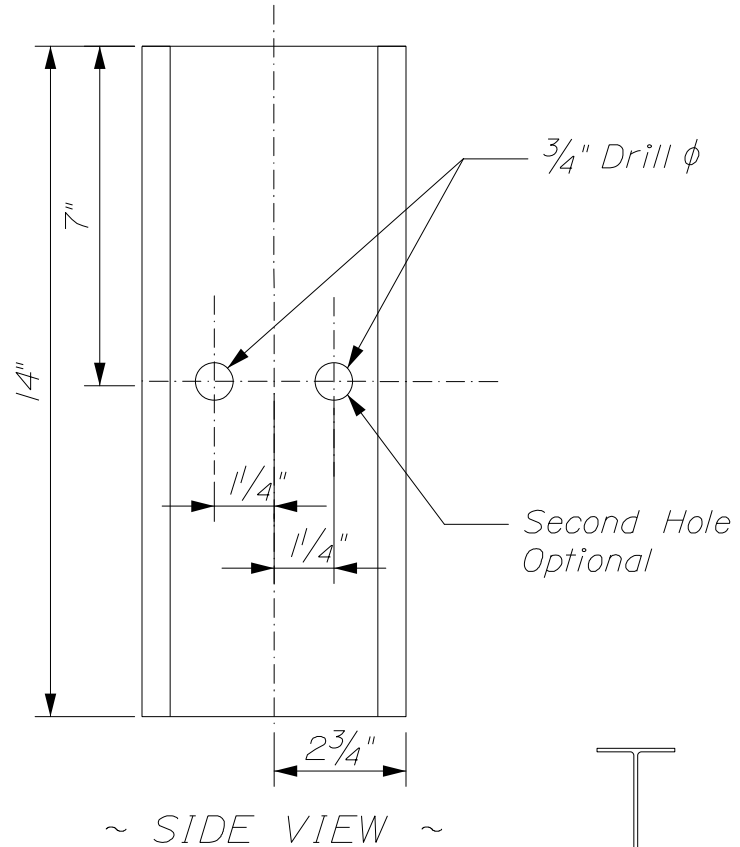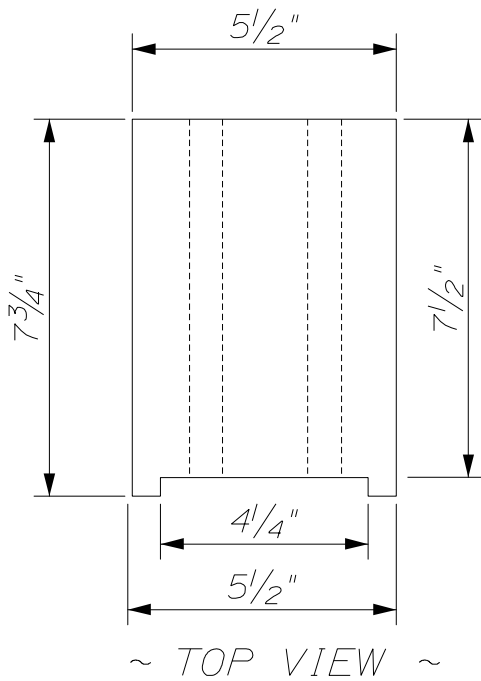


Offset Block and
Post shall be bolted with
one FBB03 Post Bolt.
Holes to be $\frac{3}{4}$ " ϕ .

Location of holes
for attaching Offset
Block to Steel Post
(second Hole is Optional)


~ STEEL POST ~
(PWE01)

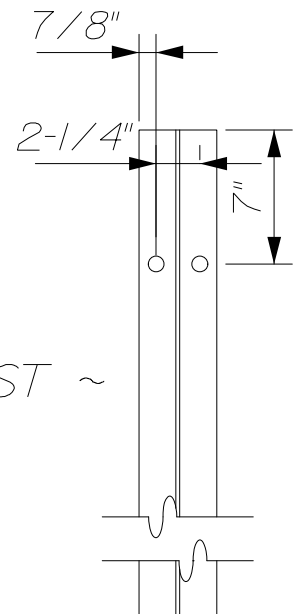

~ TOP VIEW ~

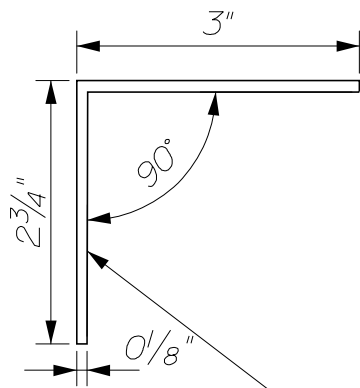


~ SIDE VIEW ~

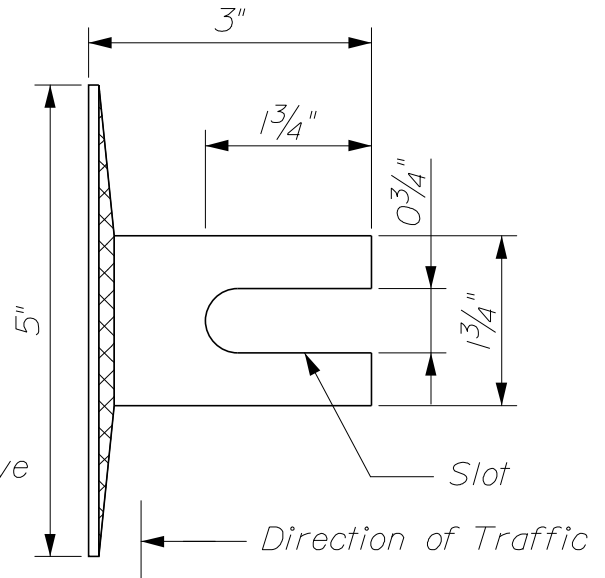


Retroreflective Material

Slot

Direction of Traffic

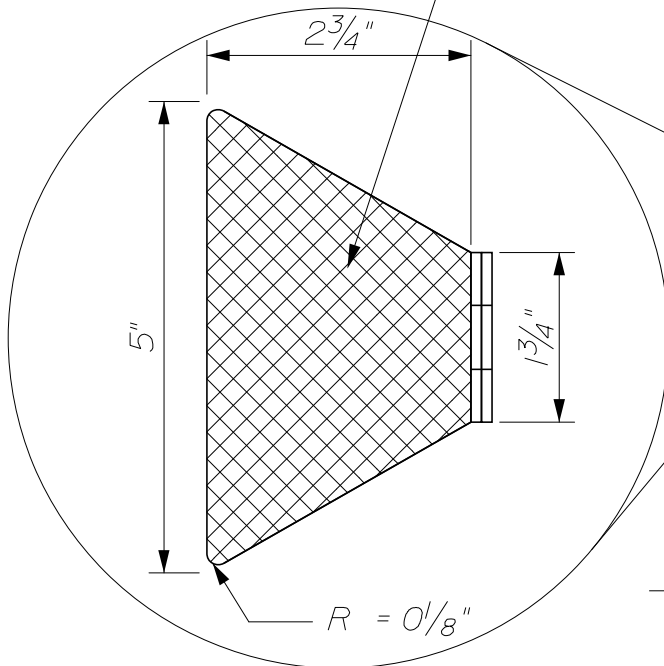

~ ELEVATION ~

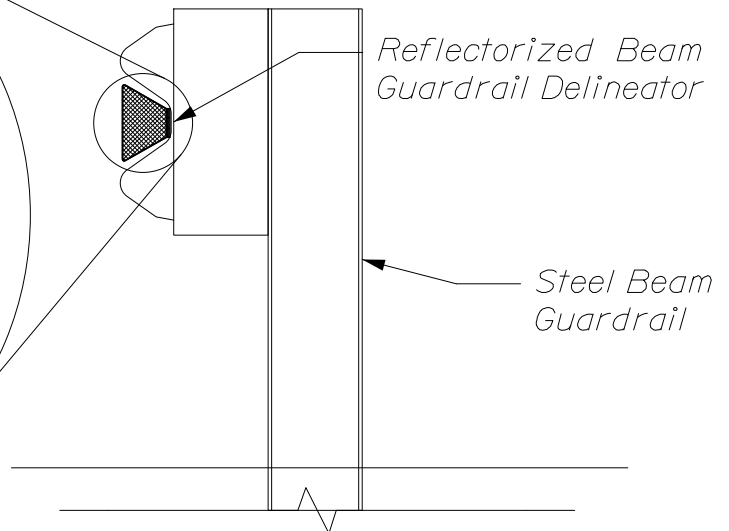


All dimensions are in inches and subject to manufacturing tolerances.

REFLECTORIZED BEAM GUARDRAIL DELINEATOR DETAILS

606(07)


NOTES:

1. *Reflectorized Flexible Guardrail Markers shall be from Maine DOT's Approved Product List of Guardrail Material.*
2. *Installation:*
 - a. *Each bolt-hole diameter shall be the bolt diameter + $\frac{1}{16}$ ".*
 - b. *Wood post attachment - attach marker with 2, $\frac{5}{16}$ " diameter galvanized lag bolts, having 3" of embedment into the wood post. Use $\frac{5}{16}$ " flat galvanized steel washers.*
 - c. *Steel post attachment - attach marker with 2, $\frac{5}{16}$ " diameter galvanized hex head bolt, washer and nut assemblies, having $\frac{1}{2}$ " of bolt extension behind steel post. Washers shall be $\frac{5}{16}$ " flat galvanized steel.*
 - d. *When provided by the marker manufacturer, a stiffening pipe shall be inserted into the base of the marker prior to drilling bolt holes and shall remain in-place.*

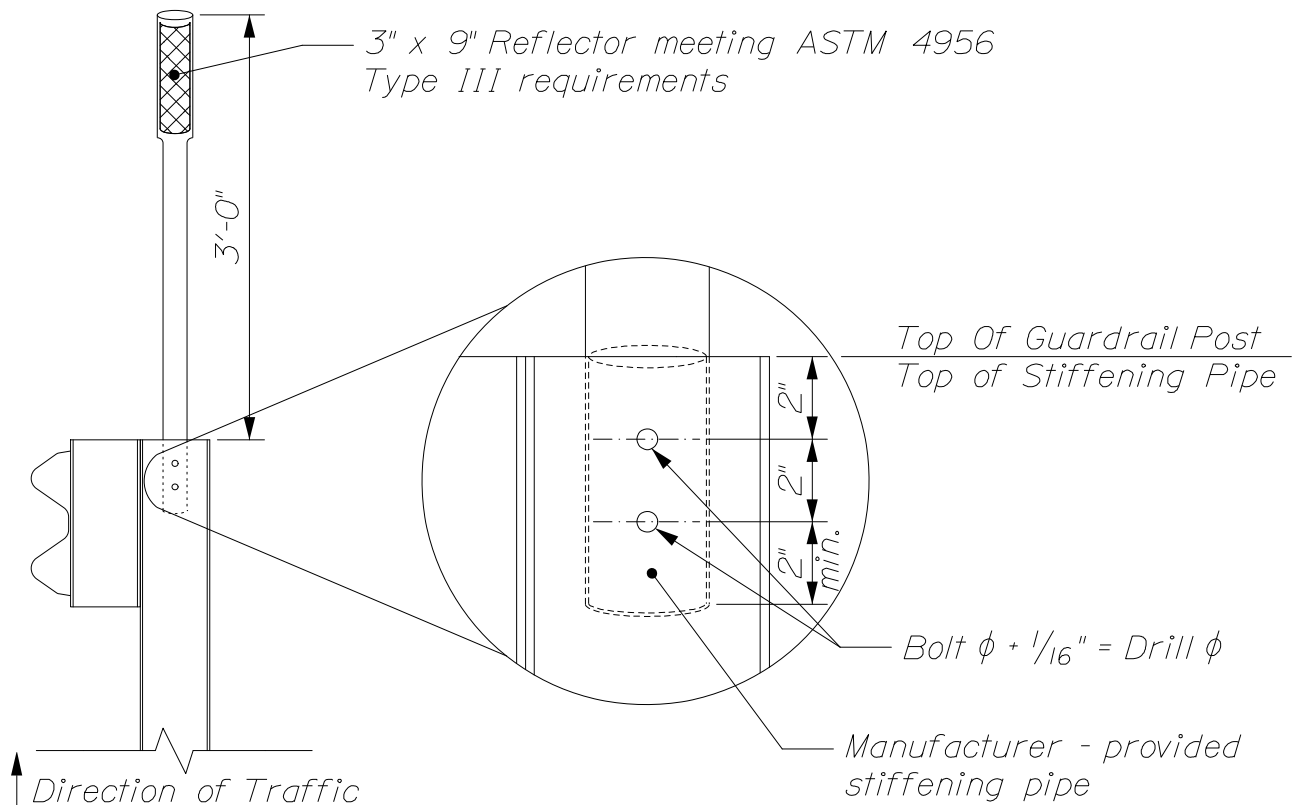

REFLECTORIZED FLEXIBLE GUARDRAIL
MARKER DETAILS

606(08)

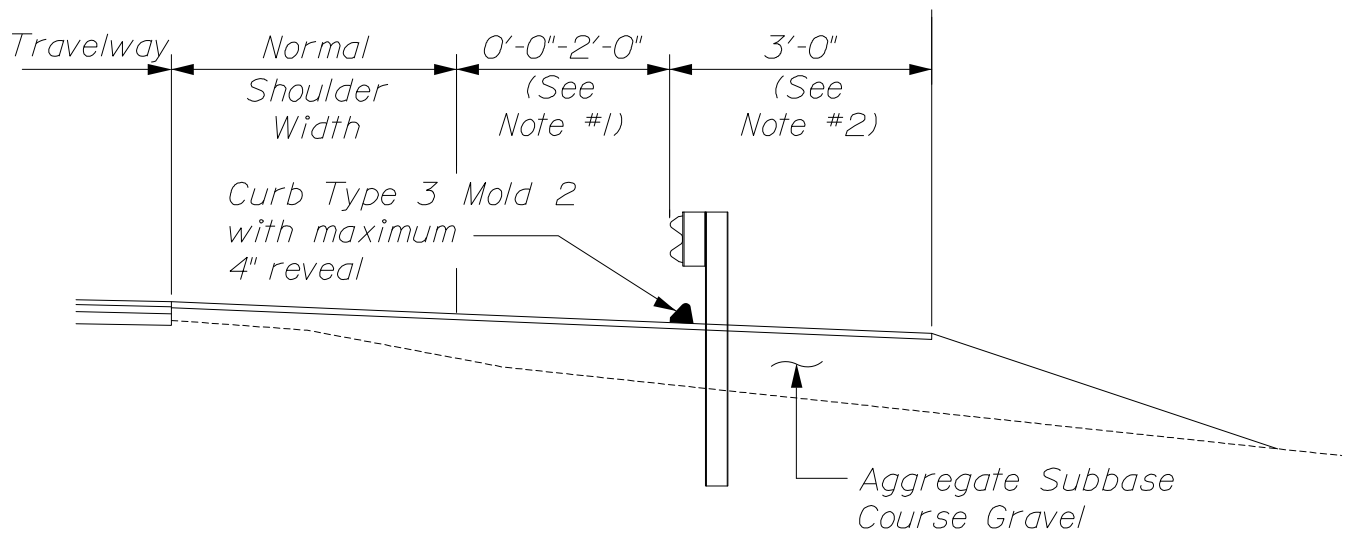

~ SECTION ~

~ NOTES ~

1. Typical barrier location should be two feet beyond the normal shoulder edge, or 16 feet from centerline.


2. A minimum of three feet shall be provided between the face of the barrier and the break in a fill embankment. When impacts are an issue, a two foot space may be used, but eight foot guardrail posts are required.

3. Curb should be placed in front of guardrail only when necessary for drainage purposes. The face of the curb should be flush with the face of the guardrail. Curb shall have a maximum 4" reveal.

4. Curb shall not be placed in front of guardrail terminals unless approved by the Project Manager.


GUARDRAIL AND CURB PLACEMENT

606(10)

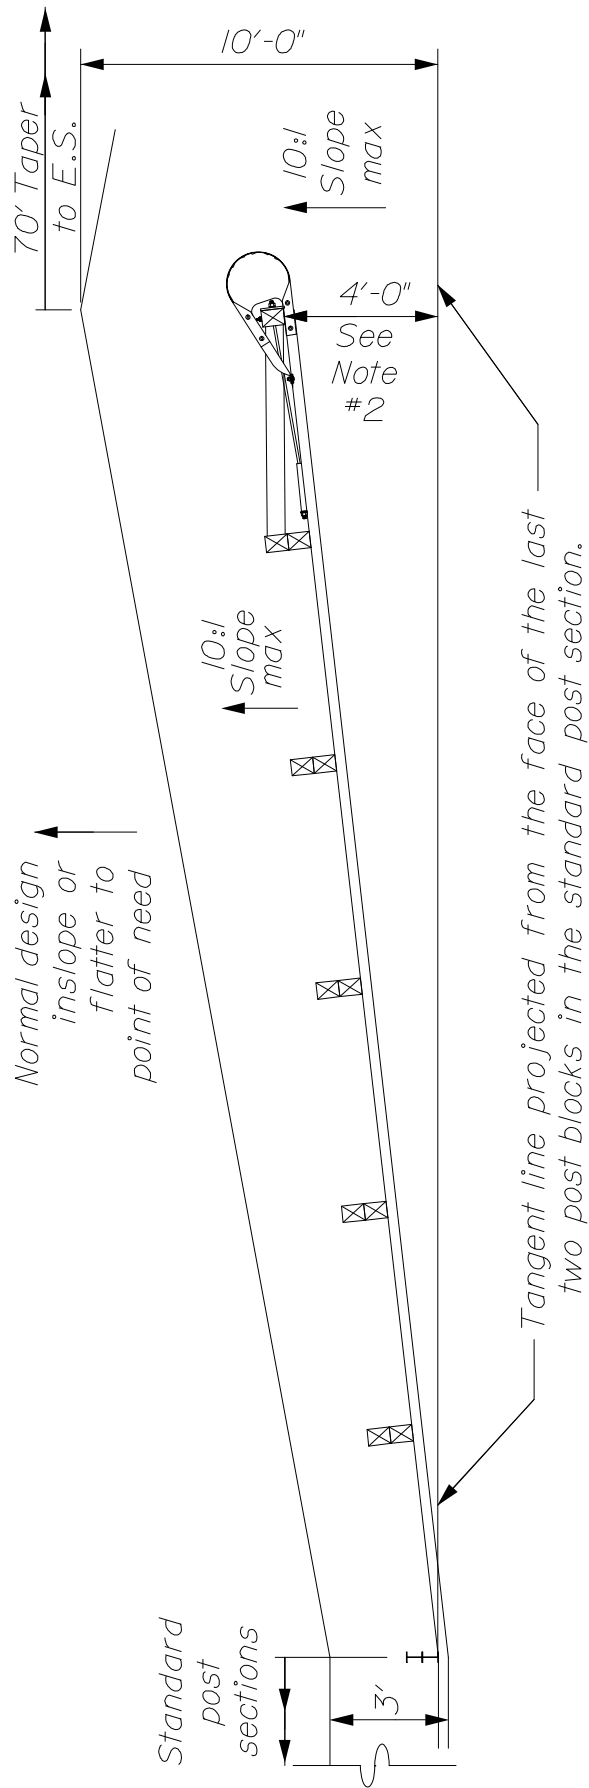


NOTES:

1. Post layout and Spacing will vary based on the terminal system that's selected. Refer to MFG Specifications for detailed layout and grading requirements.
2. Use a 4'-0" offset when allowed by the manufacturer. Otherwise, use the maximum offset allowed by the manufacturer.

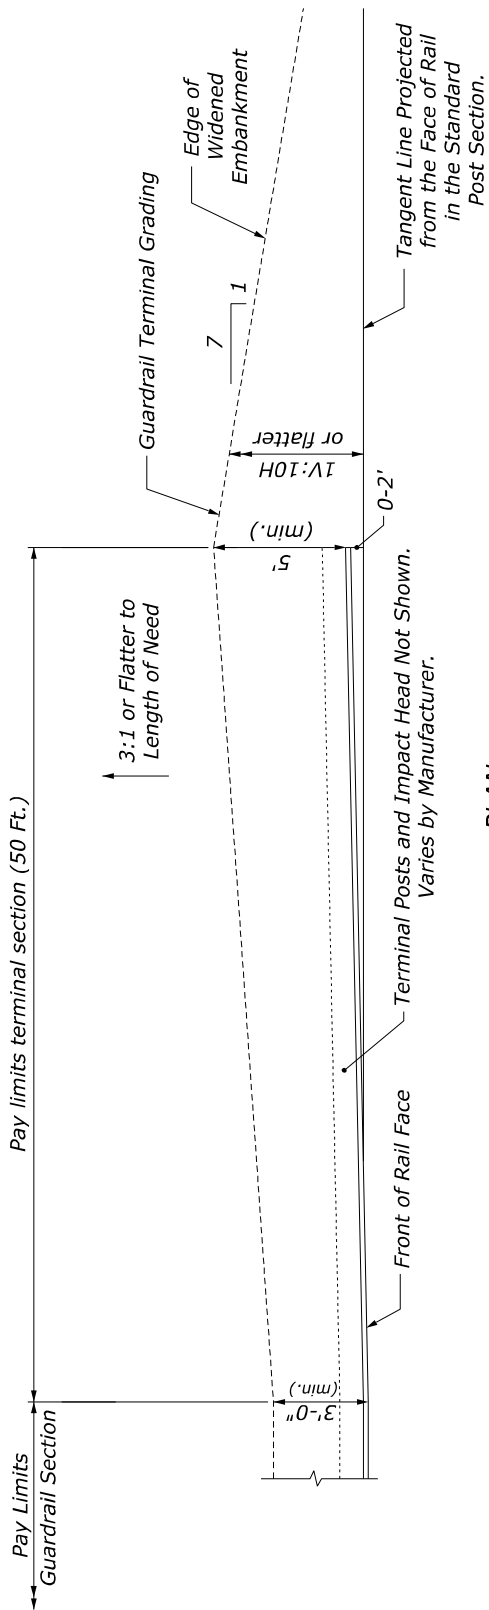

PLAN

PREFERRED GRADING


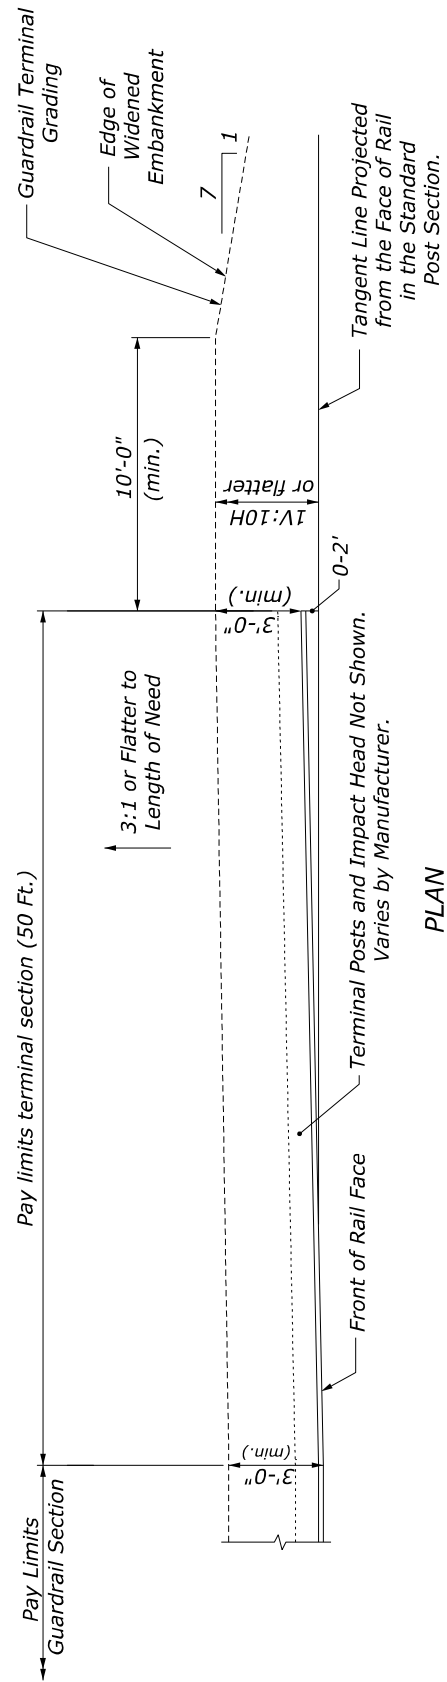


PLAN


ALTERNATIVE GRADING

GUARDRAIL TANGENT TERMINAL GRADING



606(12)

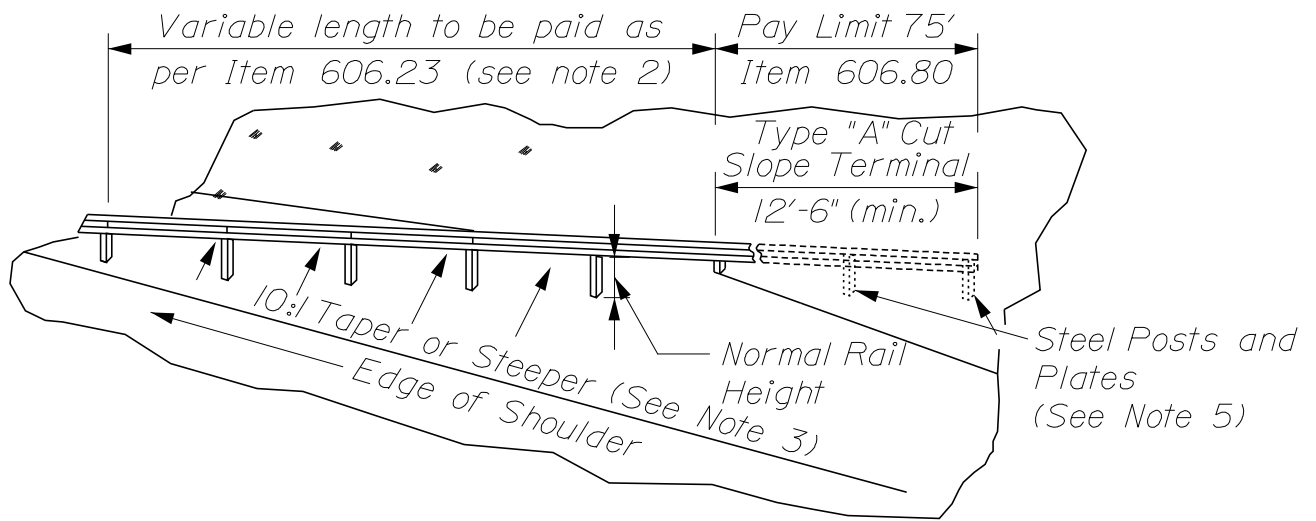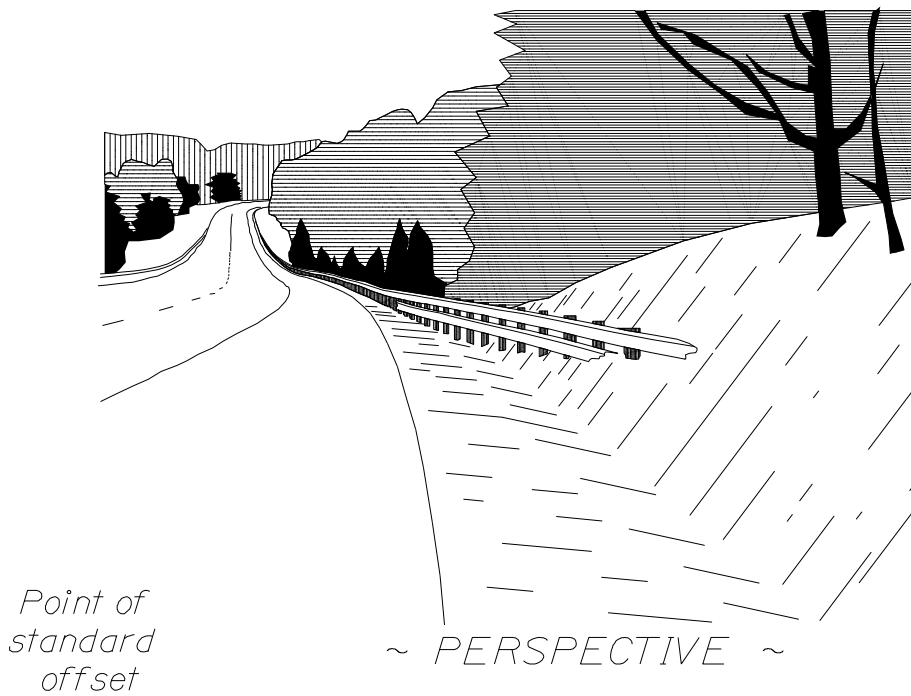

~ TYPE A (SOFT SHALE OR SOIL) TERMINAL ~

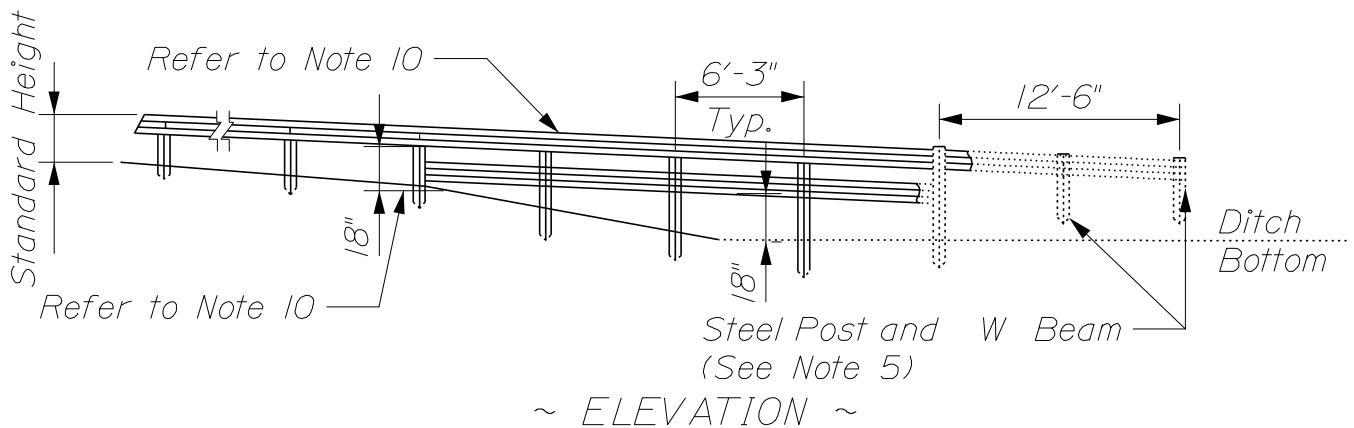


BURIED BACKSLOPE GUARDRAIL TERMINAL 606(13)

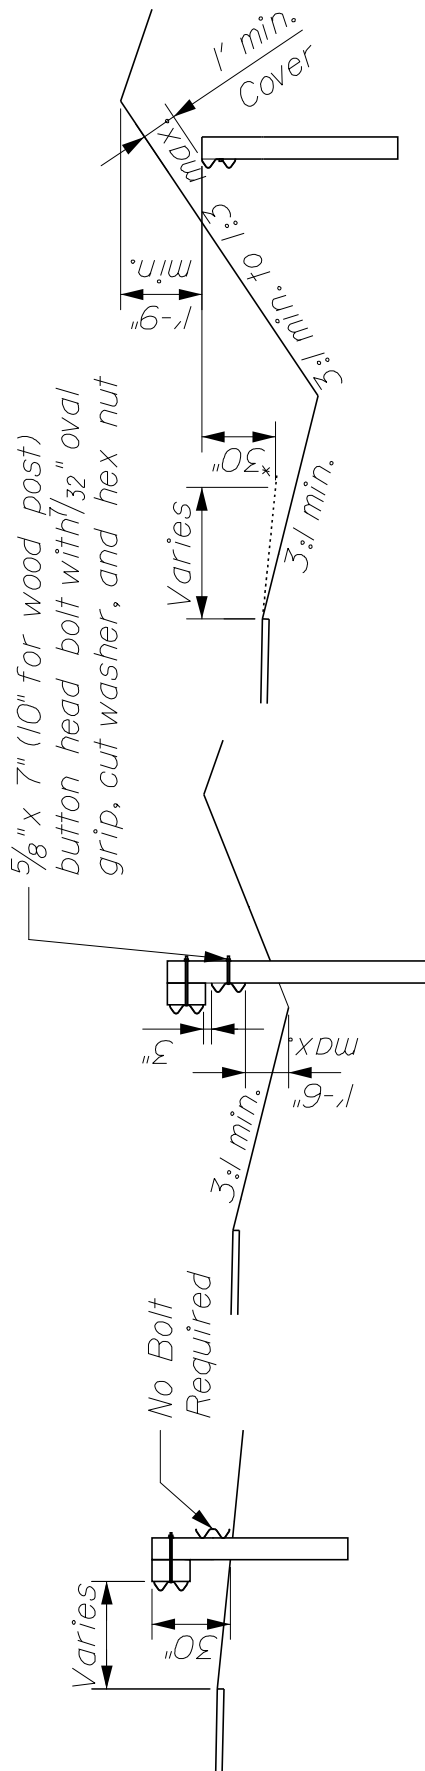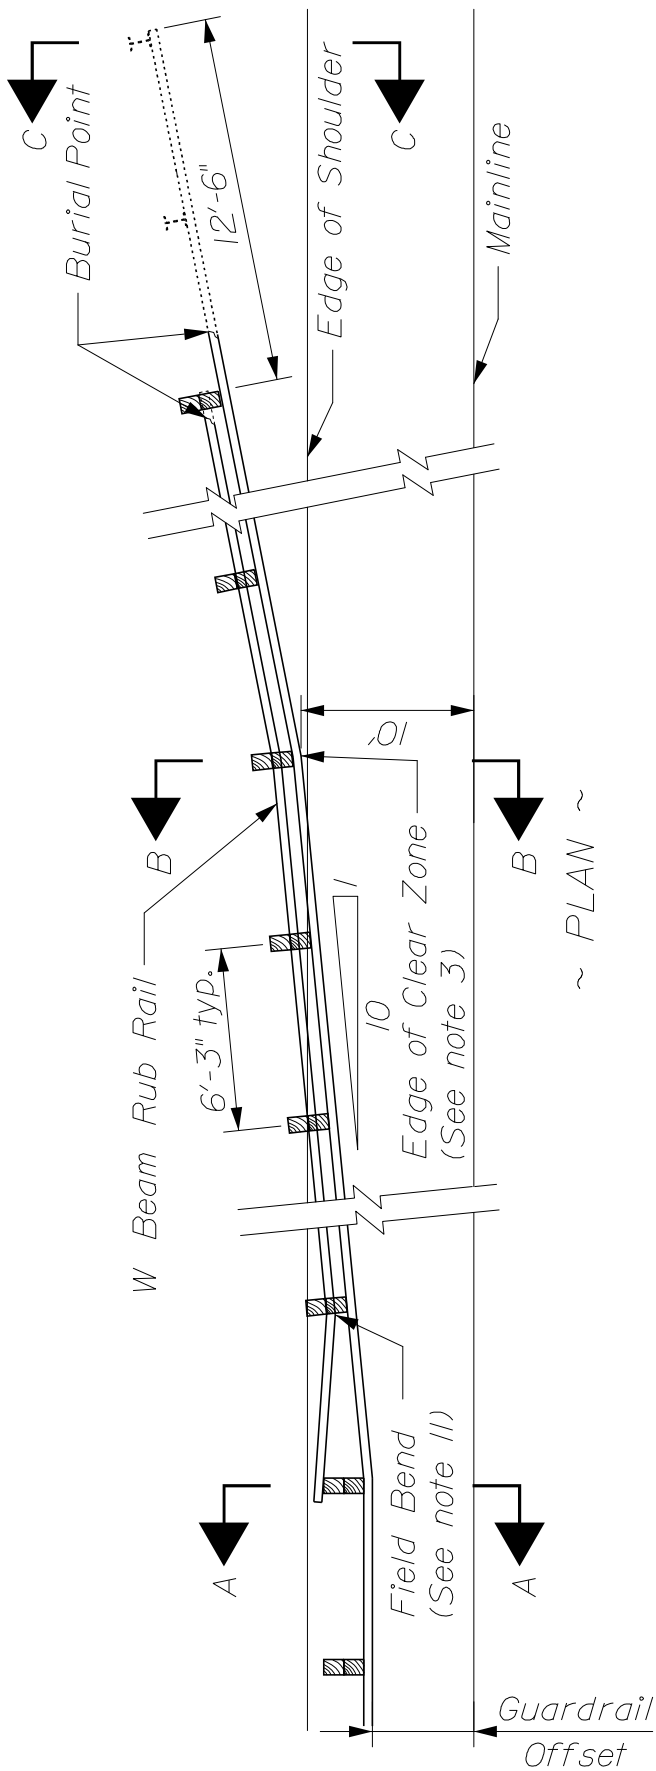


* See Note 2

BURIED IN BACKSLOPE GUARDRAIL TERMINAL
606(14)

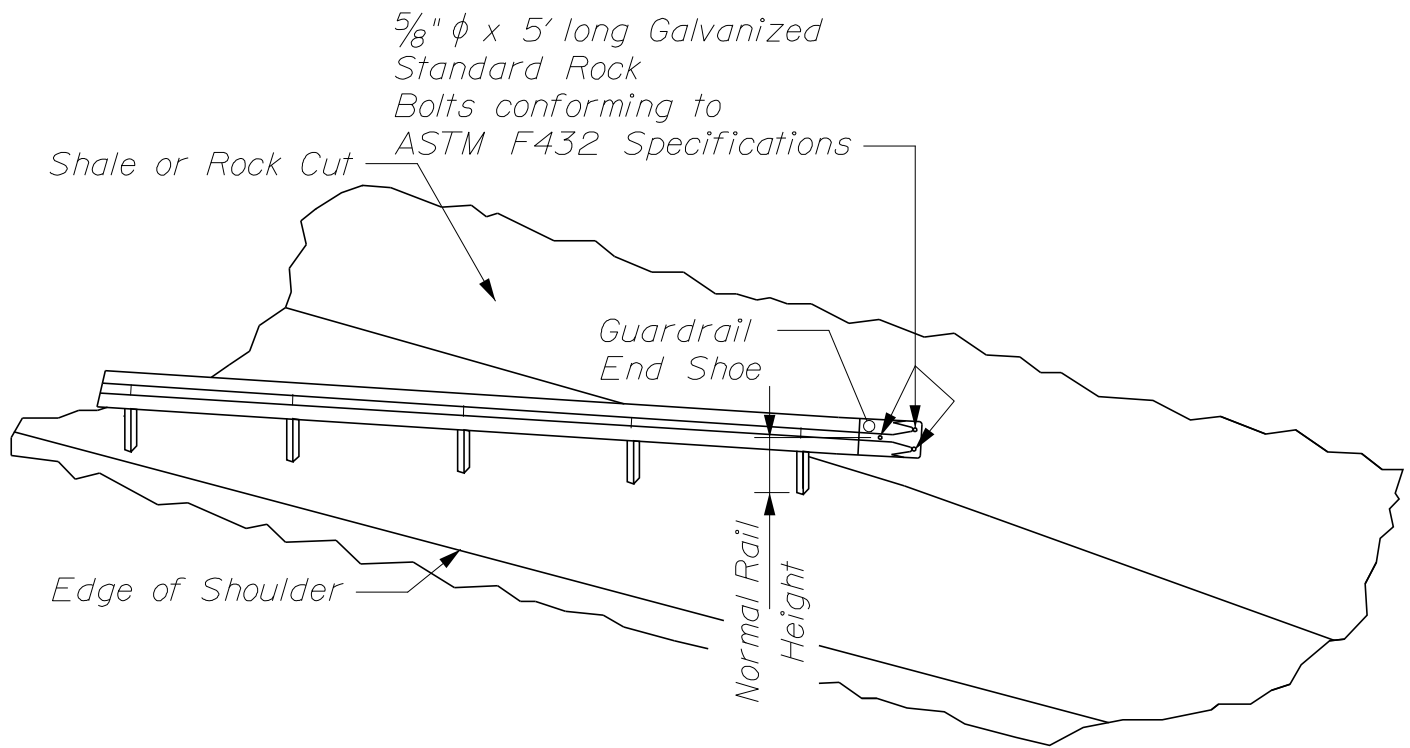

~ TYPE B (SHALE OR ROCK) TERMINAL INSTALLATION ~

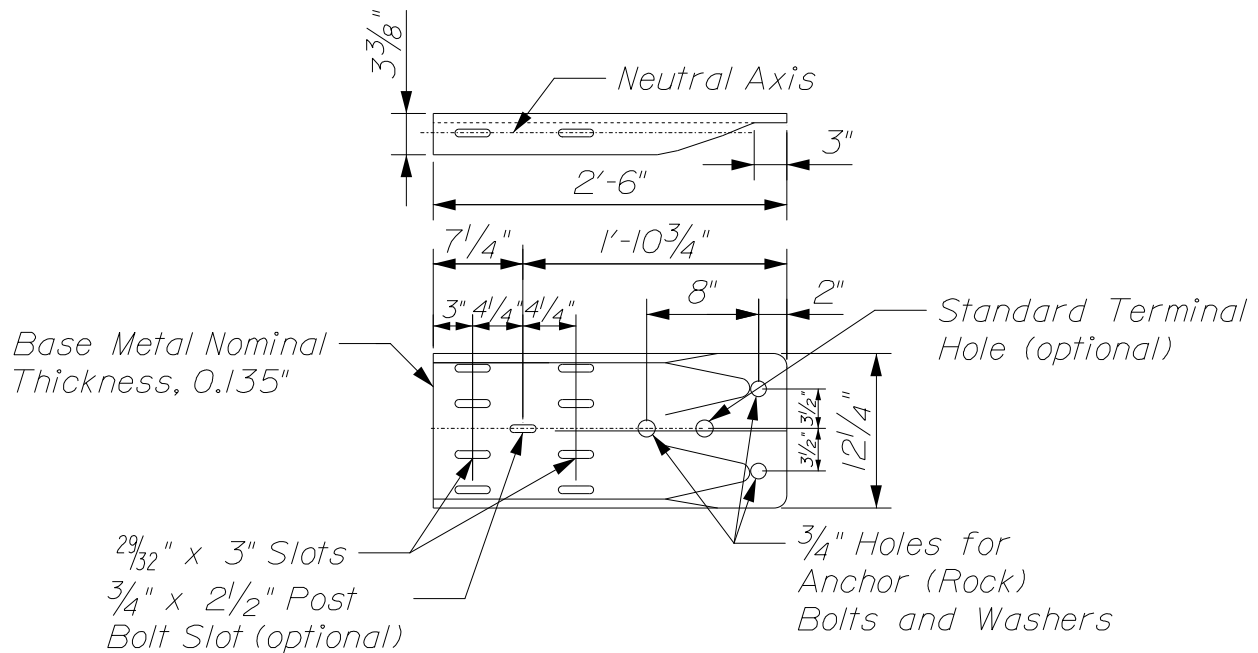

~ GUARDRAIL END SHOE DETAIL ~

GUARDRAIL TERMINAL ATTACHMENT TO LEDGE

606(15)

NOTES



1. *Prior to placing guardrail, a final check of existing conditions will be made by the project resident and any adjustment necessary to ensure the proper functioning of the guardrail for the purpose for which it is intended will be made accordingly.*
2. *Extra length posts and W beam rub rail required within the pay limit of Item #606.80 shall be considered incidental.*
3. *Extra W Beam Rub Rail required outside of the pay limit of Item #606.80 will be paid with guardrail Item (606.178 Guardrail Beam).*
4. *Extra length posts, if needed, outside the pay limit of Item 606.80 shall be incidental to Item 606.23.*
5. *The flare taper rate of the guardrail may be steepened after crossing the clear zone point to shorten the length of the terminal.*
6. *Type (A) (soil) cut slopes terminal guardrail shall be that guardrail which*
 - is to extend a minimum of two 6'-3" spans into the cut slope, from the first post beyond the toe of the cut slope, as detailed herein*
 - is to terminate a minimum of 1'-0" below the ground elevation of the back slope.*
7. *In the buried portion of the terminal, posts shall be galvanized steel. Wood posts and blocks may be used for the remainder of the terminal.*
8. *The Contractor shall so arrange his work sequence to provide that each Type (A) and (B) Terminal End shall be installed concurrently with the placement of each section of beam rail including backfilling and shaping of the disturbed slope.*
9. *Type (B) (shale or rock) Terminal installation shall consist of anchoring the guardrail against the face of the exposed rock using guardrail end shoes as detailed herein.*
10. *The final decision as to the type of cut slope terminal installation Type (A) or (B) at each location will be based on the actual materials encountered during construction.*
11. *Buried end terminals, both Type (A) and (B), will be paid as Item #606.80 complete in place.*
12. *All labor, equipment, and materials necessary for the terminal end installation including but not limited to excavation, backfilling, and slope shaping will be considered incidental to Item #606.80.*
13. *Hold the top guardrail element constant with the typical barrier installation:*
 - When the bottom of the top of guardrail element exceeds 18" in height, at any point of the slope, go up stream 1 post and add a bottom rail element under the standard guardrail element.*
 - When the top of the installation exceeds 45" from the ground, at any point in the installation, then both elements will be sloped down to maintain a maximum height of 45" in front of the toe of slope.*
14. *Bend the downstream end of the bottom rail to the backside of the post and bolt to posts. Use 96" long posts, wood (see note 7) or steel, width dimensions as per standard details at location requiring bottom rail element:*
 - When bolt holes are field drilled, zinc rich paint (cold galvanization) shall be applied to all disturbed surfaces prior to bolt installation.*

BURIED IN BACKSLOPE/ATTACHMENT TO LEDGE GUARDRAIL TERMINALS

606(16)

NOTES



1. WHEN ATTACHING A 31" GUARDRAIL TERMINAL TO GUARDRAIL TYPE 3 THIS SPLICE WILL BE THE FIRST SPLICE AT OR BEYOND THE LIMITS OF THE TERMINAL. THE ENTIRE TRANSITION WILL TAKE PLACE BEYOND THE LIMITS OF THE GUARDRAIL TERMINAL.
2. WHEN ATTACHING A 31" GUARDRAIL TERMINAL TO GUARDRAIL TYPE 3 THIS POST WILL BE POST 8 OR BEYOND, UNLESS OTHERWISE SPECIFIED BY THE MANUFACTURER.
3. A 9'-4 1/2" GUARDRAIL BEAM MAY BE USED IN PLACE OF THE ADDITIONAL POST AS DIRECTED BY THE RESIDENT. POST SPACING WILL NEED TO BE ADJUSTED ACCORDINGLY.
4. THE 25' TRANSITION APPLIES TO HEIGHT TRANSITIONS FROM 31" TO 27-3/4". IF TRANSITIONING TO A LOWER EXISTING GUARDRAIL HEIGHT, TRANSITION AT A RATE OF NO MORE THAN 3" PER 25'.
5. THE FIRST 25' OF TRANSITION WILL BE INCIDENTAL TO THE GUARDRAIL TERMINAL PAY ITEM. ADDITIONAL TRANSITION LENGTH WILL BE PAID FOR UNDER THE ADJUST GUARDRAIL PAY ITEM.

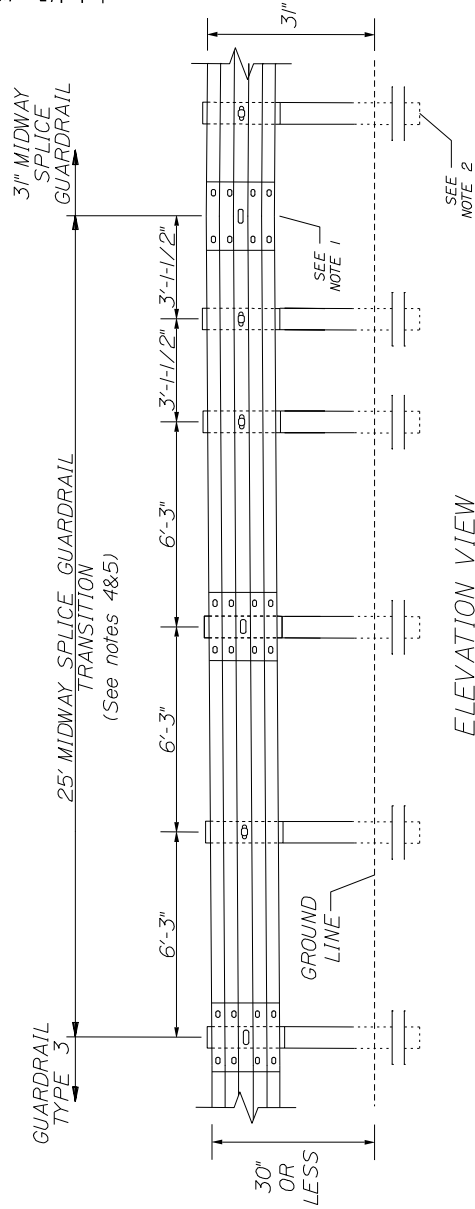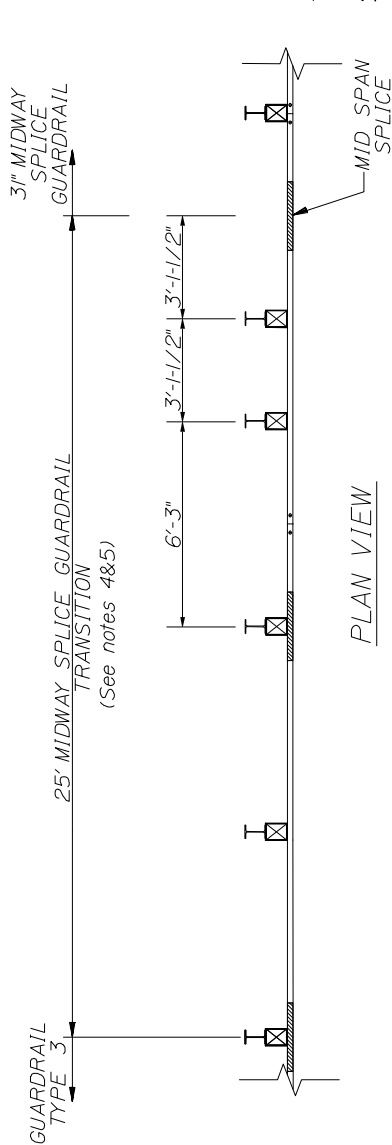

MIDWAY SPLICE GUARDRAIL TRANSITION


MIDWAY SPLICE GUARDRAIL TRANSITION

606(17)

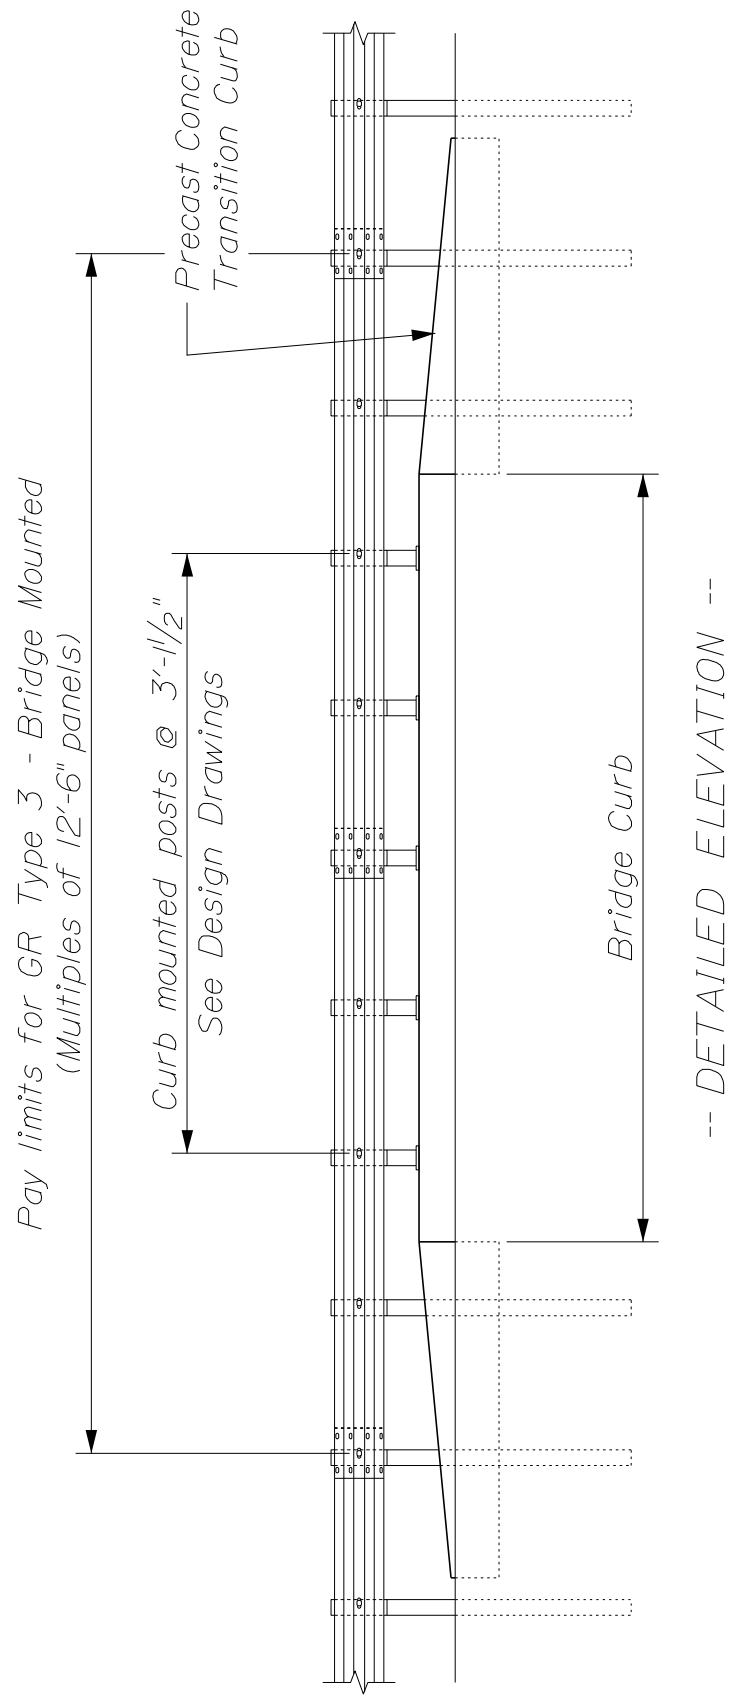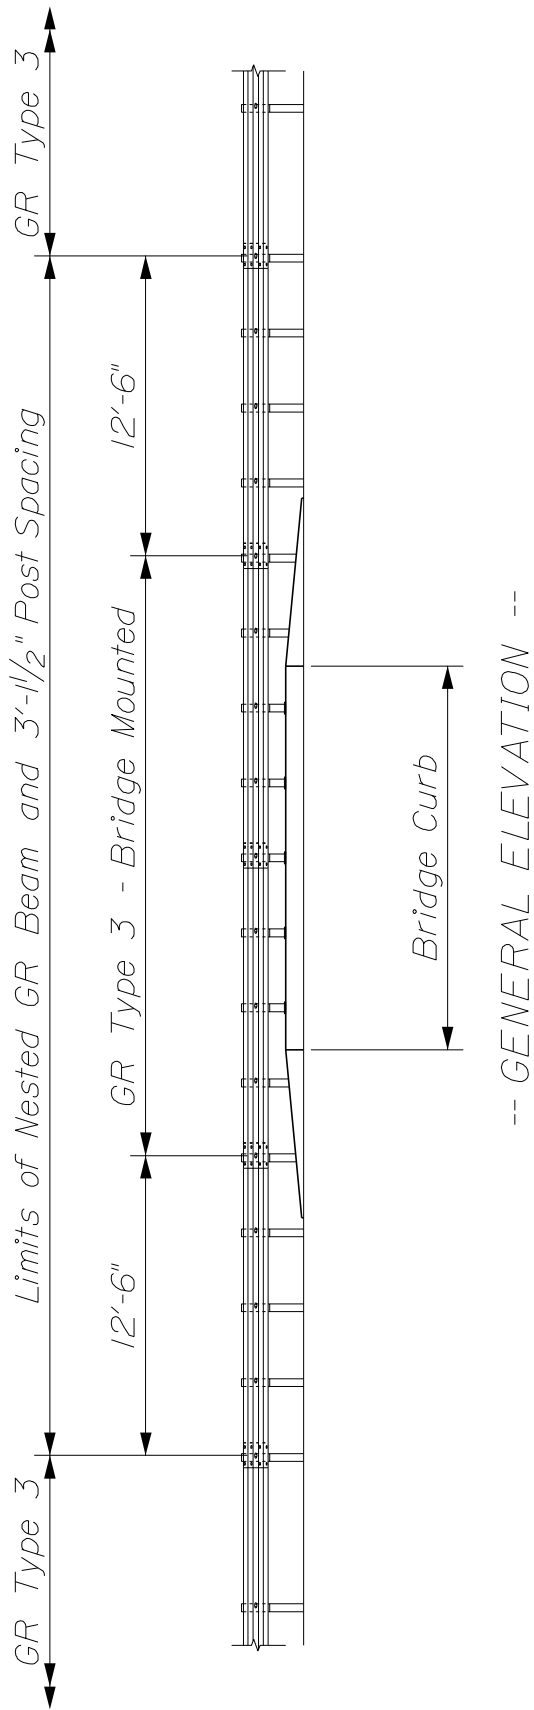


GUARDRAIL TYPE 3 - SINGLE RAIL BRIDGE MOUNTED

606(18)

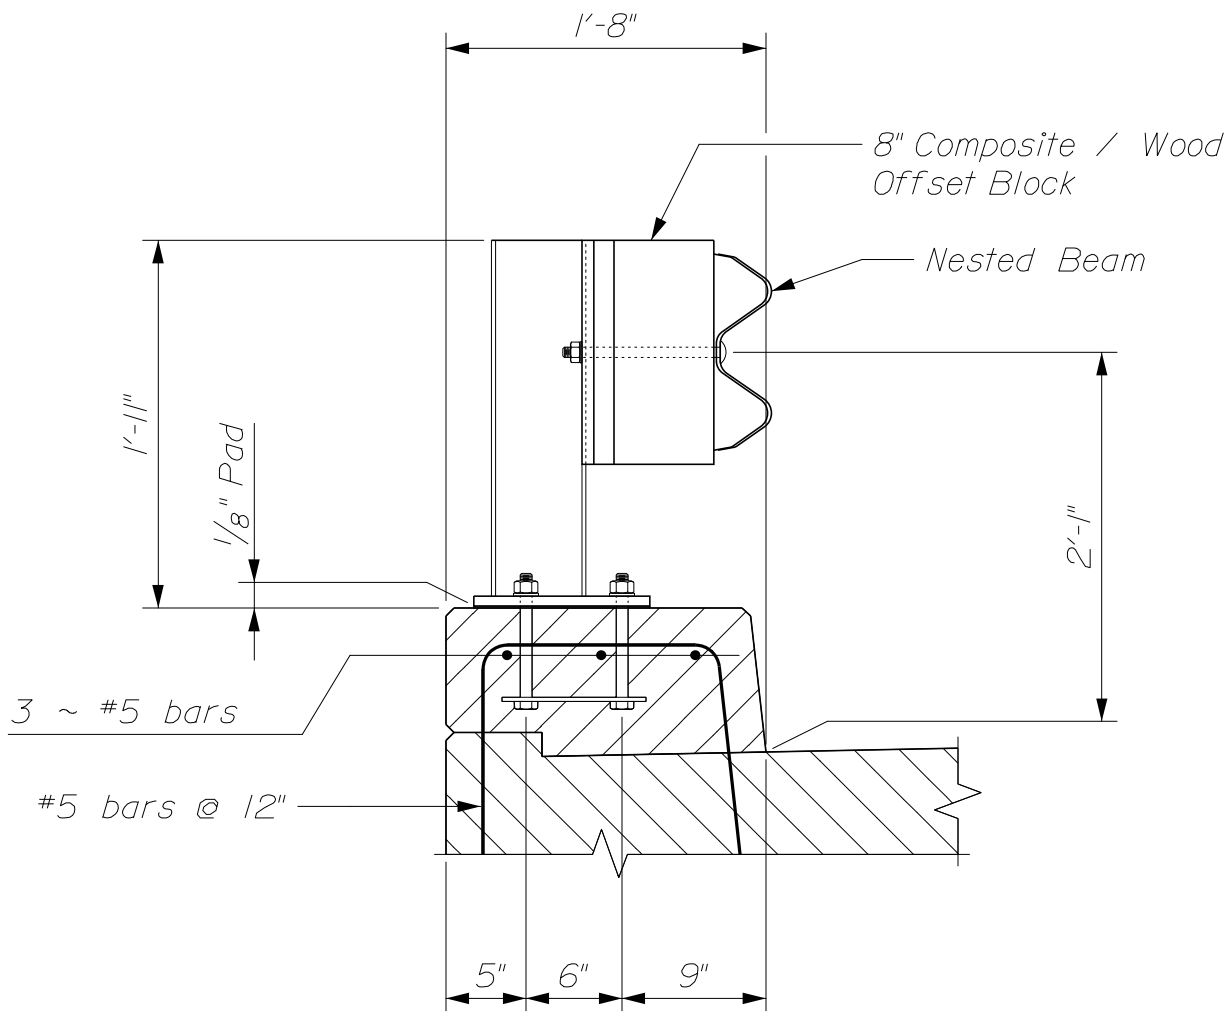


-- TYPICAL RAIL SECTION --

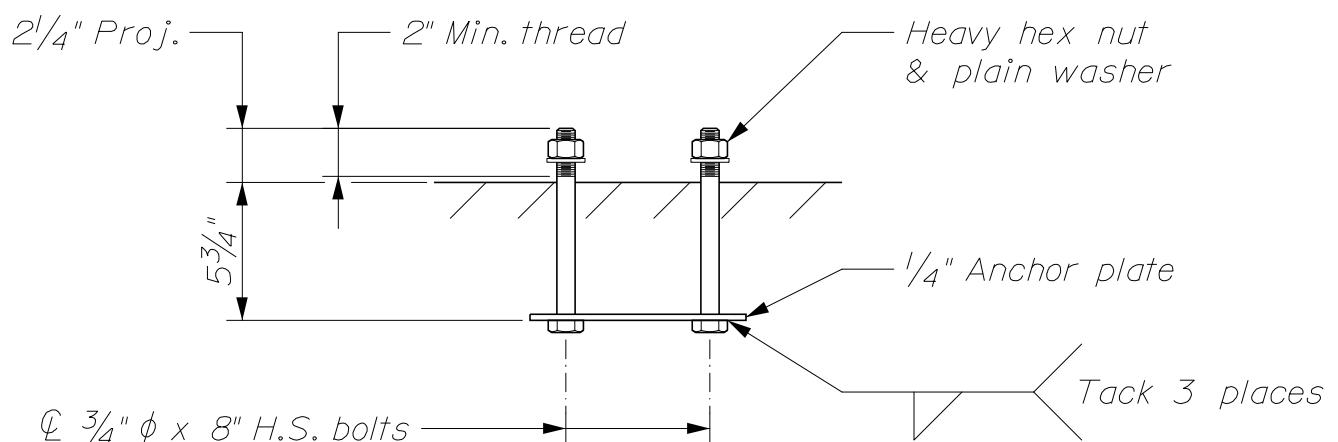


-- ANCHOR BOLT DETAIL

GUARDRAIL TYPE 3 - SINGLE RAIL BRIDGE MOUNTED

606(19)

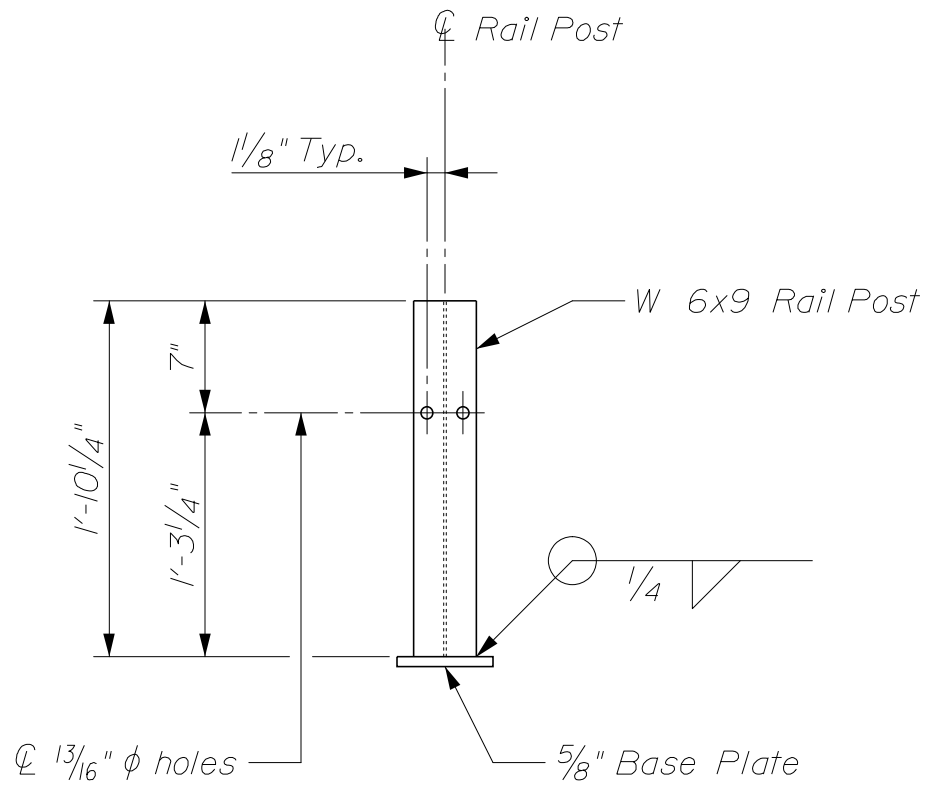

-- RAIL POST ELEVATION --

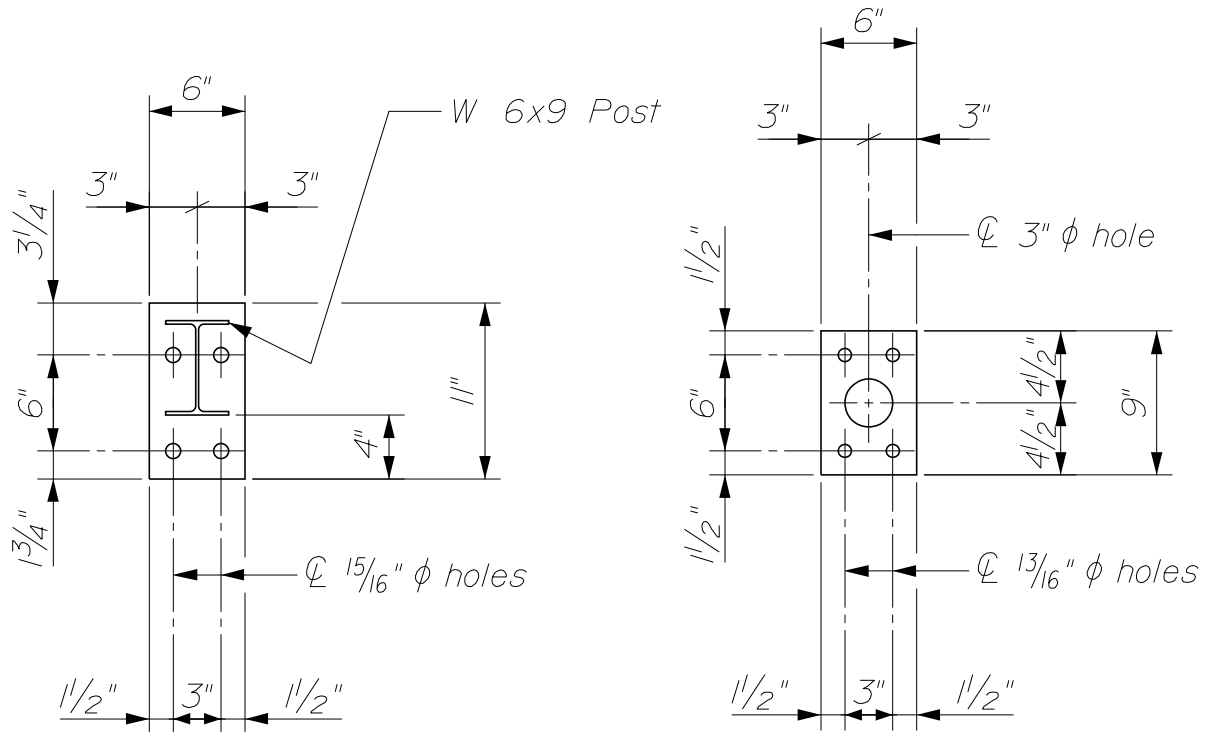

-- BASE PLATE PLAN --

-- ANCHOR PLATE PLAN --

GUARDRAIL TYPE 3 - SINGLE RAIL BRIDGE MOUNTED

NOTES:

1. All work and materials shall conform to the provisions of Section 507 - Railings and Section 606 - Guardrail of the Standard Specifications, as applicable.
2. All exposed cut or sheared edges shall be broken and free of burrs.
3. Curb mounted posts shall be set normal to grade unless otherwise shown.
4. Composite / wood offset blocks shall match those of the associated highway guardrail system.
5. Perform non-destructive testing per Section 504. Acceptance criteria shall be in accordance with the latest edition of the AWS D1.5 Bridge Welding Code.
6. All non - stock parts shall be galvanized after fabrication in accordance with ASTM A123, except that hardware shall meet the requirements of either ASTM A153 or ASTM B695, Class 50, Type I. Parts except hardware shall be blast - cleaned prior to galvanizing in accordance with SSPC - SP6.
7. Anchor bolts shall be set with a template. Nuts securing the post base shall be tightened to a snug fit and given an additional $\frac{1}{8}$ turn.
8. Nested guardrail beam and extra posts beyond the pay limits of the Bridge - Mounted Guardrail will be paid for as twice the required length of Guardrail Type 3 - Single Rail.
9. For details of the Concrete Transition Curb, refer to Standard Detail 609(08), Precast Concrete Transition Curb.

MATERIALS:

Guardrail Beam, Composite / Wood

Offset Blocks & Posts See Standard Specifications Section 710

Base Plate & Anchor Plate AASHTO M 270M/M 270, Grade 250 (36)


ASTM A709/A709M, Grade 36 (250)

Anchor bolts ASTM A449 or ASTM A1554, Grade 55

Anchor bolt washers / nuts ASTM F436 / ASTM A563

GUARDRAIL TYPE 3 - SINGLE RAIL BRIDGE MOUNTED

606(21)

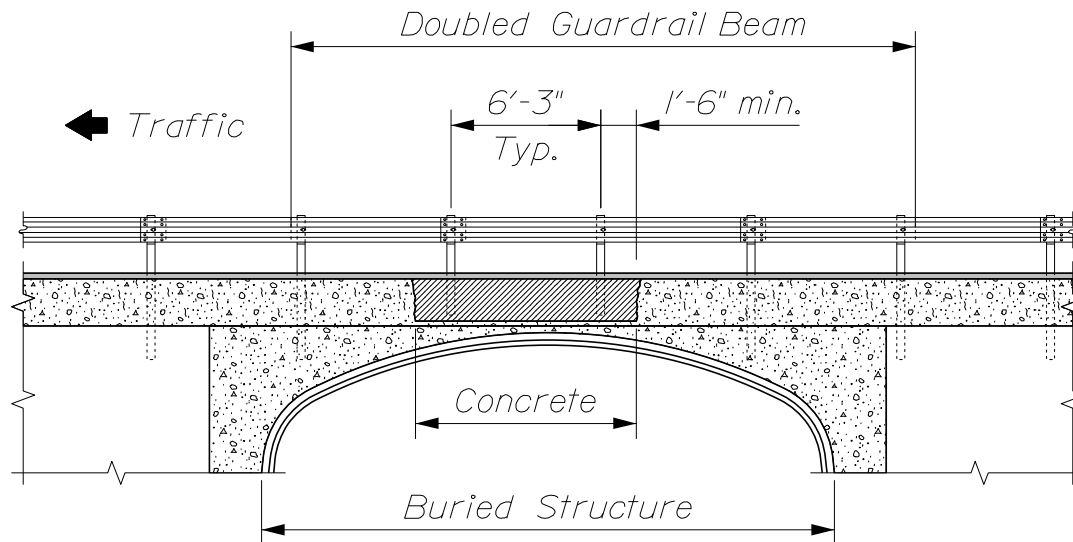

~ ELEVATION ~

NOTES:


1. This detail is not MASH compliant. Its use must be approved by the Assistant Program Manager for Design.

2. Guardrail posts interfering with a buried structure shall be cut to length in the field and cast into a concrete base as shown. The concrete may be placed directly into a trench excavated in the subbase material. The concrete mix shall be Class "A". Payment will be considered incidental to the guardrail pay items.

3. Only galvanized steel posts are to be used for this application.

4. The guardrail beam shall be doubled at least one space beyond the limits of the cut posts. Any extra beam length shall be installed toward the leading end of the guardrail. Payment will be considered incidental to the guardrail pay items.

5. Payment for any hand work required to place pavement in this area will be considered incidental to the paving items.

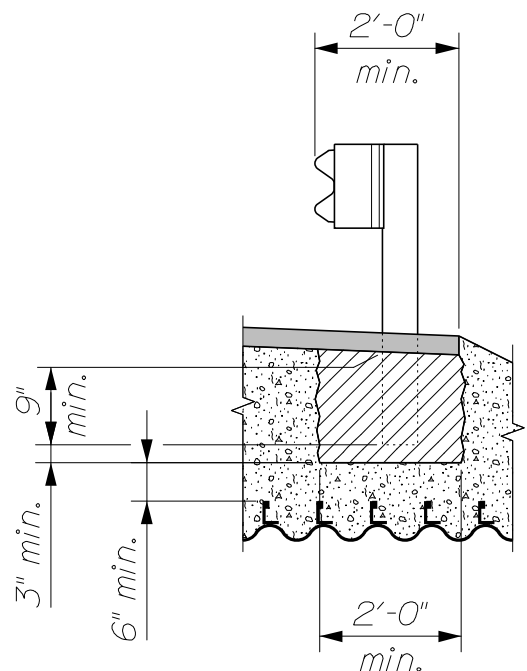


~ GUARDRAIL SECTION ~


GUARDRAIL TREATMENT OVER BURIED STRUCTURES

STANDARD BRIDGE TRANSITION - TYPE "I"

606(23)

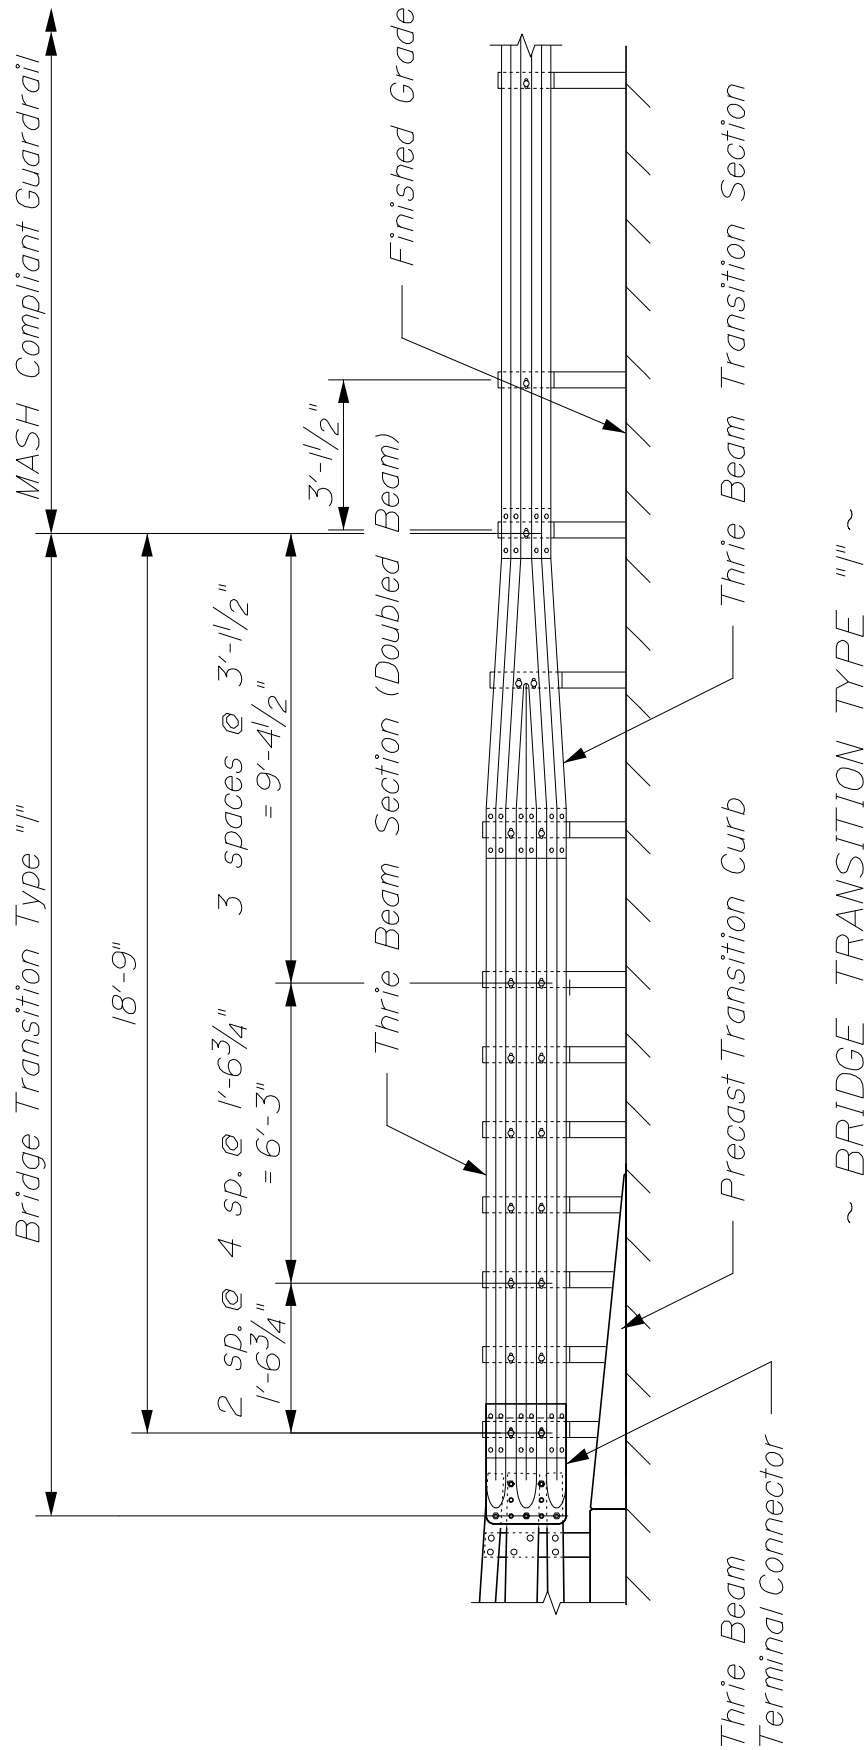


NOTE: Part designations are shown in "A Guide to Standardized Highway Barrier Hardware" as prepared and approved by the AASHTO - AGC - ARTBA Joint Committee, Task Force 13 Report.

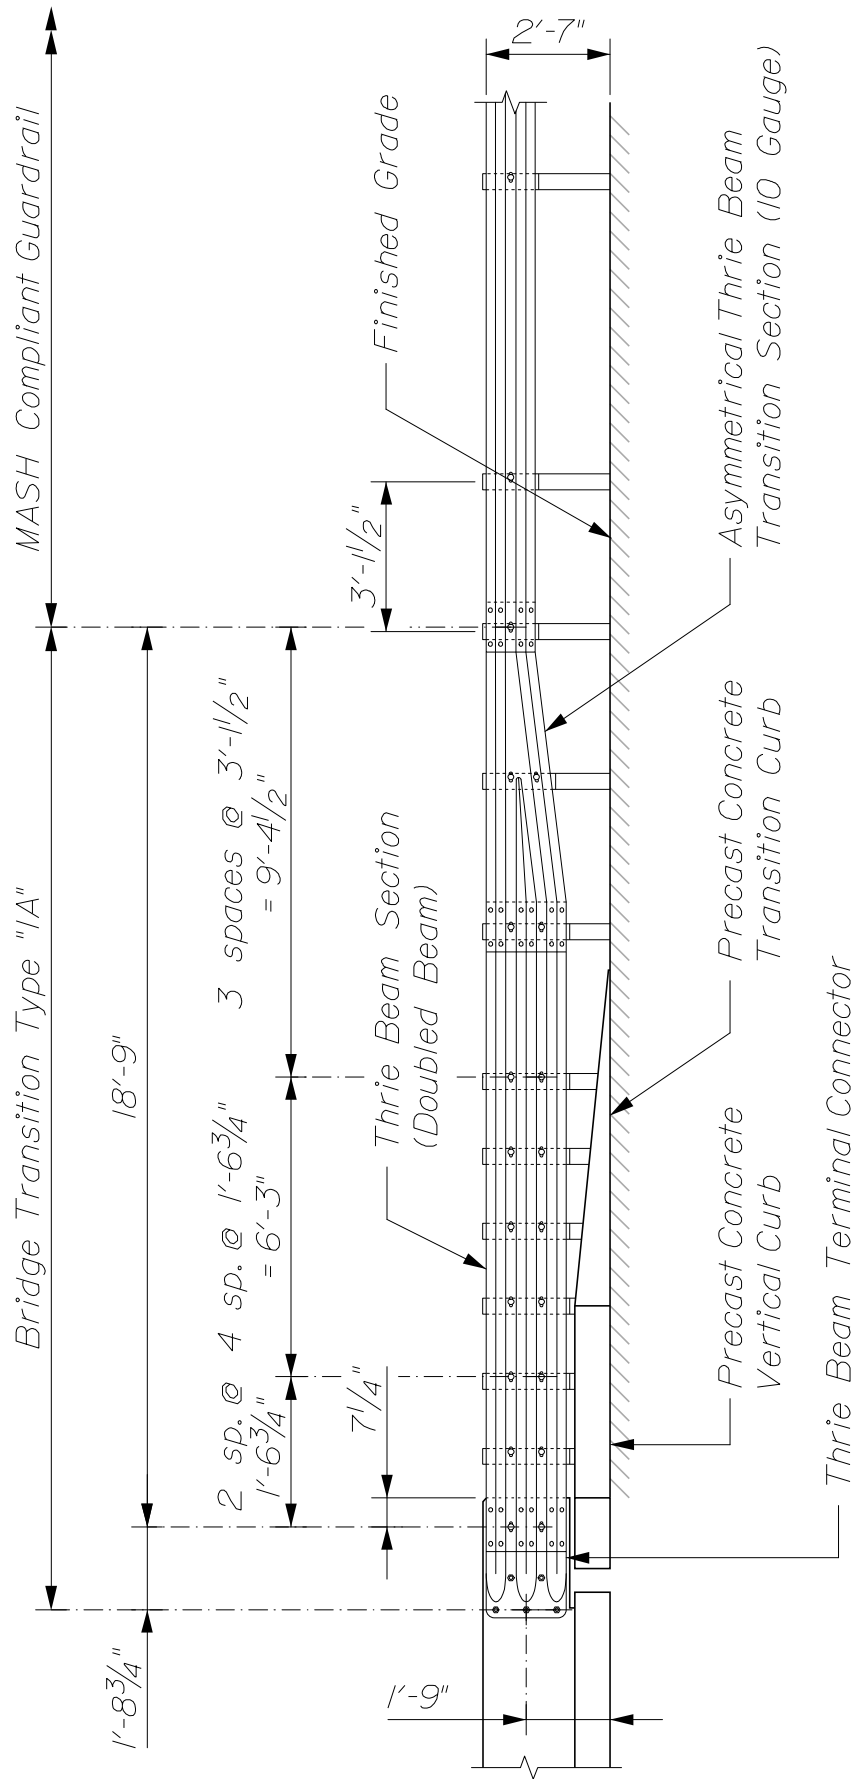

~ BRIDGE TRANSITION TYPE "IA" ~

NOTE: Part designations are shown in "A Guide to Standardized Highway Barrier Hardware" as prepared and approved by the AASHTO - AGC - ARTBA Joint Committee, Task Force 13 Report.

BRIDGE TRANSITION - TYPE "IA"
606(24)

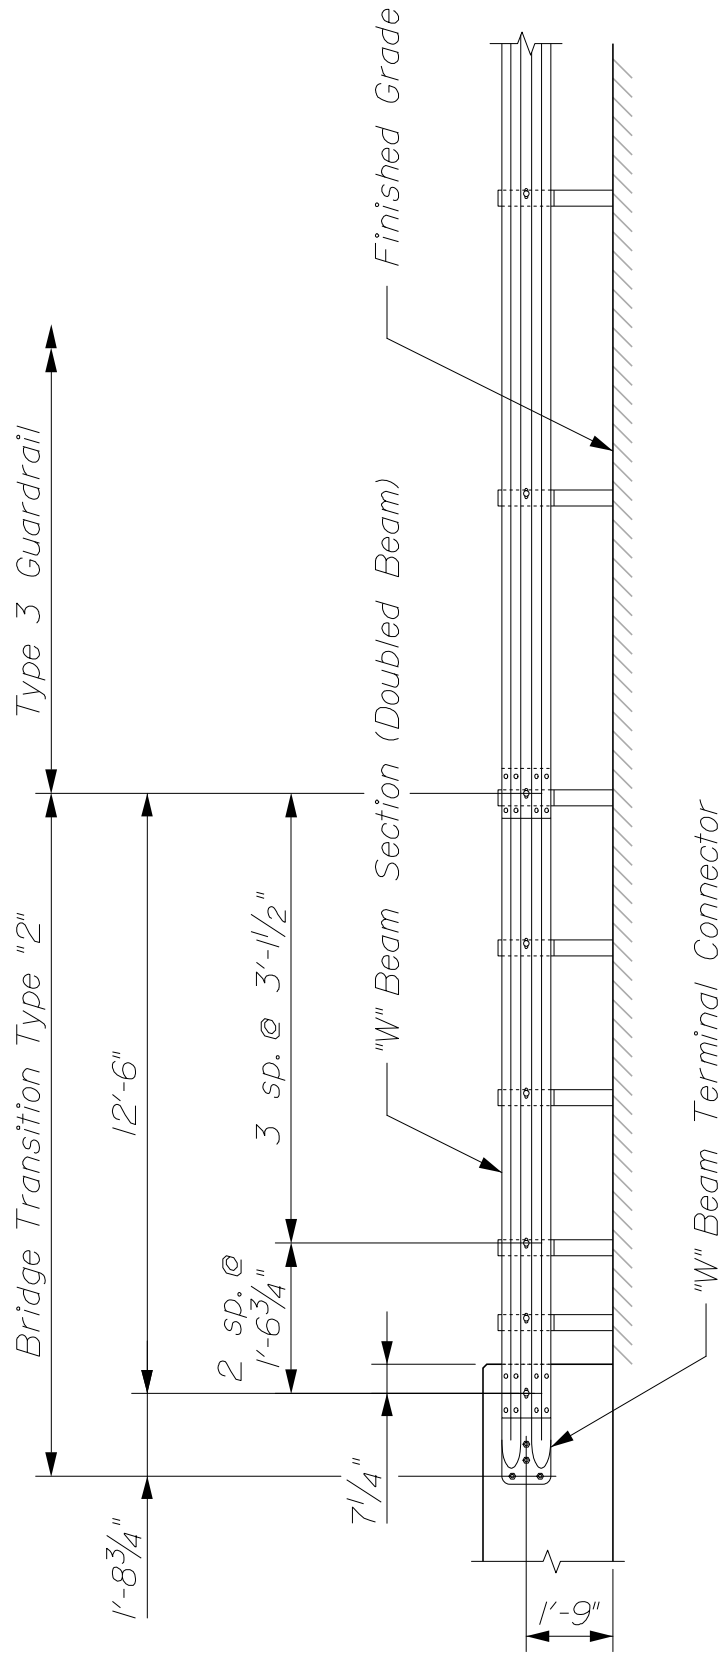

~ BRIDGE TRANSITION TYPE "2" ~


NOTES:

1. Part designations are shown in "A Guide to Standardized Highway Barrier Hardware" as prepared and approved by the AASHTO - AGC - ARTBA Joint Committee, Task Force 13 Report.
2. This design does not meet NCHRP 350 crash testing criteria.


NON - STANDARD
BRIDGE TRANSITION - TYPE "2"
606(25)

NOTES:

1. All accessories including posts, bolts and nuts shall be as specified for standard Type 3 Guardrail, except as otherwise detailed.
2. Threaded rods, washers and nuts shall conform to AASHTO M 314, Grade 105 and shall be galvanized in accordance with AASHTO M 232.
3. After installation of the guardrail is complete, upset the threads on the threaded rods in three places around each rod, at the junction of the nut and the exposed thread, with a center punch or similar tool.
4. Payment for Terminal Connector Anchorage including threaded rods, washers, nuts and bearing plate and for field drilling holes for anchor rods will be considered incidental to the Bridge Transition item.

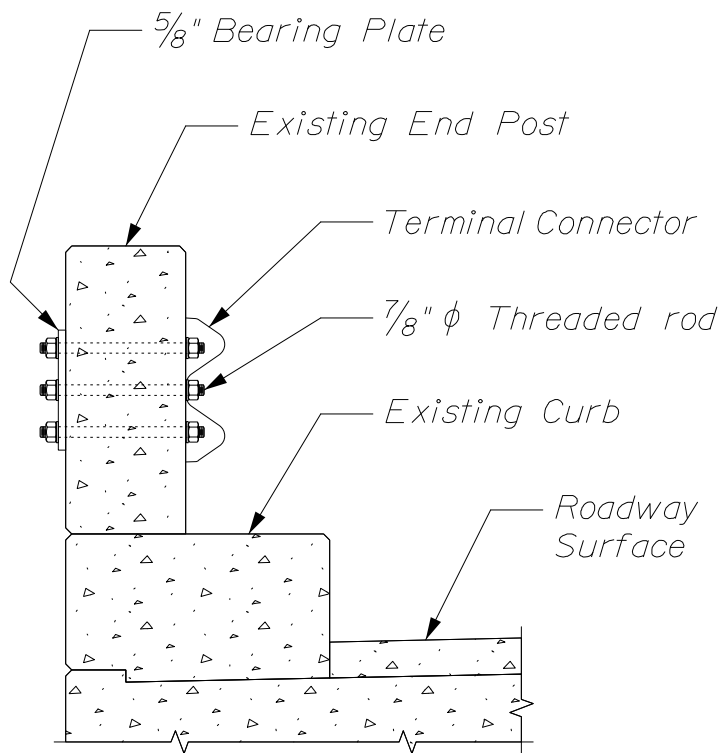

-- END POST SECTION --

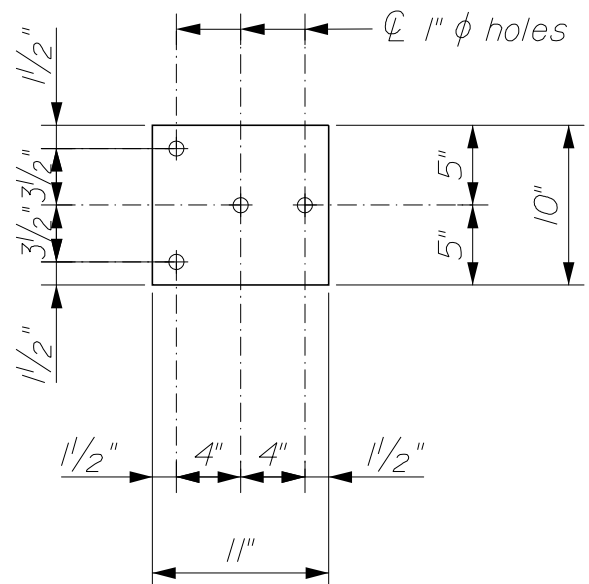

-- BEARING PLATE --

"W" BEAM TERMINAL
CONNECTOR ANCHORAGE
606(26)


WOVEN WIRE FENCE	NOMINAL SIZE (inches)	SHAPE	WEIGHT (lbs./ft.)	COMMENTS
End, Intermediate, & Corner Posts	2 1/2" x 2 1/2" x 1/4" 2" 2"	Δ	9.04	Grade 1* w/Top Cap Grade 2* w/Top Cap
		φ	8.05	
		φ	6.87	
Gate Posts	3 1/2" x 3 1/2" x 5/16"	Δ	15.85	Grade 1* w/Top Cap Grade 2* w/Top Cap
		φ	12.76	
		φ	10.23	
Line Posts	---- 1 1/4" 1 1/4"	T	2.93	Studded Grade 1* w/Top Cap Grade 2* w/Top Cap
		φ	5.00	
		φ	4.05	
Braces	1 3/4" x 1 3/4" x 1/4" 1 1/4" 1 1/4"	Δ	6.11	
		φ	5.00	
		φ	4.05	
CHAIN LINK FENCE	NOMINAL SIZE (inches)	SHAPE	WEIGHT (lbs./ft.)	COMMENTS
End & Corner Posts	2" I.D.	φ	8.05	Grade 1* Grade 2*
	2" I.D.	φ	6.87	
	2 1/2" x 2"	H	9.04	Integral Loops
	3 1/2" x 3 1/2"	Δ	11.33	
Line Posts	1 1/2" I.D.	φ	6.00	Grade 1* Grade 2*
	1 1/2" I.D.	φ	5.03	
	1 7/8" x 1 5/8"	H	5.95	
	1 7/8" x 1 5/8"	C	5.03	
Top & Brace Rails	1 1/4" I.D.	φ	5.00	Grade 1* Grade 2*
	1 1/4" I.D.	φ	4.06	
	1 5/8" x 1 1/4"	⌋		

* AASHTO M 181 Par. 29.1

FENCE POST, RAIL, AND BRACE OPTIONS

607(01)

When angle sections are used, they shall be joined with $\frac{5}{16}$ " machine bolts through $\frac{7}{16}$ " ϕ holes

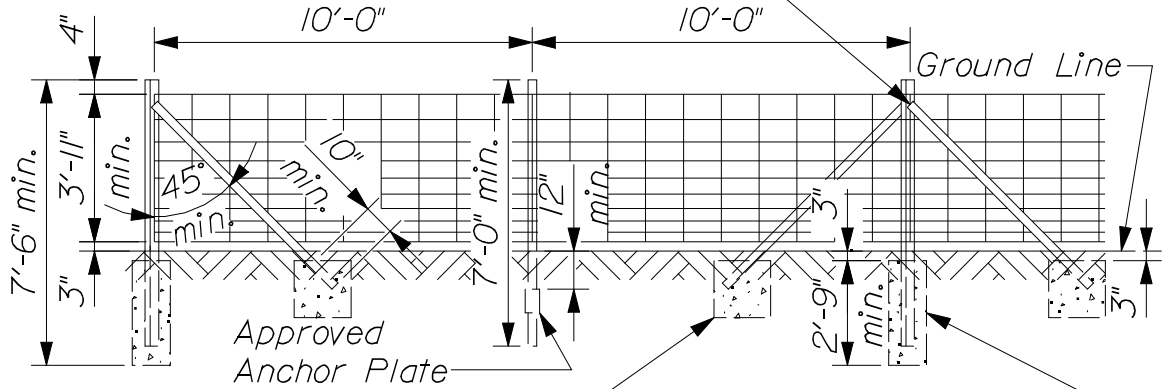

Concrete Base 18" x 18" x 18" or Metal Base Plate approved by the Resident. Forms not required in well formed holes.


End, gate, intermediate or corner posts set in 12" square or round concrete base.

~ END OR GATE POST ~


~ LINE POST ~

~ INTERMEDIATE OR CORNER POST ~

~ WOVEN WIRE FENCING - METAL POSTS ~

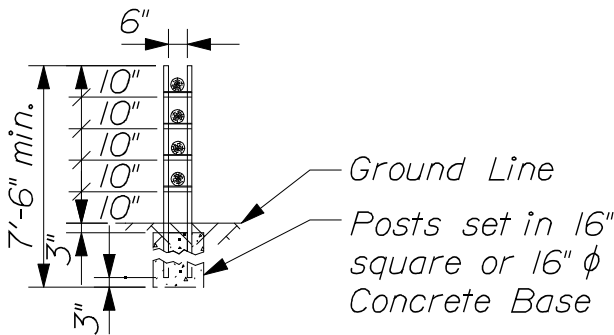

~ BARWAY ~



~ BRACE CLAMPS - PIPE POSTS ~


NOTE:

Metal posts shall be installed for a 16'-0" opening. Barway posts and braces shall conform to the requirements of "Gate Posts" and "Braces" under "Woven Wire Fencing - Metal Posts". Cross bar supports for barways shall be $1\frac{3}{4}$ " x $1\frac{3}{4}$ " x $\frac{1}{4}$ " rolled angle section. When round gate posts are used, the length of the cross bar supports shall equal the center-to-center of the posts plus 2 inches and they shall be attached to the barway post with $\frac{5}{16}$ " x $4\frac{1}{4}$ " machine bolts. When angle section gate posts are used, the length of the cross bar supports shall be equal to the out-to-out dimensions of the angle sections and shall be attached with $\frac{5}{16}$ " x 1" machine bolts. All bracing shall conform to the requirements of "Woven Wire Fencing - Metal Posts". Cross bars shall be as required for "Barways - Wood Posts".

~ BARWAYS - METAL POSTS ~

FENCING


607(02)

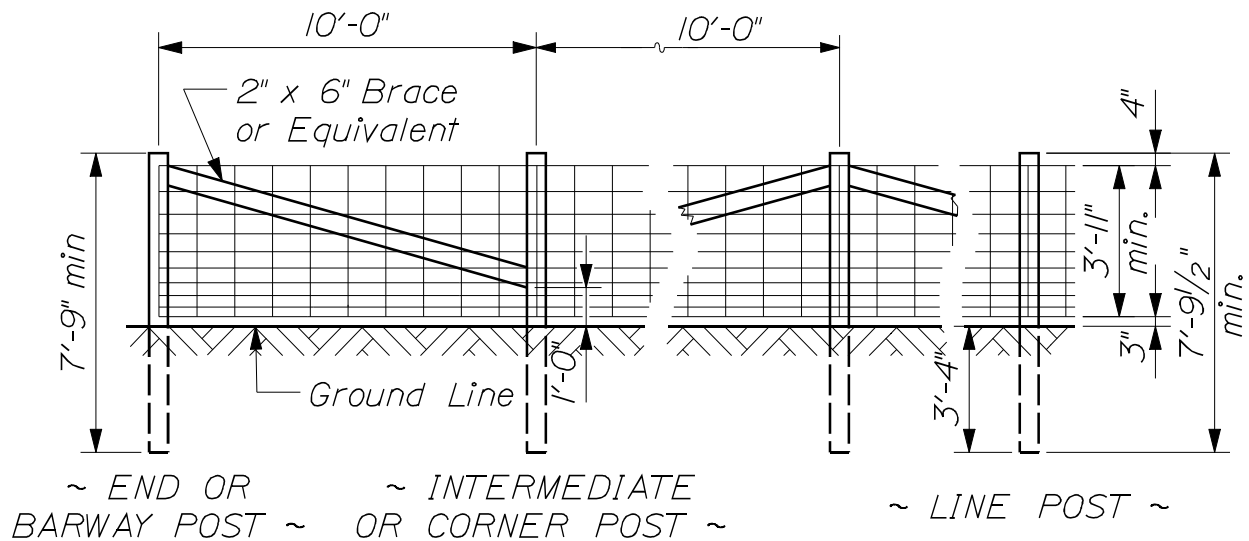

NOTES:

1. Staples for wood posts are to be 9 Ga. 1 1/2" and placed according to the Standard Specifications.
2. All end, corner, barway, and intermediate posts shall be braced as shown.


~ WOVEN WIRE FENCING - WOOD POSTS ~

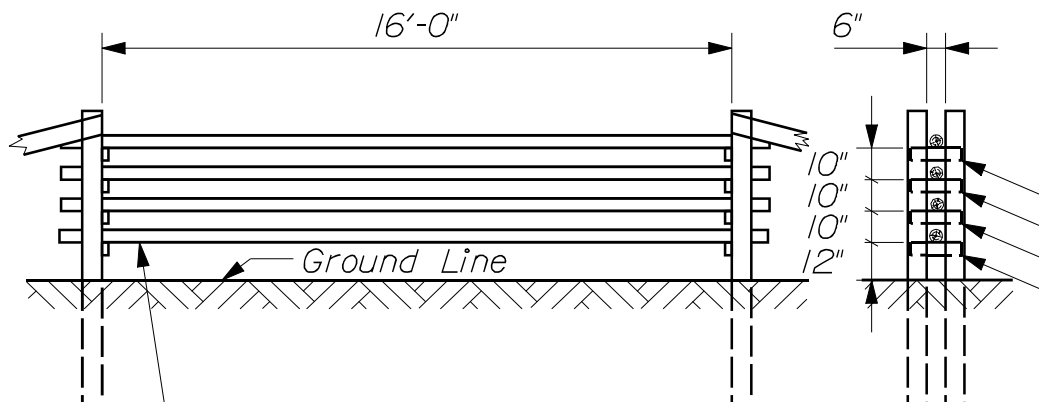

Cross Bars for Barways are to be a minimum of 4" ϕ and of a length equal to the Barway opening plus 24".

2" x 4" Cross Bar support length shall equal the center to center length of the post plus 4". Each support shall be nailed with (4) 4d penny nails.


~ BARWAYS - WOOD POSTS ~

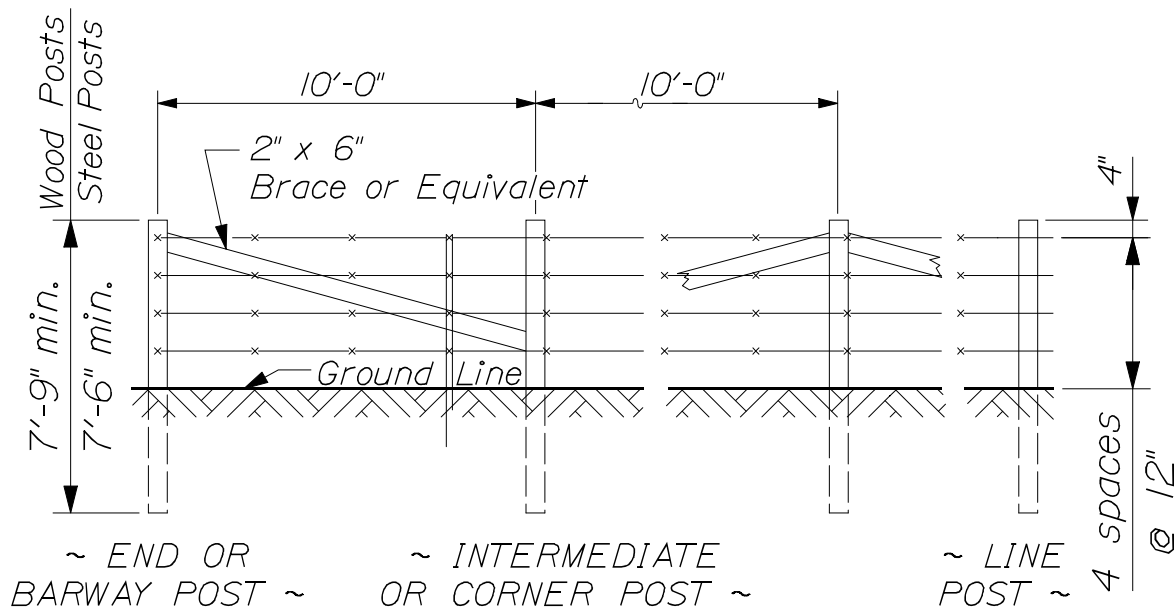


NOTE:

"Barbed Wire - Metal Posts" shall be constructed with the post and wire spacing shown above. Metal posts and braces shall conform to all of the requirements noted and shown for "Woven Wire Fencing - Metal Posts", including concrete bases.

BARBED WIRE FENCING - WOOD POSTS AND BARBED WIRE FENCING - METAL POSTS

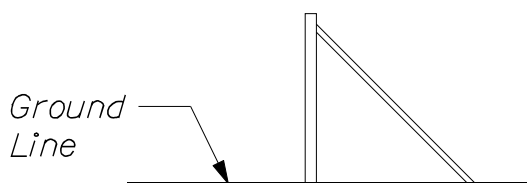


~ BRACING - TYPE I ~
used at gates, barways,
and terminals

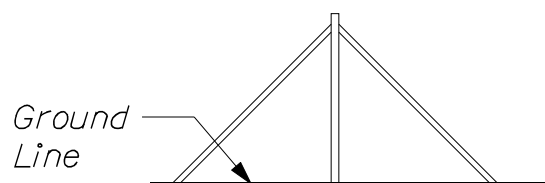

~ BRACING - TYPE II ~
used at corners, intermediate points,
and changes in vertical alignment



BRACING ASSEMBLIES FOR WOVEN WIRE AND BARBED WIRE FENCING

607(04)

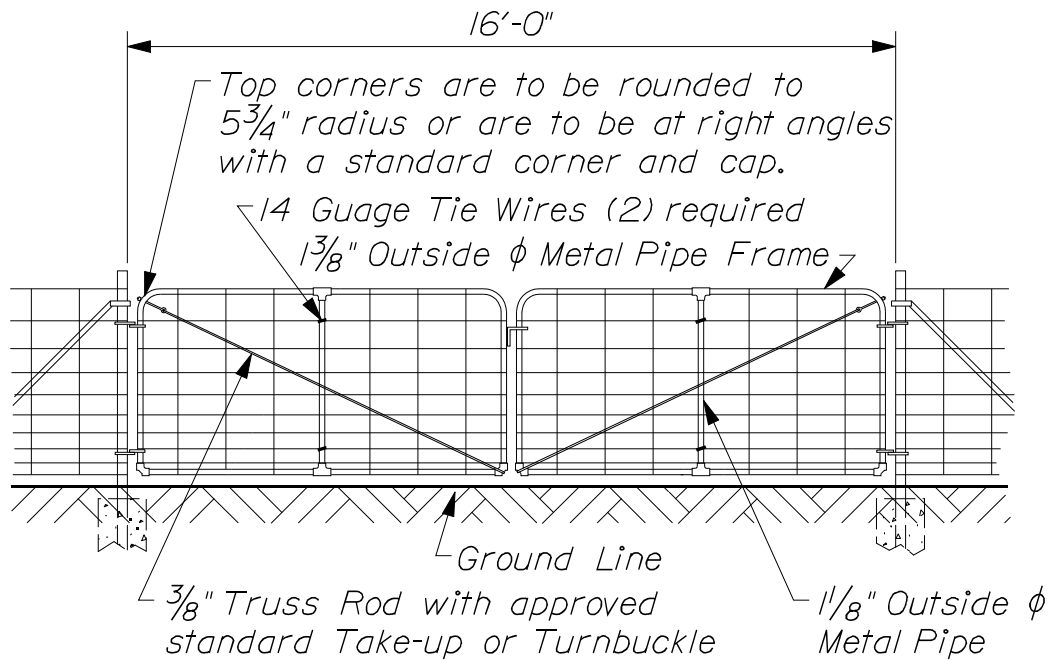

NOTES:

1. Gate posts, braces and anchorages to be as specified under "Woven Wire Fencing - Metal Posts".
2. All gates shall be installed with the top hinge point pointing down.
3. Wire for gates shall conform to A.S.T.M. A116, Class 1, Design No. 1047-12-11.
4. The required fittings for fence and gates shall be steel or malleable iron of an approved standard type.
5. Gates shall be furnished with a standard fork latch and one piece of $\frac{3}{16}$ " straight link alloy steel chain, 24" long. One end shall be attached to the gate frame and attached to the other end shall be a snap lock or other approved fastening device.

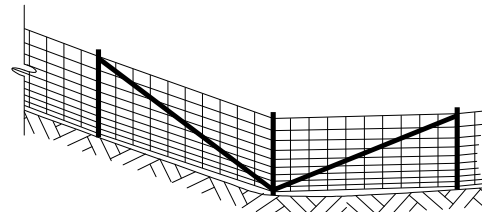
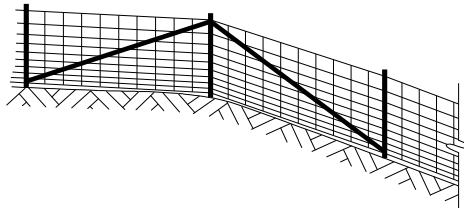


Where the change in grade between any three fence posts exceeds 15%, additional intermediate bracing shall be provided.


DRIVE GATEWAYS (16 FEET) & INTERMEDIATE BRACING

607(05)

In Medians and in Clear Zones the Top of Rail shall be omitted and replaced with 7 Gauge Galvanized Steel Wire.

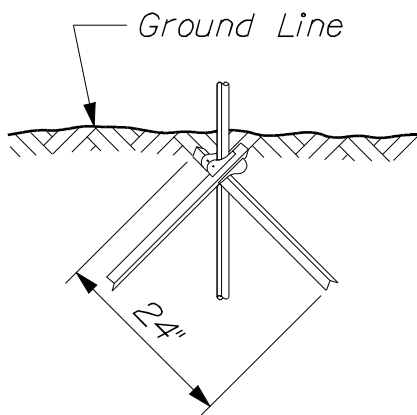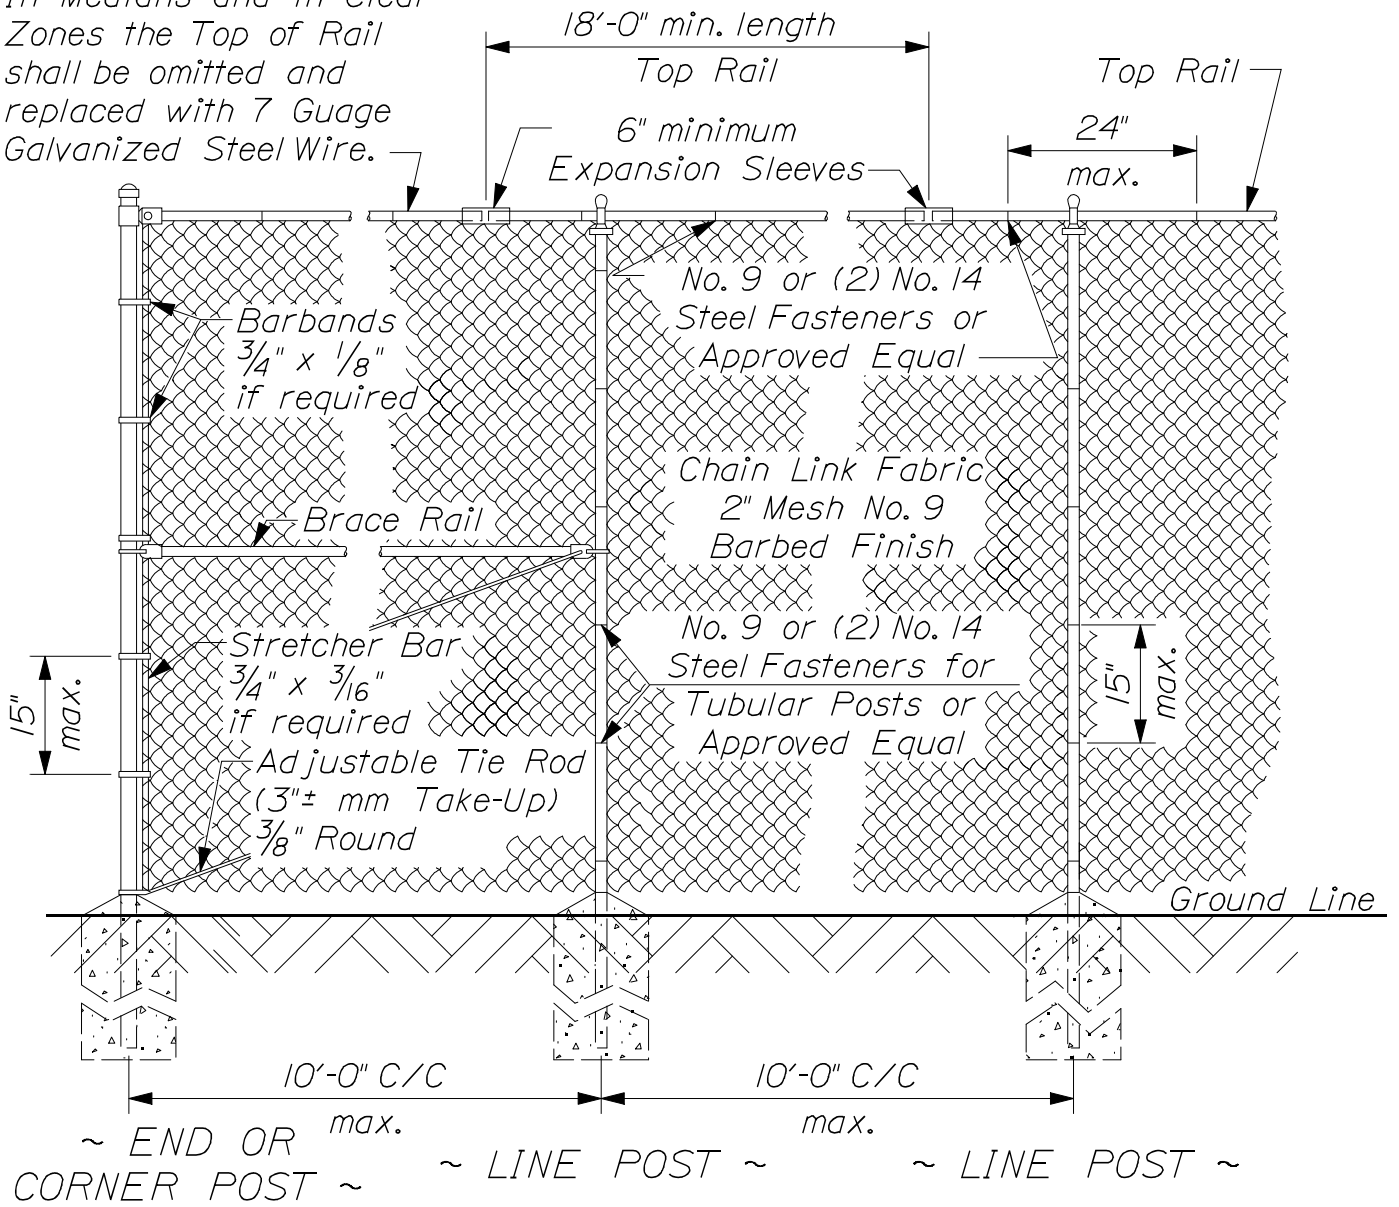

~ DRIVE ANCHOR ~
(90° to Fence Line)

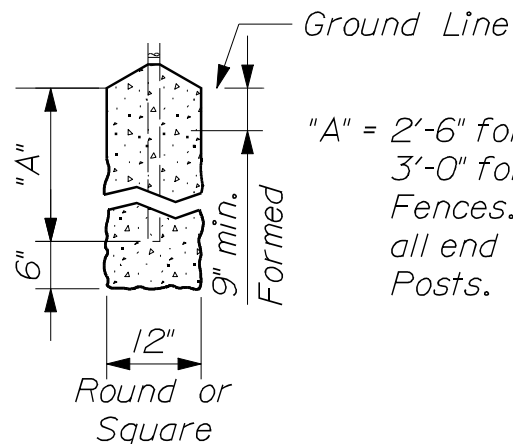


~ LINE, CORNER, AND
END POST BASE ~

"A" = 2'-6" for 4' Fence.
3'-0" for 6' and 8'
Fences. 5'-0" for
all end and Gate
Posts.


CHAIN LINK FENCE

607(06)

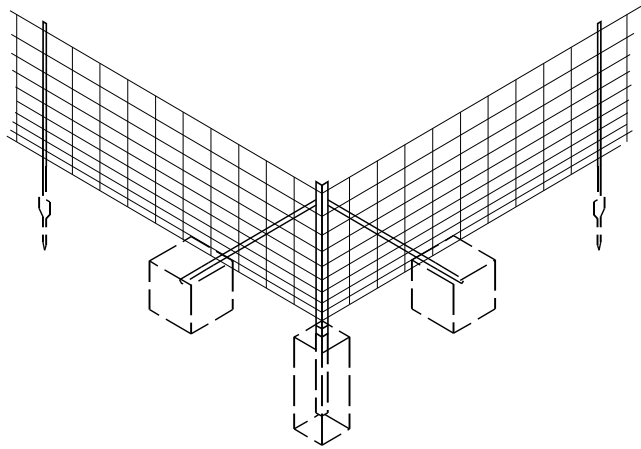


Corner Post

~ BRACING ASSEMBLY
FOR METAL POSTS ~

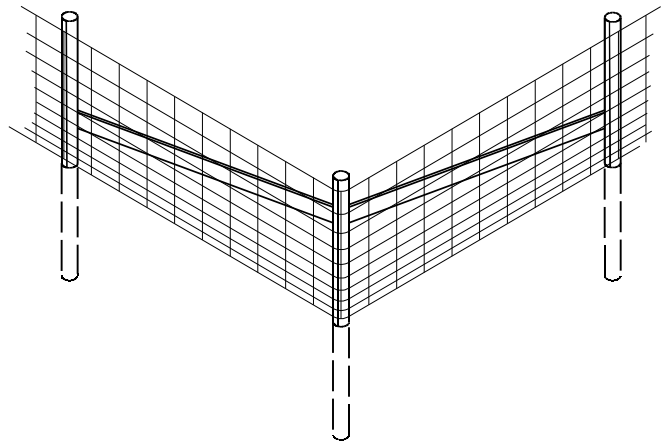


Corner Post


~ BRACING ASSEMBLY
FOR WOOD POSTS ~

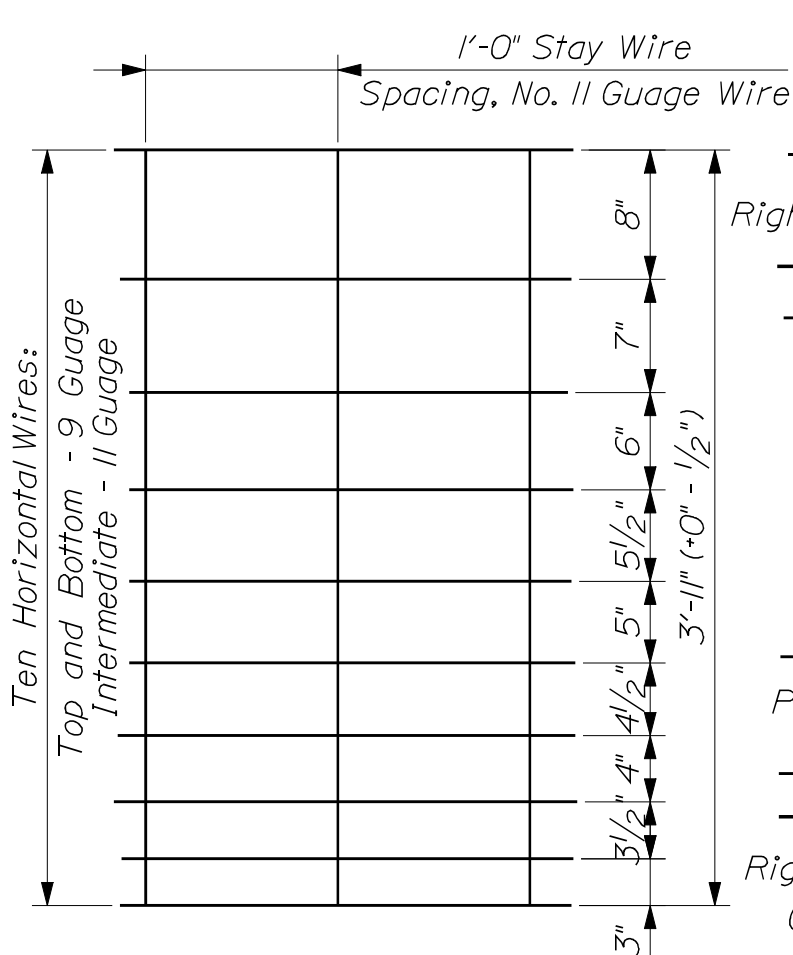

~ WOVEN WIRE FENCE ~

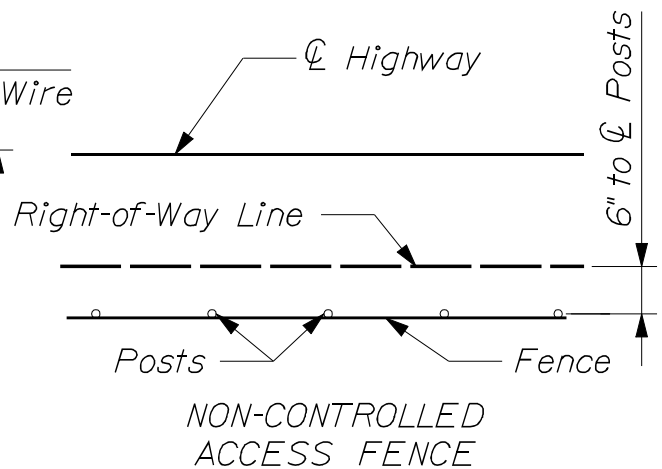

NON-CONTROLLED
ACCESS FENCE

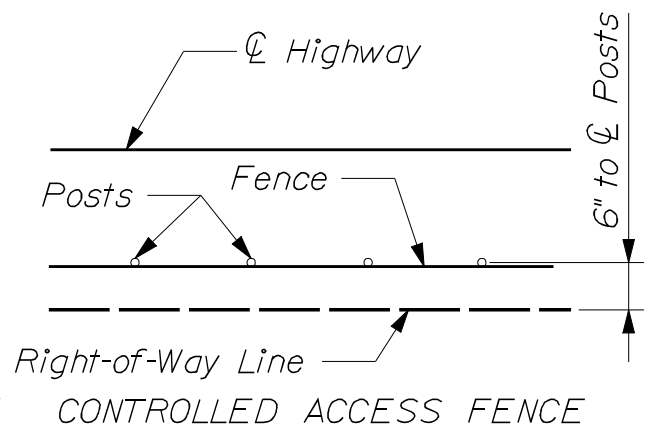

CONTROLLED ACCESS FENCE

~ FENCE LOCATION
WITH RESPECT TO
RIGHT OF WAY LINE ~

GENERAL NOTES


1. When ledge is encountered, steel posts shall be set and grouted 12 inches deep unless the posts penetrate the ground to the depth indicated on the drawings.
2. When wood posts are used, braces shall be attached to the posts with a minimum of (4) 40 penny nails per attachment.
3. When the word "Standard" is used, it shall be interpreted as if it were followed by the expression "To The Fence Industry".
4. Woven wire and barbed wire fencing shall be attached to wood posts with 9 guage 1 1/2" galvanized staples.
5. Concrete for post foundations shall be Class B.
6. In well formed holes with vertical walls, forms will be required only at the top 9 inches. Holes which cannot be well formed shall have forms for the full depth of the base.

~ SPACING OF FENCE POSTS ON CURVES ~

RADIUS OF CURVE AT FENCE LOCATION	NORMAL POST SPACING
Over 500 feet	10 feet
Over 200 feet to 500 feet	8 feet
Over 100 feet to 200 feet	6 feet
100 feet and Less	5 feet

FENCING

607(08)

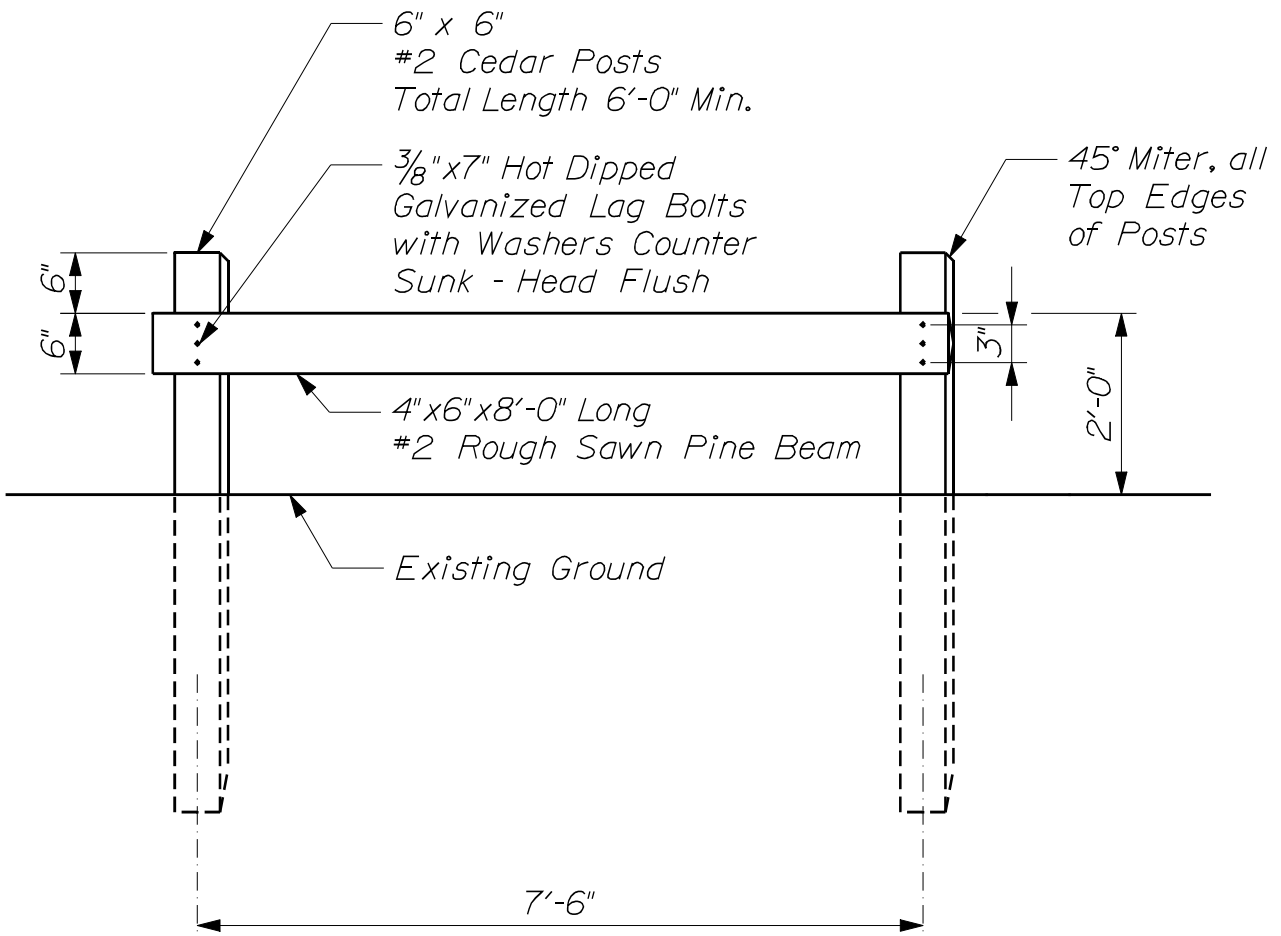

NOTES:

1. Pre-drill $\frac{1}{4}$ " diameter holes for Lag Bolts.
2. Pre-drill $\frac{1}{4}$ " diameter holes $\frac{1}{2}$ " deep to counter sink Lag Bolts.


End Caps Secure to Post
(Crimp or Screw Set) (Typ.)

W6x25

Rail 1 1/2" Standard
Pipe (Typ.)


Steel Bridge Rail
3 Bar Shown
(4 Bar Rail Similar)

1/2" Bolts with
Nuts and Washer
(Galvanized Steel)

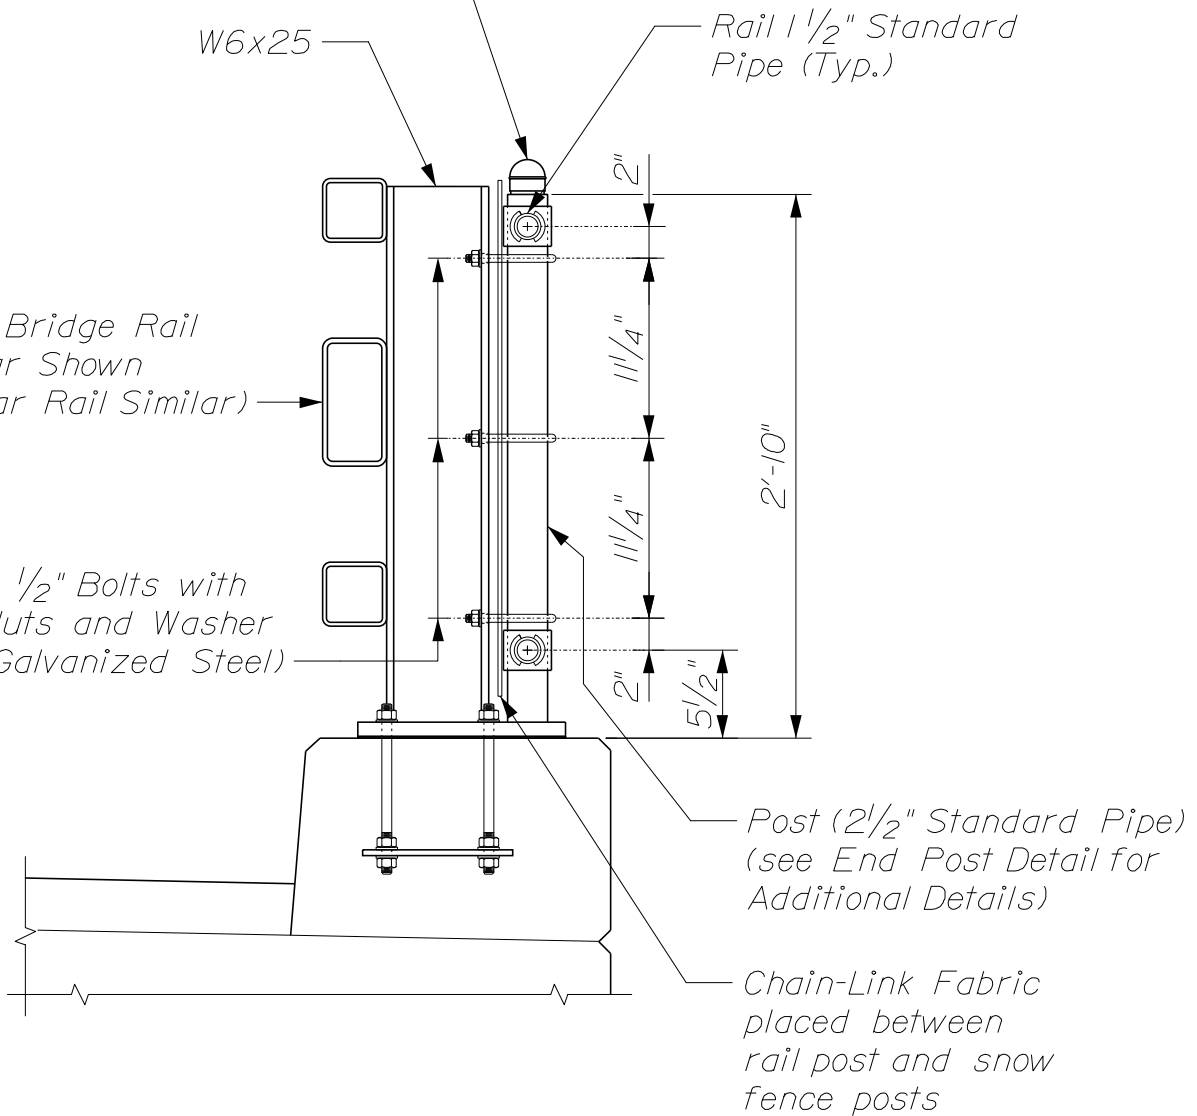


~ SNOW FENCE CONNECTION DETAILS ~

SNOW FENCE DETAILS
607(10)

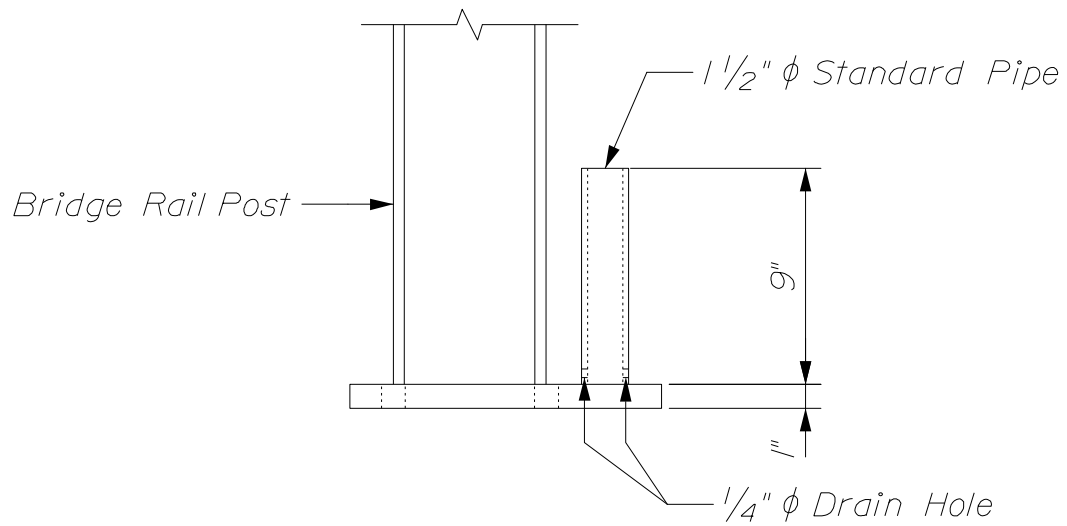


~ MODIFIED BASE PLATE ELEVATION ~

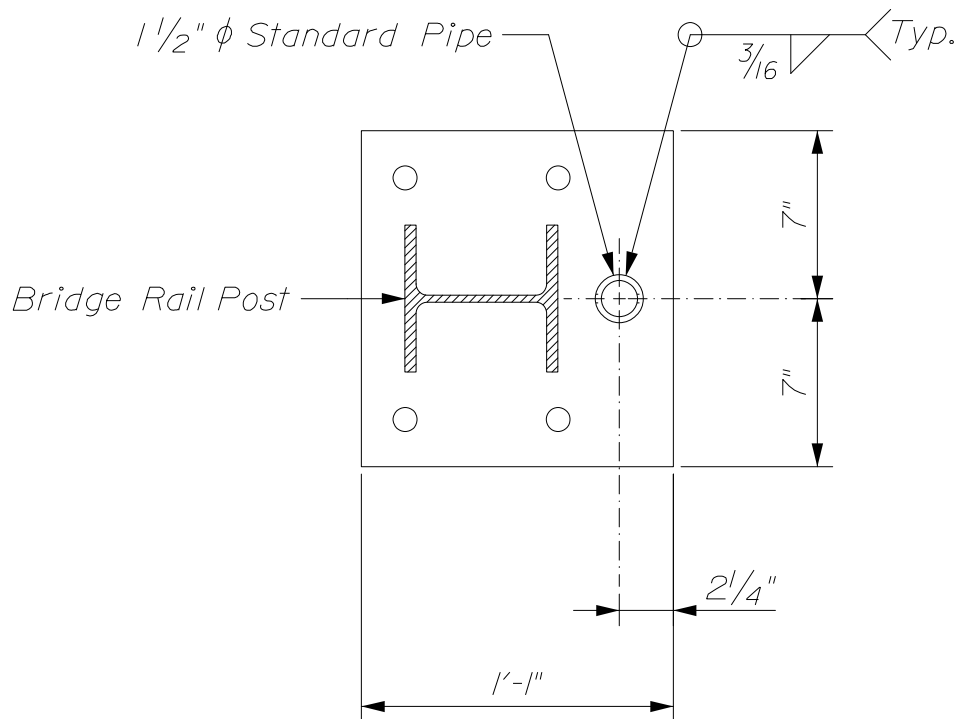


~ MODIFIED BASE PLATE DETAIL ~


SNOW FENCE DETAILS
607(11)

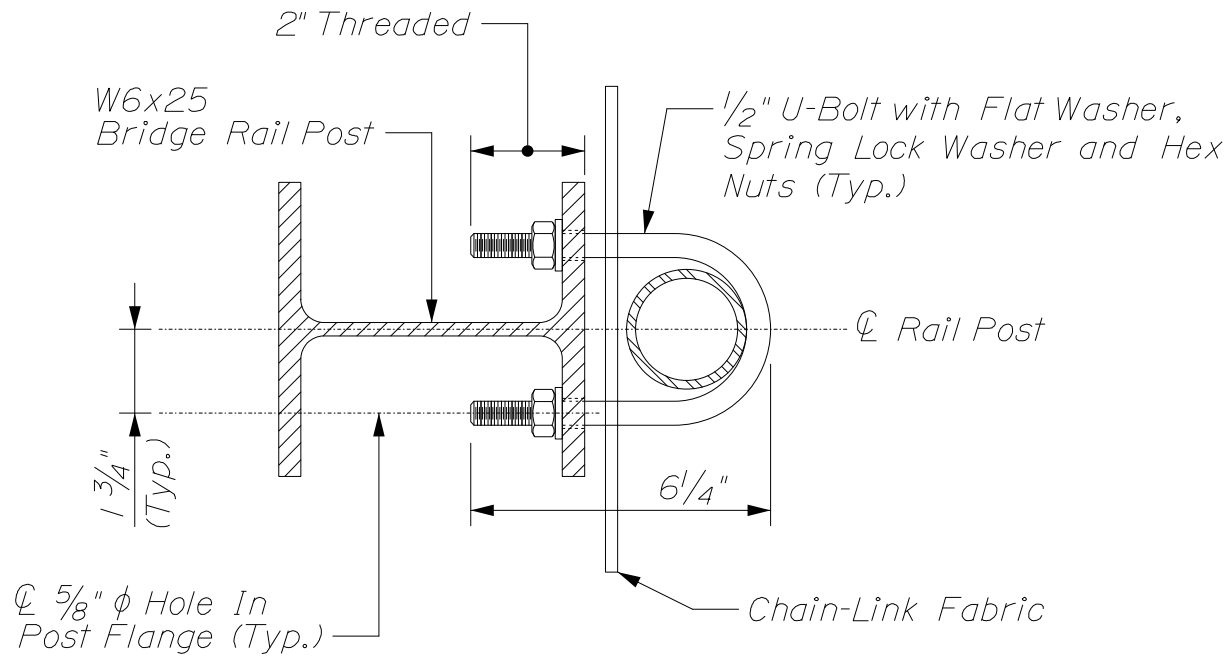

~ U-BOLT CONNECTION DETAIL ~
(At Interior Post)

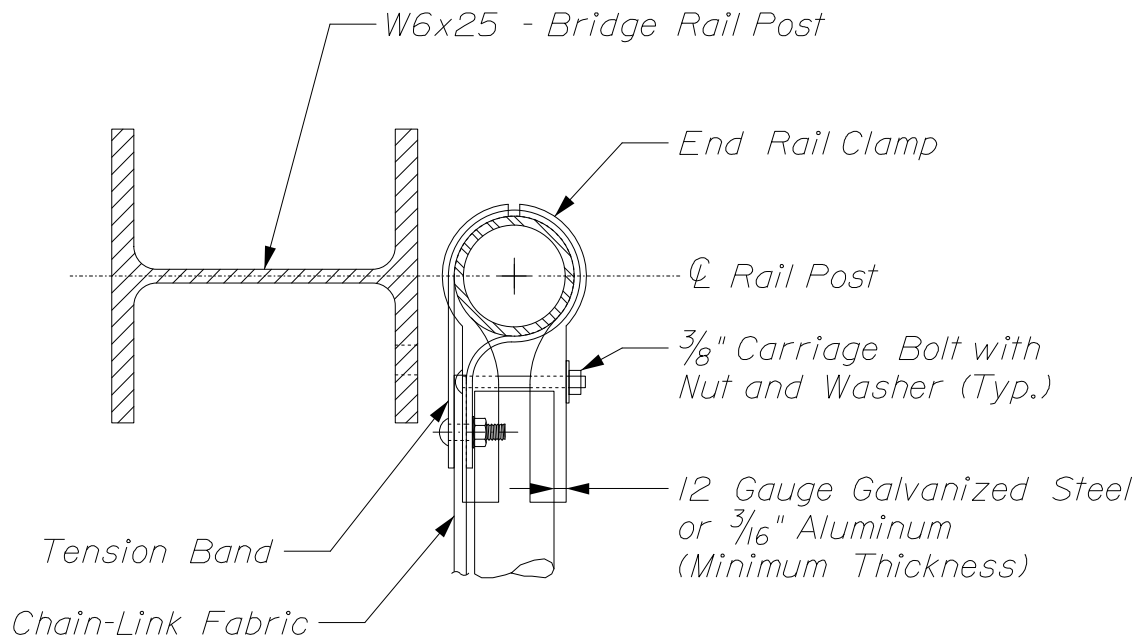


~ END POST DETAIL ~
(U-Bolt Not Shown)

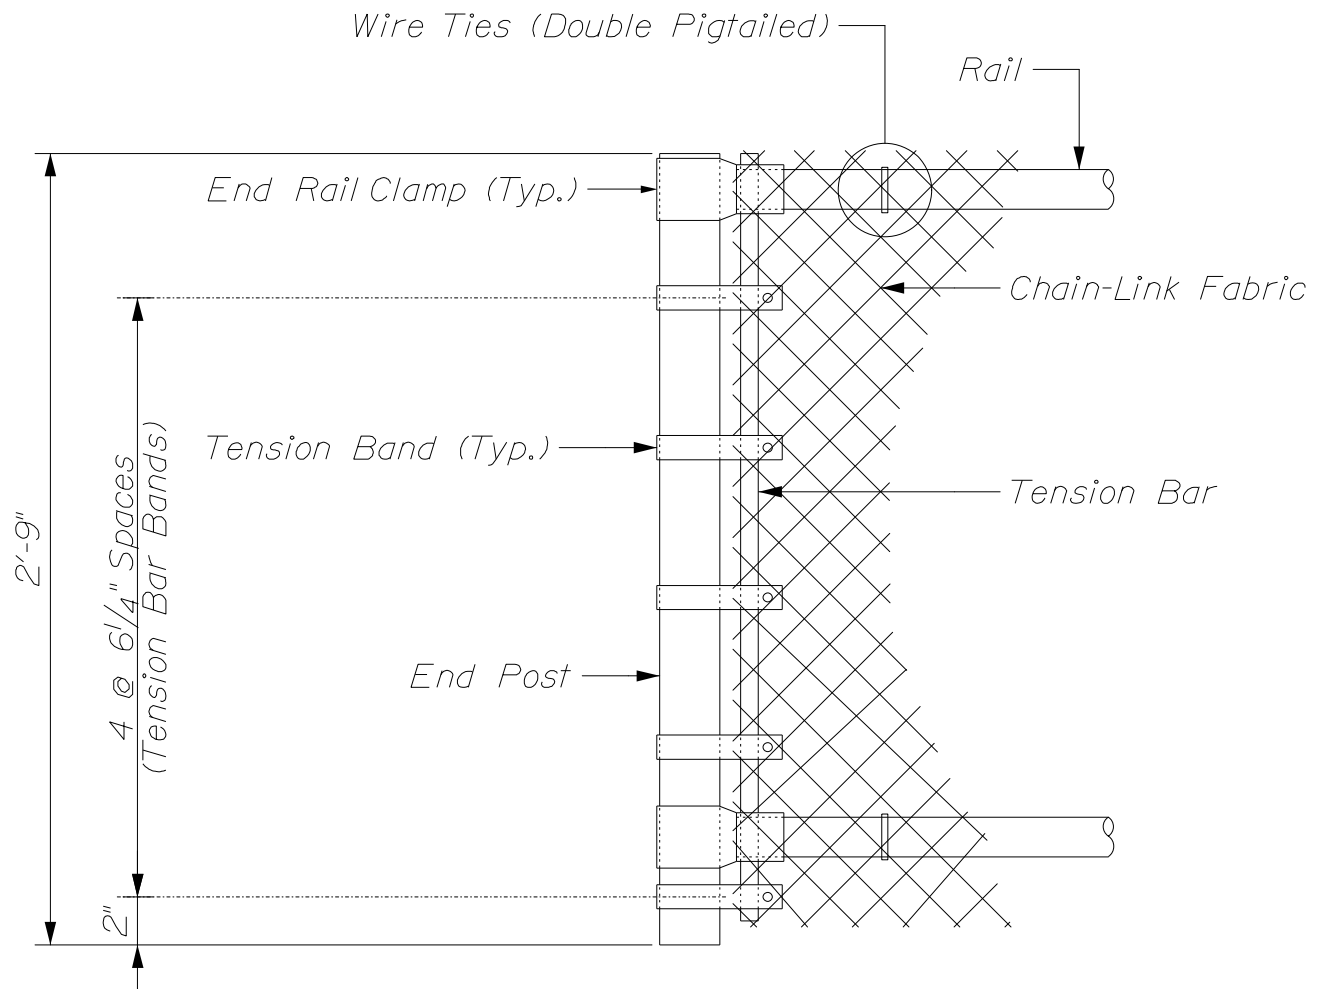


~ END POST ELEVATION ~


SNOW FENCE DETAILS
607(13)

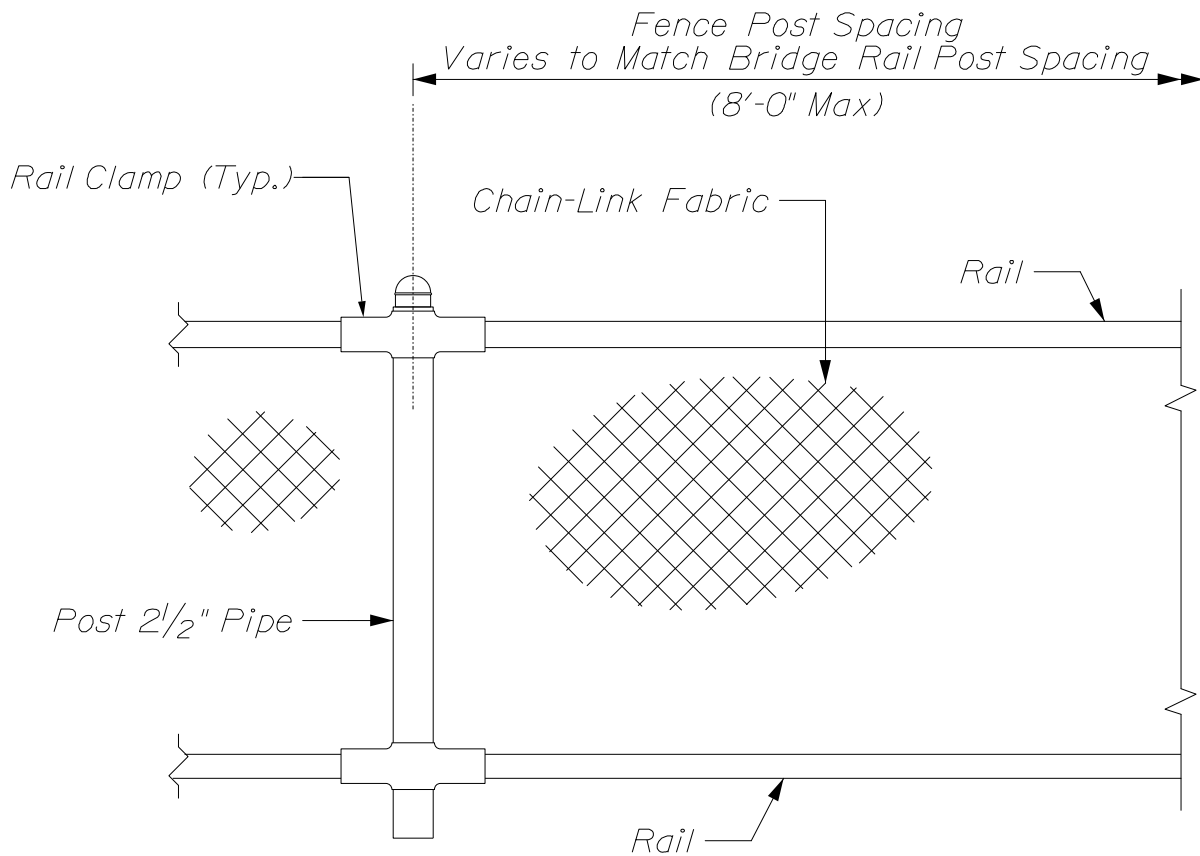


~ ELEVATION - SNOW FENCE ~

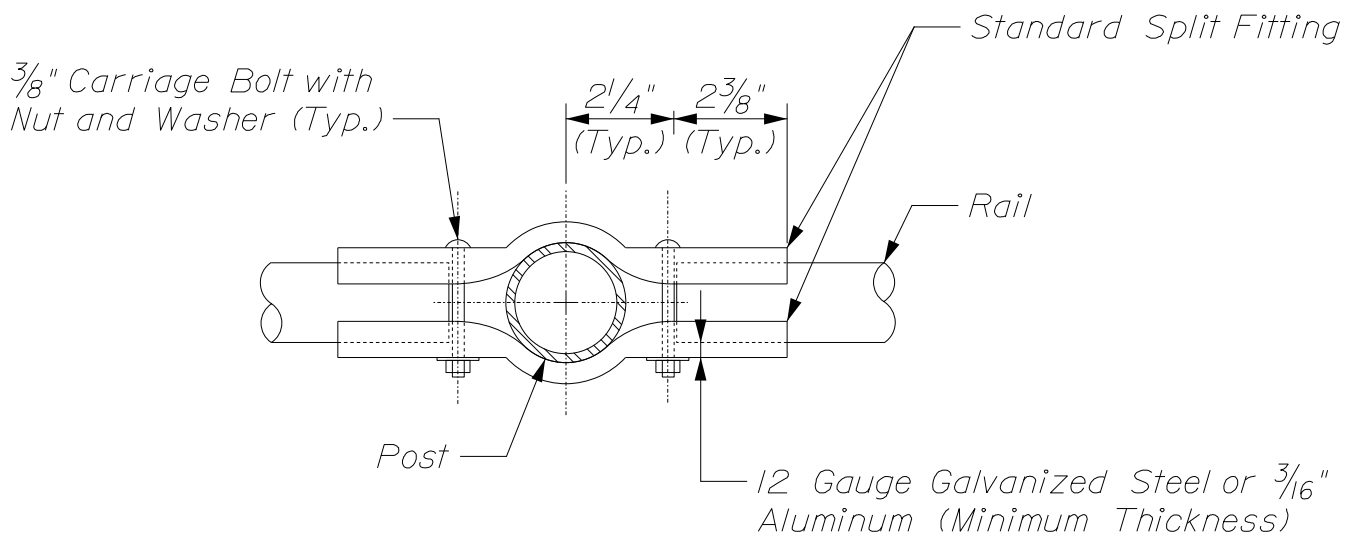

~ RAIL CLAMP DETAIL ~

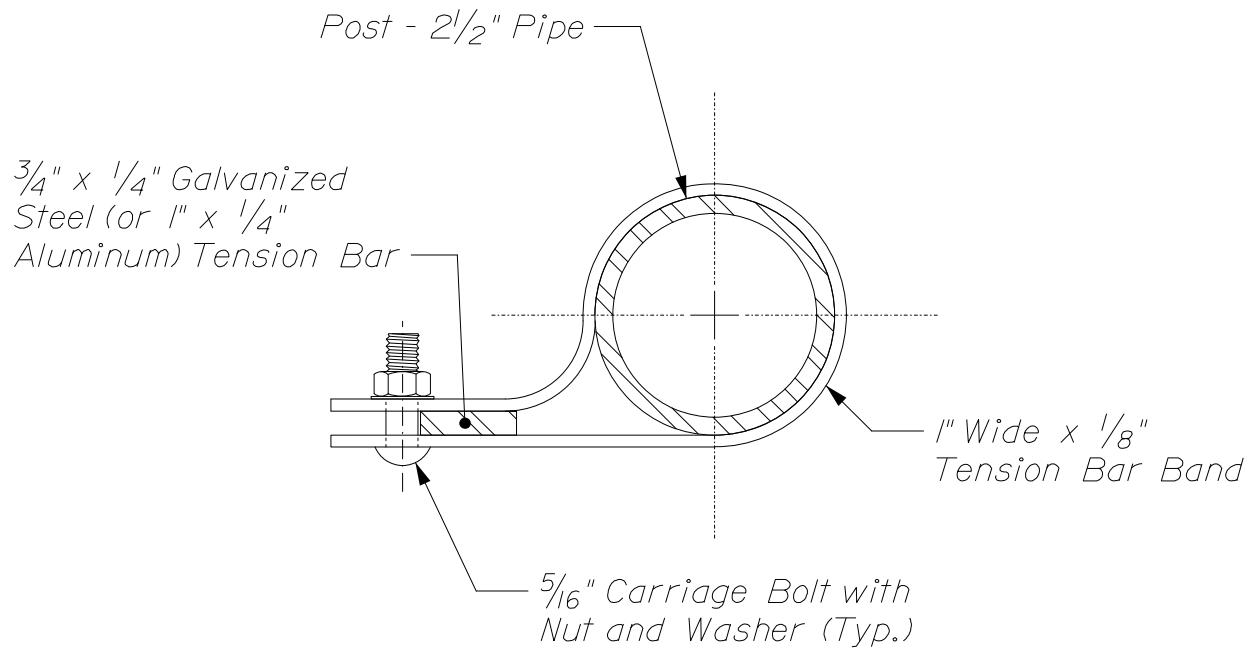

~ TENSION BAND DETAIL ~

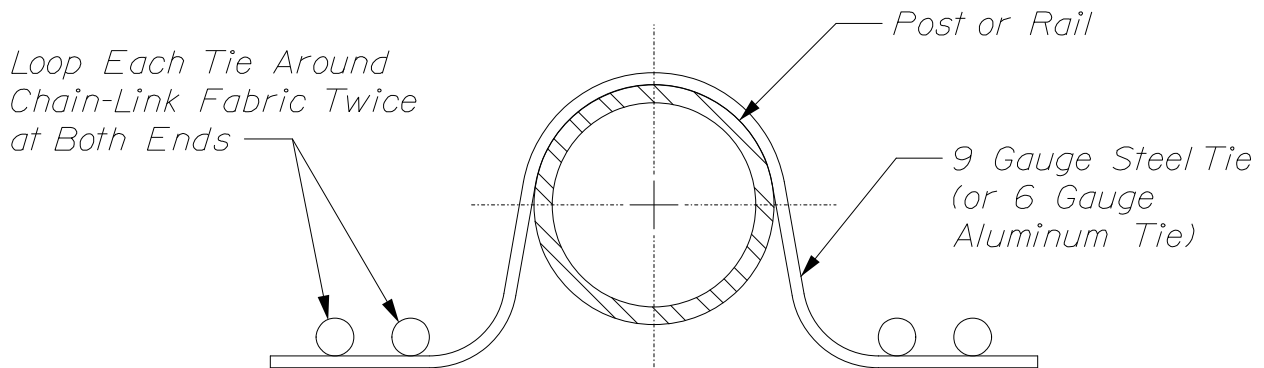

~ DOUBLE PIGTAILED TIE ~


SNOW FENCE NOTES

1. Chain-Link fence shall conform to Section 710.03 and Section 607. The size of wire mesh (fabric) shall be 1" by 1".

2. Post and rail pipe shall be hot-dip galvanized steel. All pipe shall be schedule 40, standard weight. Nominal pipe sizes are shown.


3. Rail may be field cut (sawn) to fit post spacing. Repair galvanizing on cut edges in accordance with ASTM A780. The thickness of the repair coating must be equal to or greater than the original coating thickness.

4. Payment for modified base plate will be incidental to related Contract items.

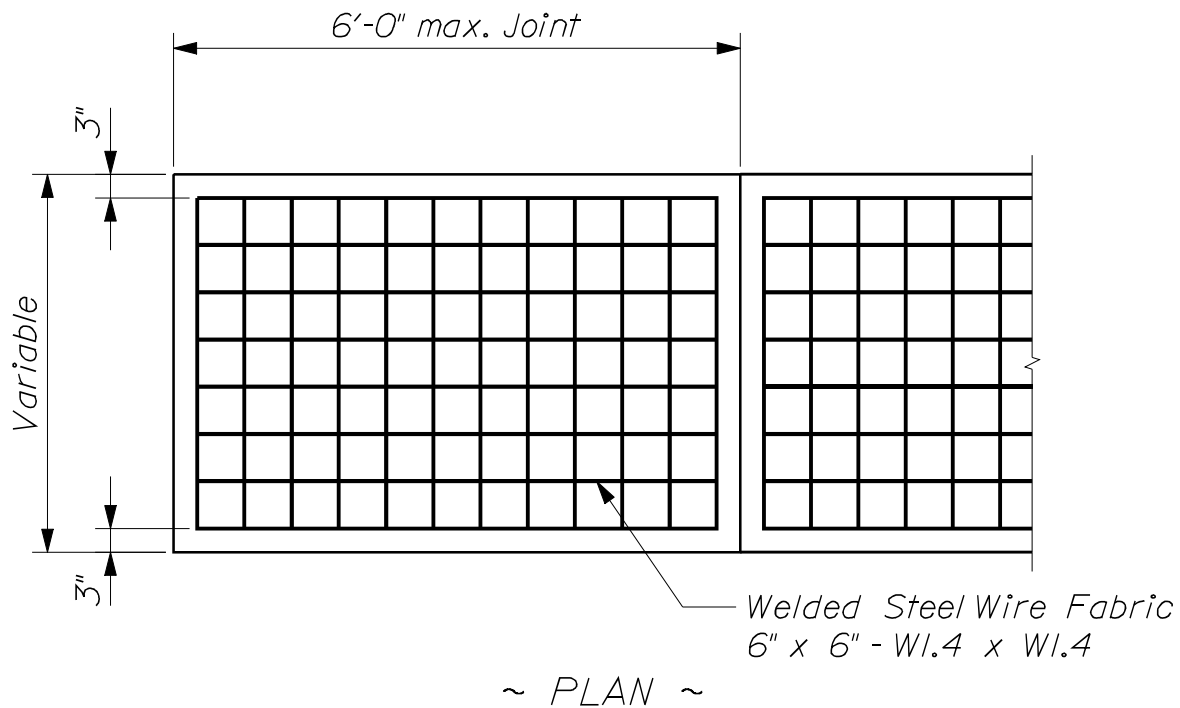

NOTE:

Sidewalk shall conform to Standard Specifications Section 608.

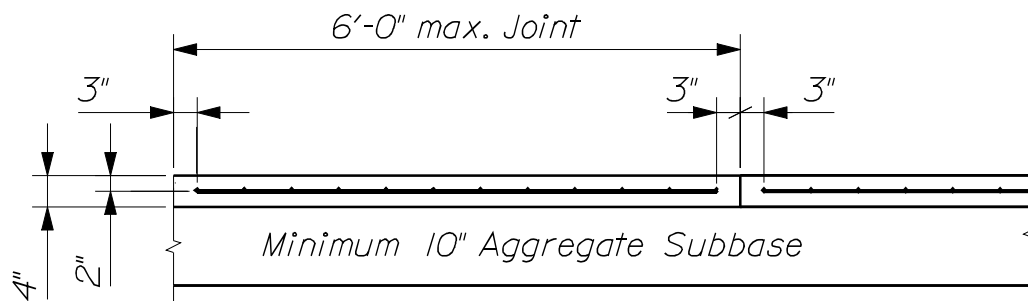


~ ELEVATION ~

REINFORCED PORTLAND CEMENT
CONCRETE SIDEWALK
608(01)


VIEWS AND DETAILS OF THE DETECTABLE WARNING

(NOT TO SCALE)

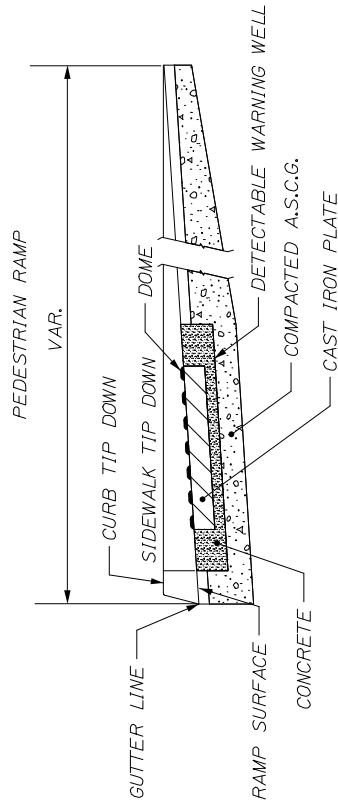

SIDE SECTION VIEW OF
DETECTABLE WARNING, WELL, CURB AND GUTTER



THE TOP DIAMETER OF THE
TRUNCATED DOMES SHALL BE
50% TO 65% OF THE BASE
DIAMETER.




ELEVATION VIEW

PLAN VIEW

* SHALL BE EQUAL IN
BOTH DIRECTIONS

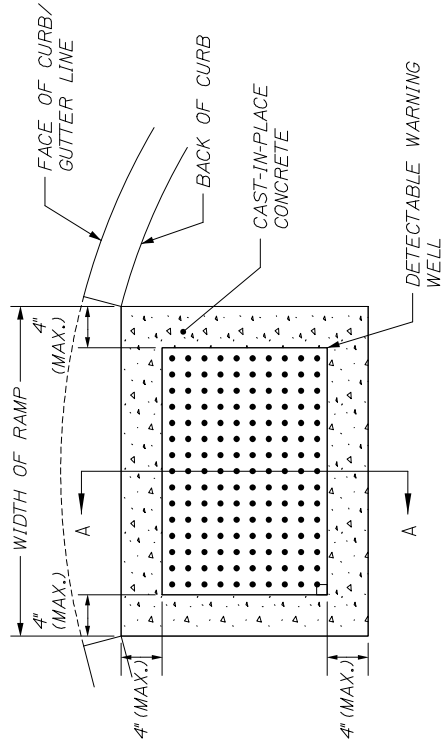

PLAN VIEW OF
DETECTABLE WARNING AND WELL

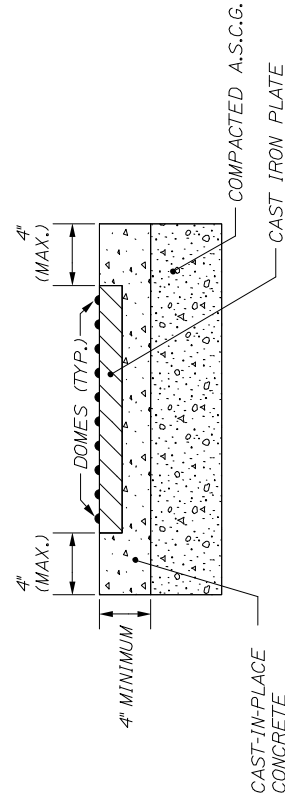


SECTION A-A


FOR PEDESTRIAN RAMP LAYOUT, SEE STANDARD DETAILS
80(11) - 80(27)

CURB TYPES 1, 2 & 5 ON CURVES

<i>T_Y_P_E</i>	<i>RADIUS OF CURVE</i>	<i>LENGTH</i>	<i>PAID FOR AS</i>	<i>STONE IS CUT OR CAST</i>
<i>1 & 2</i>	<i>0 to 60' incl.</i>	<i>4' min.</i>	<i>Circular</i>	<i>Arc to Fit Curve</i>
	<i>Over 60' to 160'</i>	<i>4' to 6'</i>	<i>Straight</i>	<i>Straight Pieces</i>
<i>5</i>	<i>0 to 8' incl.</i>	<i>2' min.</i>	<i>Circular</i>	<i>To Fit Curve</i>
	<i>Over 8' to 30' incl.</i>	<i>12" min. Chord</i>	<i>Circular</i>	<i>Str. Pieces, Radial Ends</i>
	<i>Over 30' & Under 160'</i>	<i>2' to 3'</i>	<i>Straight</i>	<i>Straight Pieces</i>
	<i>160' and Over</i>	<i>3' to 6'</i>	<i>Straight</i>	<i>Straight Pieces</i>

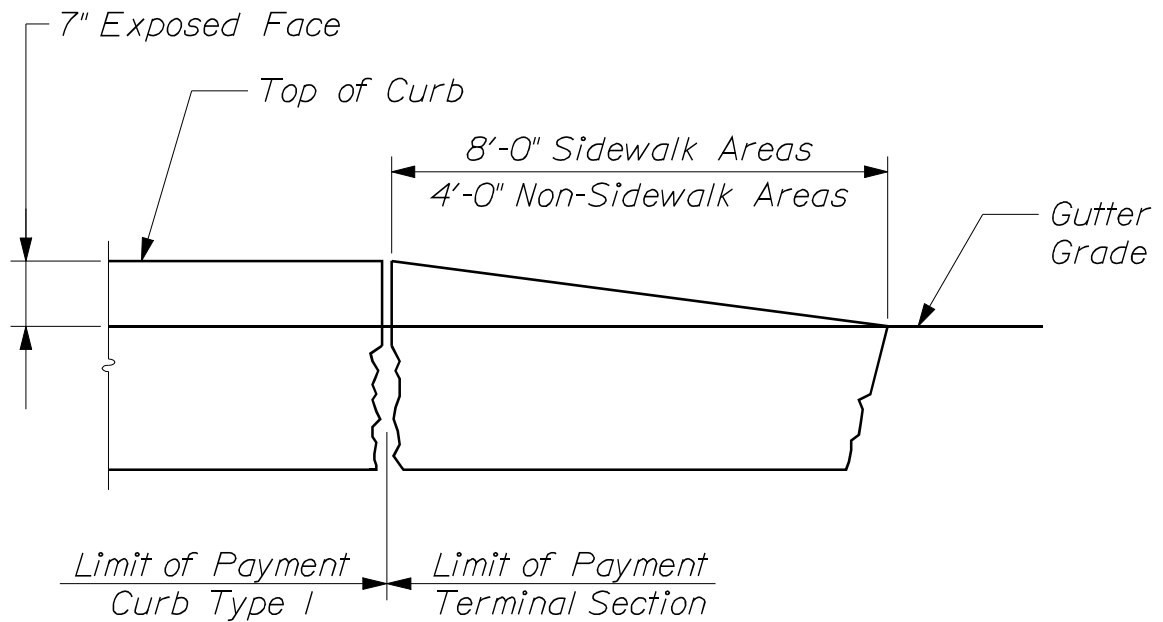

~ TERMINAL SECTION TYPE "1" ~


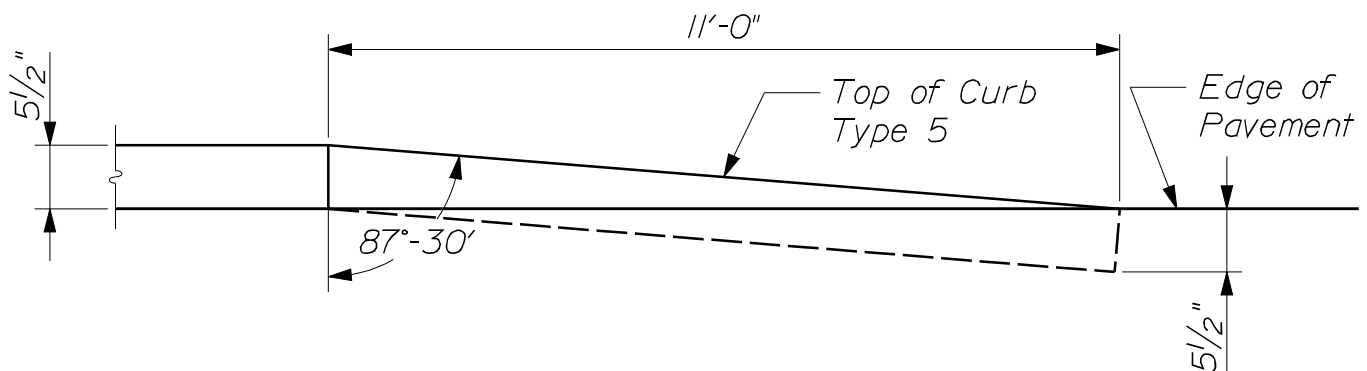


~ TERMINAL SECTION TYPE "5" ~

(use when shown on plans only)



TERMINAL CURB SECTION

609(01)

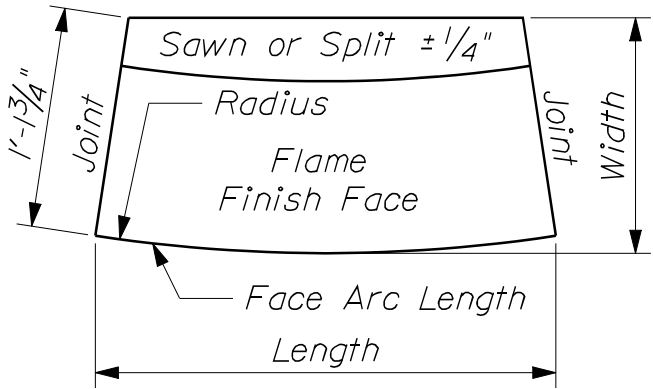


~ CURB TYPE 5 ~

CURB
609(02)

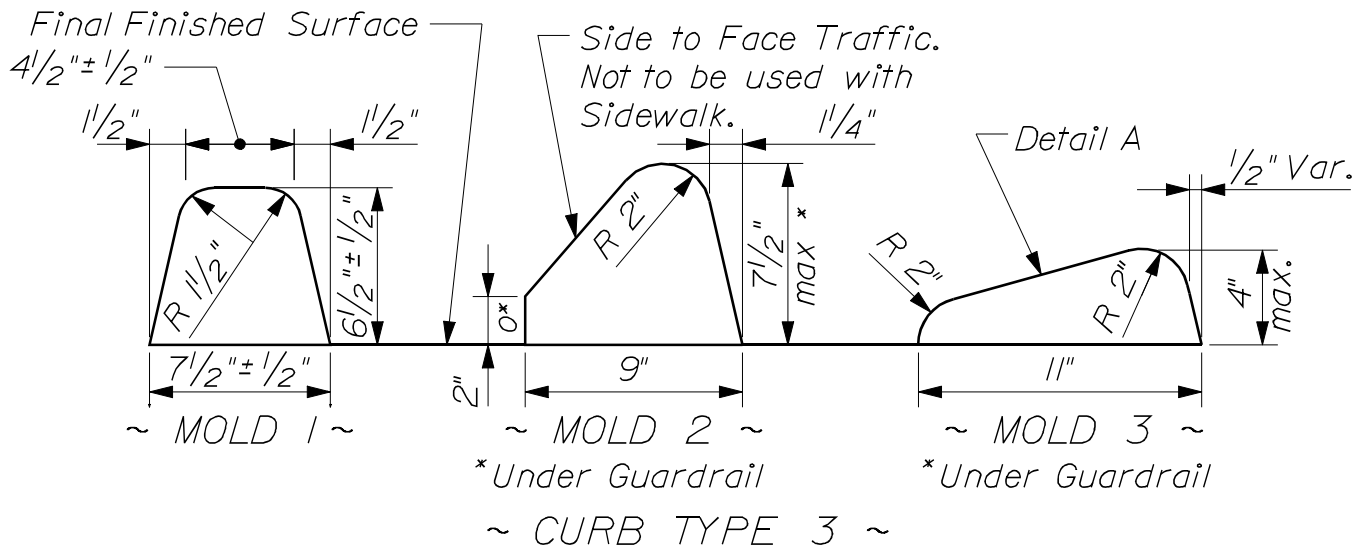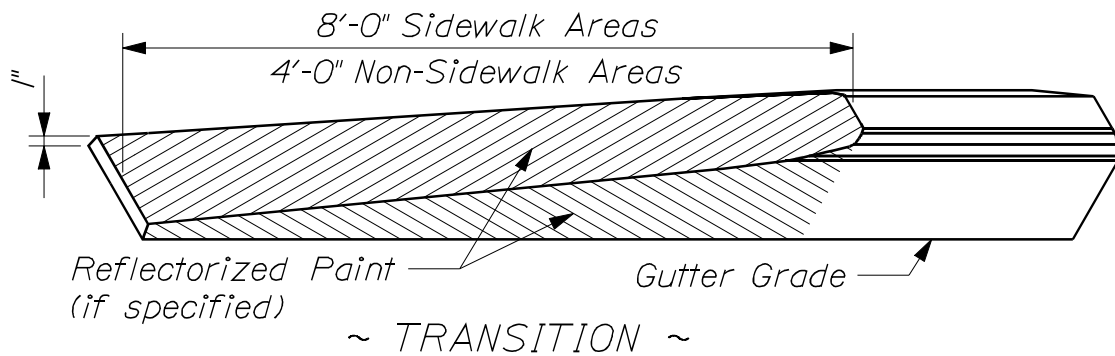





Curb Mold 2 or 3 shall be used in all situations except for where the curb forms the edge of the sidewalk. Mold 1 shall be used in conjunction with sidewalks or where there is a potential for sidewalks. Mold 3 shall be used in situations where the design speed exceeds 45 mph. Maximum height of Curb under Guardrail shall not exceed 4".

~ DETAIL A ~

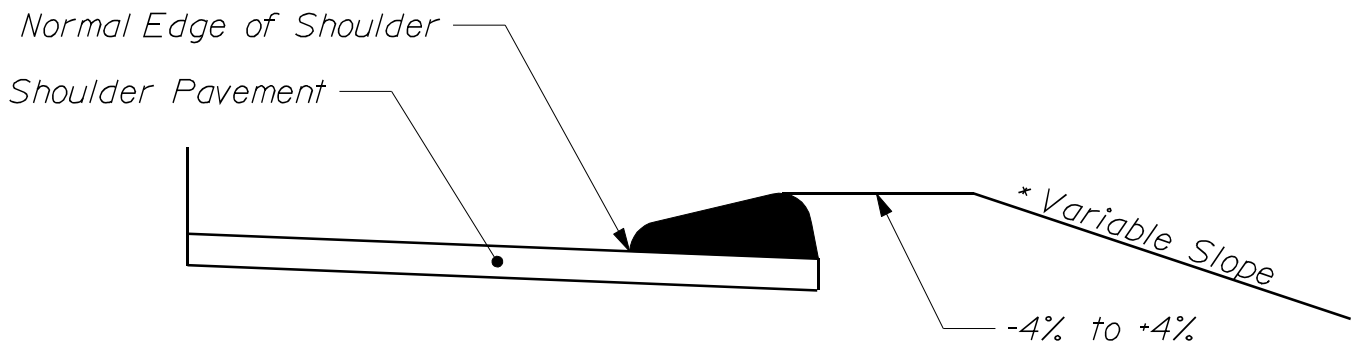


* See Typical Sections for Project

CURB TYPE 3
609(03)

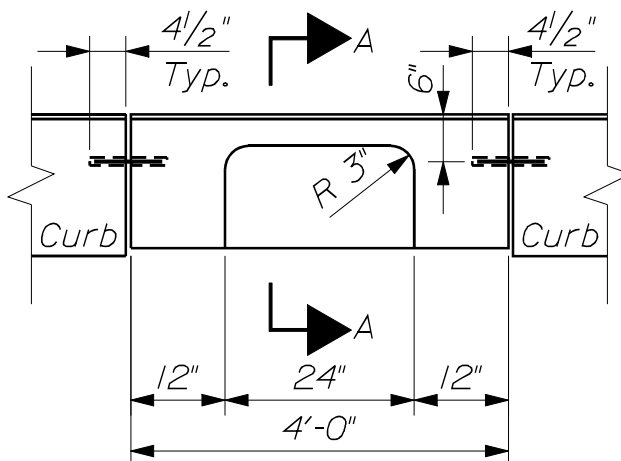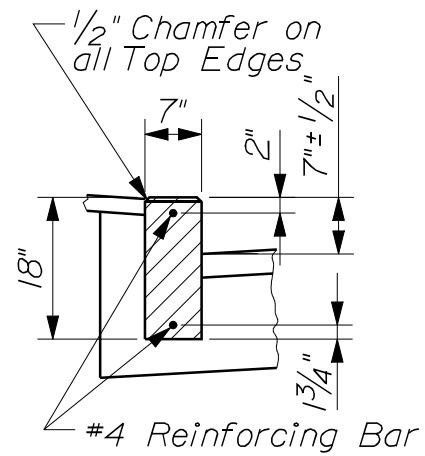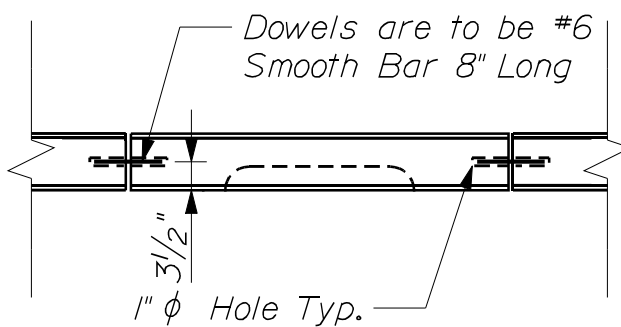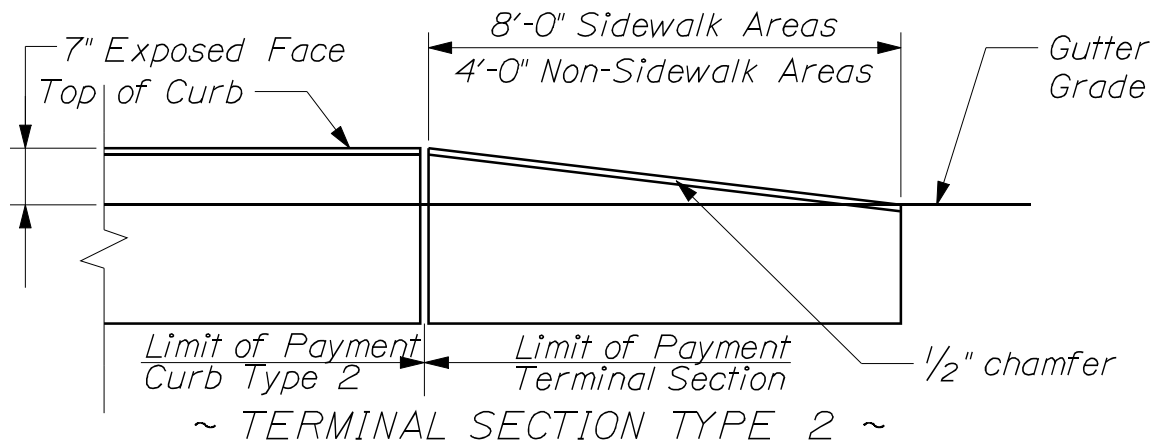

~ VERTICAL CURB ~
TYPE 2




~ CURB INLET TYPE 2 ~

~ SECTION A - A ~

VERTICAL CURB TYPE 2


609(04)

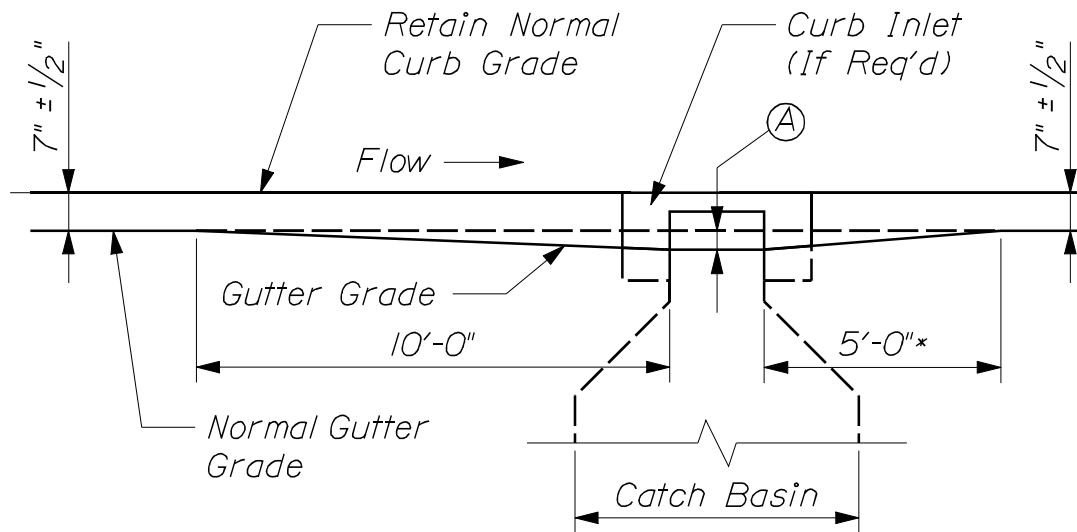

~ AT CURB INLETS ~

Ⓐ For Parking Lane = 2"
Adjacent to Travel Lane = 0"

* Dimension to be 10'-0"
if at bottom of a sag.

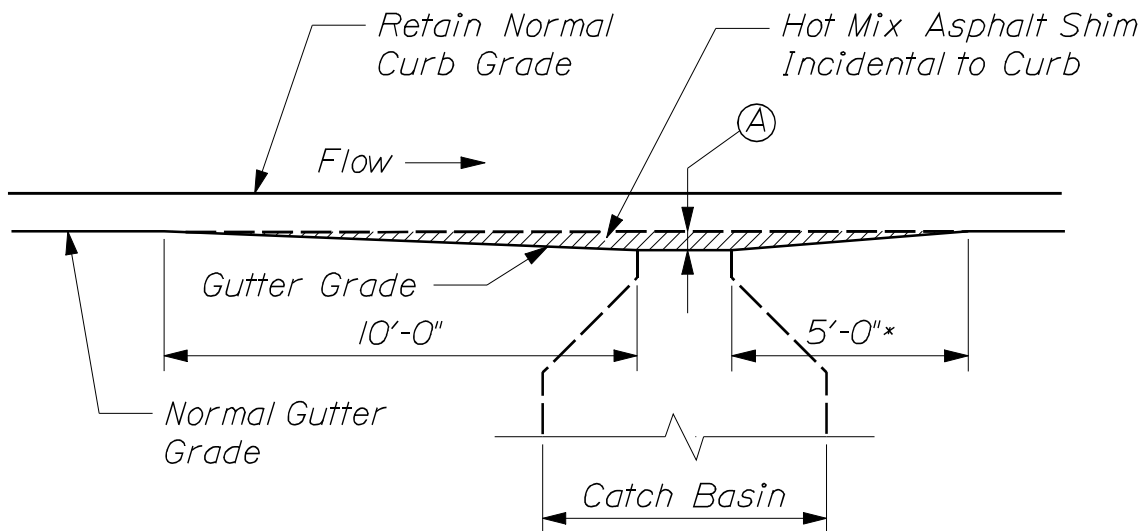

~ AT CURB WITHOUT INLET STONES ~

NOTE:


Grates shall be installed on gradient of the gutter and be depressed 2" below the normal gutter grade unless this depression interferes with traffic.

GUTTER GRADE TRANSITION AT CATCH BASIN

609(05)




VERTICAL BRIDGE CURB
609(06)

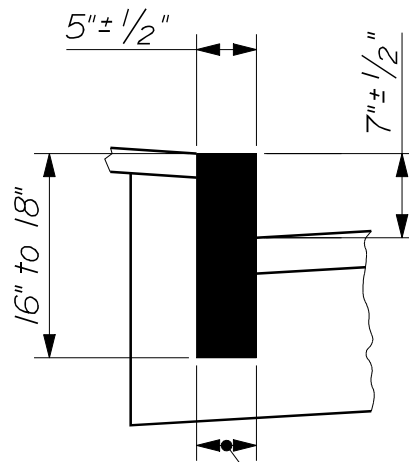


$3\frac{1}{2}$ " min. for at least $\frac{2}{3}$ of Length


~ VERTICAL CURB ~
TYPE I

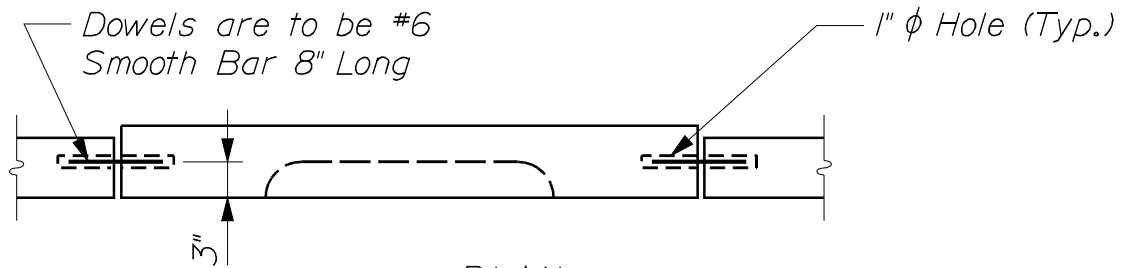

~ PLAN ~

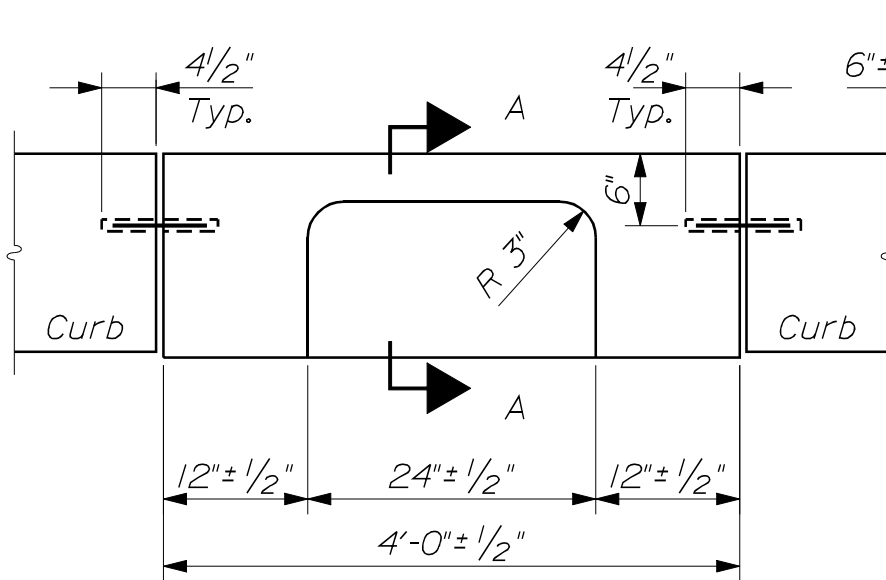

~ CURB INLET TYPE I ~

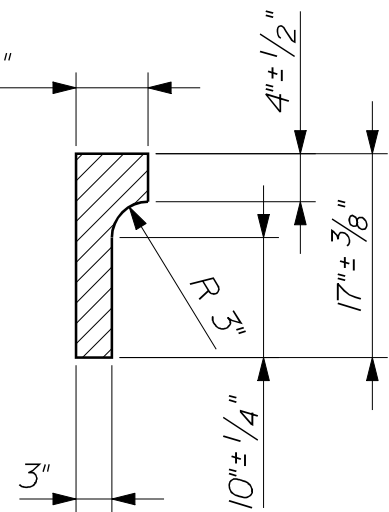

~ SECTION A-A ~


CURB TYPE I
609(07)

CURB TYPE /




I. CONCRETE BACKFILL MUST BE MINIMUM 3000 PSI CONCRETE MEETING CLASS S OR CLASS FILL, OR A PREPACKAGED CONCRETE MIX FROM THE DEPARTMENT'S QUALIFIED PRODUCTS LIST (QPL). FLOWABLE FILL SHALL NOT BE USED.

3. WOODEN SHIMS MAY BE USED TO SET CURB.

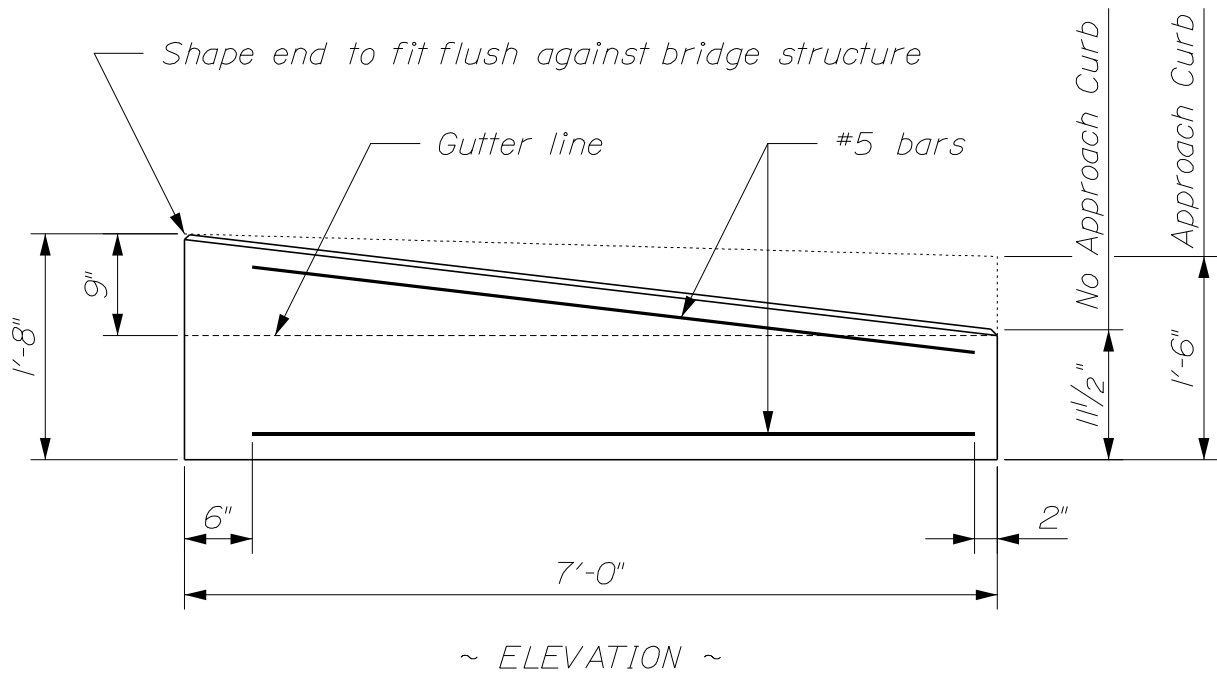


NOTES:

1. Precast Concrete Transition Curb shall meet the requirements of Standard Specifications Section 609 - Curb.
2. At the Contractor's option, the Contractor may perform the work to precast the Precast Concrete Transition Curb. Concrete shall meet the requirements of Class A or Class LP concrete per Method C, in accordance with Standard Specification Section 502, Structural Concrete. Reinforcing steel shall be in accordance with Standard Specification Section 503, Reinforcing Steel.
3. Unless otherwise indicated, payment will be included under the applicable bridge transition or bridge approach rail item. No separate payment will be made.

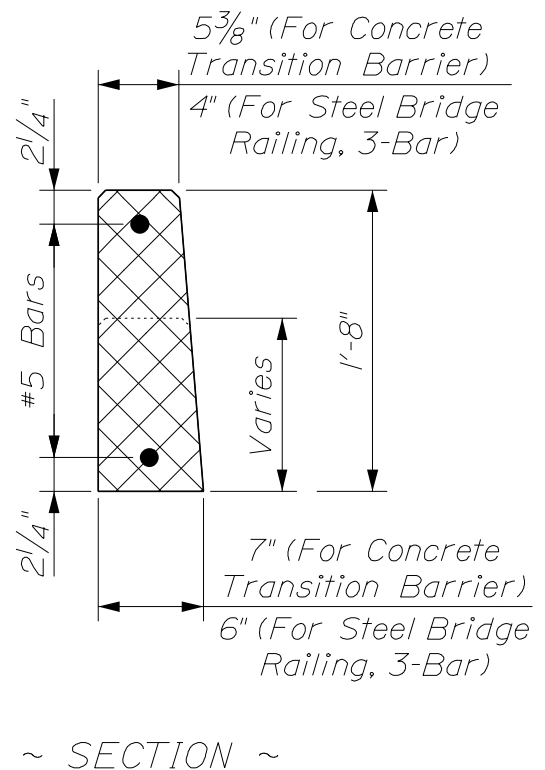


PRECAST CONCRETE TRANSITION CURB
609(08)




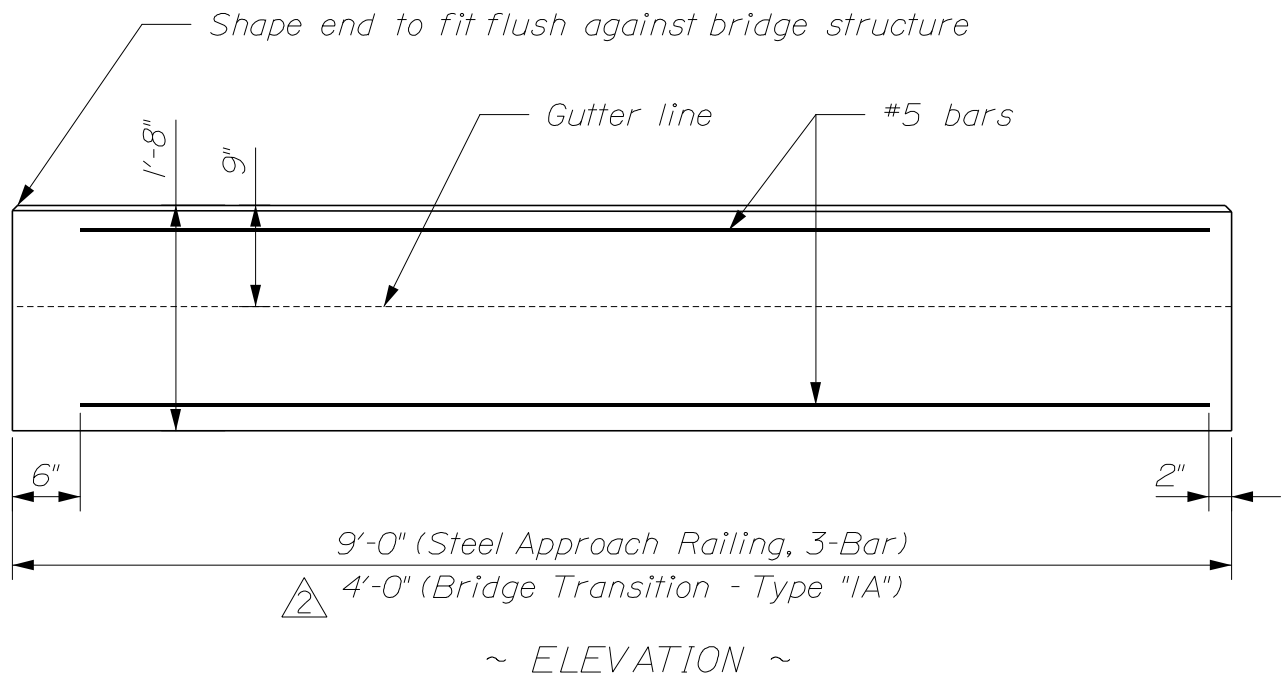


NOTES:


1. Precast Concrete Vertical Curb shall meet the requirements of Standard Specifications Section 609 - Curb.
2. At the Contractor's option, the Contractor may perform the work to precast the Precast Concrete Transition Curb. Concrete shall meet the requirements of Class A or Class LP concrete per Method C, in accordance with Standard Specification Section 502, Structural Concrete. Reinforcing steel shall be in accordance with Standard Specification Section 503, Reinforcing Steel.
3. Unless otherwise indicated, payment will be included under the applicable bridge transition or bridge approach rail item. No separate payment will be made.

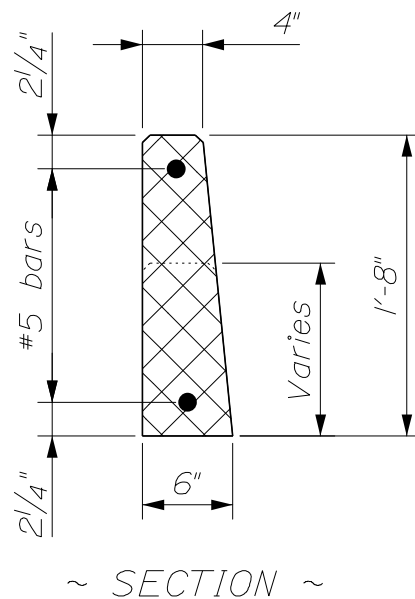

PRECAST CONCRETE VERTICAL CURB
609(09)

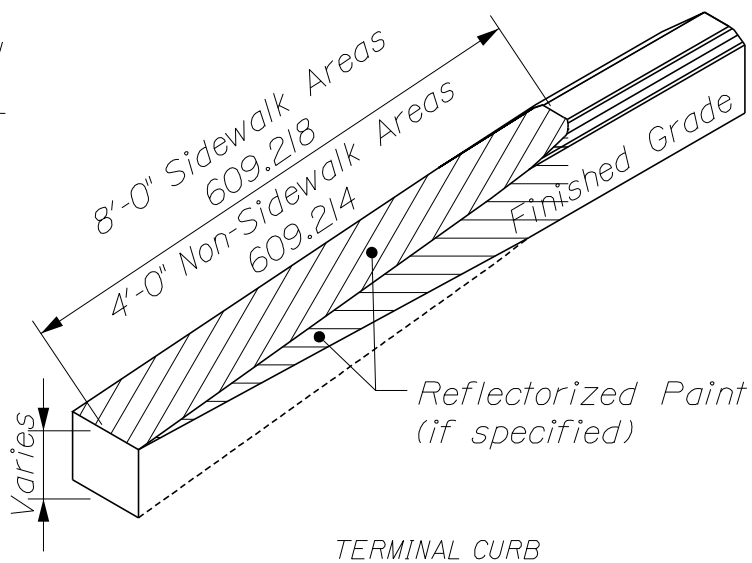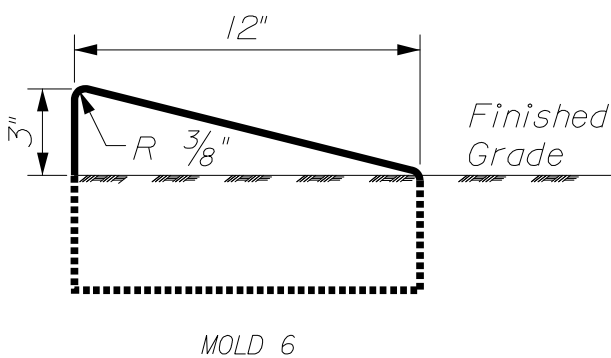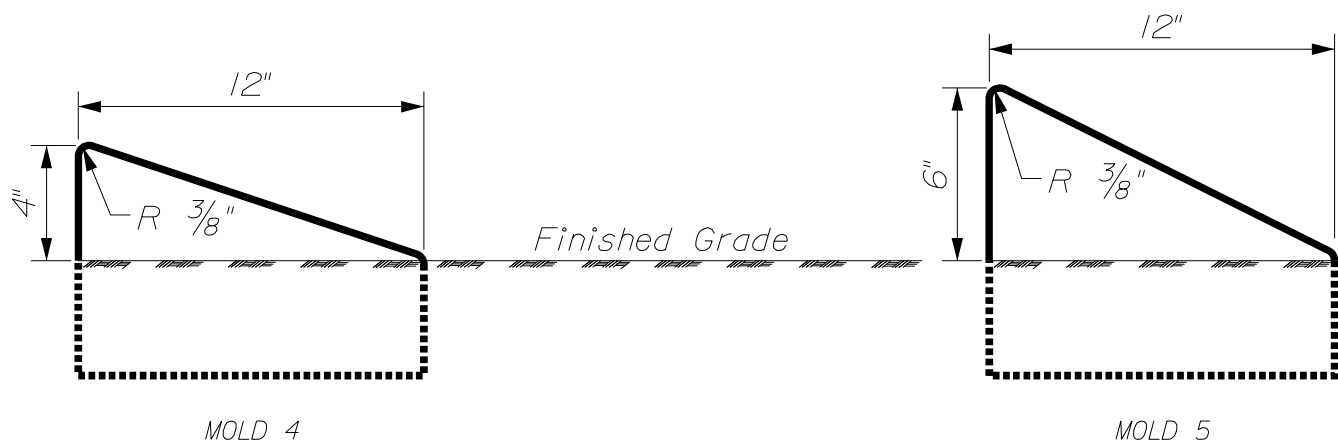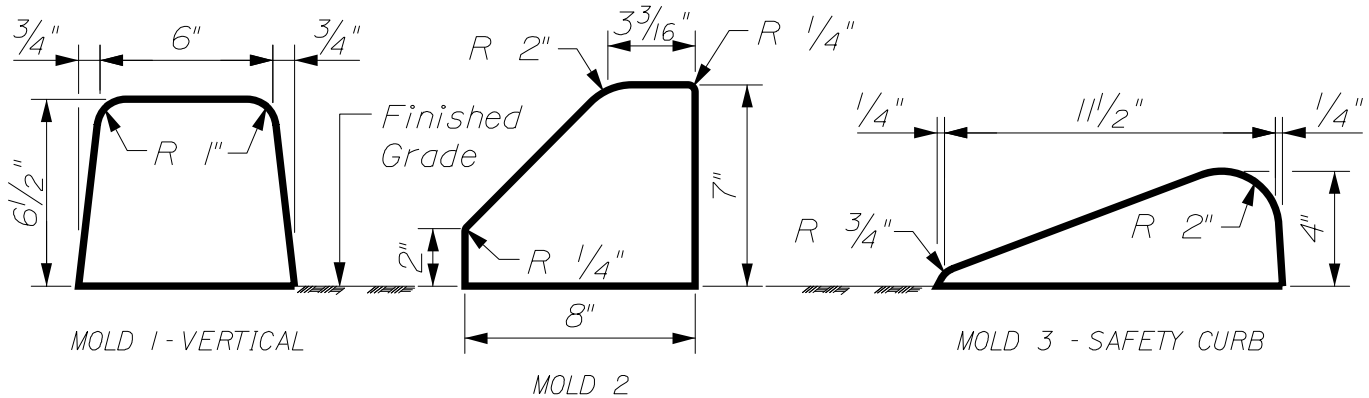

CONCRETE SLIPFORM CURB 609(10)

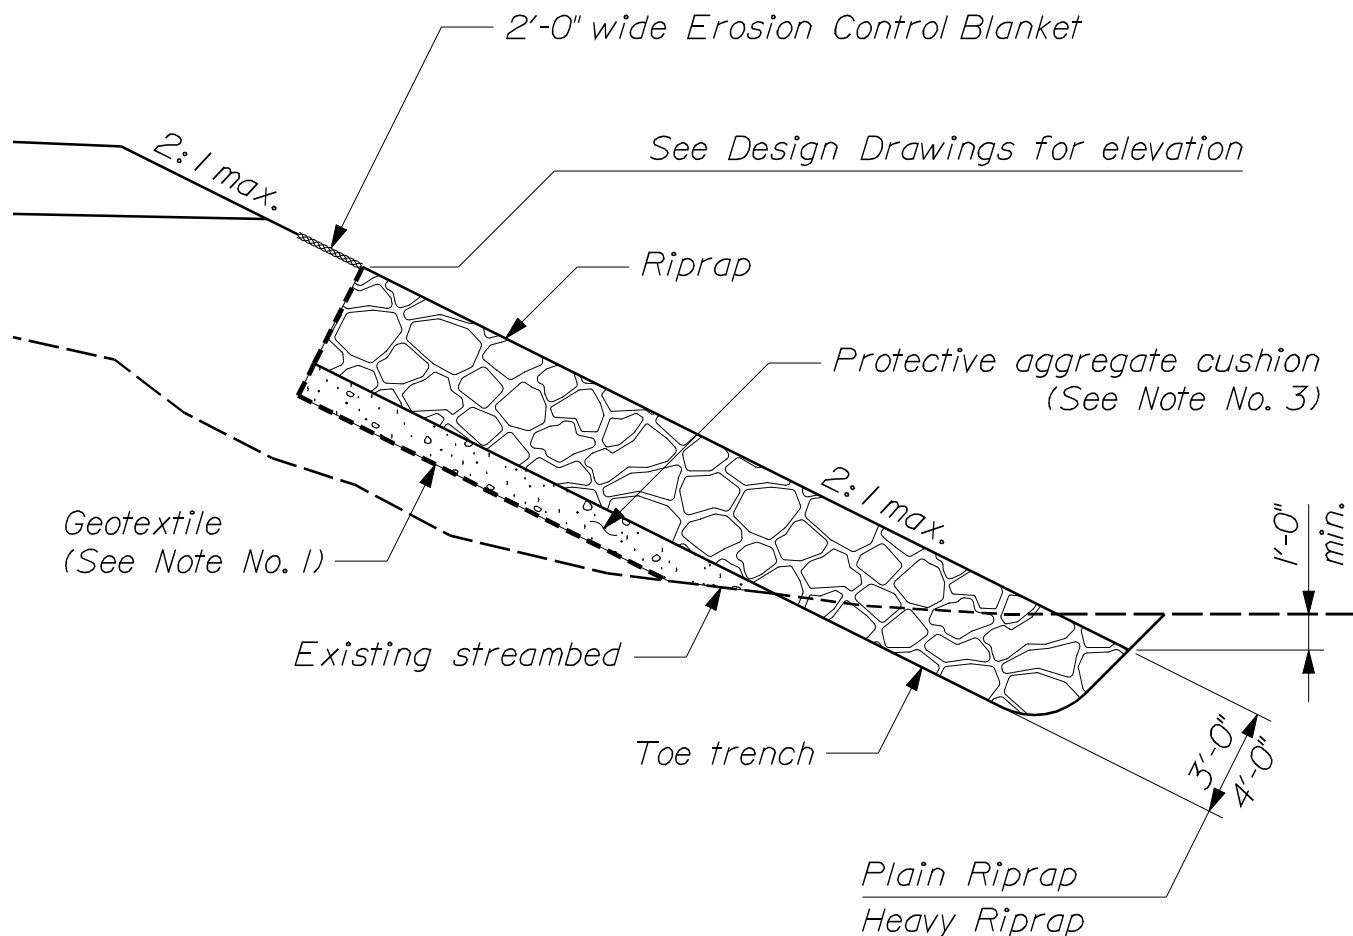


~ PLAIN OR HEAVY RIPRAP SIDE SLOPE ~

NOTES:


1. Geotextile shall be Class 1, Non - woven, Erosion Control Geotextile (loosely placed) meeting the requirements of Standard Specification 722.03.
2. Refer to Standard Detail 620(05) for specific details on geotextile placement.
3. Protective aggregate cushion shall be a minimum of 12 inches thick and shall meet the requirements of 703.19, Granular Borrow - Material for Under-water Backfill
4. Use of Plain or Heavy Riprap shall be as shown on the Design Drawings.

STONE SCOUR PROTECTION
610(02)

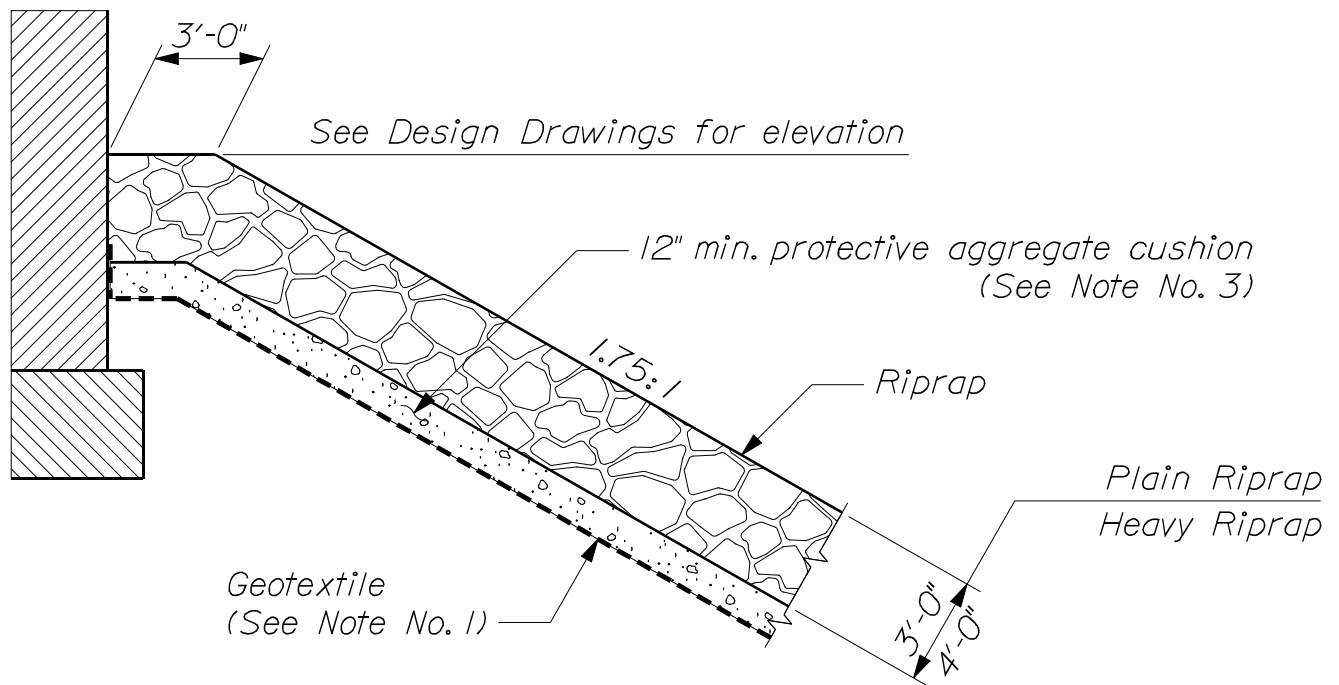


~ RIPRAP SLOPE AT TRADITIONAL ABUTMENT ~

Note: Work these details with Standard Detail 610(02)

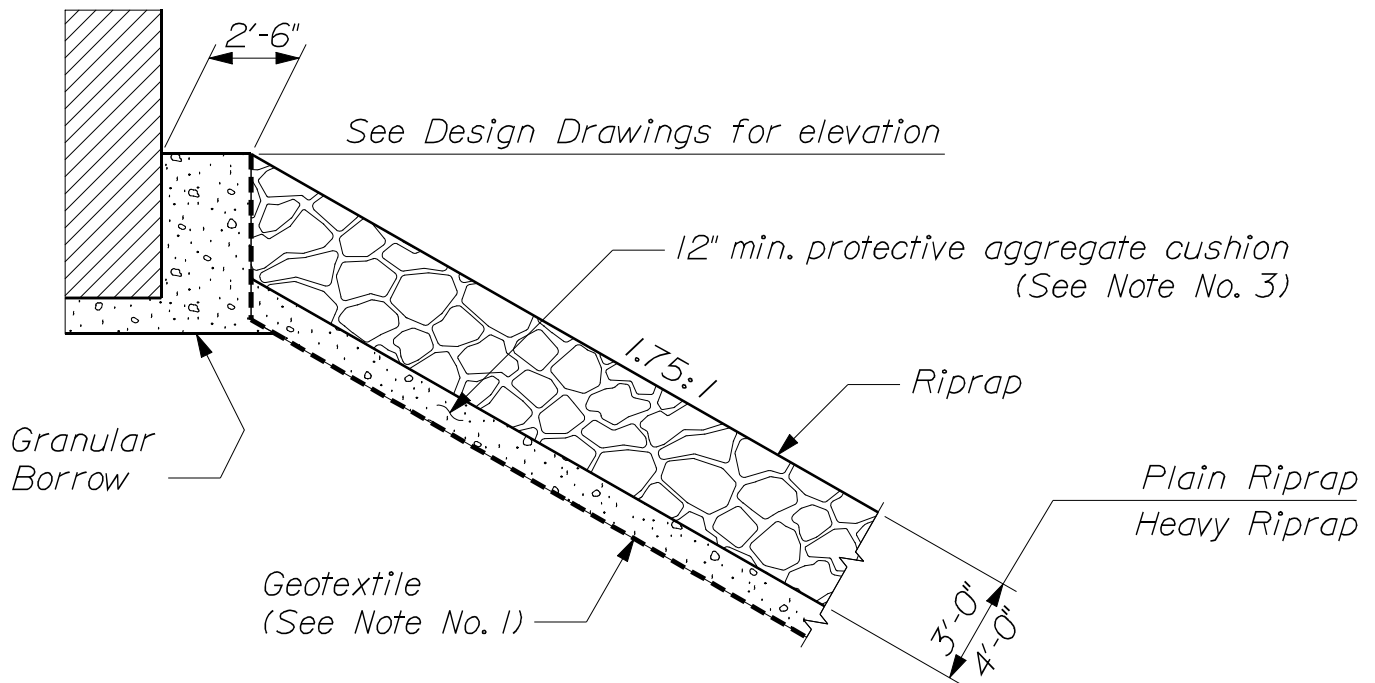


~ RIPRAP SLOPE AT INTEGRAL ABUTMENT ~

STONE SCOUR PROTECTION
610(03)

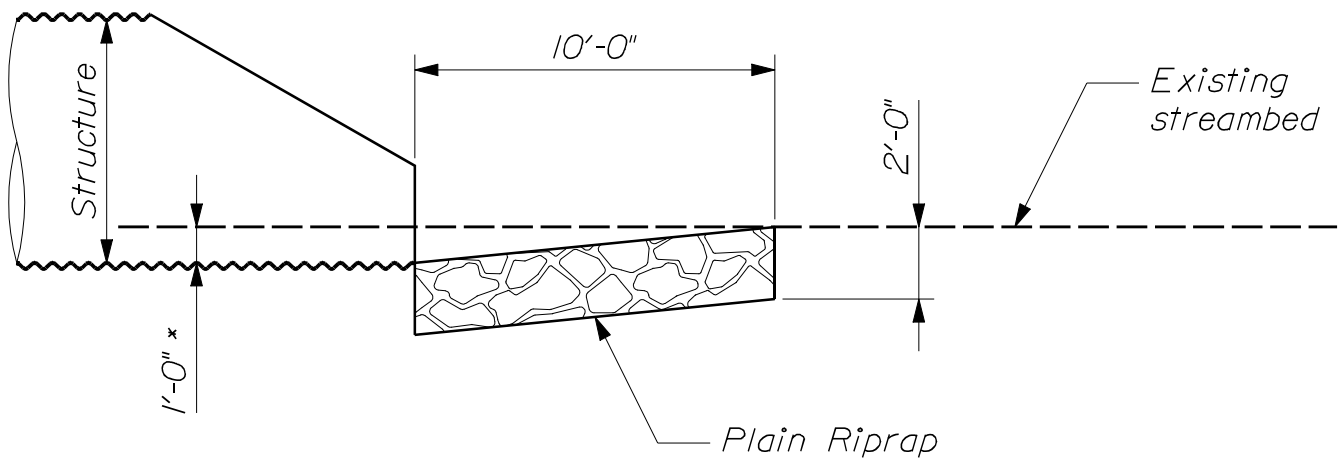


~ PLAIN RIPRAP APRON ~
 * Or as specified on the Design Drawings

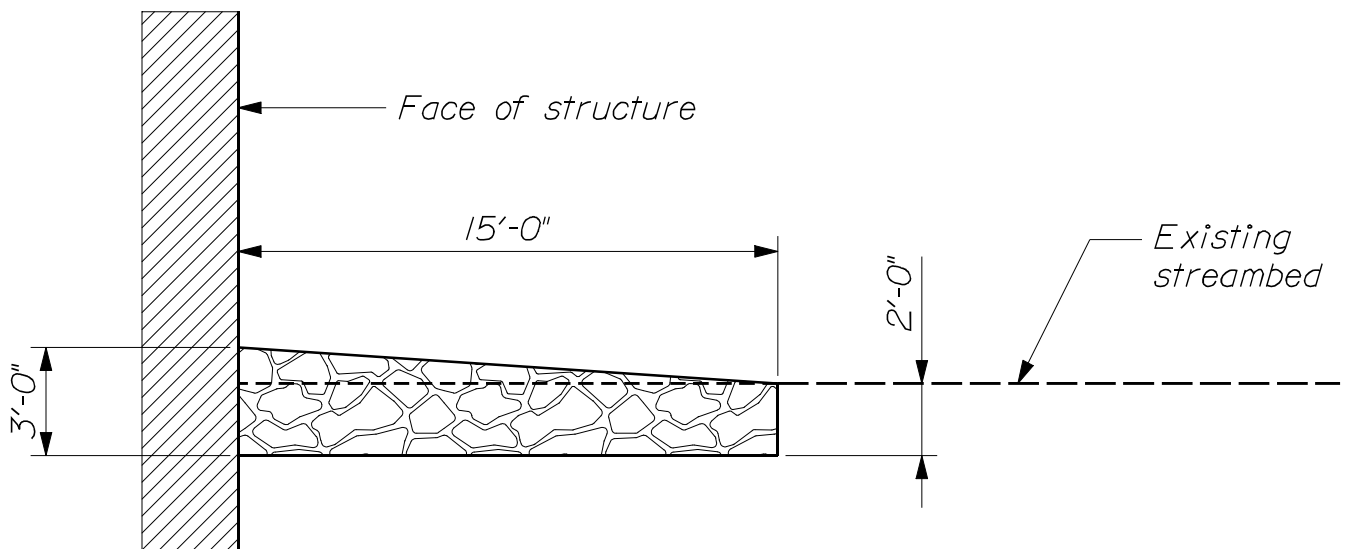


~ STONE BLANKET ~

STONE SCOUR PROTECTION
 610(04)

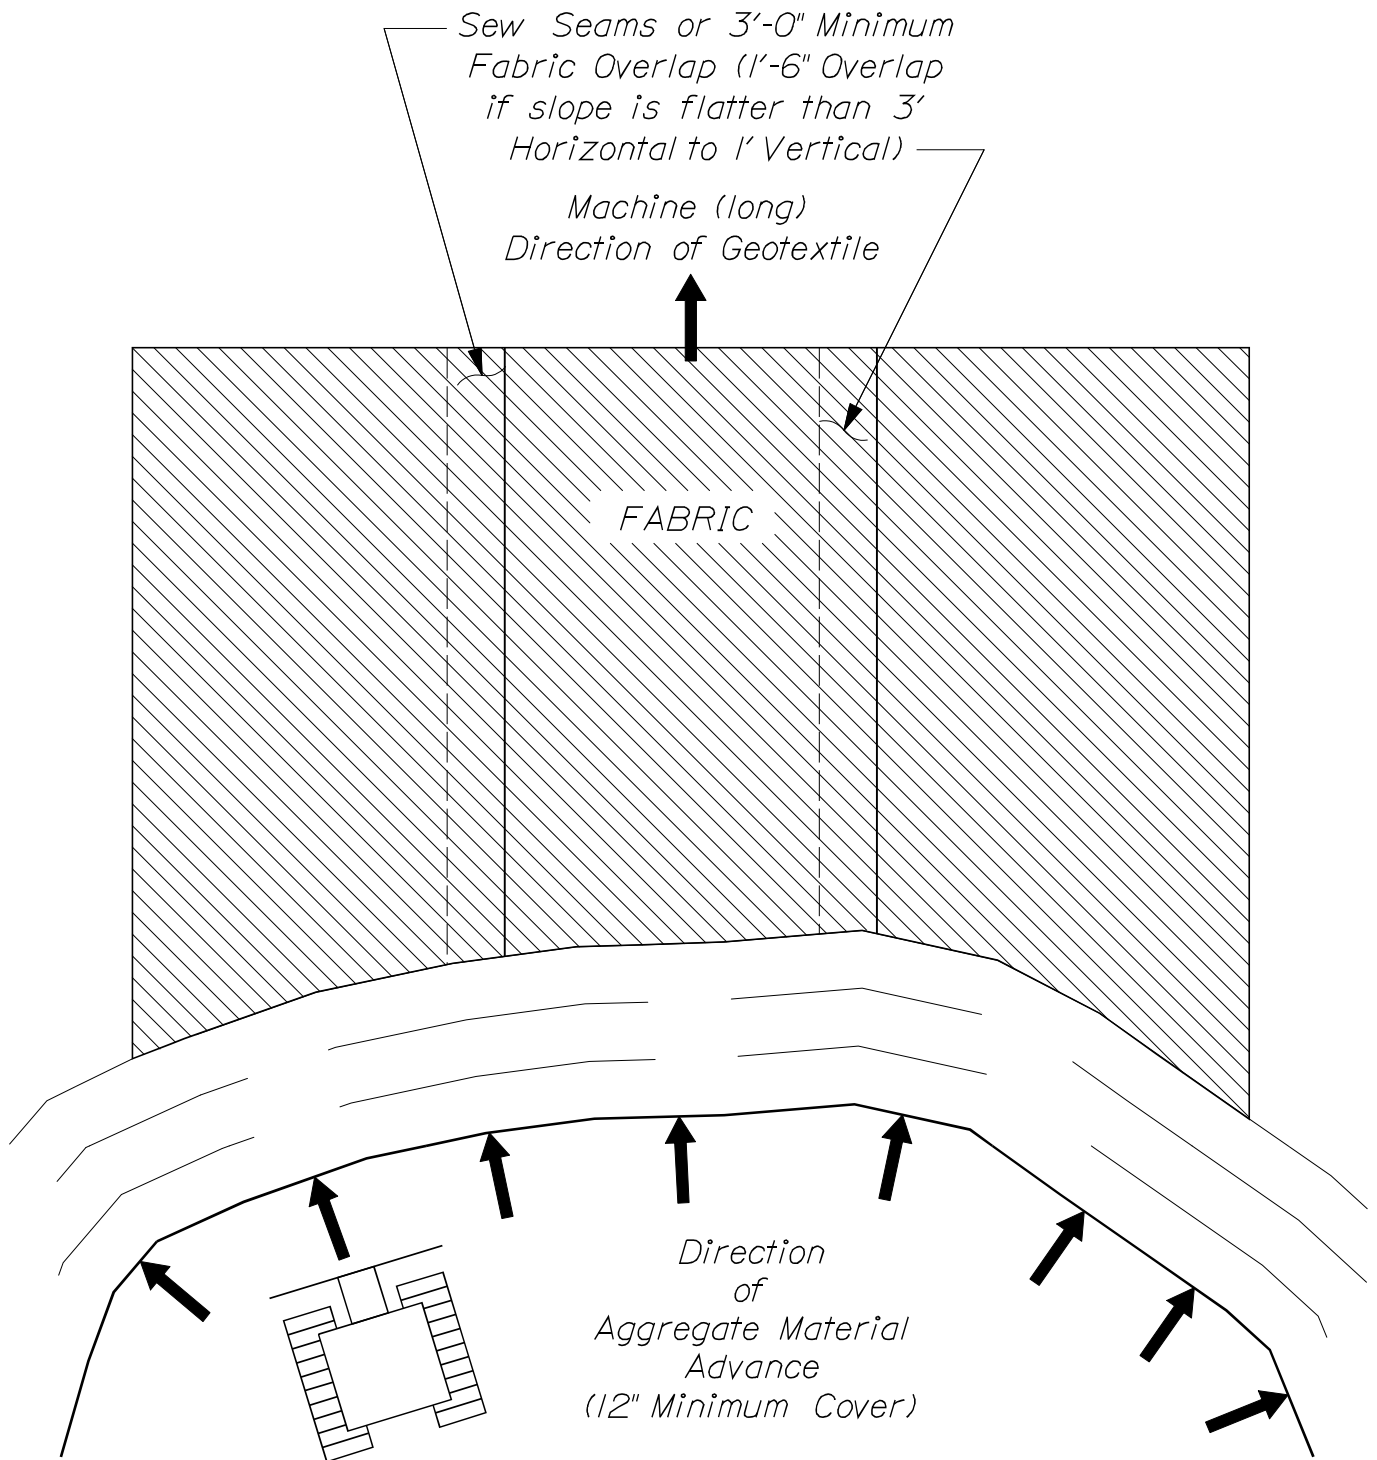


PLACEMENT OF FIRST LIFT OF COVER MATERIAL TO
 ~ TENSION GEOTEXTILE ON MODERATE GROUND CONDITIONS ~
 (NO MUD WAVE).

GEOTEXTILE PLACEMENT
 620(01)

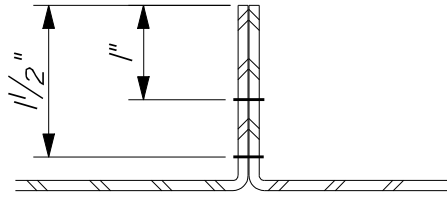


*FLAT or PRAYER Seam
Type SSA-2*

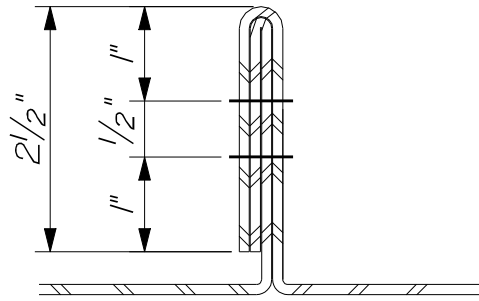


*J Seam
Type SSN-1*

~ TYPES OF SEAMS ~

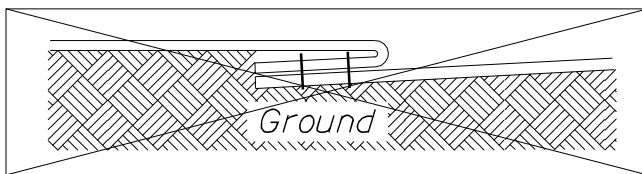


*Improper Placement
(cannot inspect or repair)*



*Proper Placement
(seam up)*

~ SEAM PLACEMENT ~

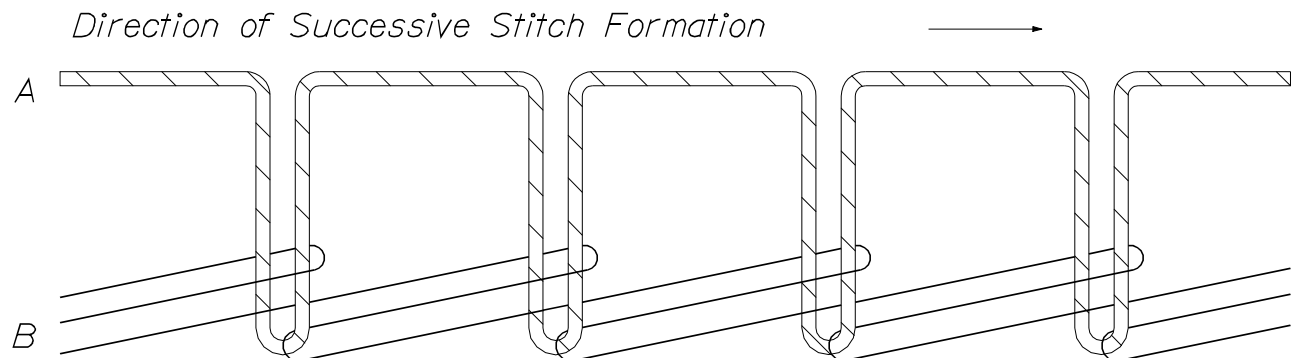




~ CLASS 401 TYPE STITCH ~

NOTE:


This type of stitch shall be formed with two threads: one needle thread "A", and one looper thread, "B". loops of thread "A" shall be passed through the material and interlaced and interlooped with loops of thread "B". The inter-loopings shall be drawn against the underside of the bottom ply of material.

GEOTEXTILE SEAMING

620(02)

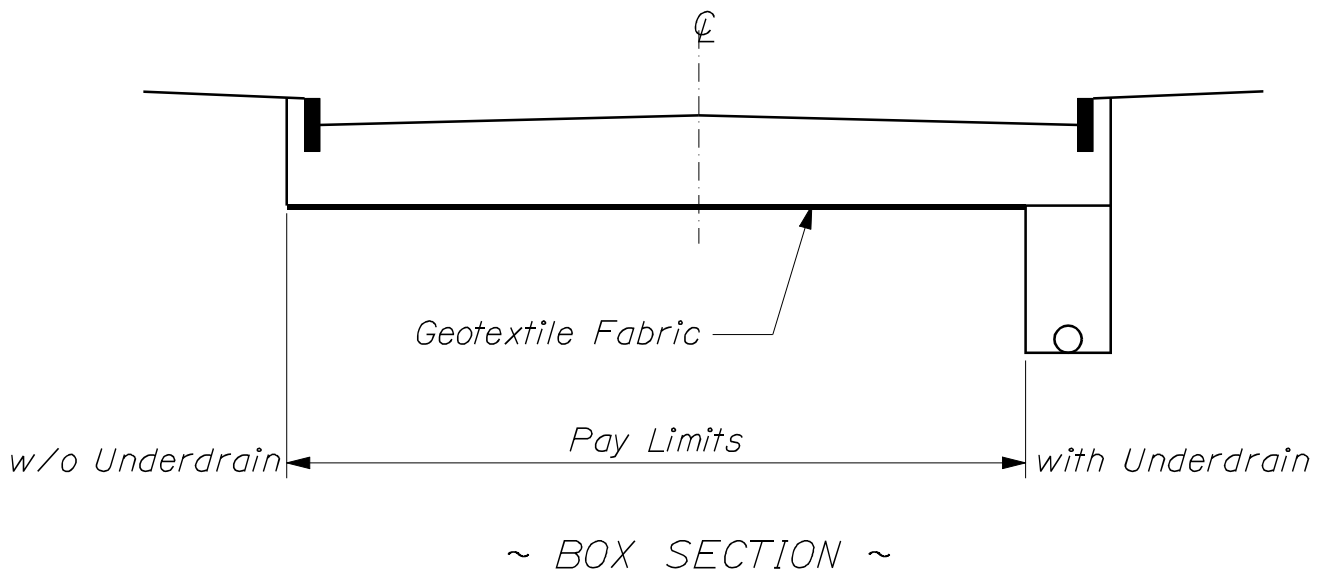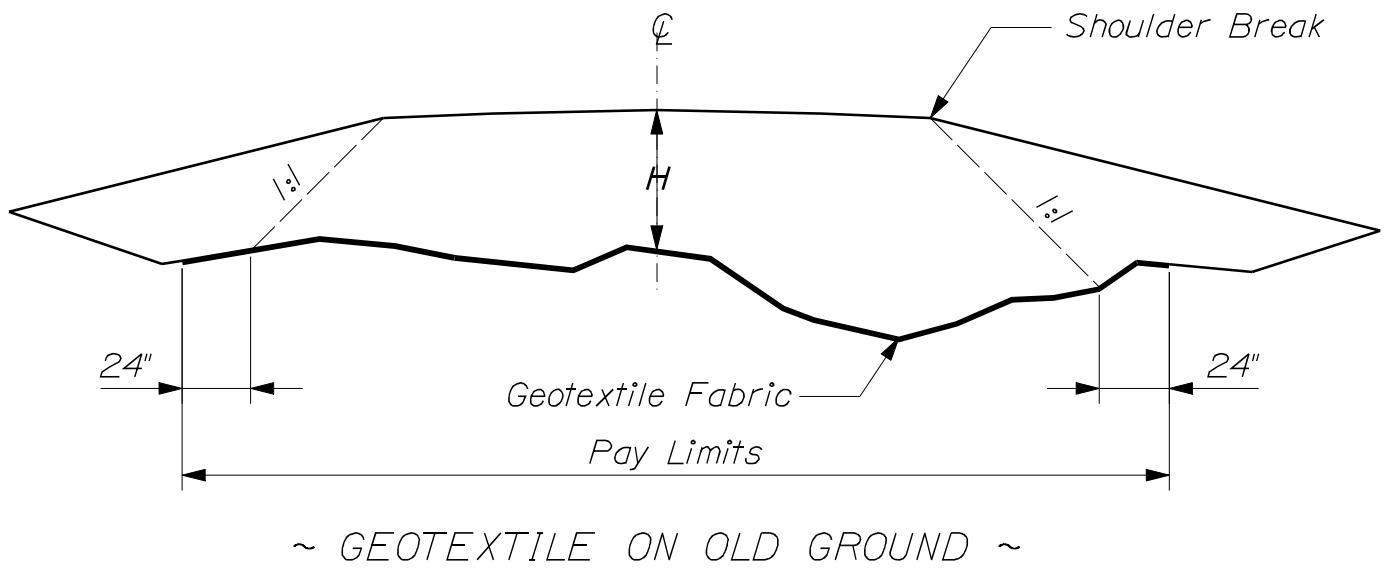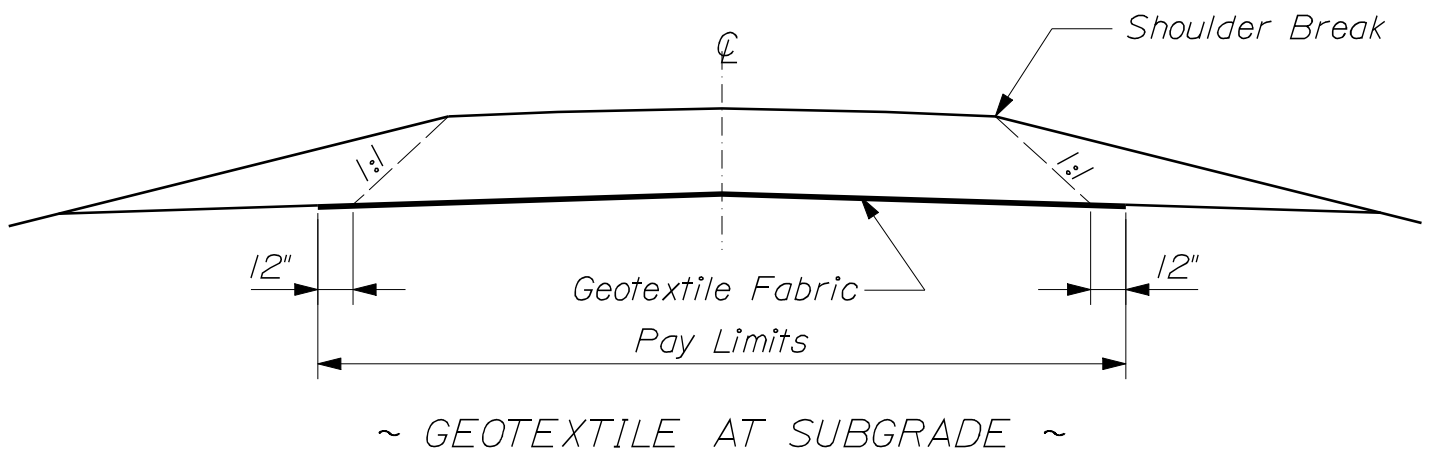


LATERAL LIMITS IN A ROADWAY
620(03)

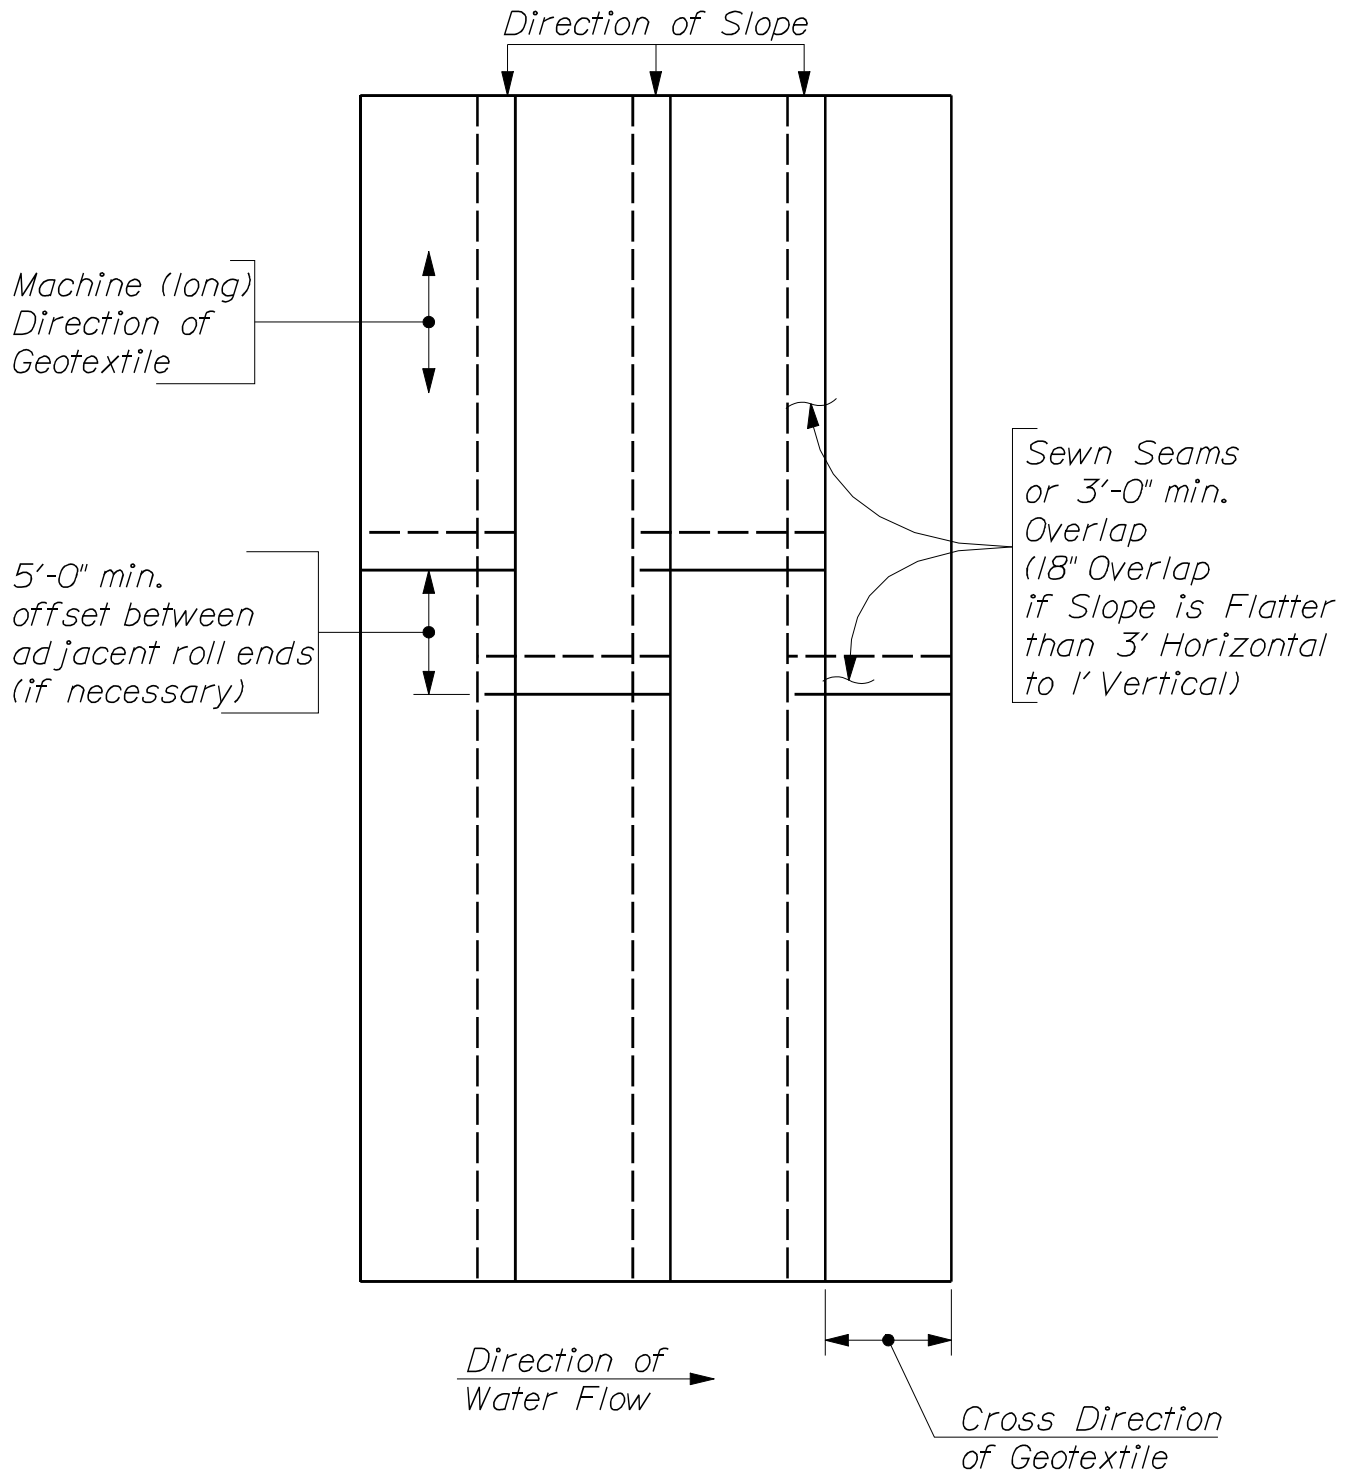


~ PLAN VIEW ~

GEOTEXTILE PLACEMENT FOR PROTECTION OF
SLOPES ADJACENT TO STREAMS & TIDAL AREAS

620(04)

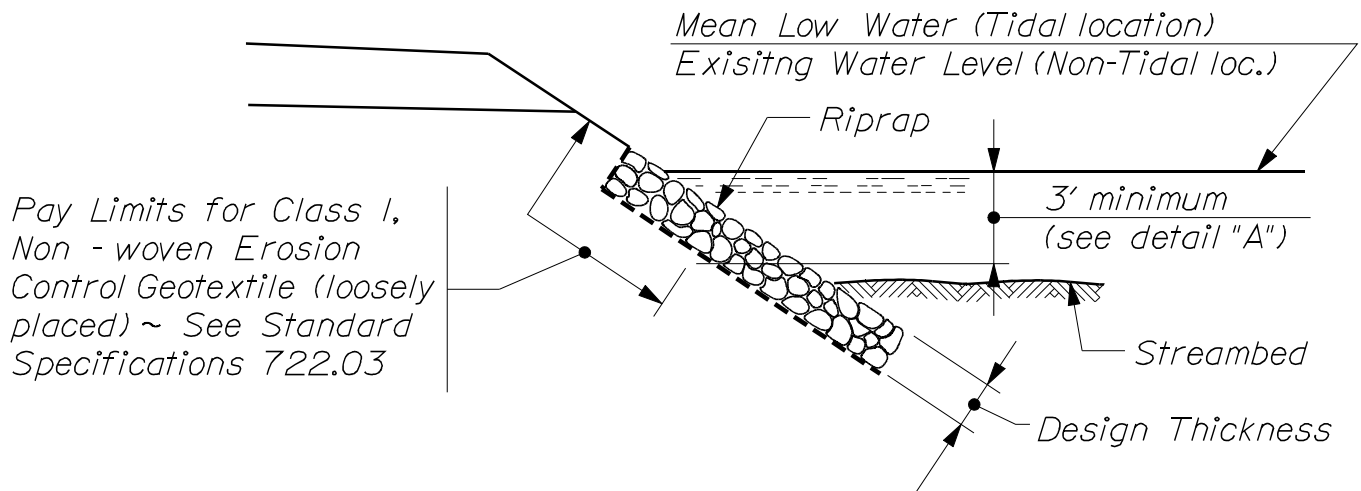


~ AT ROADWAY SLOPES ~

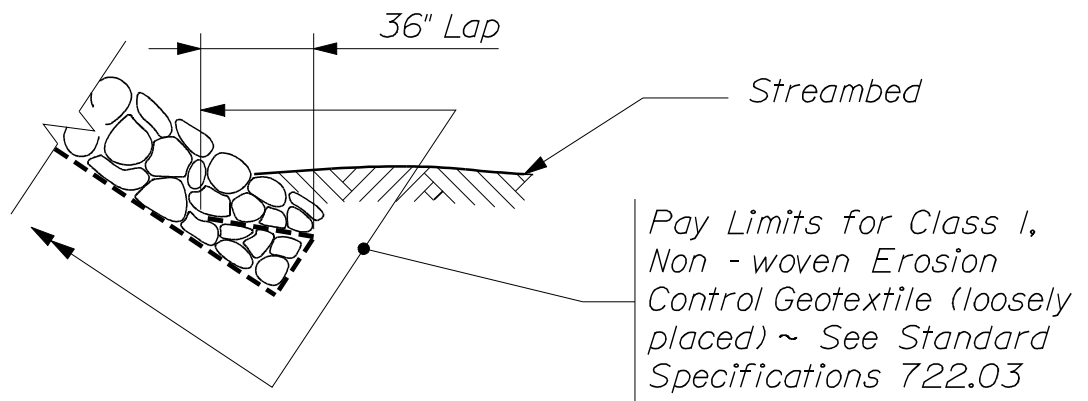



~ DETAIL "A" ~

(For use where water depth is less than 3')

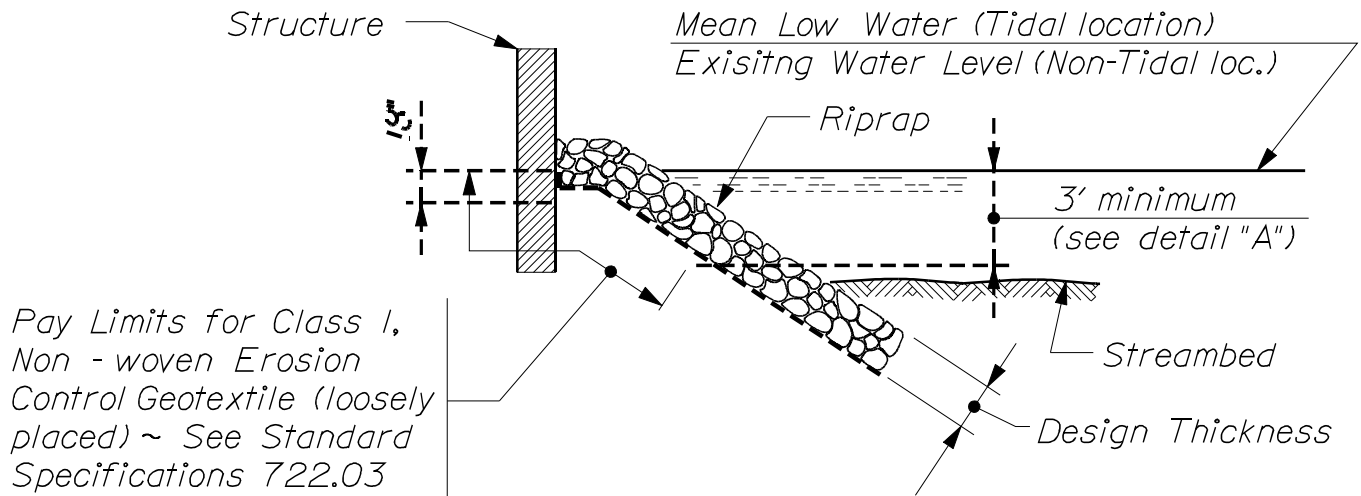

~ AT STRUCTURE ~

GEOTEXTILE PLACEMENT FOR PROTECTION OF
SLOPES ADJACENT TO STREAMS & TIDAL AREAS

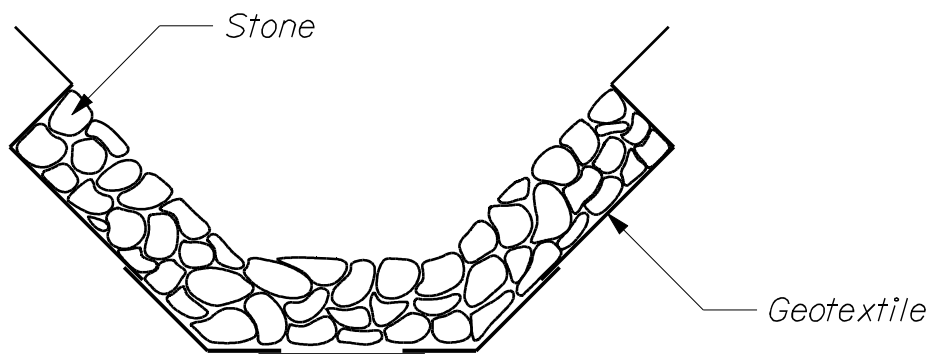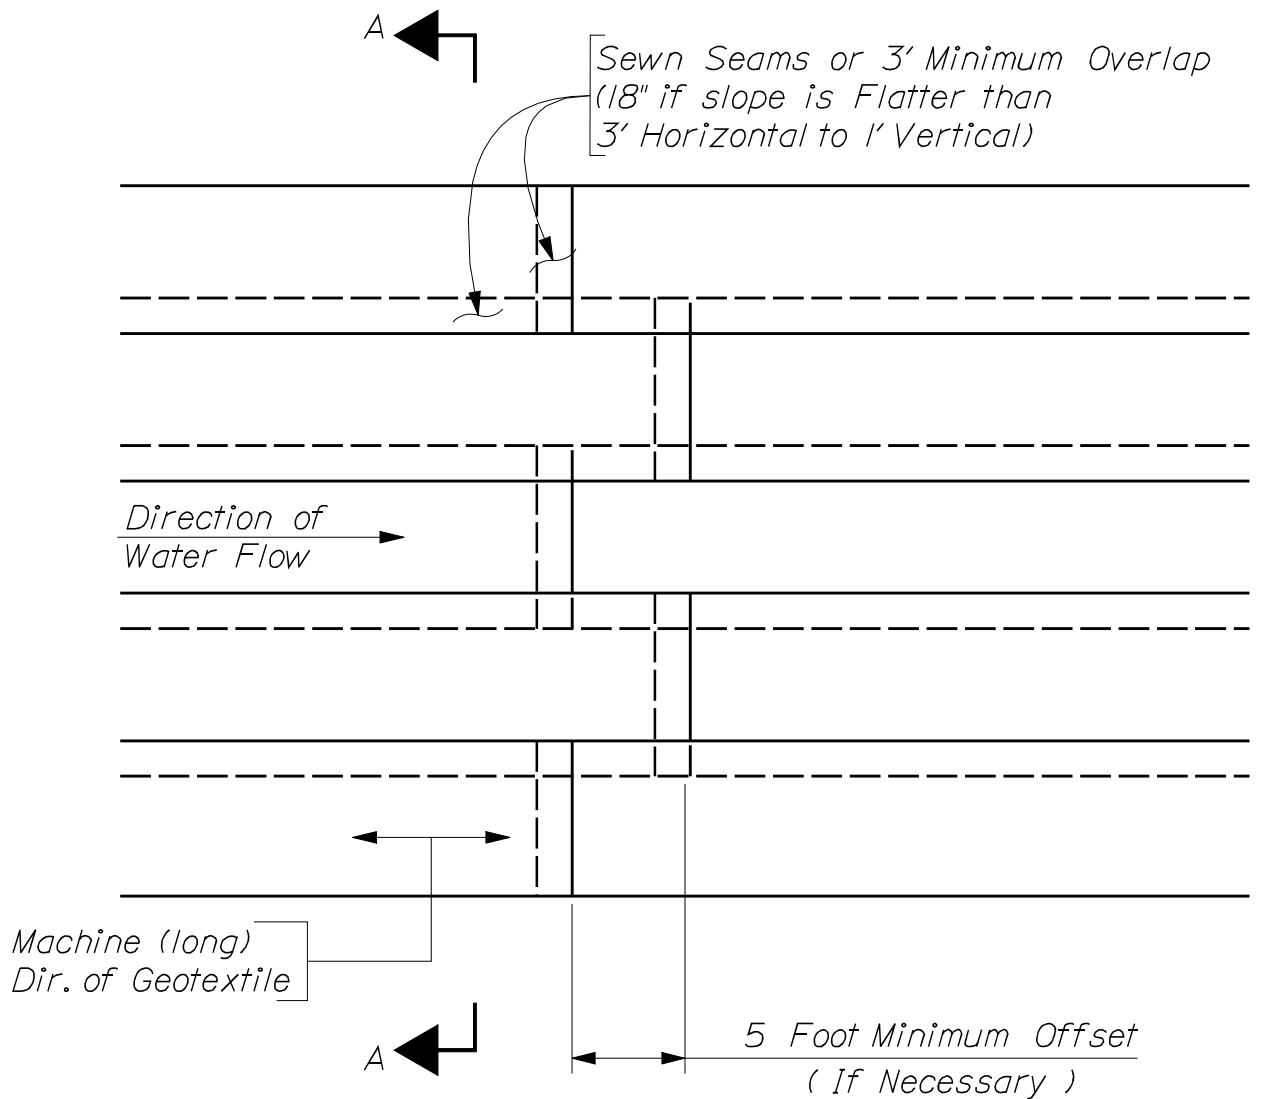

*GEOTEXTILE PLACEMENT SCHEME FOR
PROTECTION OF DITCHES, SHALLOW CHANNELS, ETC.*
620(06)

NOTES:

- 1. Staking may be required to assure straight trunk. Staking must follow proper industry standards.*
- 2. Remove top 1/3 of burlap and wire basket. Existing ball shall be even or slightly above existing grade.*

Do not apply mulch directly against trunk

Build 4" High Minimum Soil Berm for Water Saucer

4" Bark Mulch

Existing Grade

Amended Backfill Mix with Minimum of 1/3 Amendments per Specifications


Slow Release Fertilizer Tab

Undisturbed Soil



B & B TREE PLANTING DETAIL

621(01)

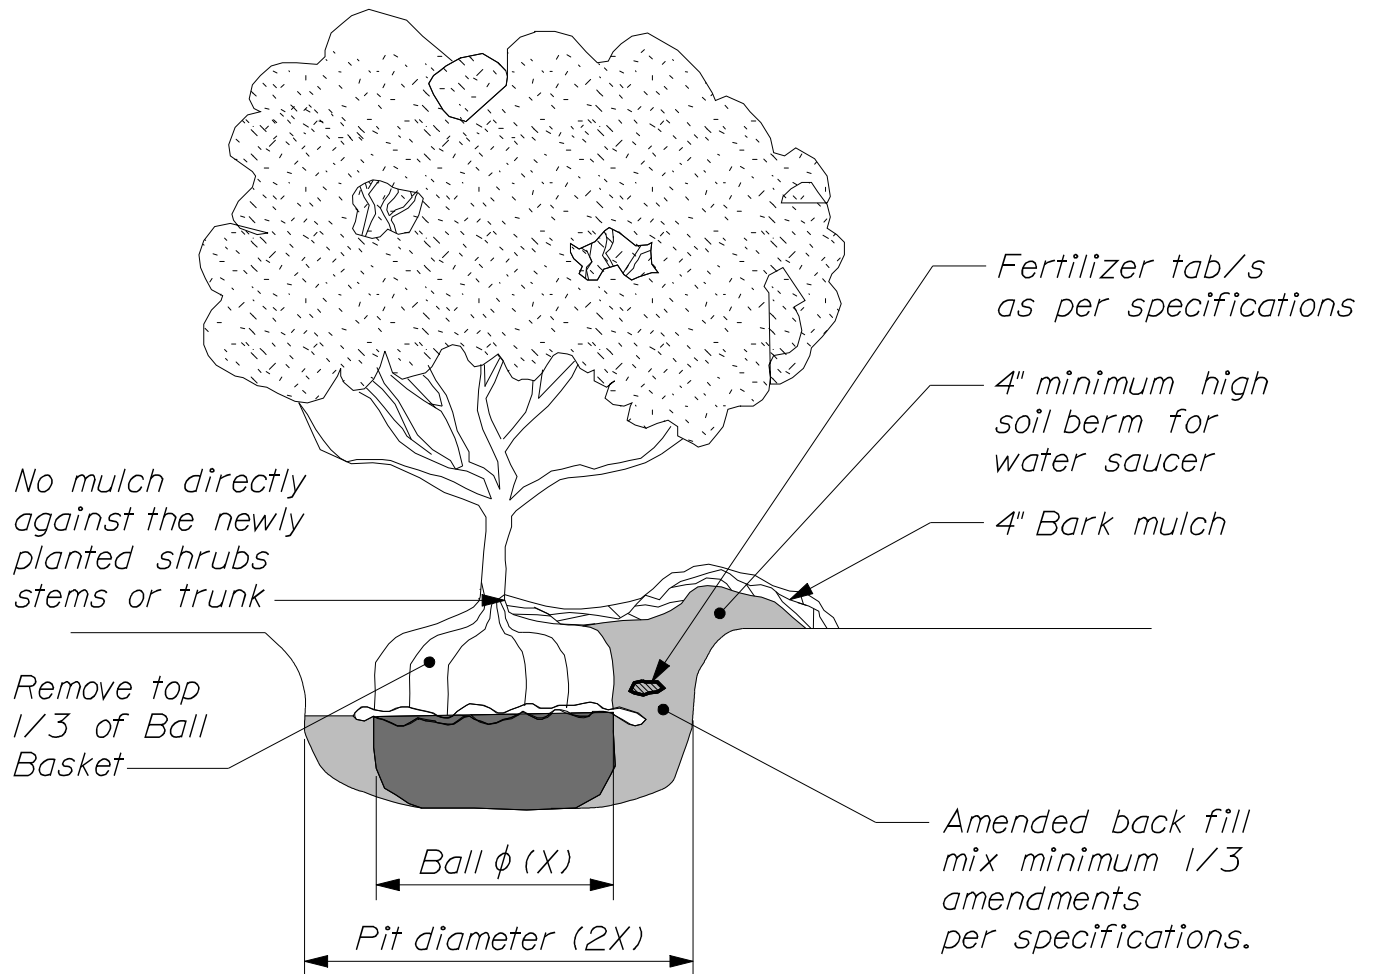


B & B SHRUB PLANTING DETAIL

621(02)


NOTES:

- 1. All plantings shall comply with current Maine Department of Transportation Standard Specifications.*
- 2. Remove and properly dispose of containers, tags, labels, and flagging tape, unless otherwise directed by an Authorized MaineDOT employee.*
- 3. Prune broken and dead branches at time of planting.*

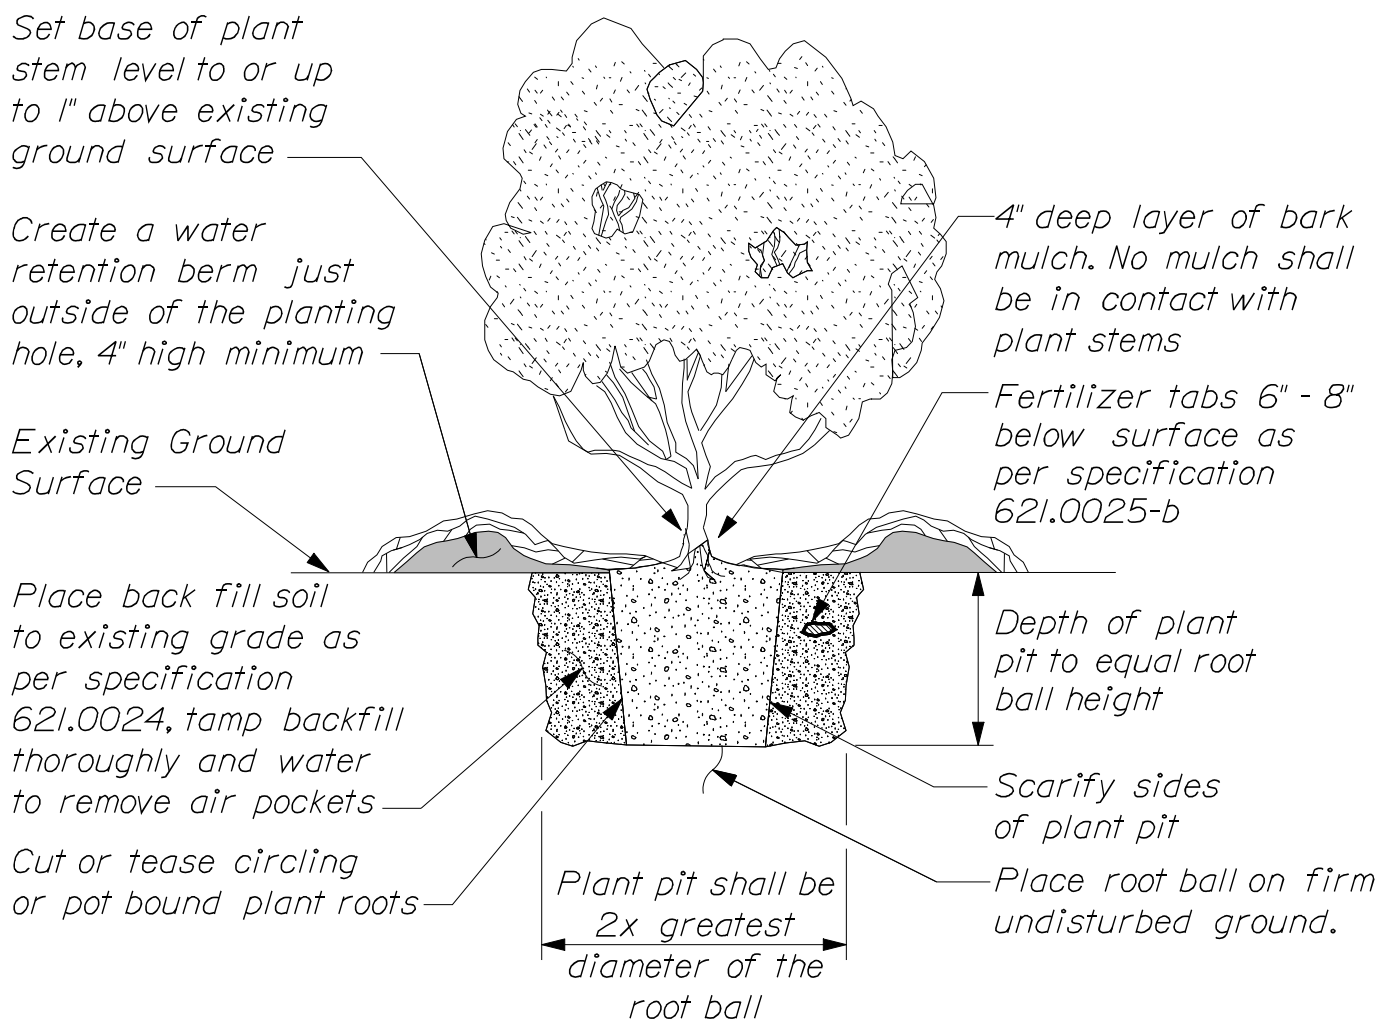

CONTAINER TREE/SHRUB PLANTING DETAIL
621(03)

*1/2" wide Drain Chase
sloped to drain. Required
with electrical work.*

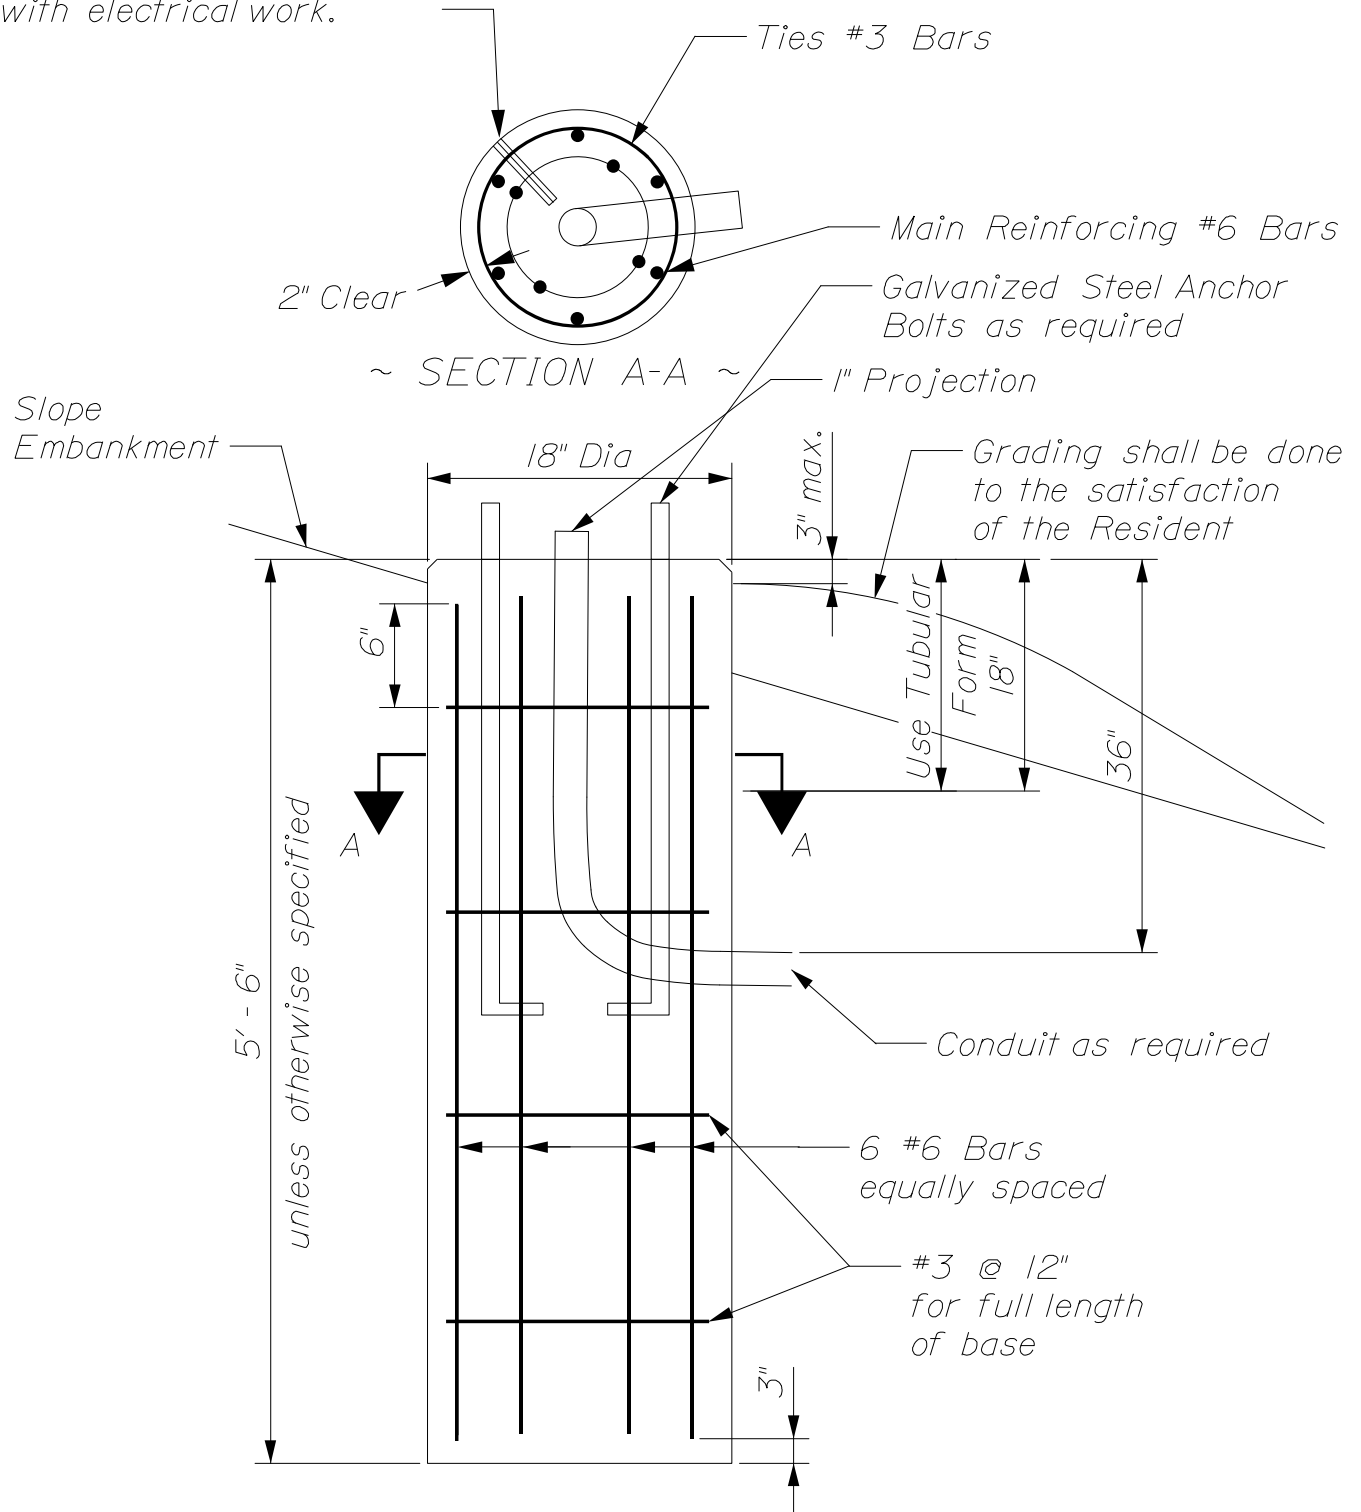

*~ 18 INCH FOUNDATION ~
ITEM NO. 626.411*

*FOUNDATIONS FOR TRAFFIC SIGNALS, HIGHWAY
SIGNING AND LIGHTING
626(01)*

chase
n. Required
work.

Ties #3 bars

Main reinforcing #6 bars

Galvanized steel anchor
bolts as required or
breakaway anchors as
indicated on plans

2" Clear

~ SECTION A-A ~

1" Projection

Grading shall be done
to the satisfaction
of the Resident

24" Dia.

3" max.

Use tubular
form

18"

36"

6"

7'-0"

Unless otherwise specified

A

A

Conduit as required


Galvanized steel anchor
bolts as required
or breakaway anchors

8 #6 Bars
equally spaced


#3 @ 12"
Full length
of base

3"


FOUNDATIONS FOR TRAFFIC SIGNALS, HIGHWAY
SIGNING AND LIGHTING
626(02)

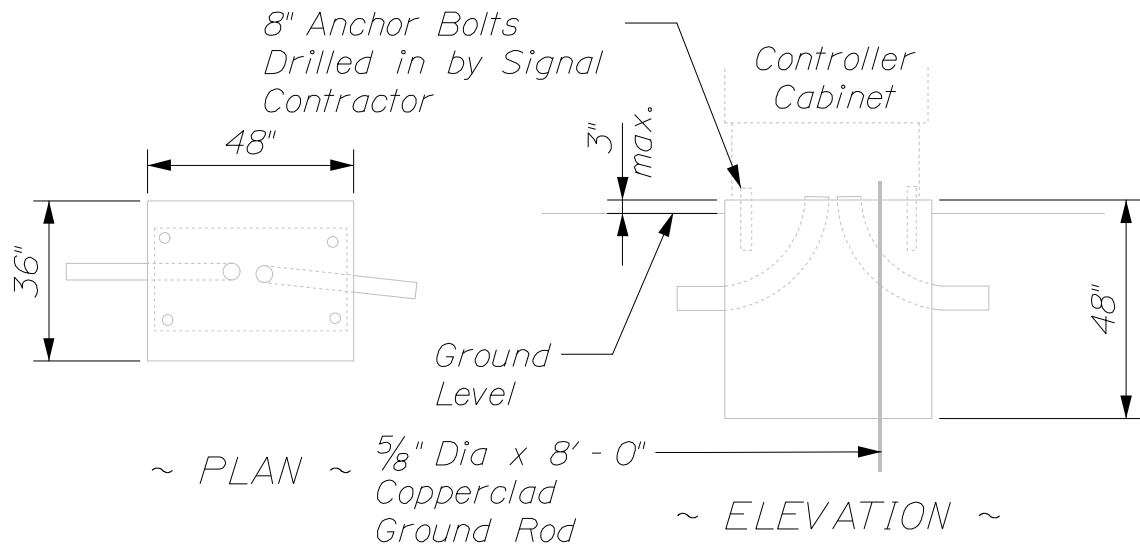

~ GROUND MOUNTED CONTROLLER
CABINET FOUNDATION ~

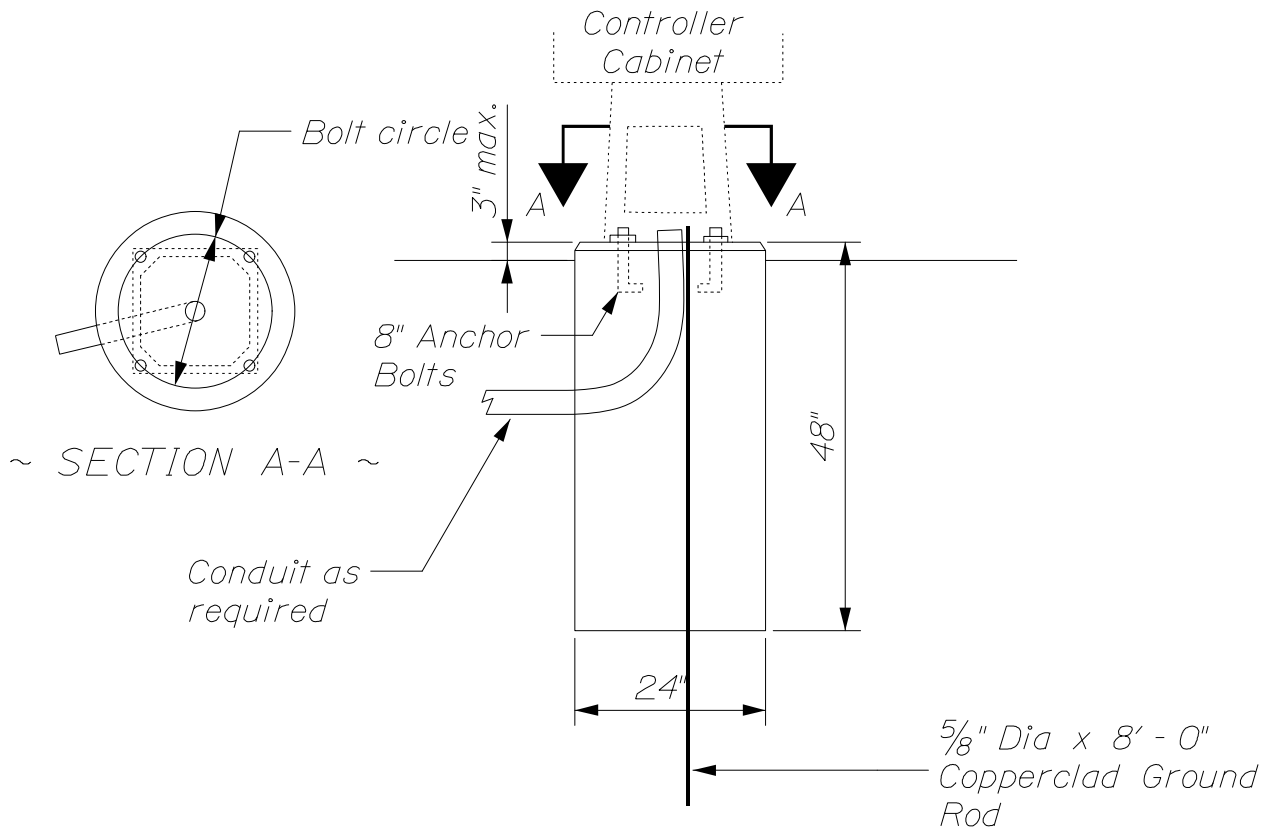


~ CONTROLLER CABINET FOUNDATION ~
ITEM NO. 626.35

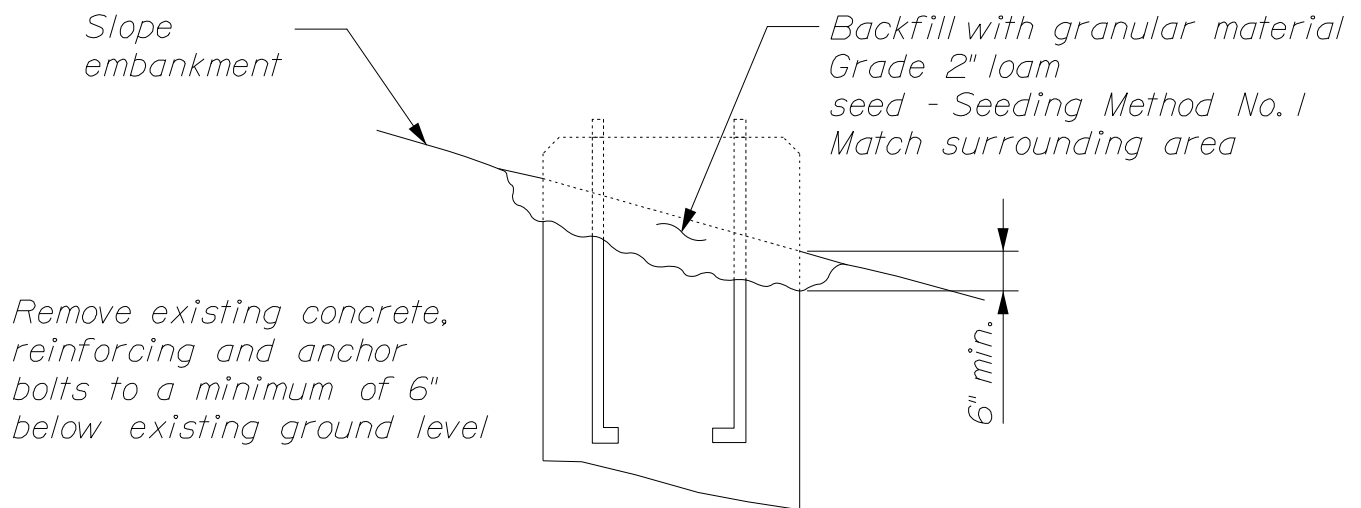

*~ REMOVAL OF CONCRETE FOUNDATIONS ~
ITEM NO. 626.36*


*FOUNDATIONS FOR TRAFFIC SIGNALS, HIGHWAY
SIGNING AND LIGHTING
626(04)*

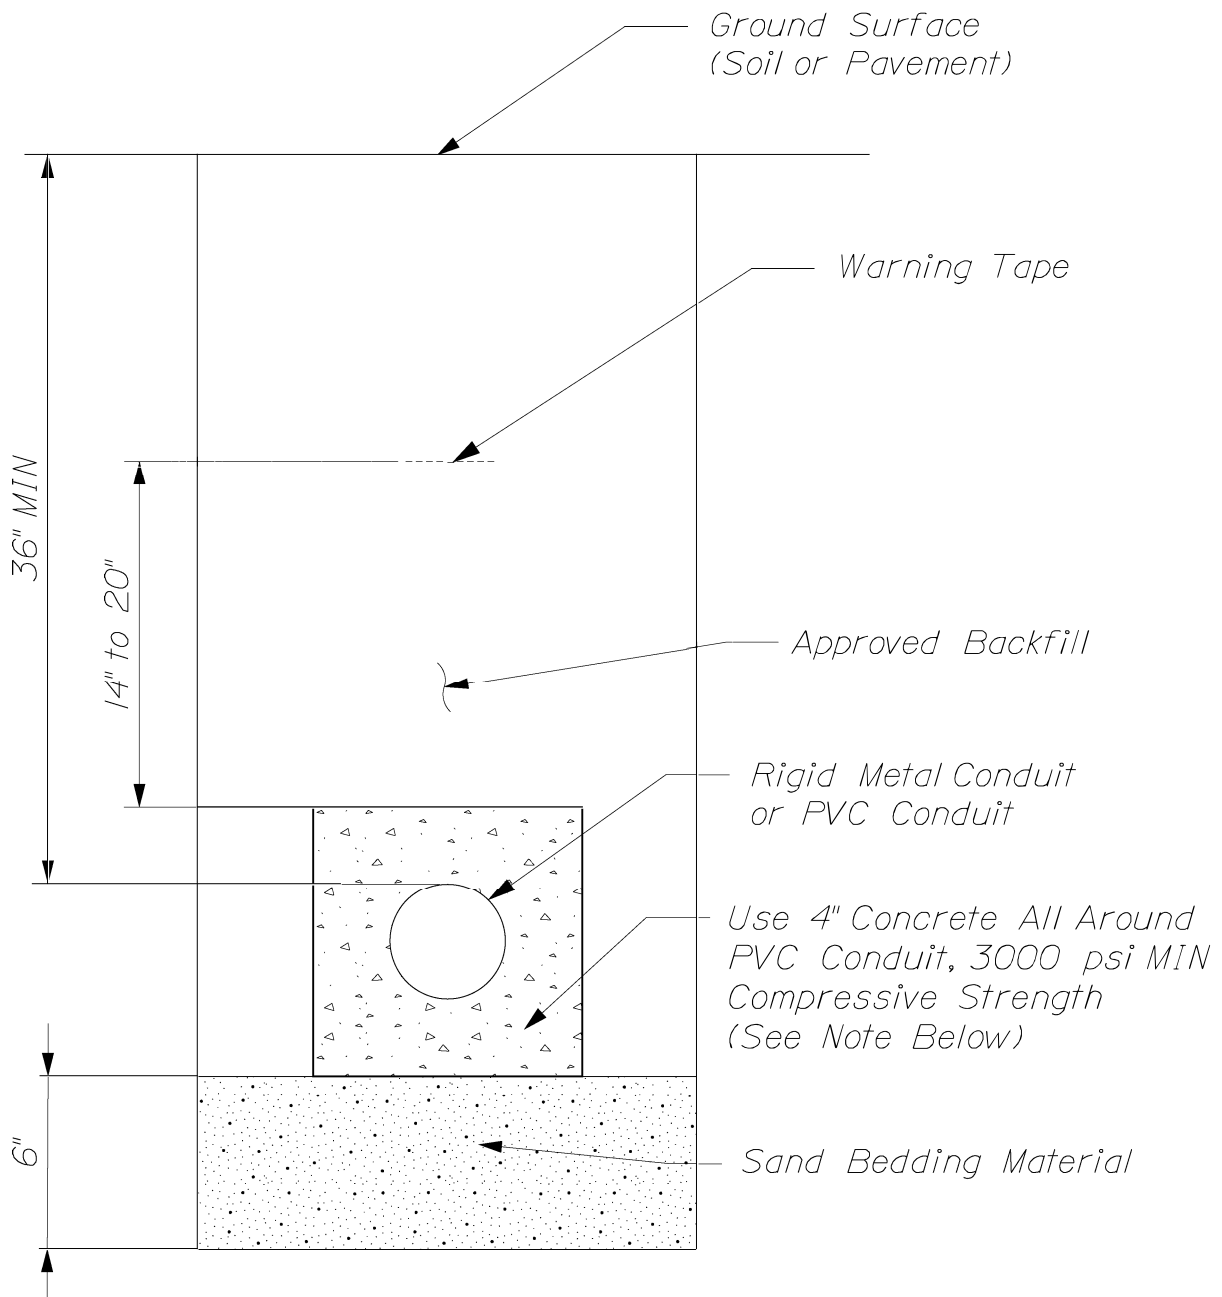


NOTE: All PVC Conduits Containing Electrical Supply Lines Feeding Secondary Utility Power To Meter Breaker Panels or Directly To Traffic Signalization Control Cabinets or Highway Lighting Breaker Boxes Shall Be Concrete Encased.

CONDUIT TRENCH FOR TRAFFIC SIGNALS, HIGHWAY SIGNING AND LIGHTING

626(05)

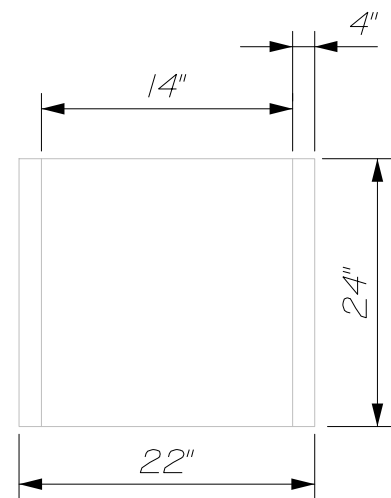

~ ELEVATION ~


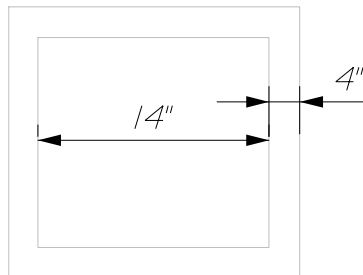


~ TOP ~


Cast Iron Frame
and Cover

Grout Frame in Place
on Top of Box

Note: For Use in
Sidewalk Areas

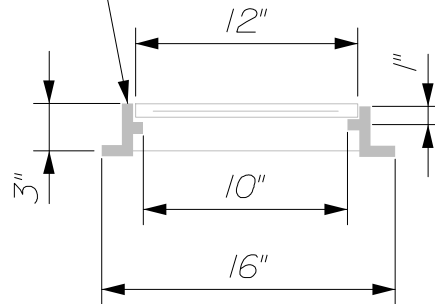



~ JUNCTION BOX COVER AND FRAME ~

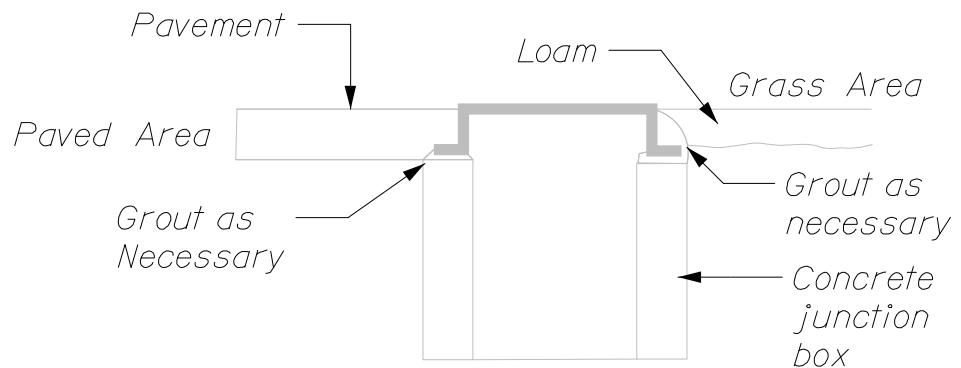

Install junction box on grade.
Grout as necessary as shown.

~ PRECAST CONCRETE JUNCTION BOX ~
ITEM NO. 626.11

ELECTRICAL JUNCTION BOX FOR TRAFFIC
SIGNALS, AND LIGHTING
626(06)

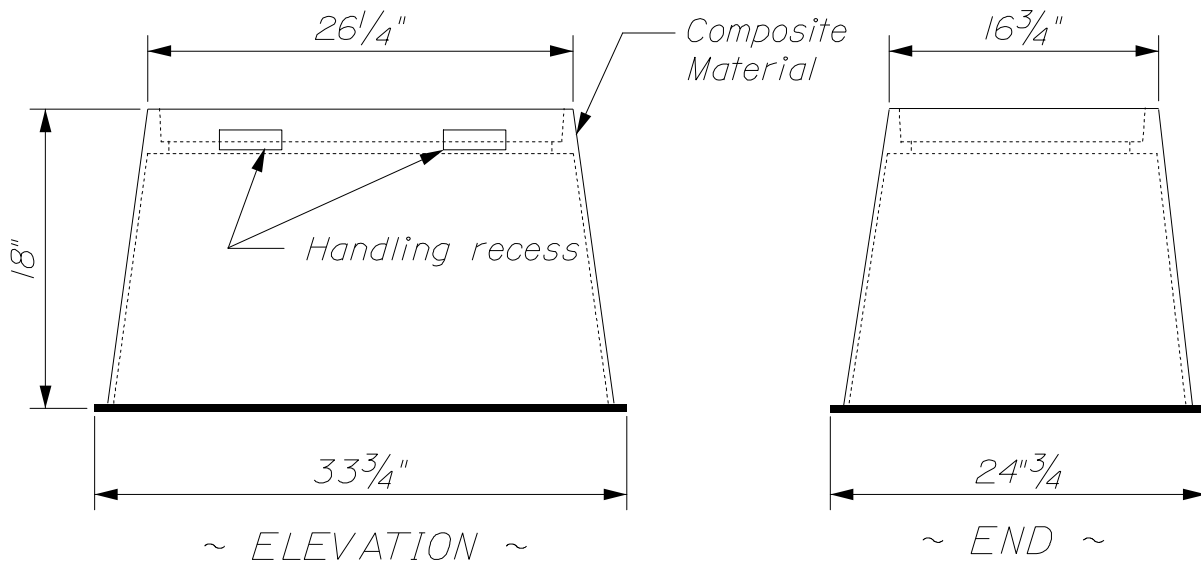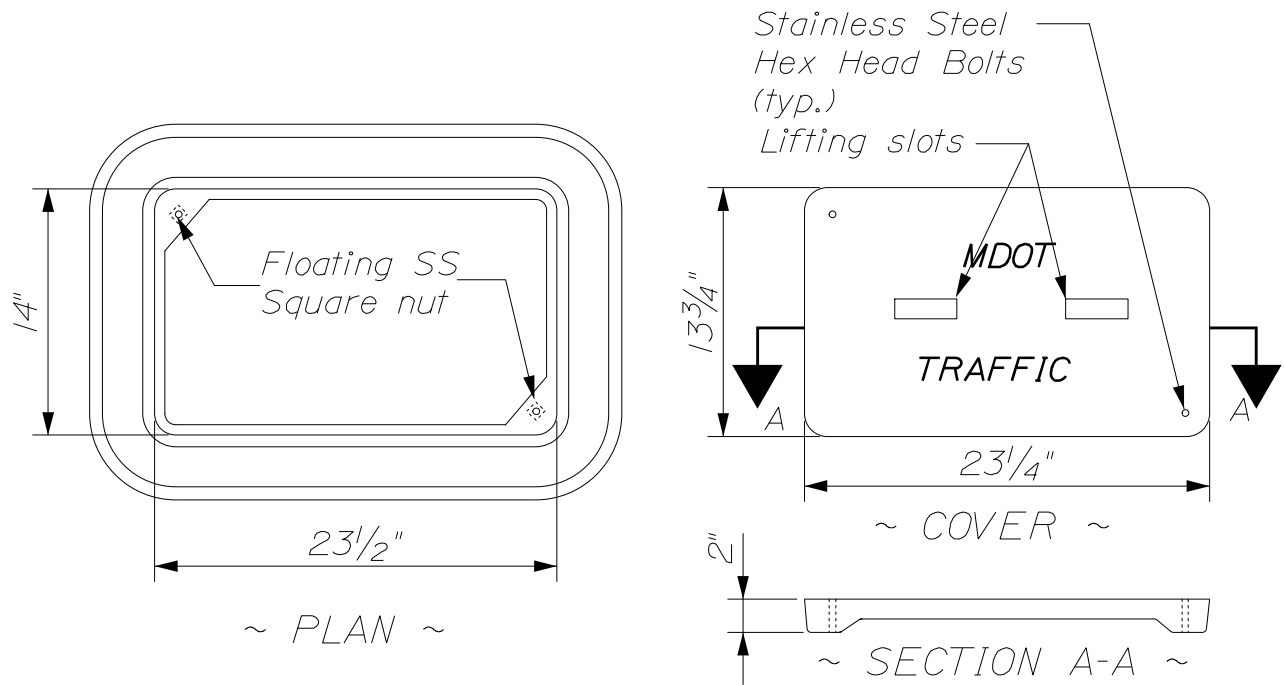

13" x 24" Flared Wall
JUNCTION BOX
ITEM NO. 626.II

NOTE:

The Junction Box shall be capable of supporting incidental traffic loads of 20,000 pounds without distortion or failure.
Junction Boxes shall be as listed on MaineDOT's Qualified Products List of Traffic Signal and Lighting Materials.
Dimensions shown are representative and may have slightly different dimensions.

**ELECTRICAL JUNCTION BOX FOR TRAFFIC
SIGNALS, AND LIGHTING**
626(07)

~ GENERAL NOTES ~

All pavement markings shall be in accordance with the most recent (Manual on Uniform Traffic Control Devices for Streets and Highways), U.S. DOT, FHWA.

Temporary Pavement Markings over Winter Shutdown shall include Yellow Center Line, And White edge lines.

~ SYMBOLS AND ARROWS ~

Stroke width and line width variance shall be no more than $\pm 1/4$ " from dimensions shown.

Square foot dimensions shown are pay dimensions, paid by Item No. 627.75.

Grid is marked in 4" intervals except as noted. Symbols and letters shall be proportioned according to grid as shown.


Spacing between characters shall be one unit, but visual spacing may be used.

Spacing between symbol and stop line shall be a minimum of 20'. Spacing between symbol and symbol shall be a minimum of 50' or as directed by the Resident.

Pavement marking lines on interstates shall be 6" in width.

6" crosswalk lines shall be paid for by Item No. 627.75.


4" lines for parking spaces shall be paid for by Item No. 627.75.

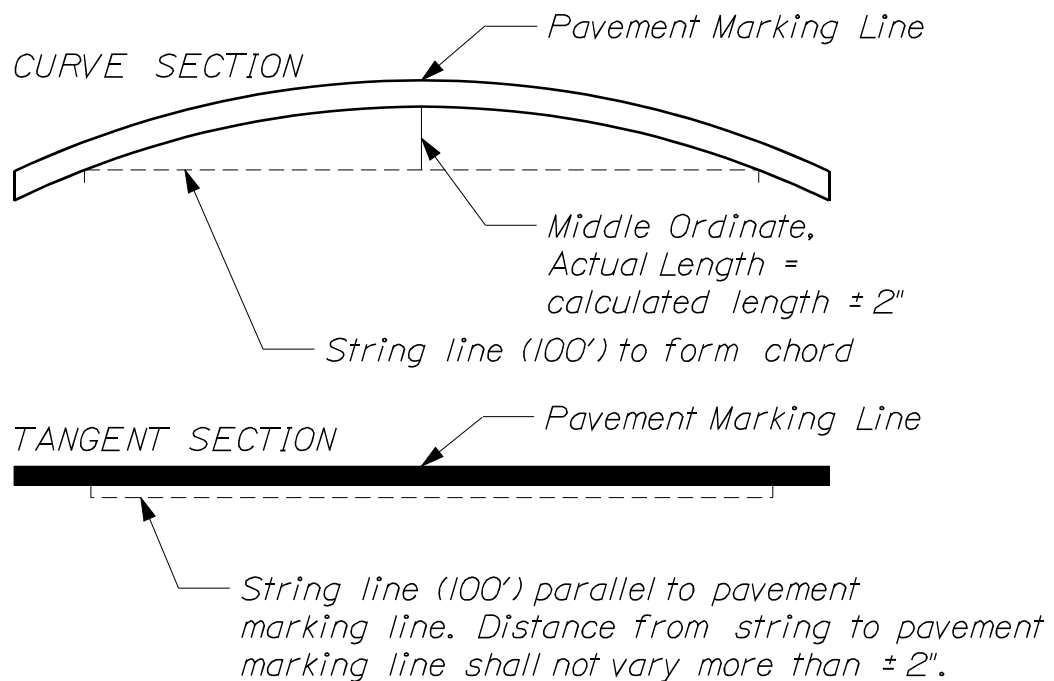


~ TOLERANCE FOR PAVEMENT MARKING LINES ~

PAVEMENT MARKING

627(01)

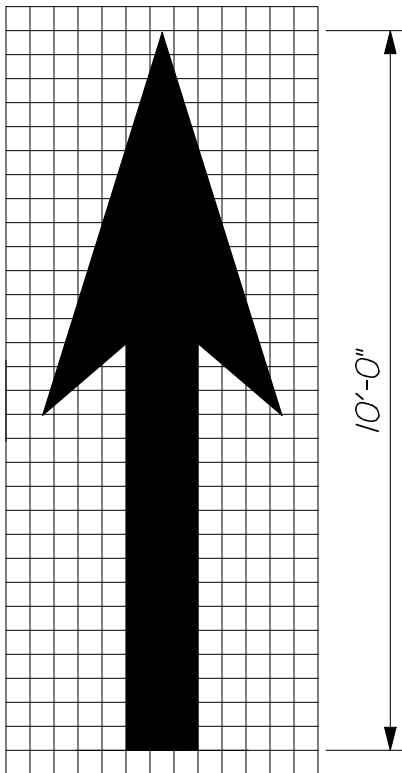


13 sq. ft.

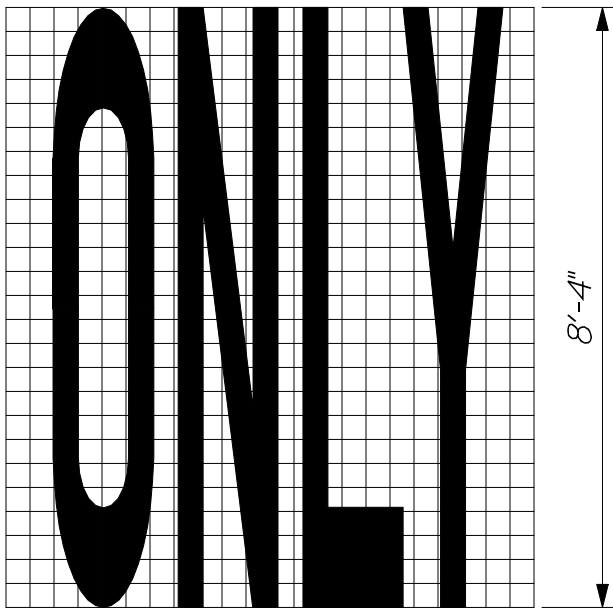


22 sq. ft.

NOTE: See page 627(01) for general notes on pavement markings.

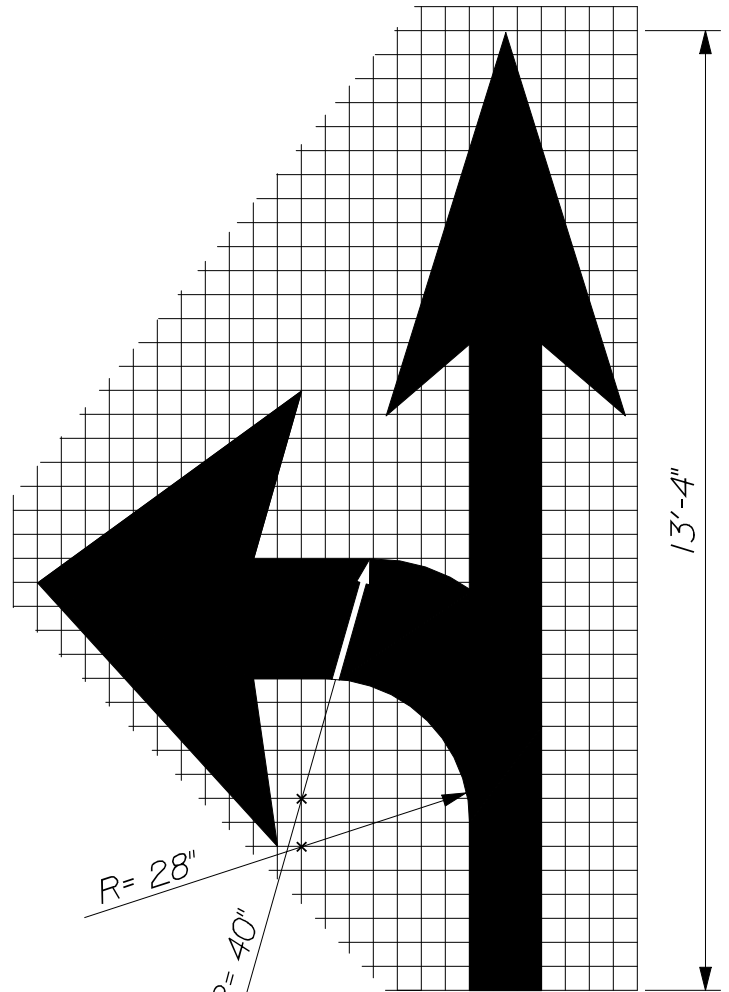



29 sq. ft.

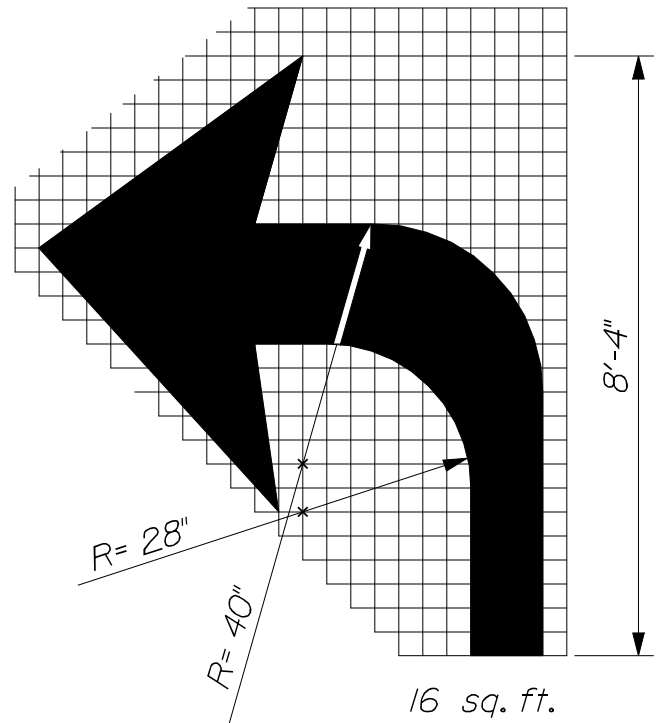

16 sq. ft.


PAVEMENT MARKING

Straight Arrow, Straight/Left Arrow, Left Arrow, & ONLY
627(02)A

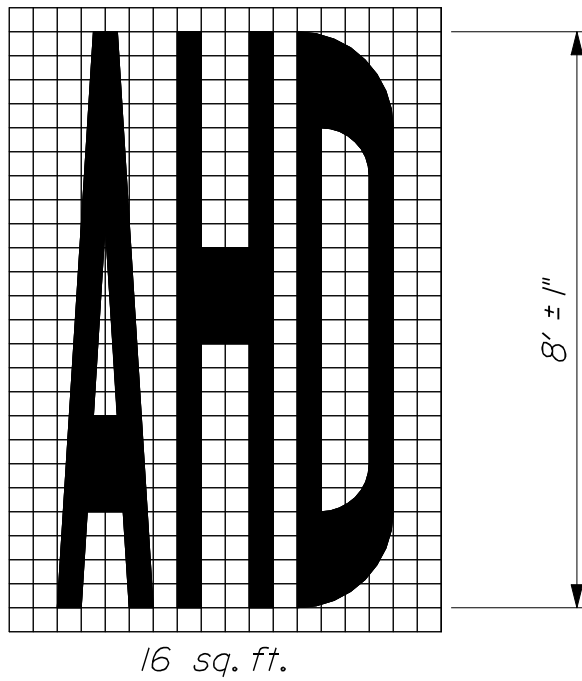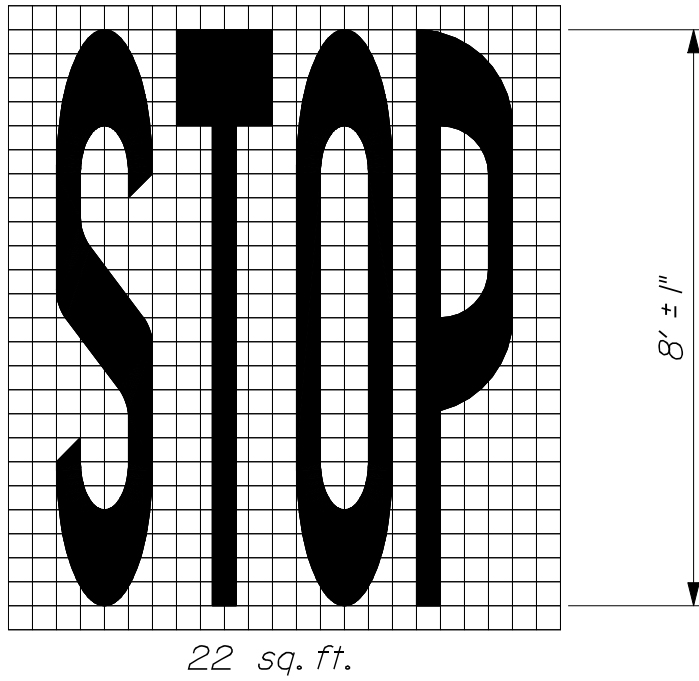

*NOTE: See page 627(01) for general
notes on pavement markings.*

PAVEMENT MARKING
STOP & AHEAD
627(02)B

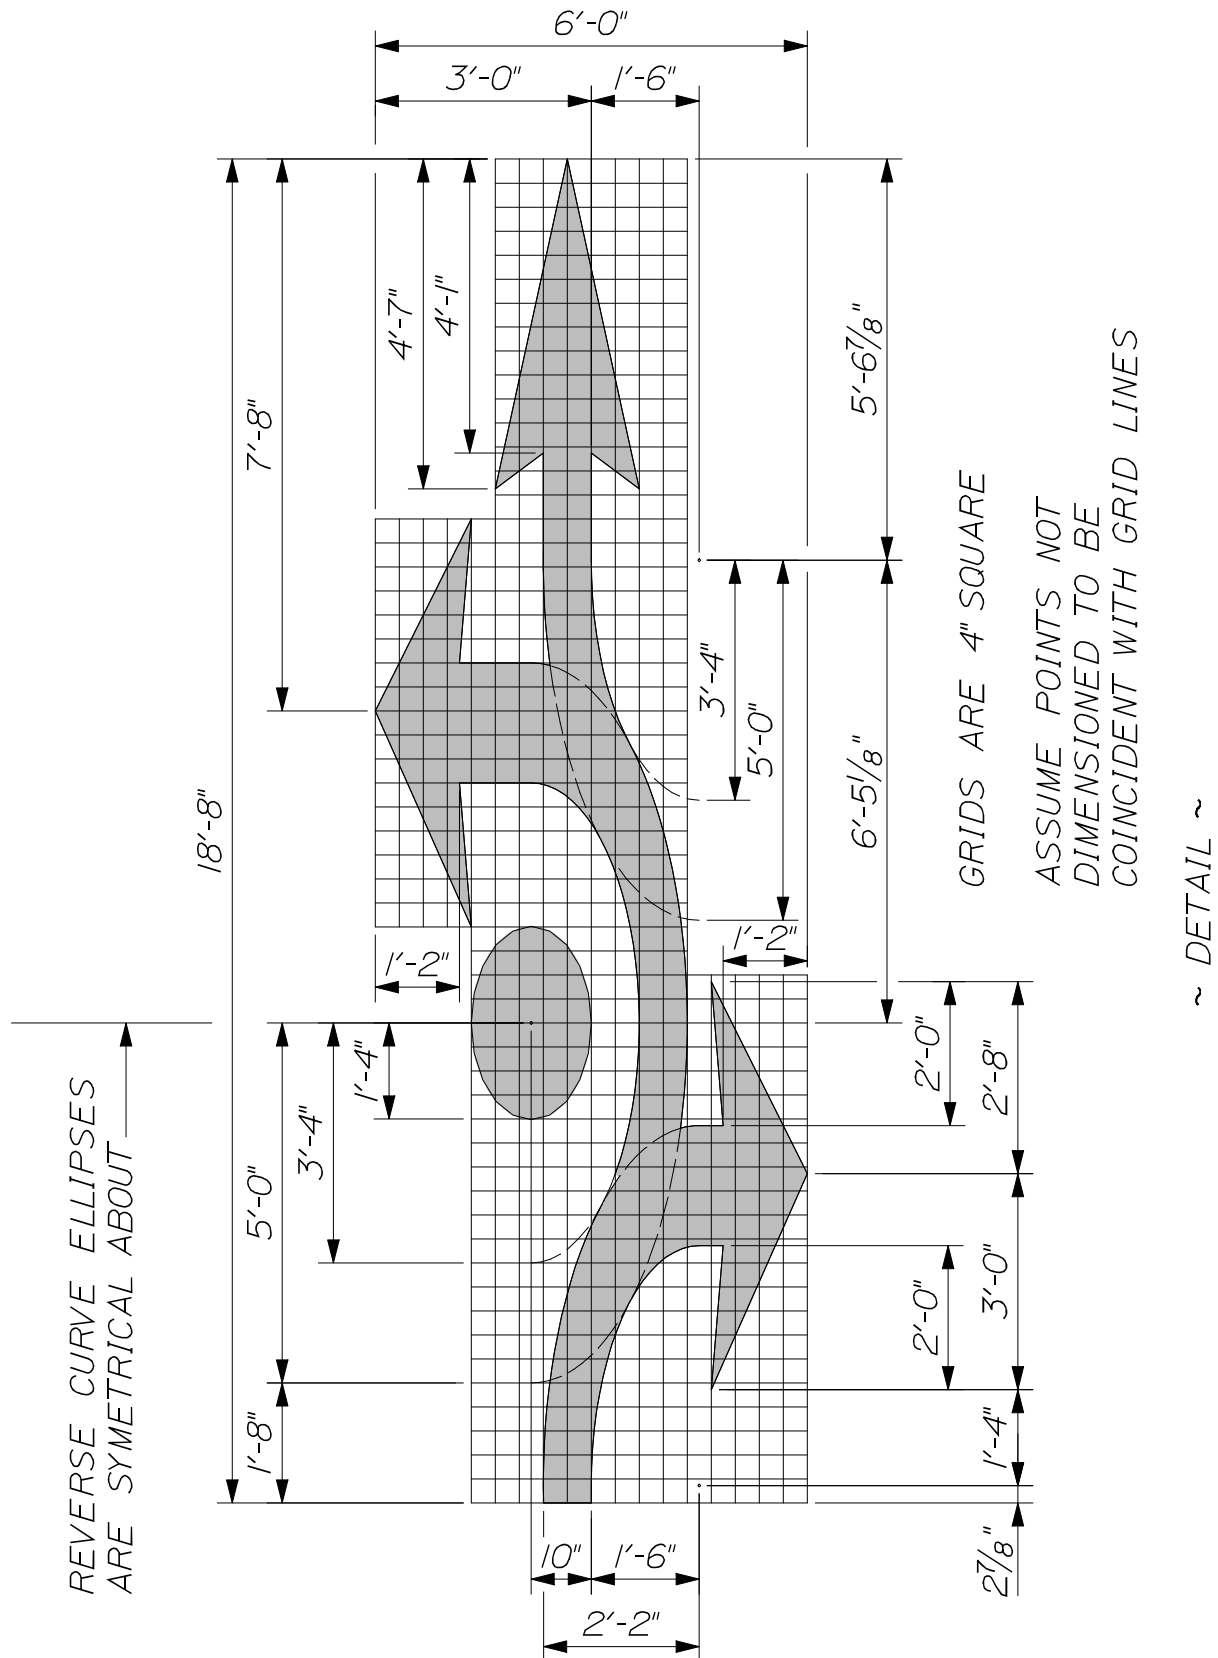

NOTE: See page 627(01) for general notes on pavement markings.

PAVEMENT MARKING

Roundabout Arrows

627(02)C

NOTE: See page 627(01) for general notes on pavement markings.

PAVEMENT MARKING

Roundabout Arrows

627(02)D



Type LE



Type TE



Type LTE



Type TRE



Type LTRE



Type T



Type LT




Type TR



Type LTR


~ ROUNDABOUT PAVEMENT
MARKING ARROWS ~




~ COMPONENT KEY ~

The labelled areas above correspond to the portions needed for each type of roundabout traffic arrows.

For example: the roundabout traffic arrow type tre requires the "common", "T", "R", and "E" areas.

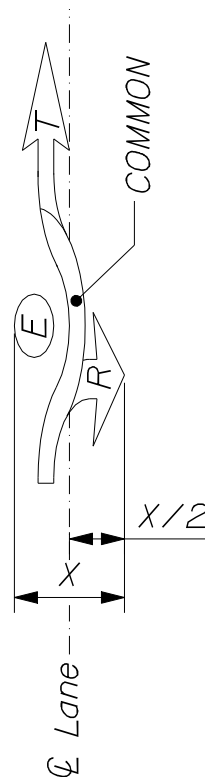


Center the arrow on the lane centerline between the lateral extremities of that arrow type.

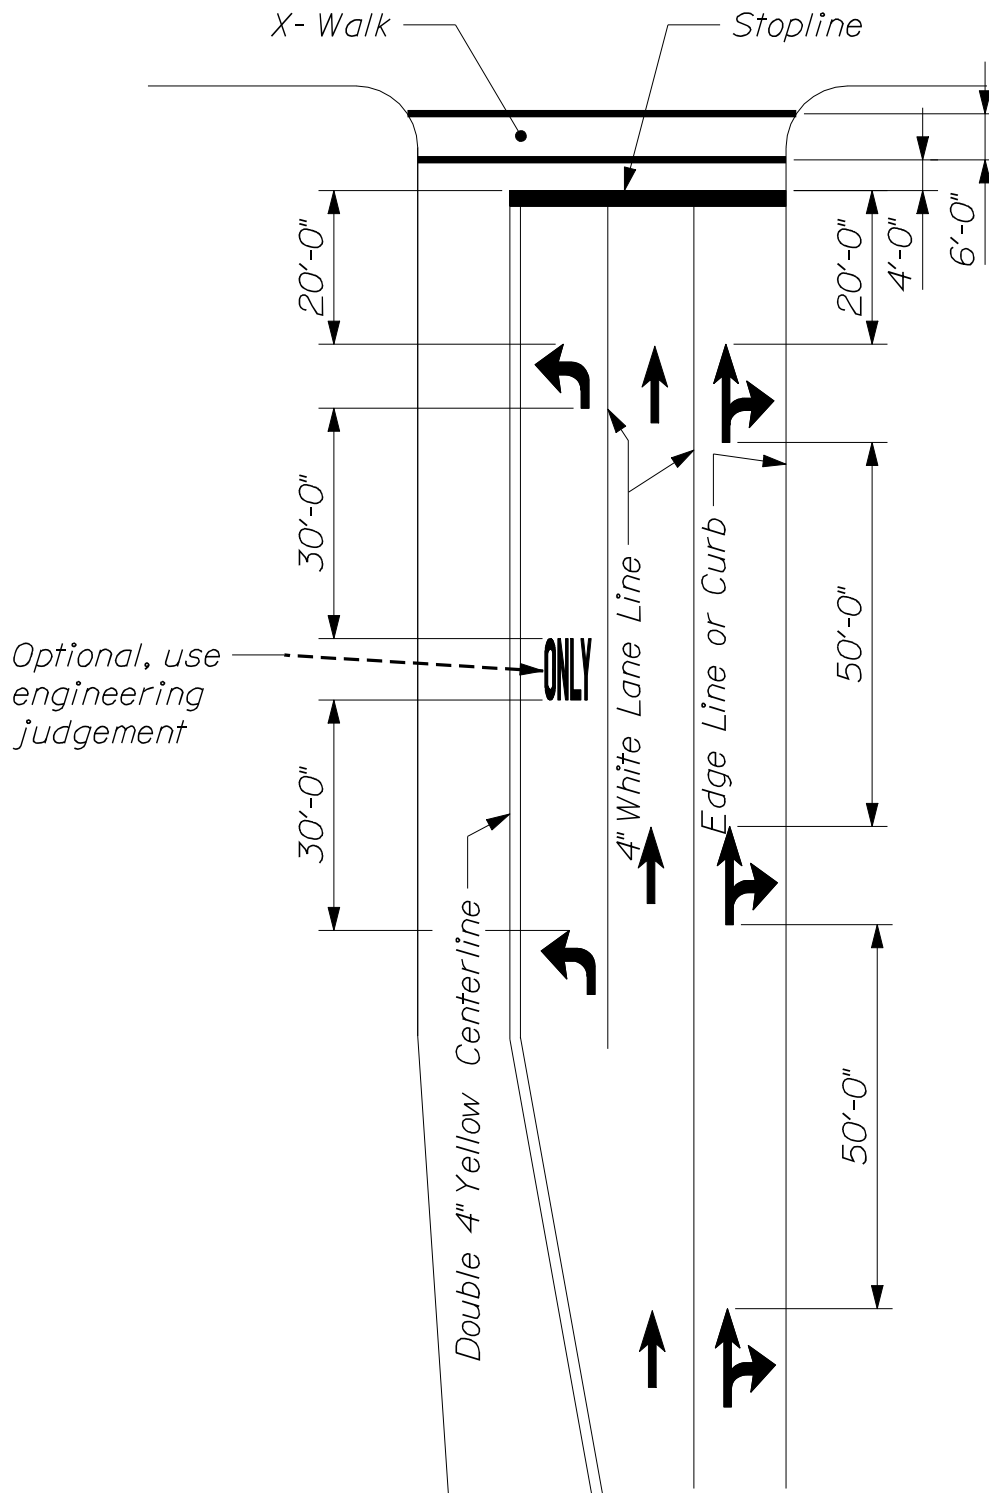


~ TYPICAL PLACEMENT OF PAVEMENT MARKING SYMBOLS
AT SIGNALIZED INTERSECTIONS ~

PAVEMENT MARKING
627(03)



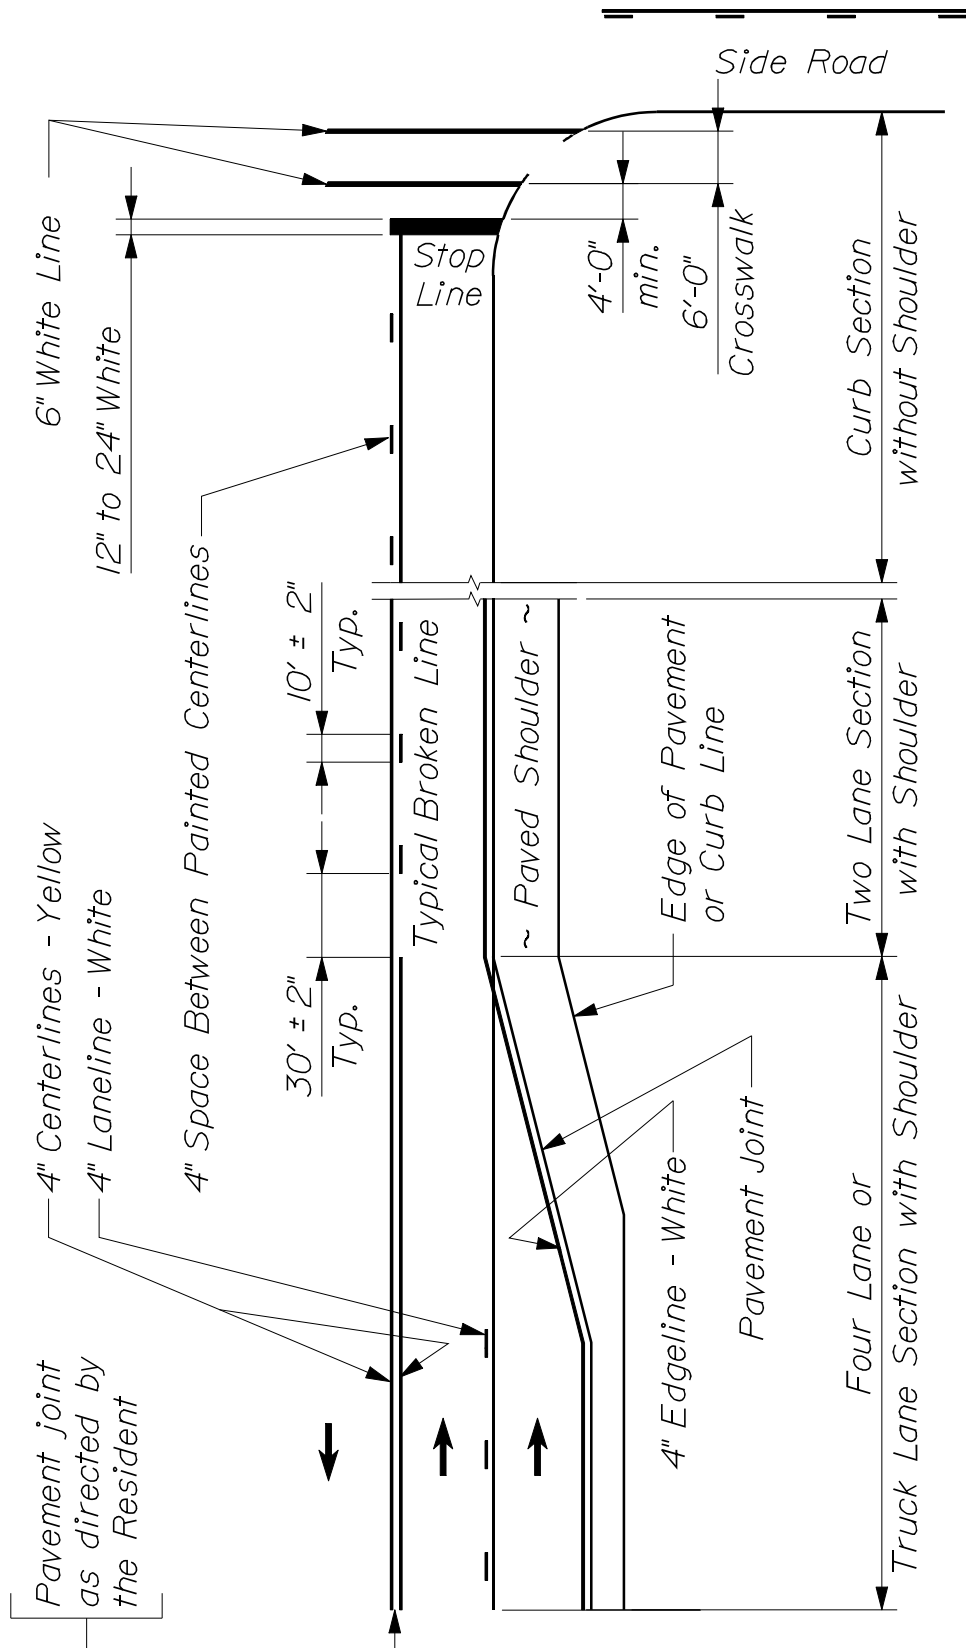

PAVEMENT MARKING
TYPICAL TWO - WAY ROADWAY
627(05)

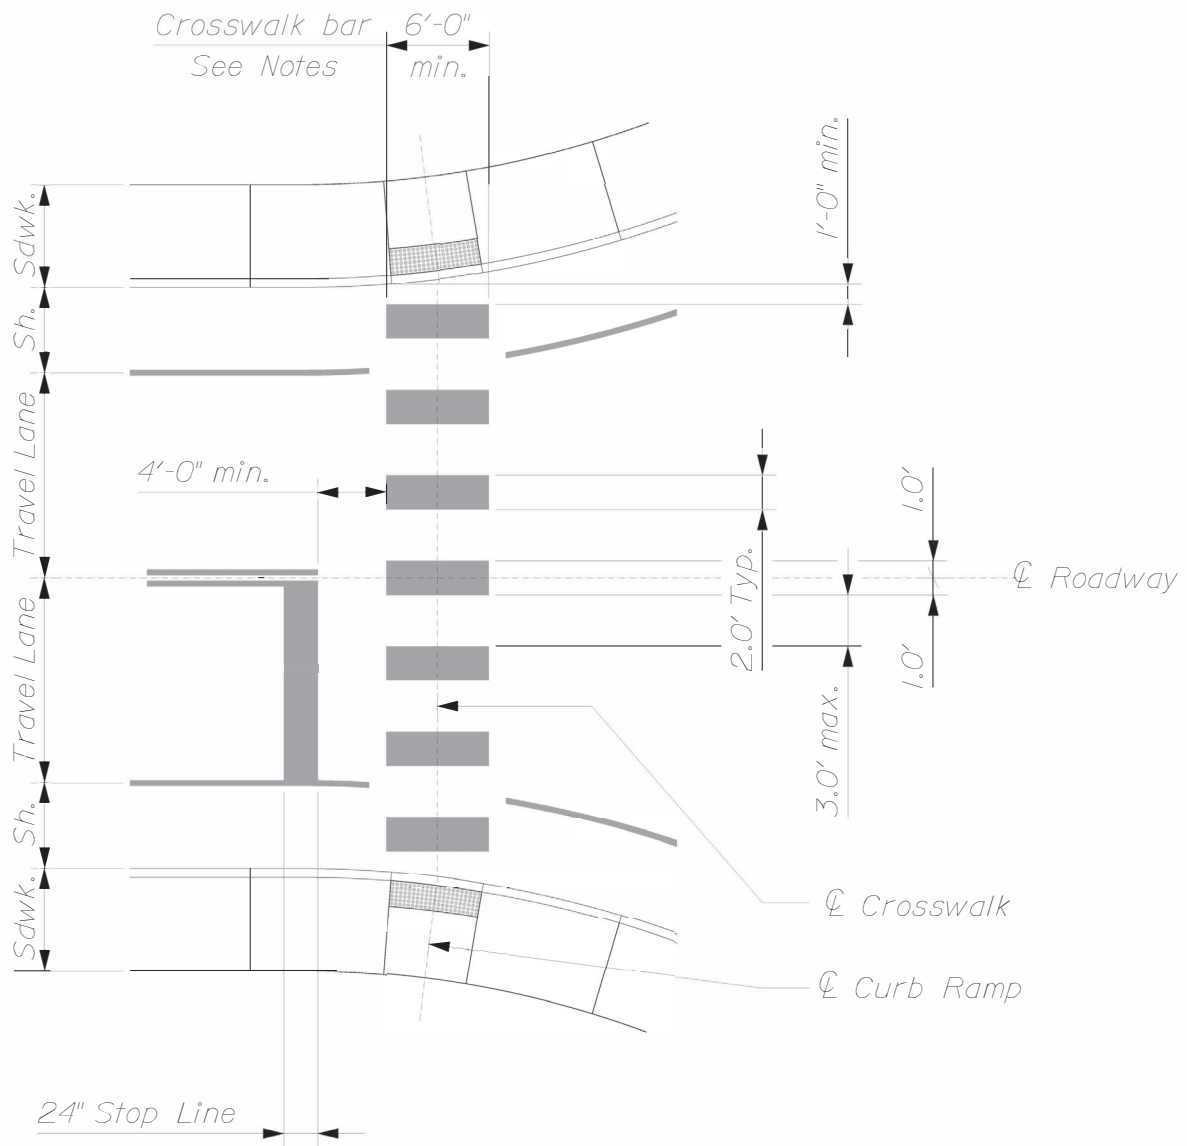

-- CROSSWALK LAYOUT --

CROSSWALK
627(07)

NOTES:

Refer to the MaineDOT Guidelines on Crosswalks for more information.

1. All Crosswalks shall meet the criteria in the Americans with Disabilities Act (ADA), 49 CFR 37, Appendix A,

2. All Crosswalks shall meet the criteria in the Manual on Uniform Traffic Control (MUTCD) Section 3B.18, including appropriate signage and signalization.

3. No parking shall be allowed within 20 feet of any un-signalized crosswalk (includes midblock) and 30 feet of a signalized intersection.


4. Crosswalks shall be located only where there is sufficient sight distance.

5. Crosswalks shall be located where the speed limit is 40 mph or less, unless at a signalized intersection.

6. Crosswalks should, to the maximum extent practicable, be perpendicular to the highway.

7. Crosswalks should be located a minimum distance of 400 feet apart.

8. Crosswalk bars shall cover the entire curb opening. Crosswalk bars shall be a minimum of six feet in width and shall not extend more than one foot beyond the curb opening on each side. See the MaineDOT Design Guidance Minimum ADA Requirements for Pedestrian Facilities and the MaineDOT Standard Details.

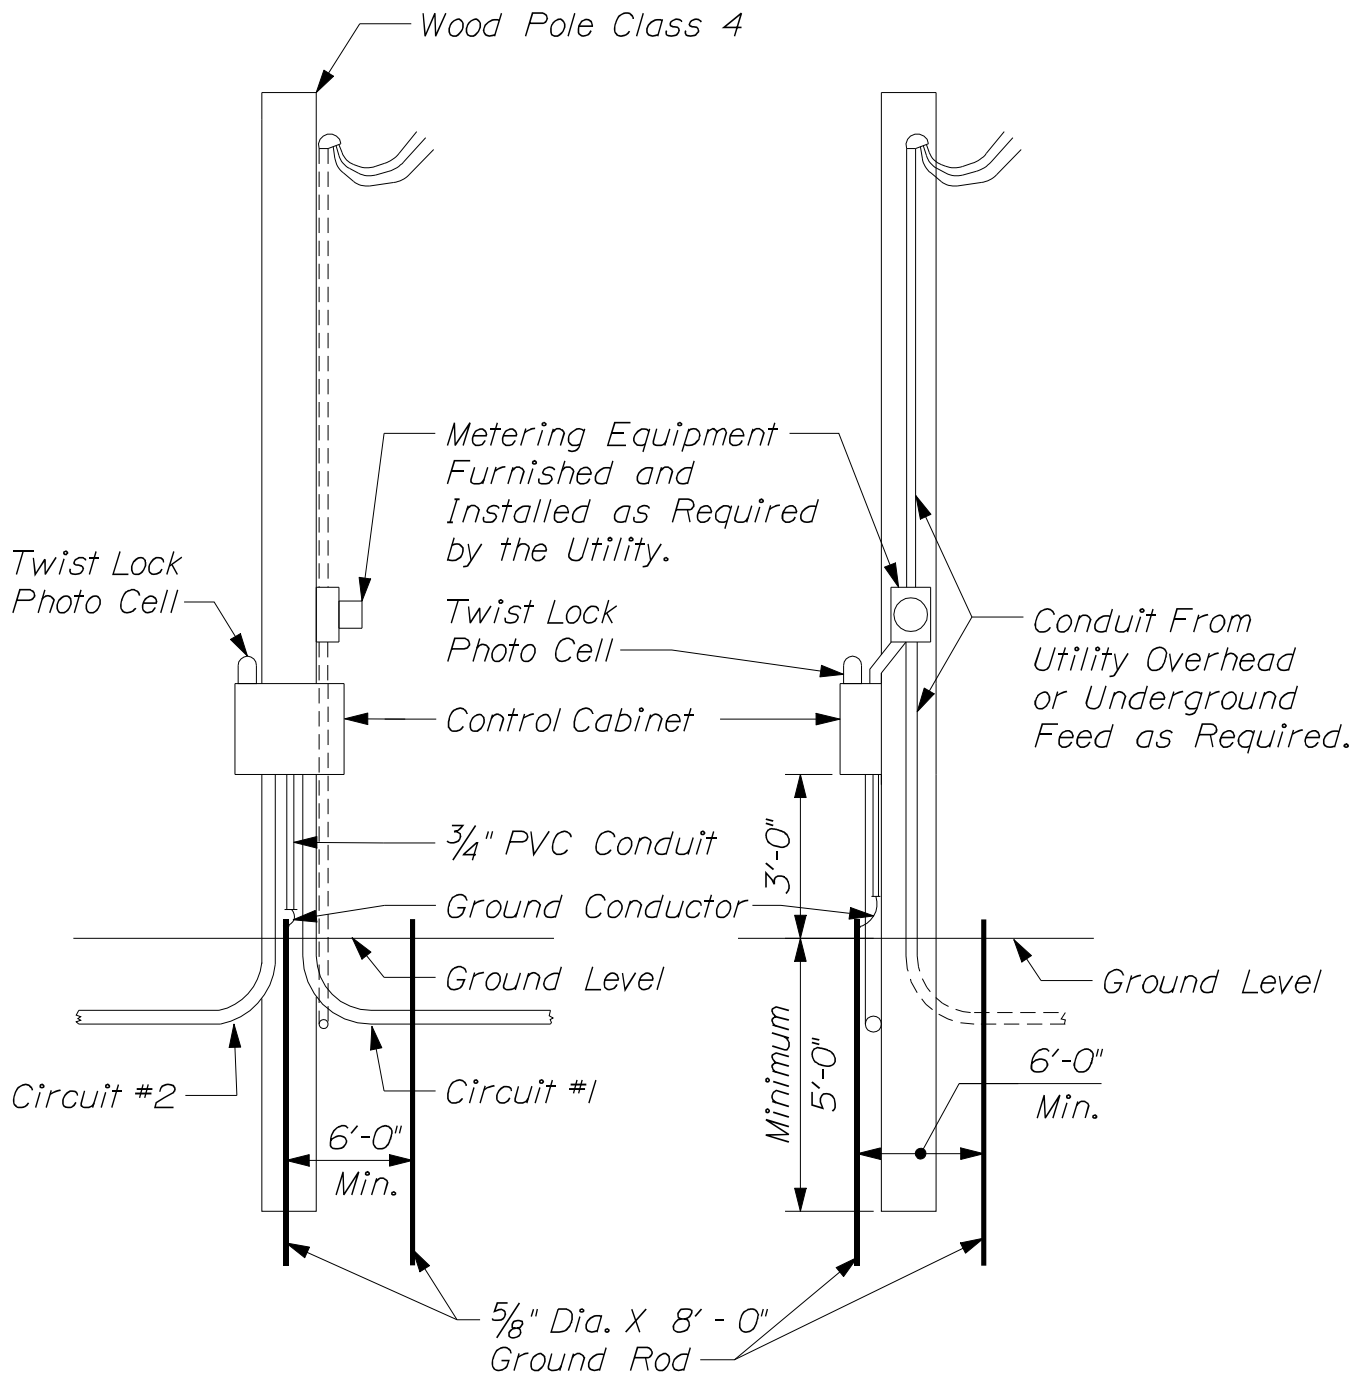


~ FRONT ~

~ SIDE ~

~ SERVICE POLE ~


HIGHWAY LIGHTING

634(01)

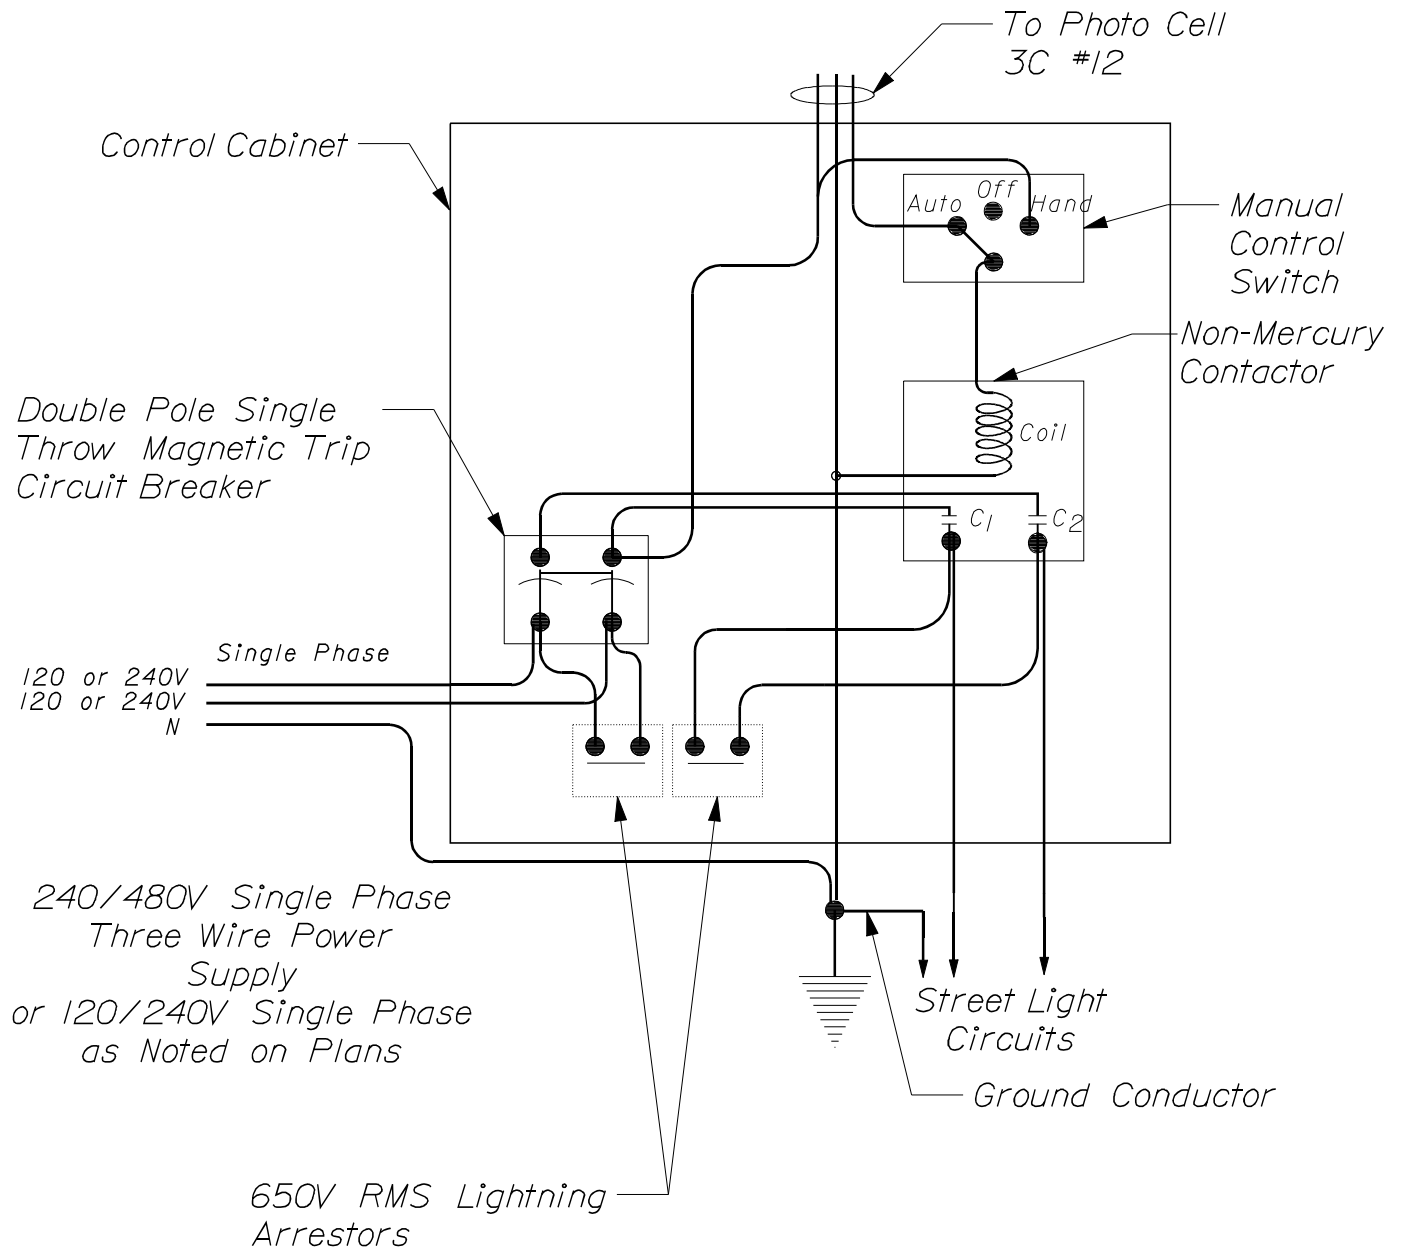

~ SCHEMATIC FOR STREET LIGHTING
CONTROL CABINET - ONE CIRCUIT ~

HIGHWAY LIGHTING
634(02)

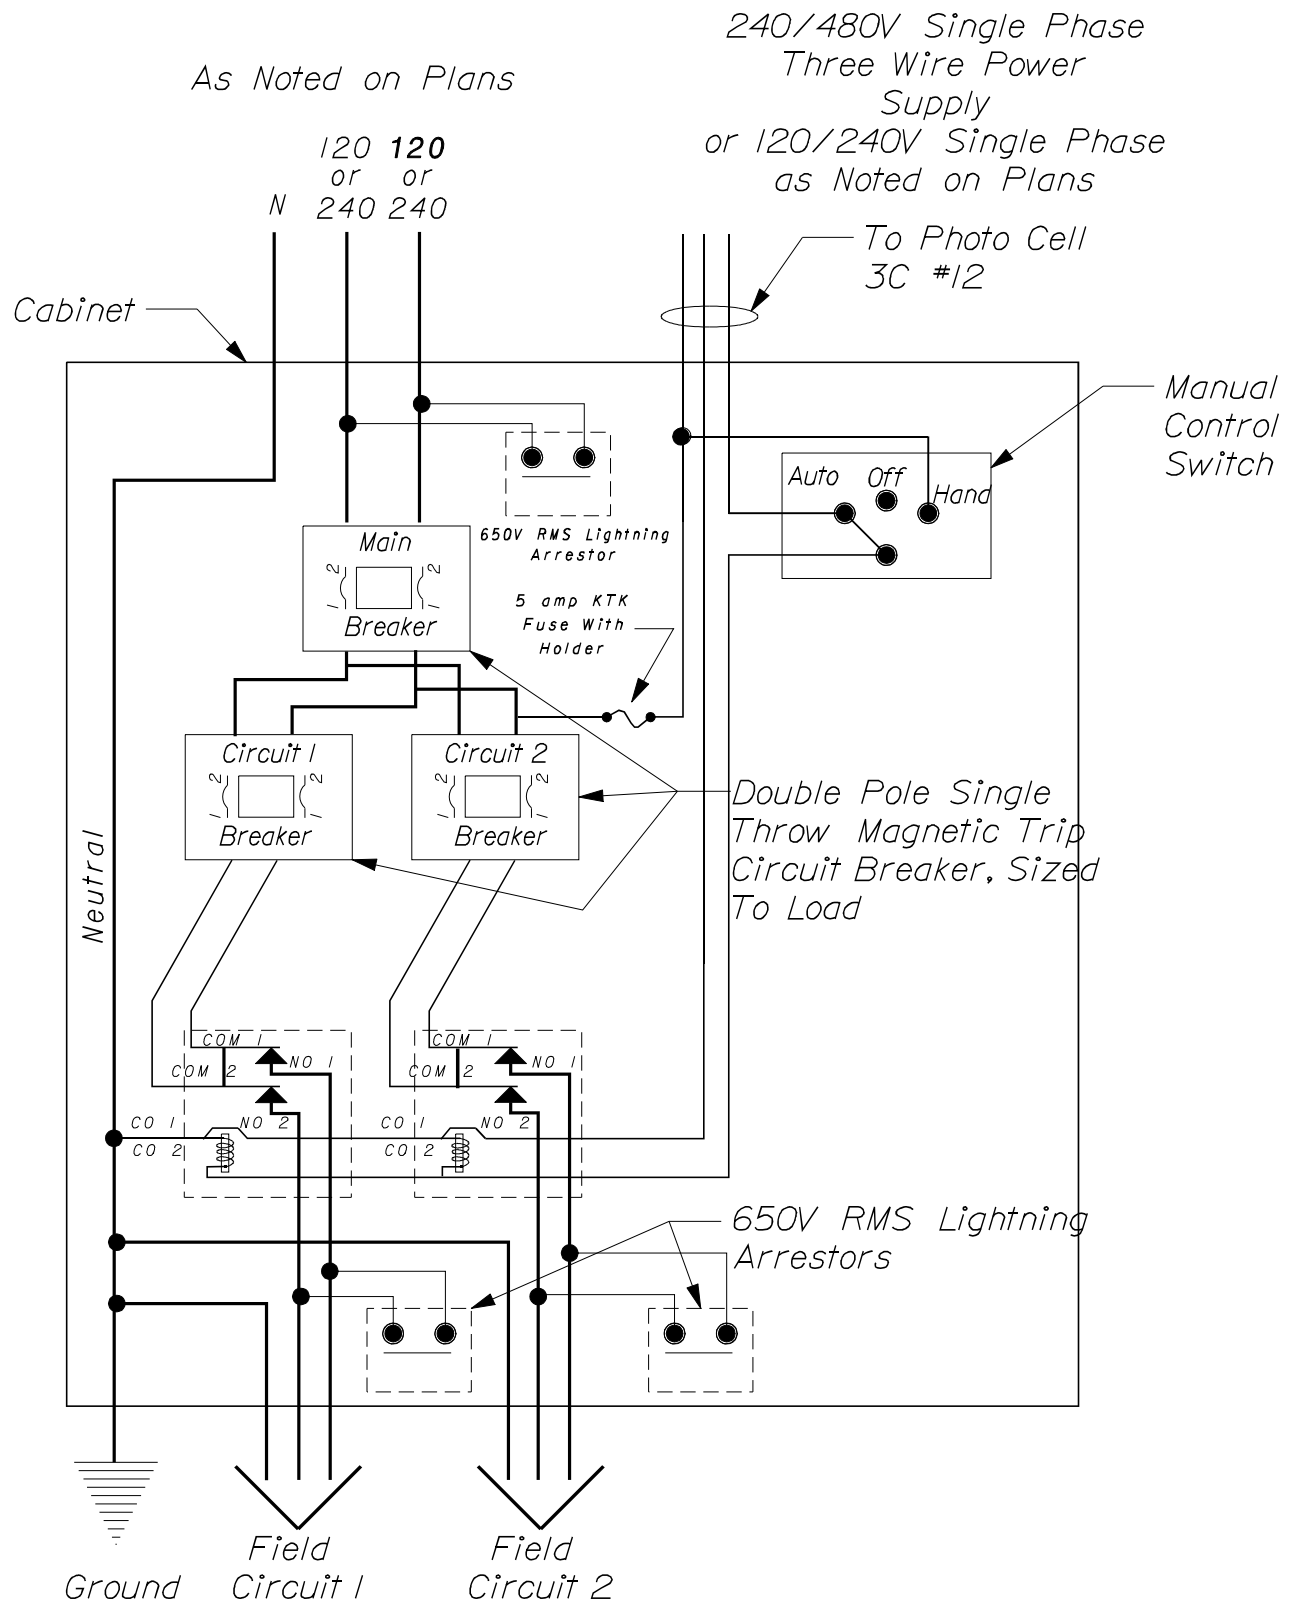

~ SCHEMATIC FOR STREET LIGHTING
CONTROL CABINET - MULTI CIRCUIT ~

HIGHWAY LIGHTING


634(03)

<i>6" RISE / 12" TREAD (2:1 SLOPE)</i>			
<i>REINFORCING STEEL</i>			
<i>MARK</i>	<i>SIZE</i>	<i>NUMBER</i>	<i>LENGTH (EACH)</i>
<i>R</i>	<i>#4 0.668 lbs./ft.</i>	<i>(2) each parapet (1) each ft. of width</i>	<i>11" for "A" +13.4" for each "B" +12" for "C"</i>
<i>S</i>	<i>#4 0.668 lbs./ft.</i>	<i>(2) for "A" (2) for each "B" (2) for "C"</i>	<i>4" each parapet +12" per ft. of width</i>
<i>CONCRETE CLASS "A"</i>			
<i>SECTION</i>		<i>STEPS PER FT. OF WIDTH</i>	<i>PARAPET EACH WALL</i>
<i>"A" header</i>		<i>0.026 cu. yds.</i>	<i>0.013 cu. yds.</i>
<i>"B" each inter. Step</i>		<i>0.031 cu. yds.</i>	<i>0.021 cu. yds.</i>
<i>"C" footer</i>		<i>0.033 cu. yds.</i>	<i>0.022 cu. yds.</i>


<i>8" RISE / 12" TREAD (1 1/2:1 SLOPE)</i>			
<i>REINFORCING STEEL</i>			
<i>MARK</i>	<i>SIZE</i>	<i>NUMBER</i>	<i>LENGTH (EACH)</i>
<i>R</i>	<i>#4 0.668 lbs./ft.</i>	<i>(2) each parapet (1) each ft. of width</i>	<i>11" for "A" +14.5" for each "B" +12" for "C"</i>
<i>S</i>	<i>#4 0.668 lbs./ft.</i>	<i>(2) for "A" (2) for each "B" (2) for "C"</i>	<i>4" each parapet +12" per ft. of width</i>
<i>CONCRETE CLASS "A"</i>			
<i>SECTION</i>		<i>STEPS PER FT. OF WIDTH</i>	<i>PARAPET EACH WALL</i>
<i>"A" header</i>		<i>0.033 cu. yds.</i>	<i>0.016 cu. yds.</i>
<i>"B" each inter. Step</i>		<i>0.036 cu. yds.</i>	<i>0.025 cu. yds.</i>
<i>"C" footer</i>		<i>0.037 cu. yds.</i>	<i>0.026 cu. yds.</i>

QUANTITIES FOR CONCRETE STEPS


642(01)

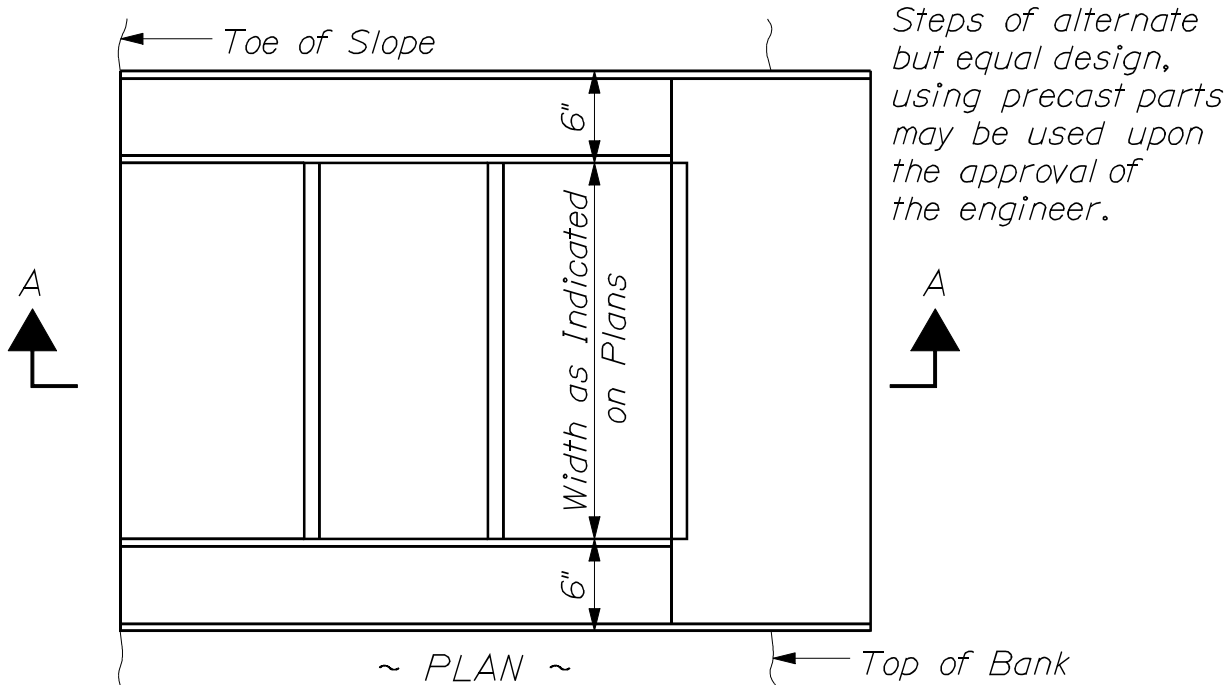


Cost of furnishing and placing reinforcing steel shall be considered included in the price per cubic yard of cast-in-place concrete steps.

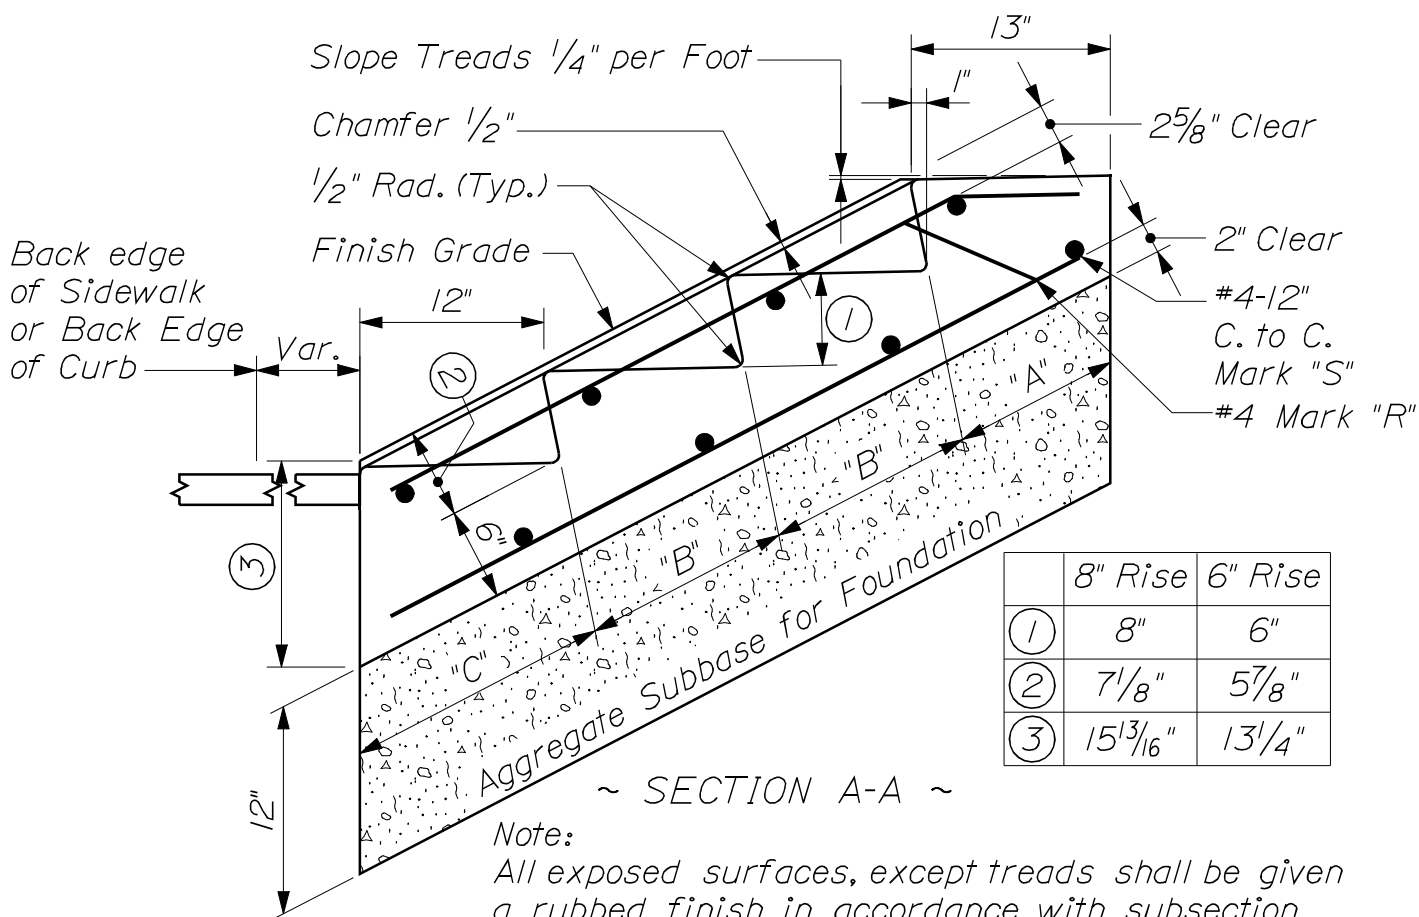

CAST IN PLACE REINFORCED CONCRETE STEPS 642(02)

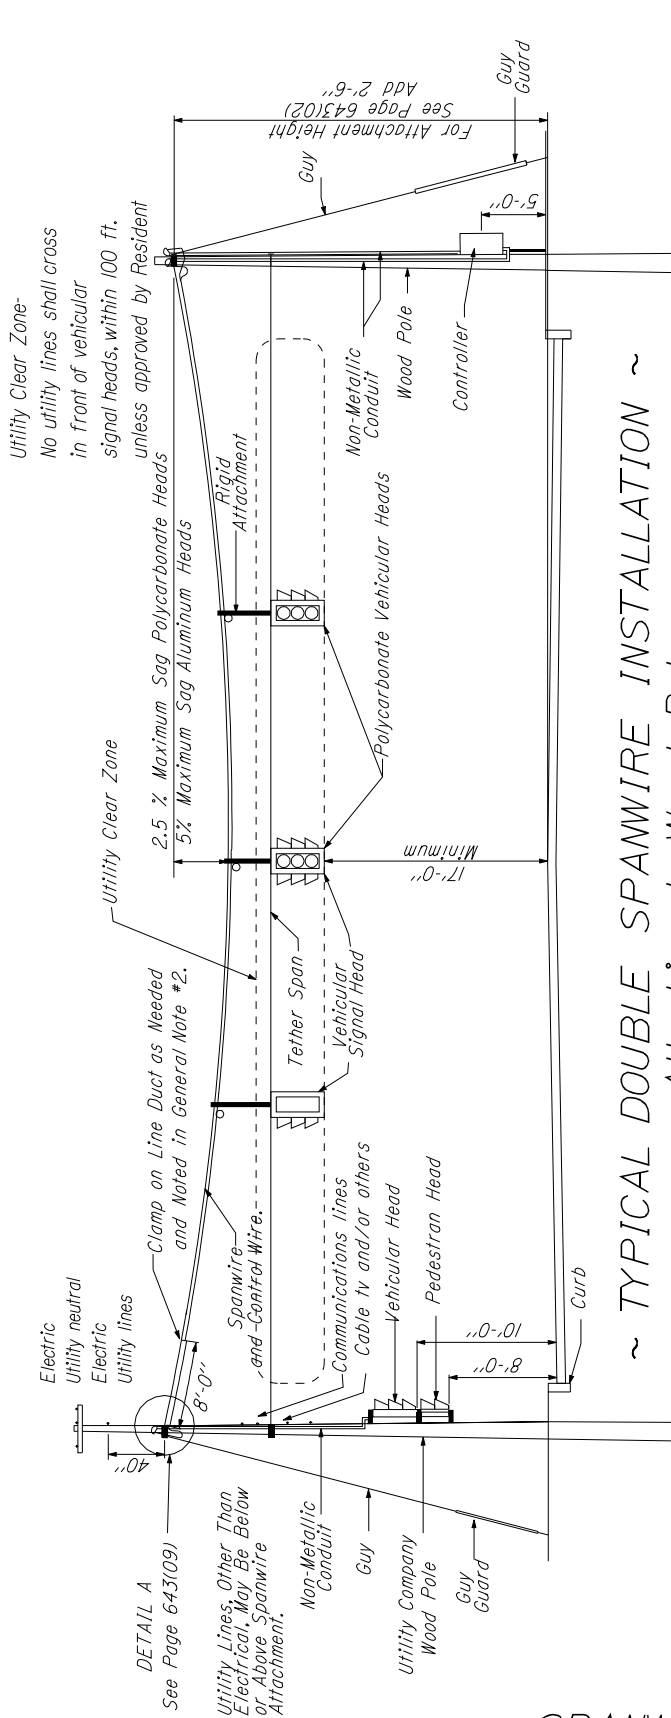

~ TYPICAL DOUBLE SPANWIRE INSTALLATION ~
Attaching to Wood Poles
(TETHER AT TOP OF SIGNAL HEADS)

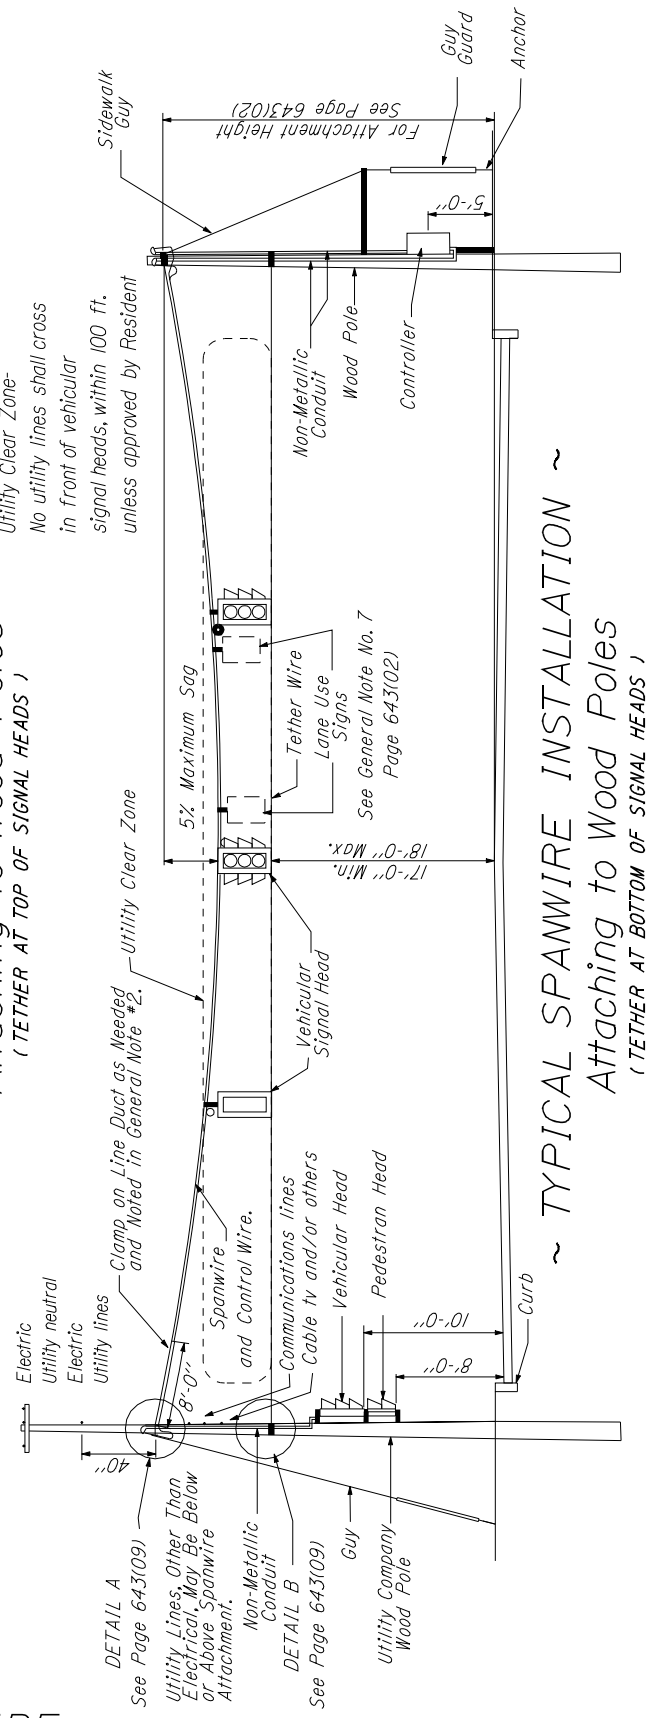

~ TYPICAL SPANWIRE INSTALLATION ~
Attaching to Wood Poles
(TETHER AT BOTTOM OF SIGNAL HEADS)


~ HEIGHT OF SPANWIRE ATTACHMENT ~

<i>HORIZONTAL SPAN WIDTH</i>	<i>HEIGHT OF SPANWIRE ATTACHMENT- 5% Sag Aluminum Heads</i>	<i>HEIGHT OF TOP ATTACHMENT- 2.5% Sag DOUBLE SPANWIRE Polycarbonate Heads</i>
<i>Up to 38'</i>	<i>23'-0"</i>	<i>24'-4"</i>
<i>40'</i>	<i>23'-6"</i>	<i>24'-6"</i>
<i>45'</i>	<i>23'-9"</i>	
<i>50'</i>	<i>24'-0"</i>	<i>24'-9"</i>
<i>55'</i>	<i>24'-3"</i>	
<i>60'</i>	<i>24'-6"</i>	<i>25'-0"</i>
<i>65'</i>	<i>24'-9"</i>	
<i>70'</i>	<i>25'-0"</i>	<i>25'-3"</i>
<i>75'</i>	<i>25'-3"</i>	
<i>80'</i>	<i>25'-6"</i>	<i>25'-6"</i>
<i>85'</i>	<i>25'-9"</i>	
<i>90'</i>	<i>26'-0"</i>	<i>25'-9"</i>
<i>95'</i>	<i>26'-3"</i>	
<i>100'</i>	<i>26'-6"</i>	<i>26'-0"</i>
<i>105'</i>	<i>26'-9"</i>	
<i>110'</i>	<i>27'-0"</i>	<i>26'-3"</i>
<i>115'</i>	<i>27'-3"</i>	
<i>120'</i>	<i>27'-6"</i>	<i>26'-6"</i>
<i>125'</i>	<i>27'-9"</i>	
<i>130'</i>	<i>28'-0"</i>	<i>26'-9"</i>
<i>135'</i>	<i>28'-3"</i>	
<i>140'</i>	<i>28'-6"</i>	<i>27'-0"</i>
<i>145'</i>	<i>28'-9"</i>	
<i>150'</i>	<i>29'-0"</i>	<i>27'-3"</i>
<i>155'</i>	<i>29'-3"</i>	
<i>160'</i>	<i>29'-6"</i>	<i>27'-6"</i>
<i>165'</i>	<i>29'-9"</i>	


~ GENERAL NOTES for TRAFFIC SIGNAL SPANWIRE ~

- 1. Height of Spanwire attachment is shown on chart above. When attaching to utility company owned poles, the Contractor shall check with respective utility companies to determine if all adjustments have been made.*
- 2. When utility pole clearances cannot be met, the signal Spanwire shall be protected by schedule 40 line duct.*
- 3. The utility companies shall be responsible for avoiding the Traffic Signal Clear Zone as shown below. At the Pre-construction Utility Meeting, conflicts, if any, will be resolved.*
- 4. Conduits installed on utility company owned poles will be installed by the respective utility. The conduit will be provided by the signal Contractor.*
- 5. Utilities will be no lower than 19 feet at mid span.*
- 6. The location of all signal equipment and related items shall be in conformity with 'Americans with Disabilities Act' (ADA) accessibility standards. Use of sidewalks and pedestrian ramps shall not be obstructed.*
- 7. Lane use shall be hung using "Pelco" assembly part no. SE-5111 or equal. Vehicular heads shall be hung using 'Pelco' assembly part no. SE-5024 or SE-5073, or equal.*


**SPANWIRE
TRAFFIC SIGNALS**
643(02)

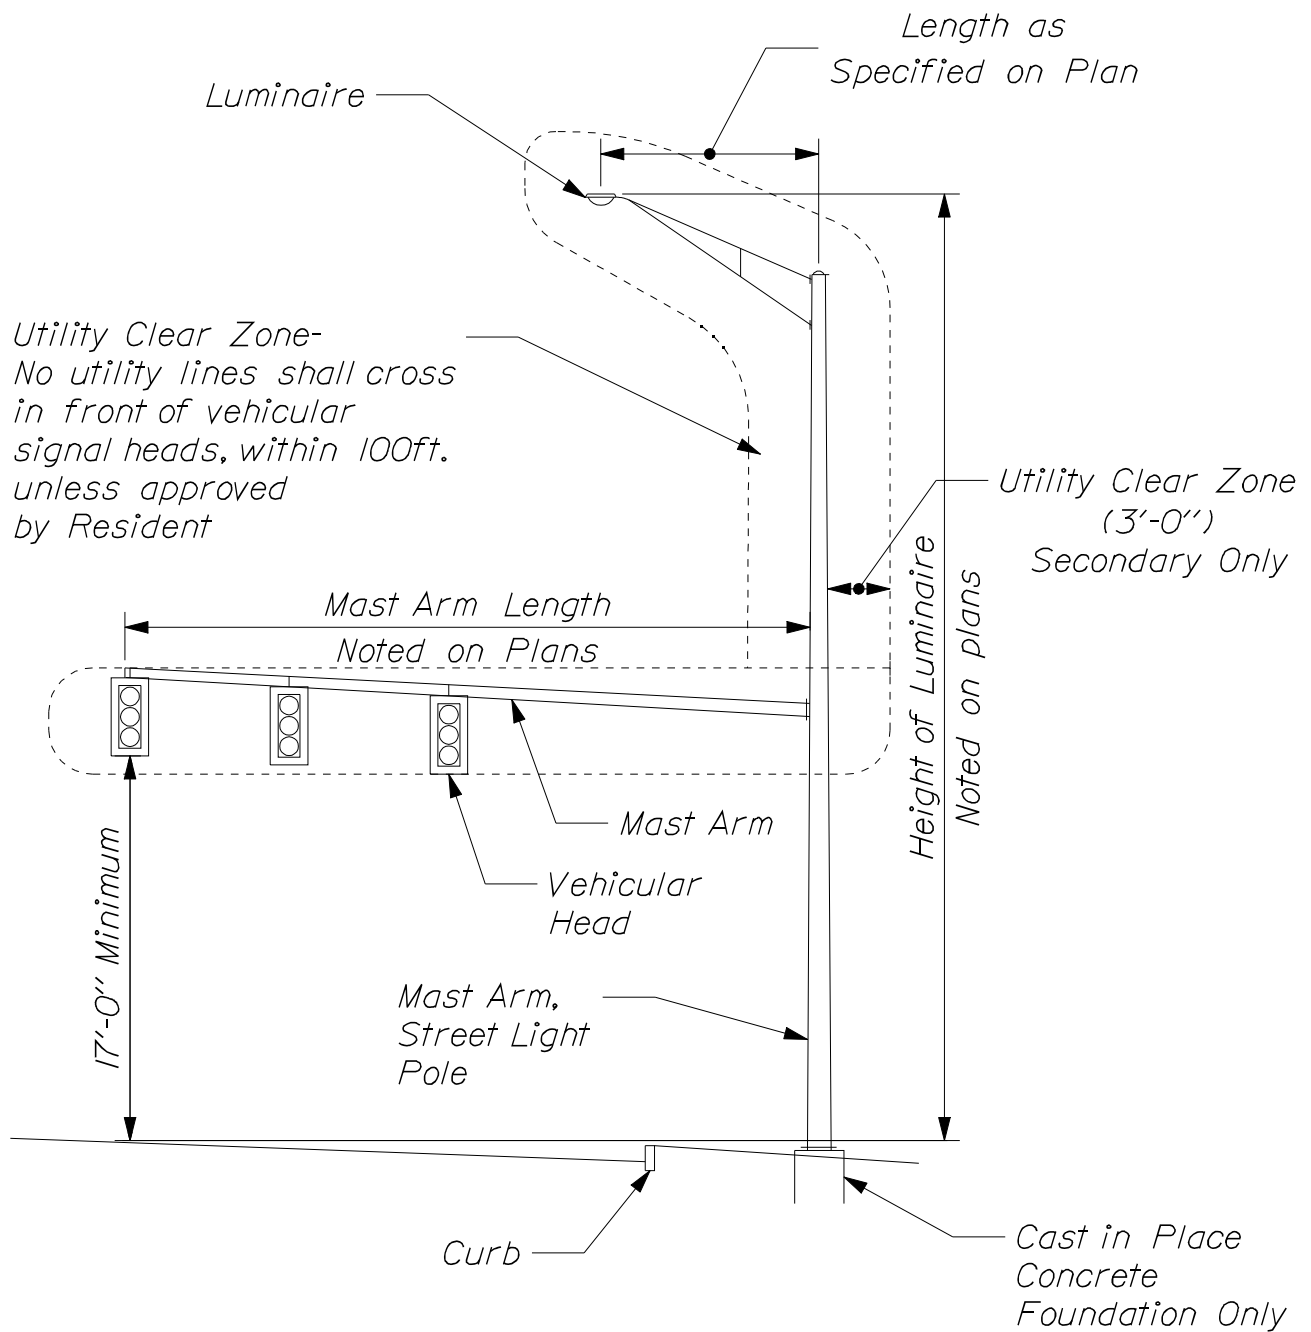

~ TYPICAL MAST ARM, STREET LIGHT
INSTALLATION ~

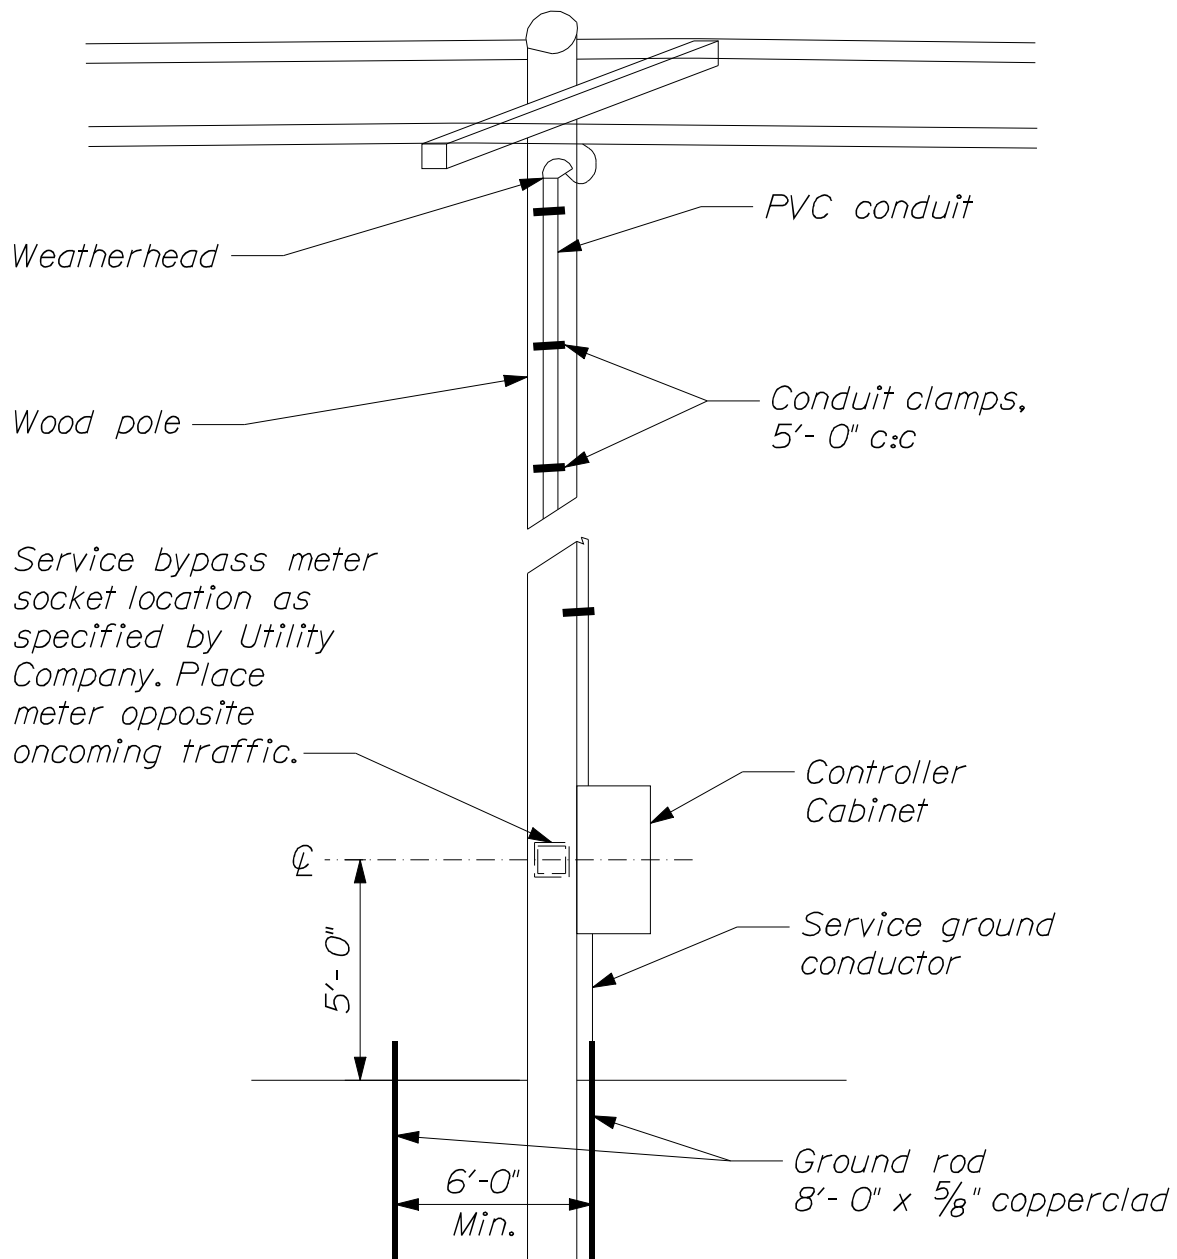


~ SERVICE CONNECTION ~

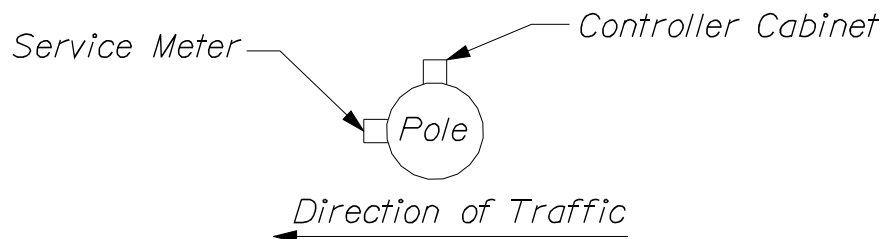


~ PLAN VIEW ~

TRAFFIC SIGNALS

643(04)

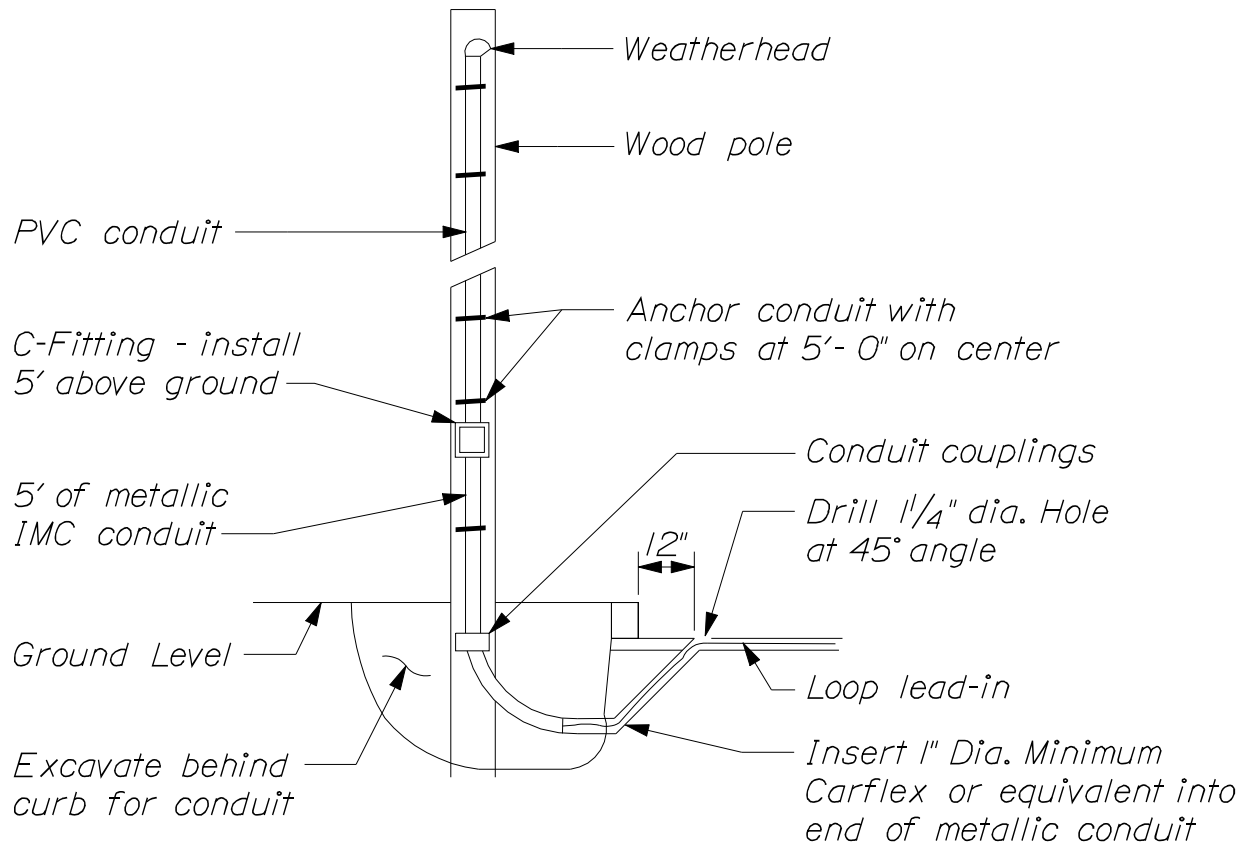

~ CURB SECTION ~

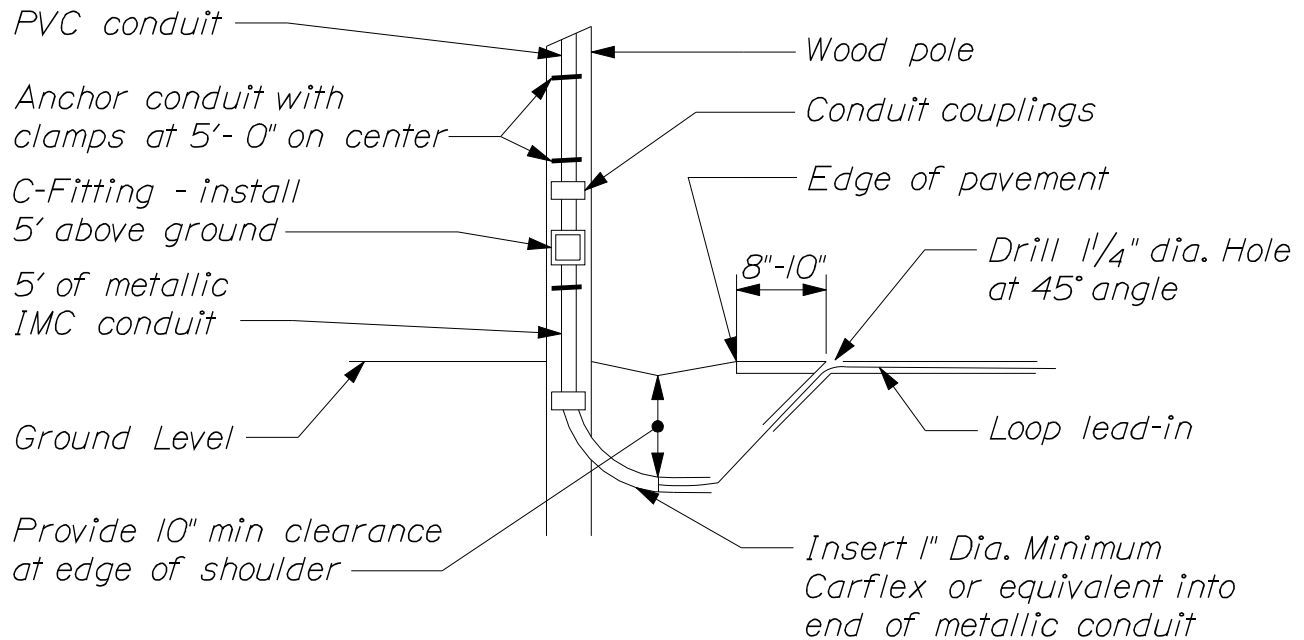

~ SHOULDER SECTION ~



~ DETECTOR LEAD-IN INSTALLATION ~

TRAFFIC SIGNALS

643(05)



NOTES:

Location and configuration of loops are subject to approval of the Resident in the field. Number of turns of wire in loops and number of loops per amplifier shall be in accordance with the manufacturer's recommendations. Loop slots shall be filled with an approved two-component epoxy embedding sealer.

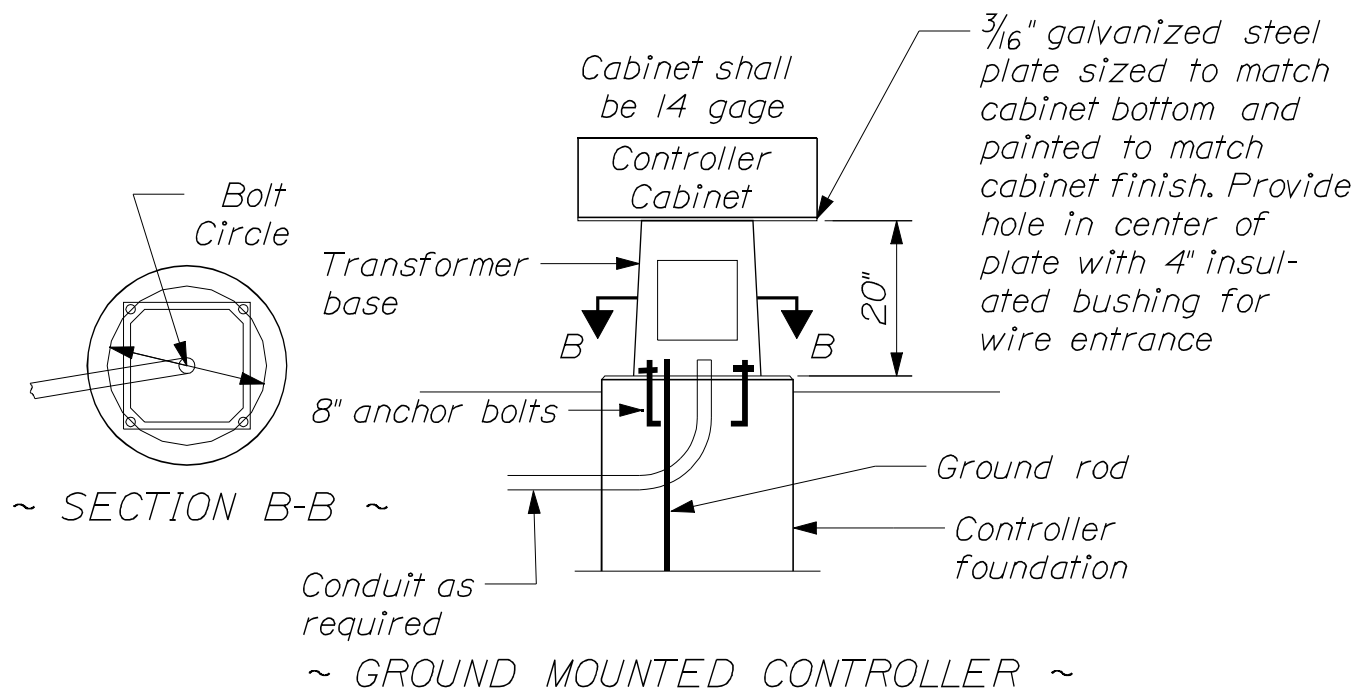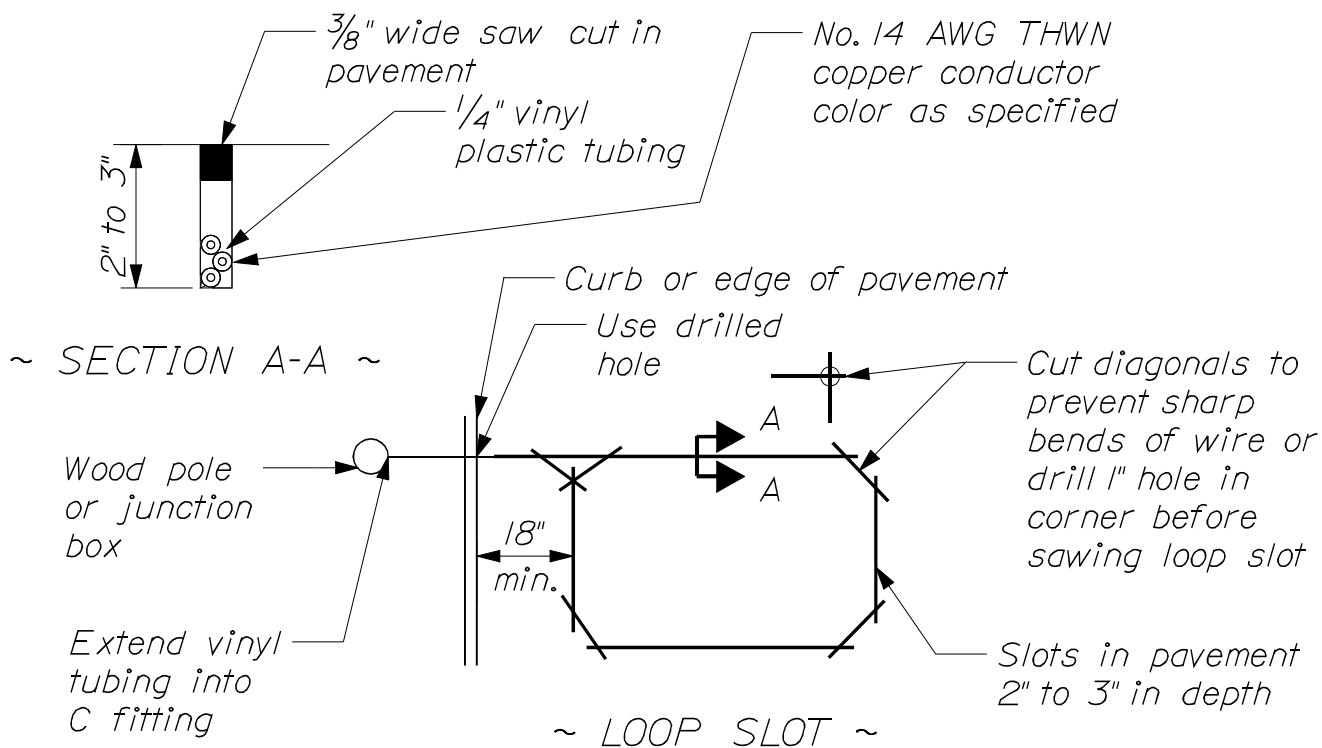


TRAFFIC SIGNALS

643(06)

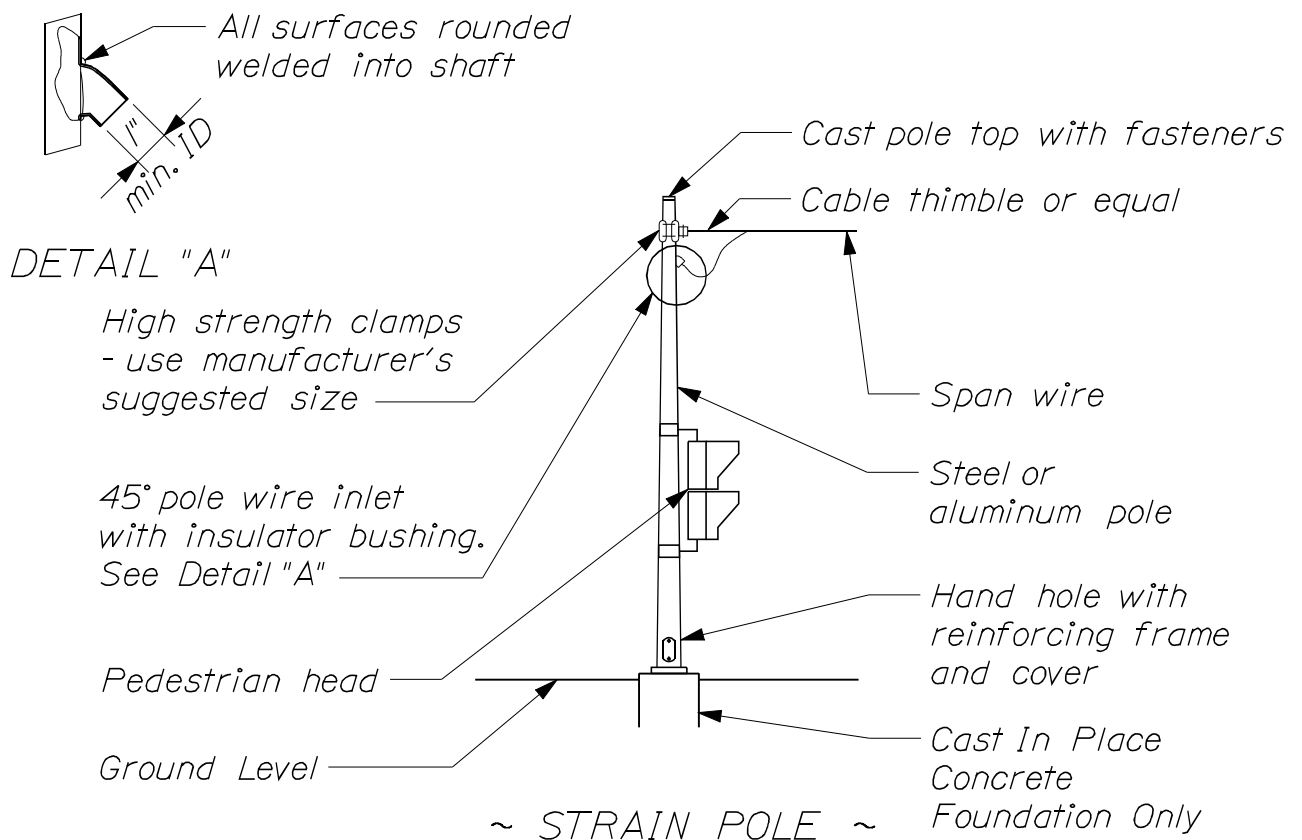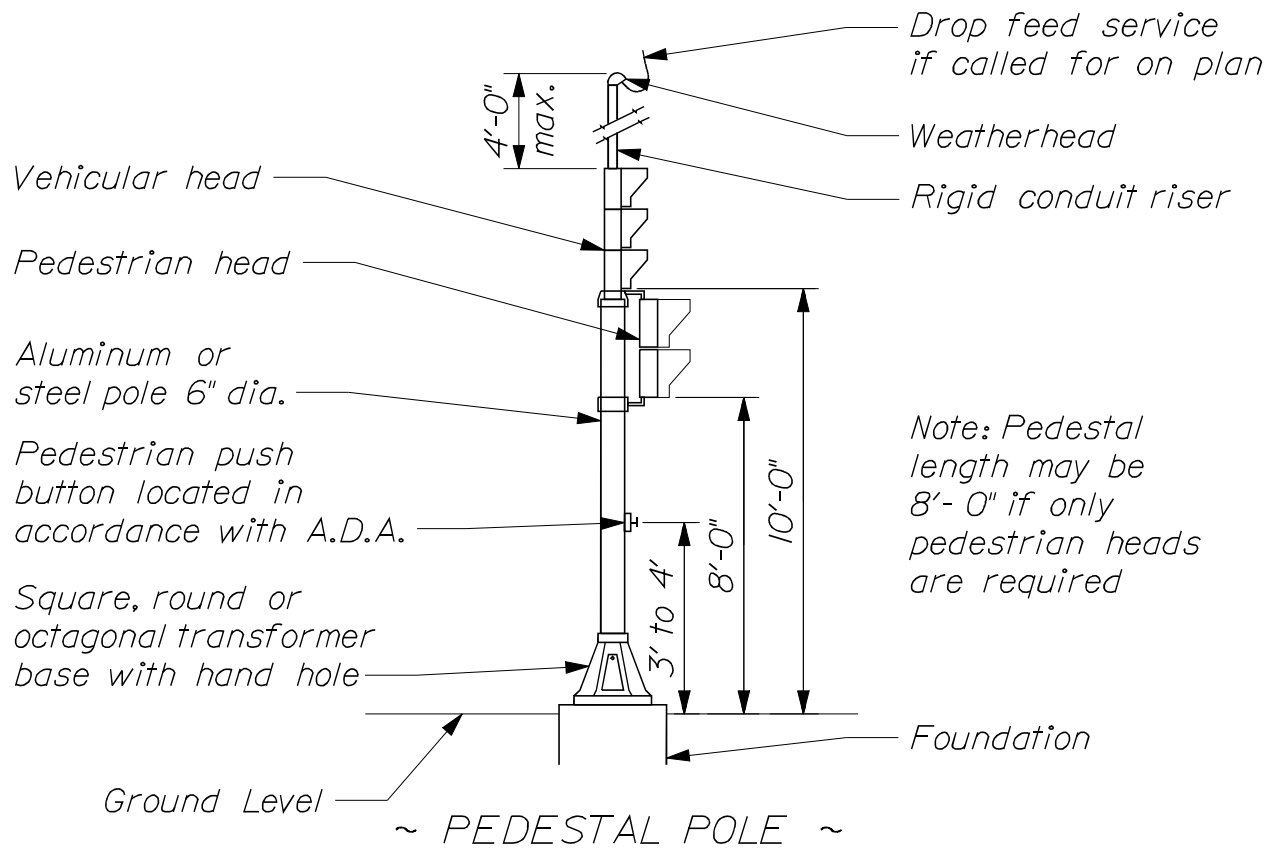


TRAFFIC SIGNALS

643(07)

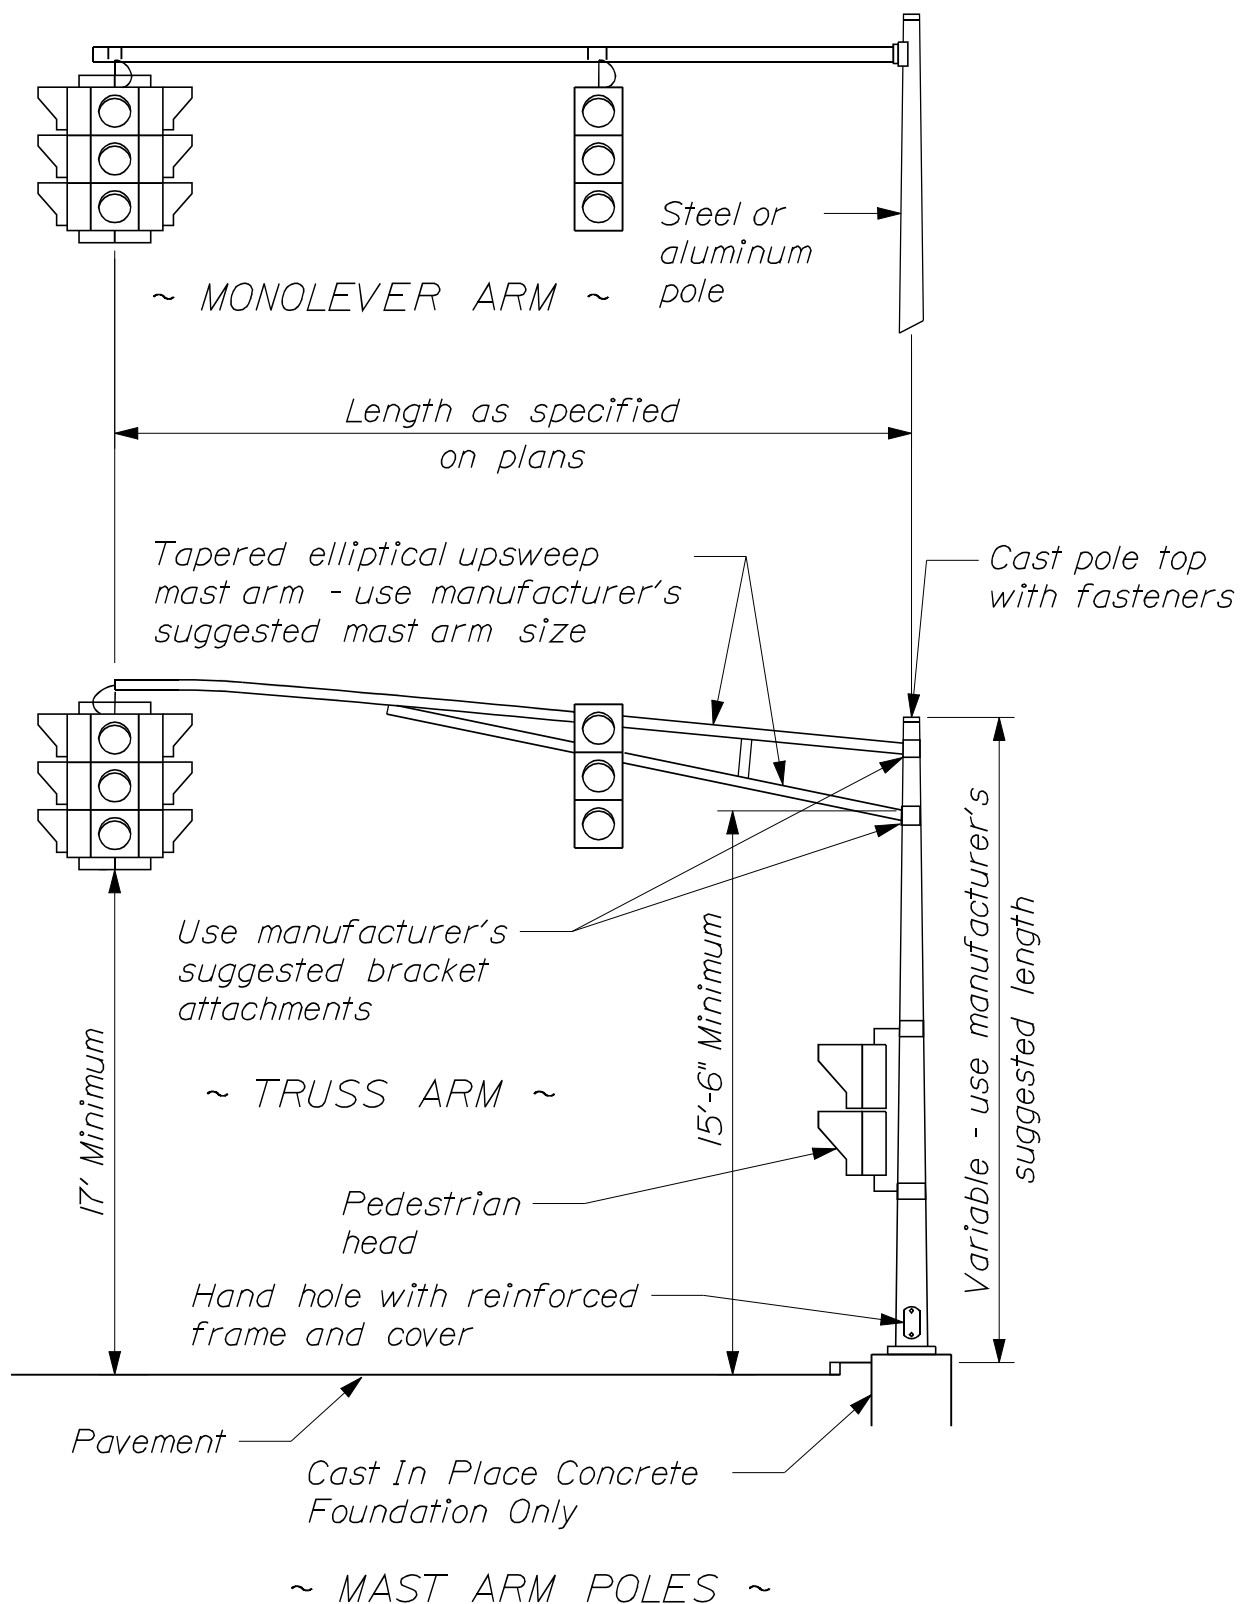


TRAFFIC SIGNALS 643(08)

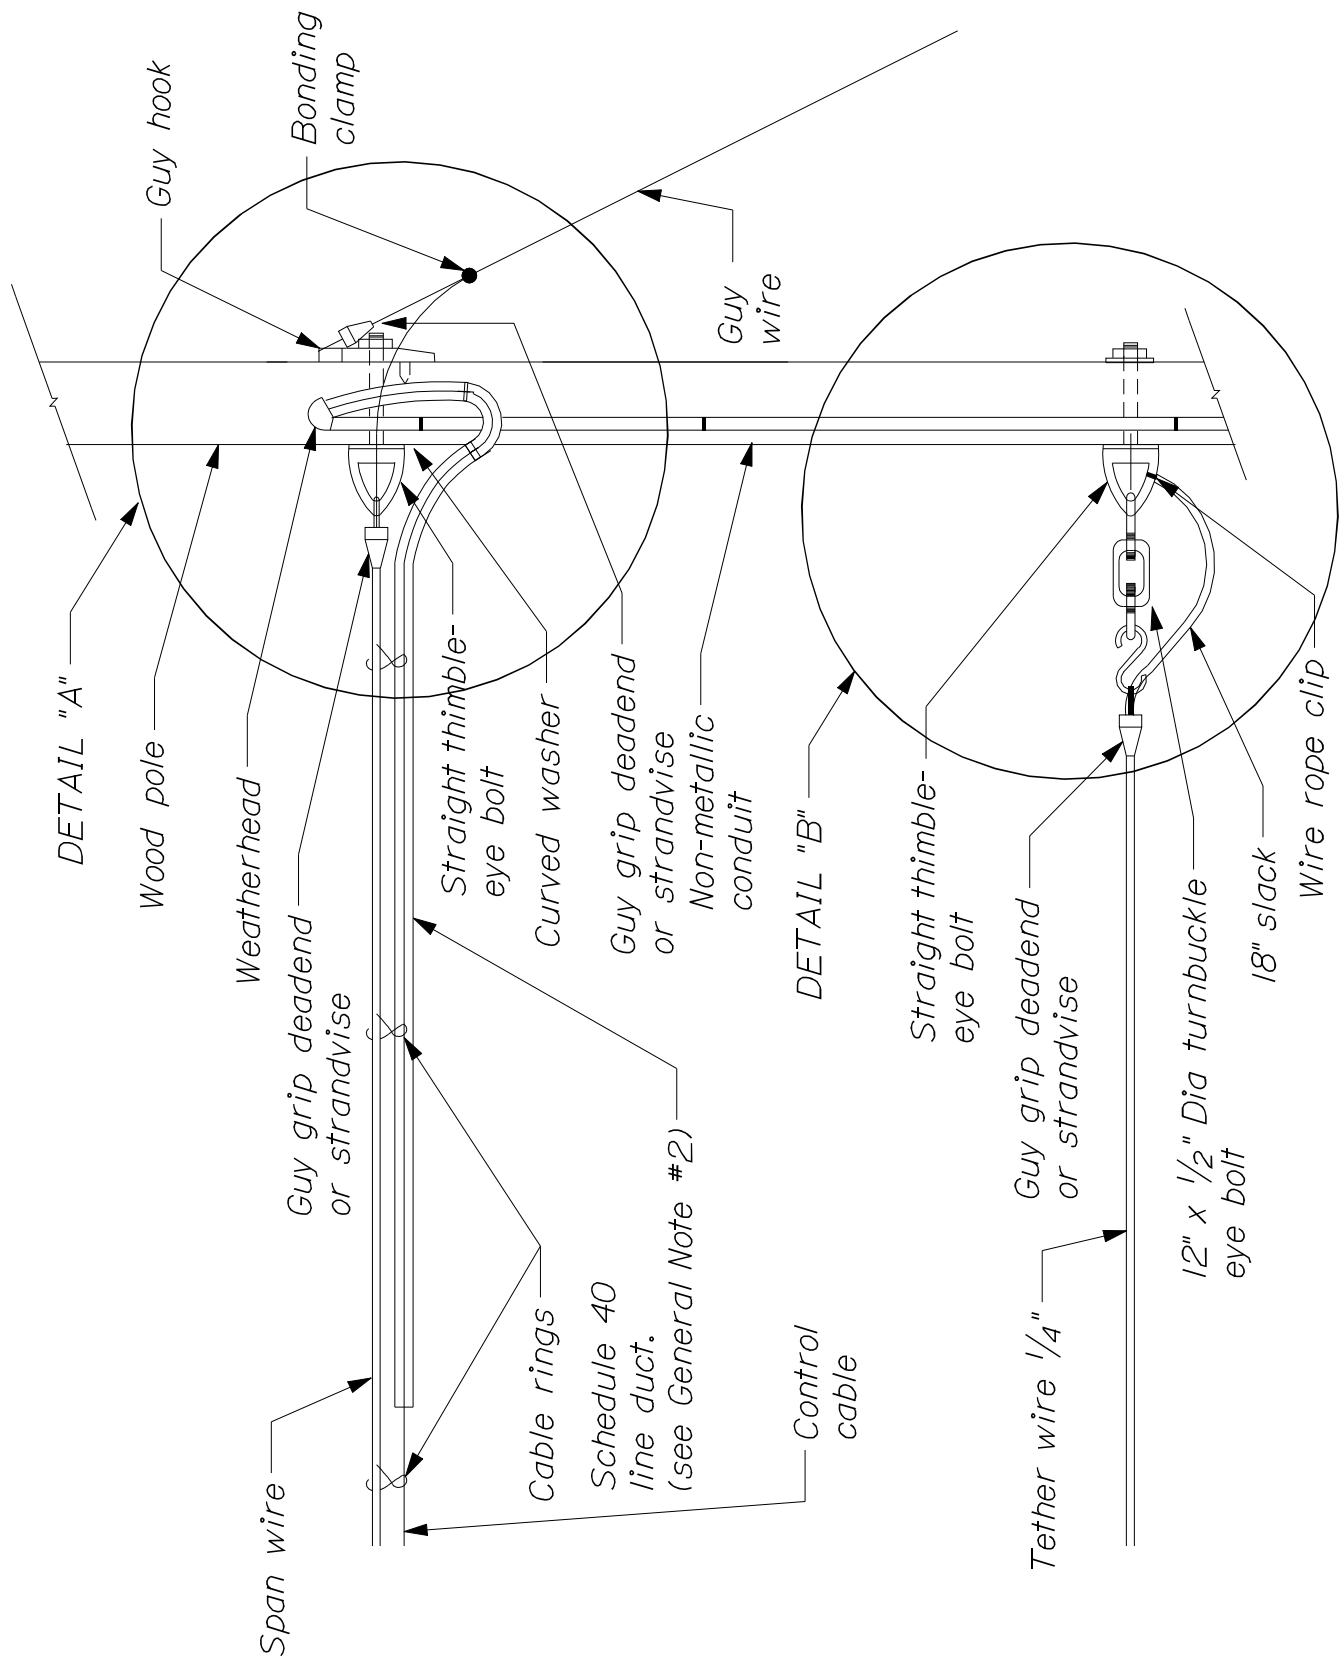

~ TYPICAL SPANWIRE INSTALLATION ~
Attaching to Wood Poles

TRAFFIC SIGNALS
643(09)

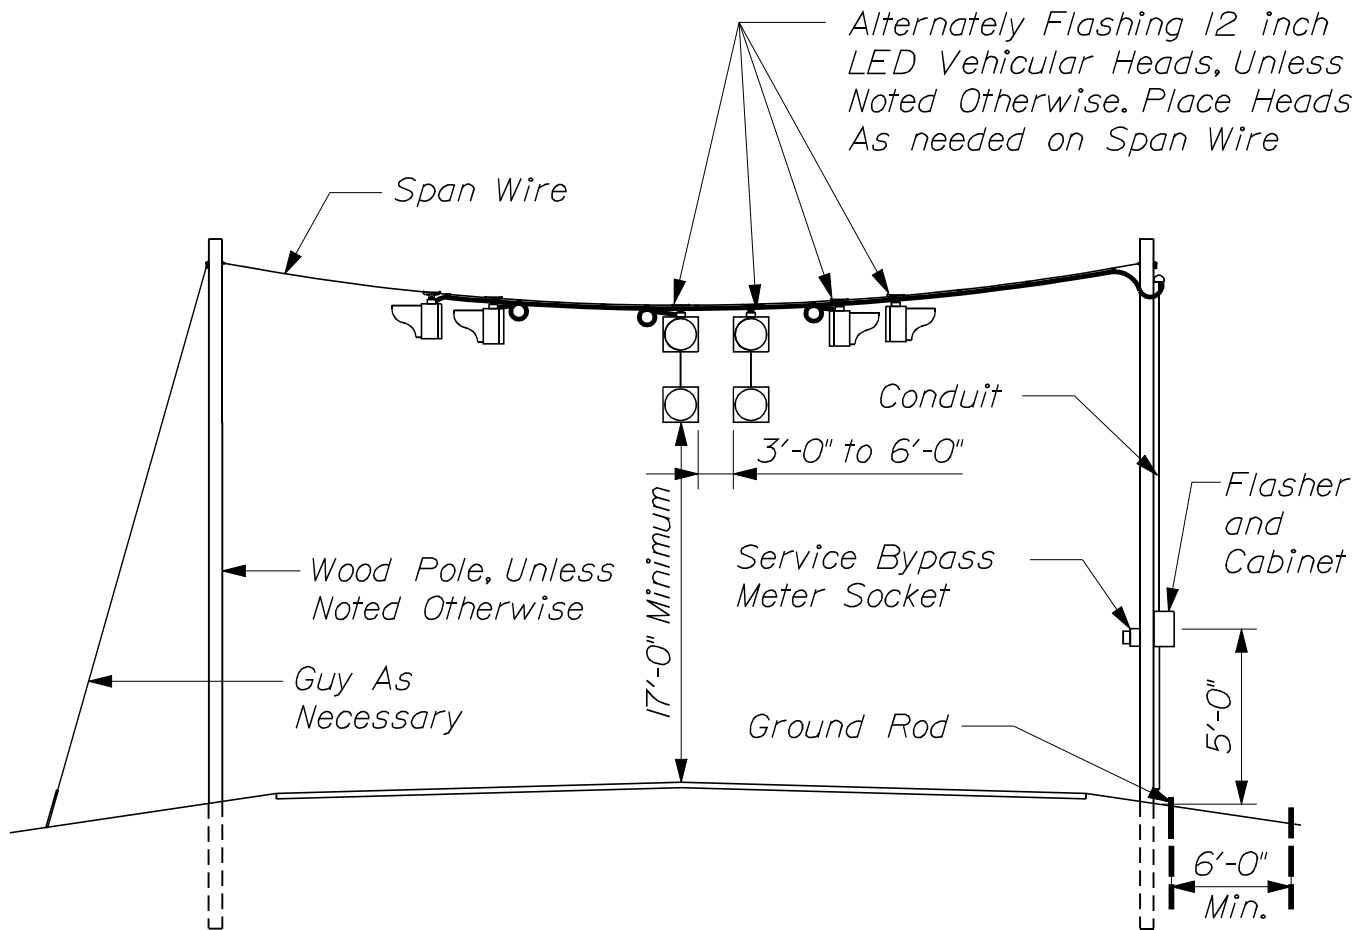

NOTE:
 All work shall conform to applicable portions of
 The Standard Specifications and The Standard
 Details.

~ TYPICAL FLASHING BEACON INSTALLATION ~
 ITEM NO. 643.60

TRAFFIC SIGNALS
 643(10)

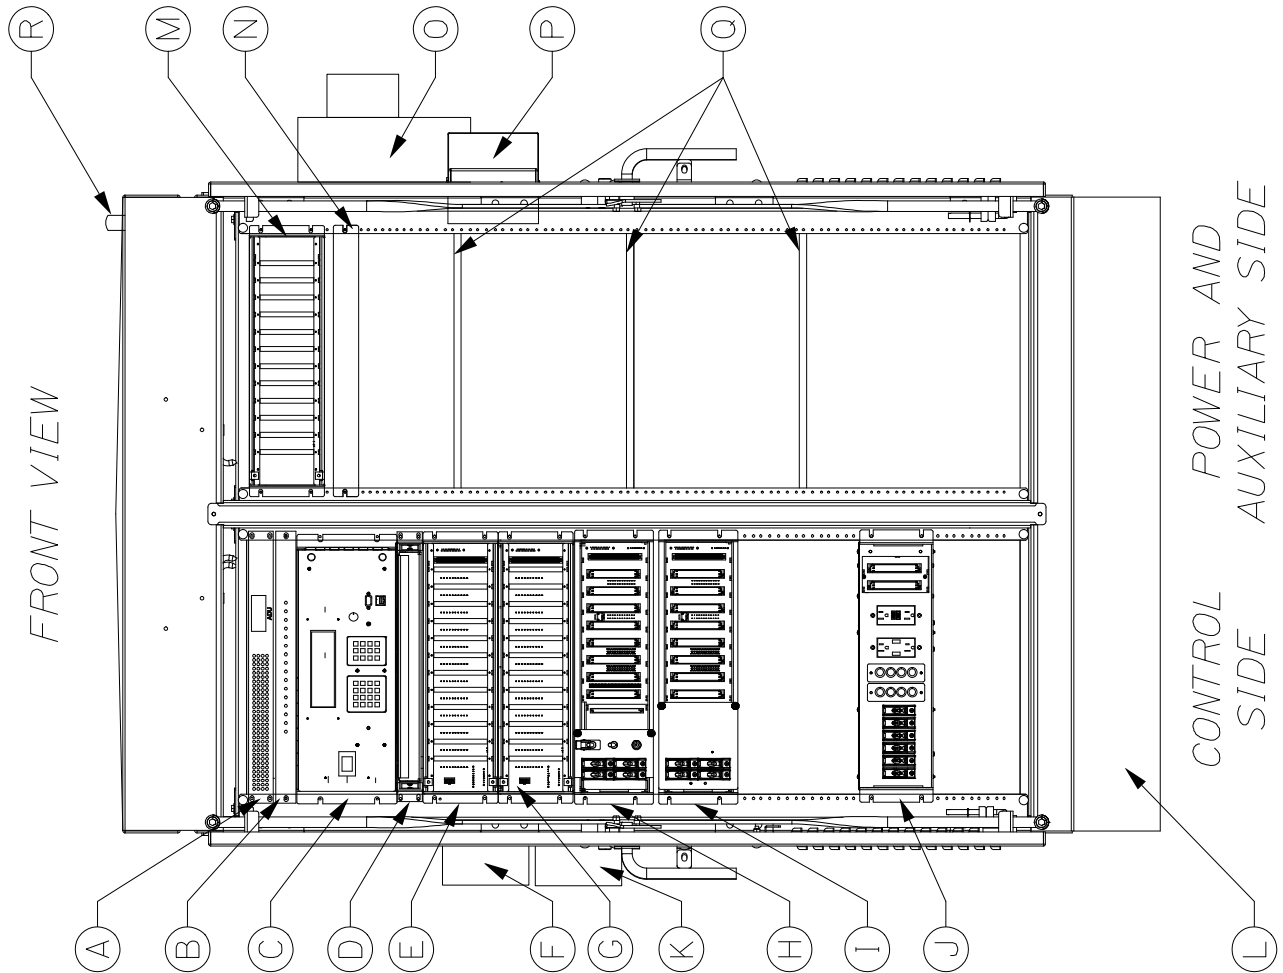


TABLE OF COMPONENTS	
CONTROL SIDE	
A	Auxiliary Display Unit
B	Detector Test Switch Panel
C	ATC Controller
D	Pull-out Drawer
E	24 Channel Input Assembly
F	GFI Outlet Access Box
G	24 Channel Input Assembly
H	Output Assembly Channels 1-16
I	Output Assembly Channels 17-32
J	Service Assembly
K	Generator Access Panel MTD to Cabinet Wall 36" Above Grade
L	6" Extender Base
POWER & AUX. SIDE	
M	Empty 19" Card Cage
N	Field Monitoring Unit
O	Electric Service Meter Socket / Electrical Service Disconnect
P	Police Door MTD to Front Door
Q	Shelves
R	Cellular Antenna

ATCC CABINET
643(II)

BACK VIEW


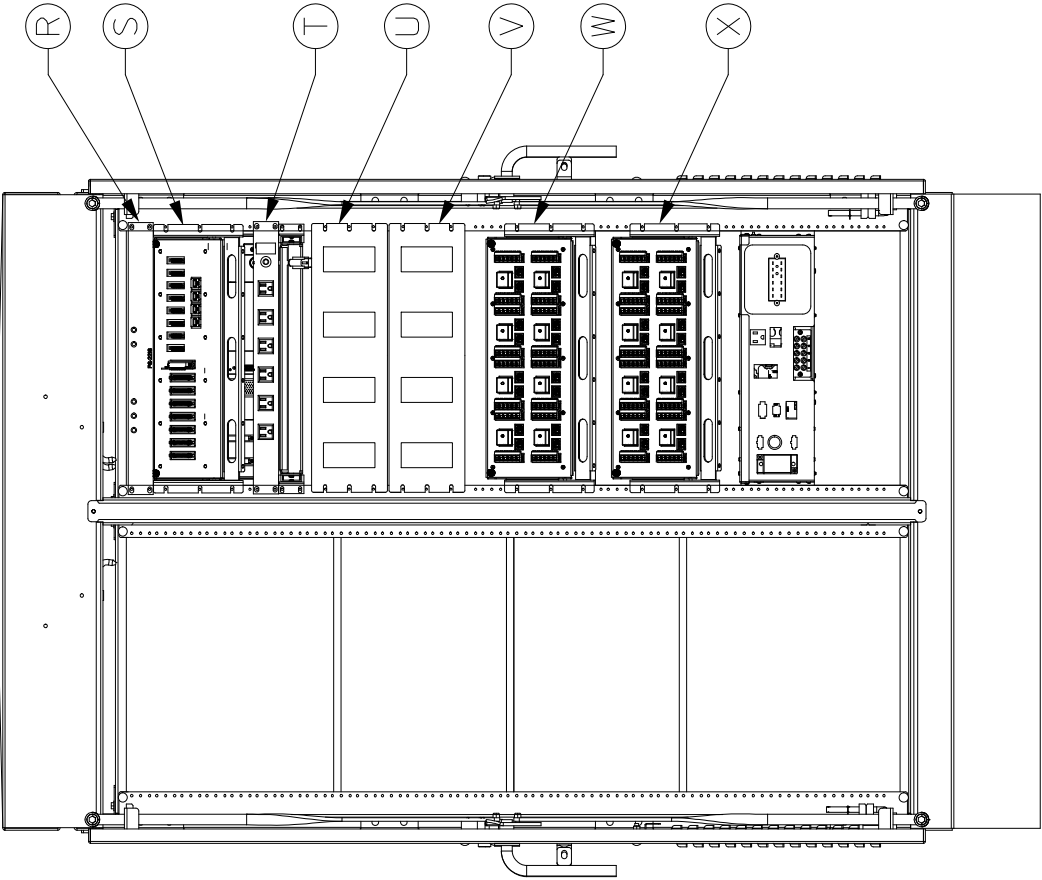



TABLE OF COMPONENTS	
CONTROL SIDE	
R	Cabinet Power Supply
S	DC Power/Serial Communication Bus
T	AC Power Strip
U	Input Termination Panel (Video) Channels 1-24
V	Input Termination Panel (Video) Channels 25-48
W	Field Output Panel Channels 1-16
X	Field Output Panel Channels 17-32

NOTES:


1. *Drawing shown is a schematic representation of the ATC cabinet depicting the relative location of various in-cabinet devices and subassemblies. The exact size of various elements may vary per manufacturer.*
2. *Input termination panel shown is for video based inputs.*
3. *Drawing depicts two input panels and two output panels. This quantity may be reduced depending on application; see special provisions for number of panels to be supplied.*
4. *Fan and thermostat shall be installed on cabinet frame above the door.*
5. *Led light strips shall be installed on cabinet frame above the door and on the underside of the lower shelf.*
6. *The size of the meter socket will vary based on the local electric utility company requirement.*
7. *The meter shall be installed such that the bottom of the meter is at least 48 inches above final grade.*
8. *The load side cable shall be routed through the interior of the cabinet such that it does not block or enter into available rack space. (Removed: thus preventing that space from being used either by equipment supplied as part of the project, or future equipment that would be installed in the rack system.) The cable shall be routed between the edge of the rack system and the cabinet side wall, along the bottom of the cabinet and below the bottom opening of the doors.*

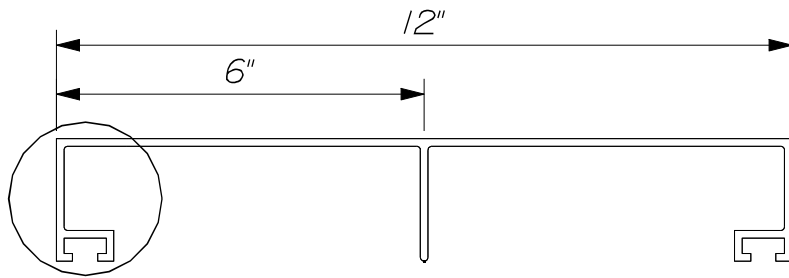

Detail A ~ 12" EXTRUDED ALUMINUM PLANK ~

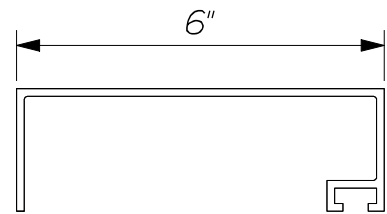


~ 6" EXTRUDED ALUMINUM PLANK ~

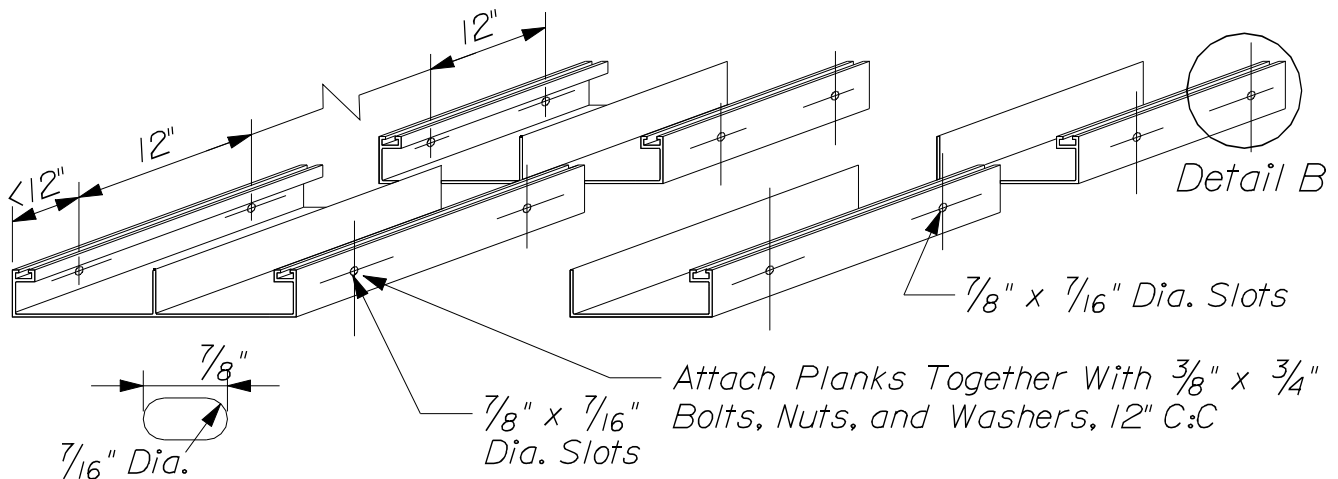


~ DETAIL - B ~


~ BOLT HOLE PUNCHING PLAN FOR EXTRUDED ALUMINUM PLANKS ~

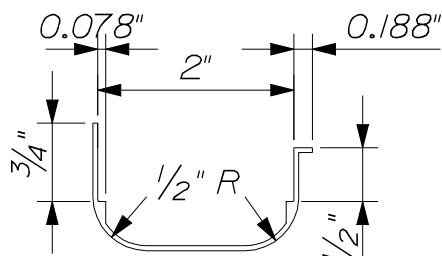

~ SIDE TRIM MOLDING ~

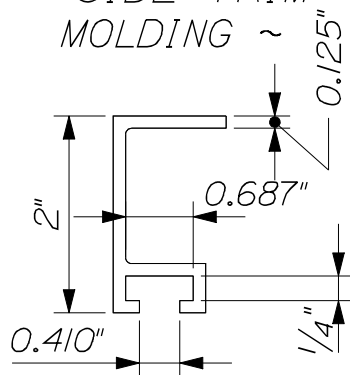


~ DETAIL - A ~

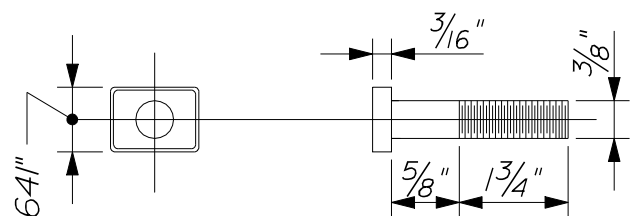


Post clip bolts shall be stainless steel on all overhead signs

~ POST CLIP BOLT ~



~ POST CLIP ~



ITEM NO. 645.251
TYPE I SIGNS
HIGHWAY SIGNING
645(01)

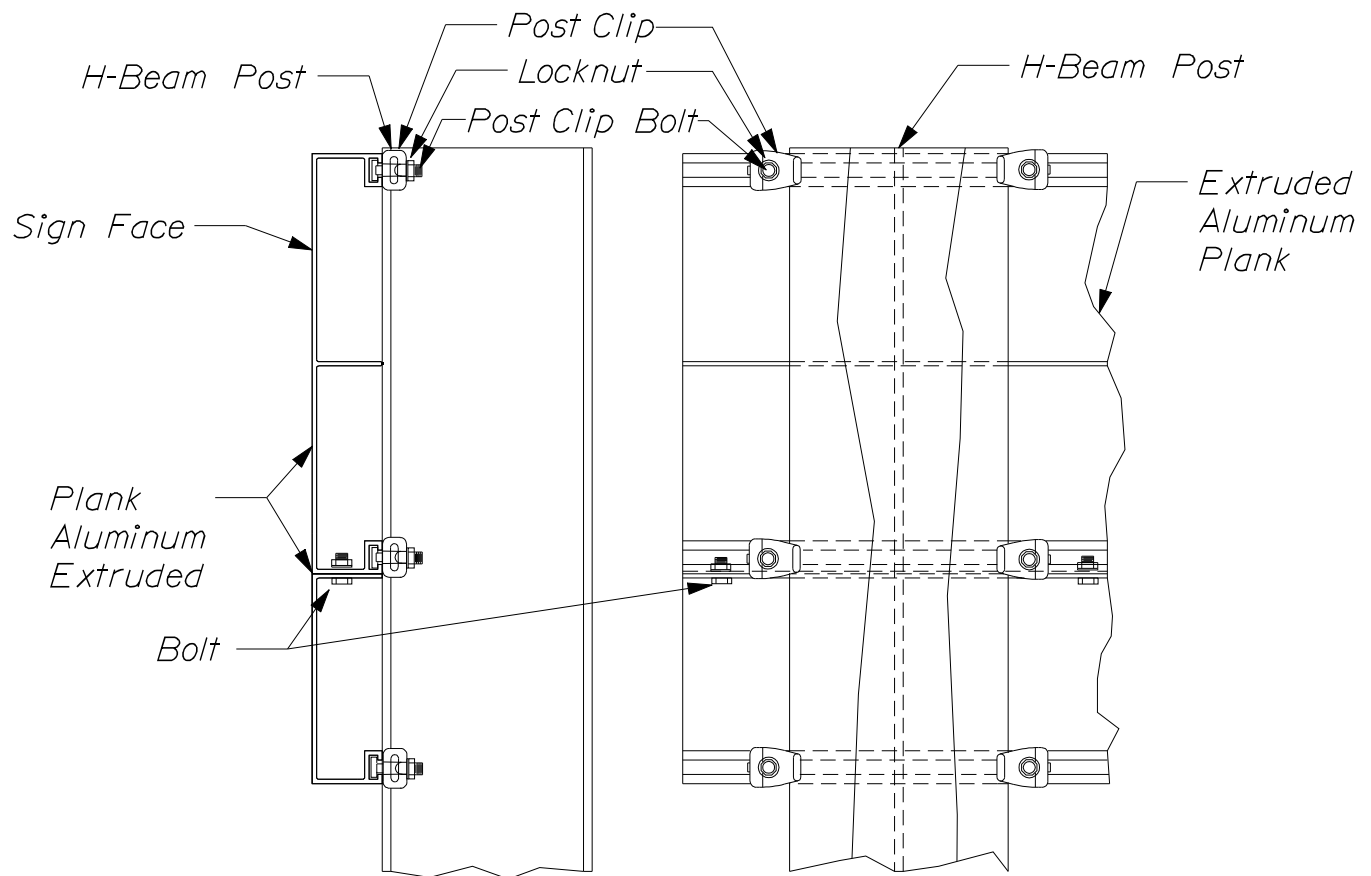


~ ATTACHMENT OF EXTRUDED ALUMINUM
PLANKS TO H-BEAM POSTS ~

ITEM NO. 645.251

TYPE I SIGNS
HIGHWAY SIGNING
645(02)

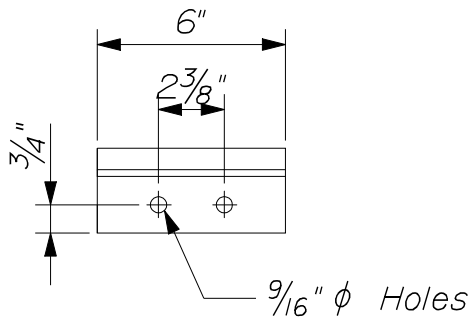



*Shipped location
of Z-piece, one per
W-shape*

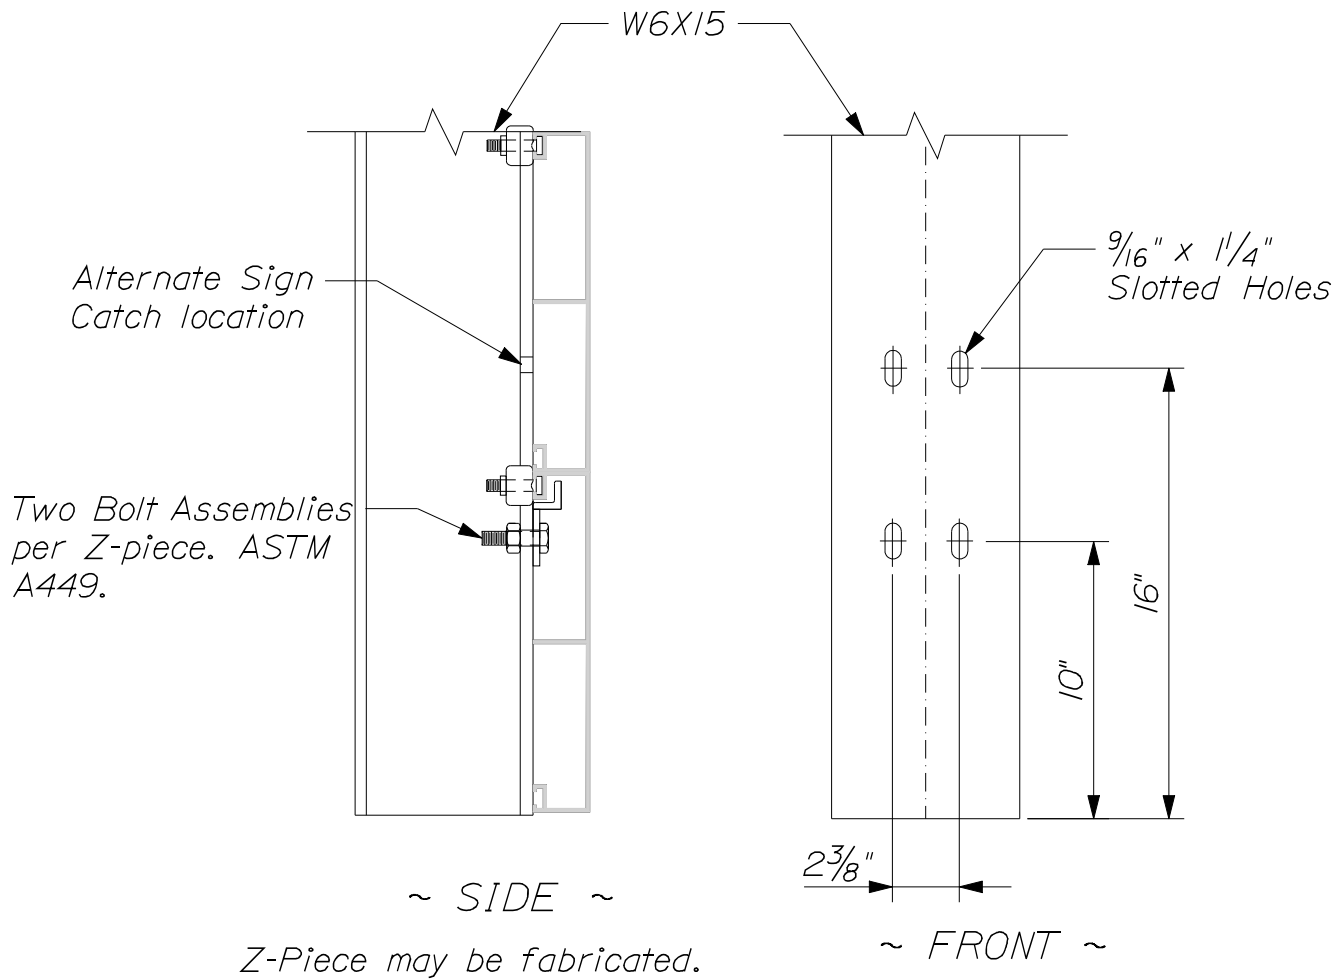

Z-Piece may be fabricated.

*~ SIGN CHECK ~
INSTALL ON ALL OVERHEAD SIGNS*

*ATTACHMENT OF EXTRUDED ALUMINUM PLANKS TO
OVERHEAD, CANTILEVER AND OVERPASS SIGN SUPPORT STRUCTURES
A Portion ITEM NUMBERS. 645.12, 645.13, 645.15
HIGHWAY SIGNING
645(03)*

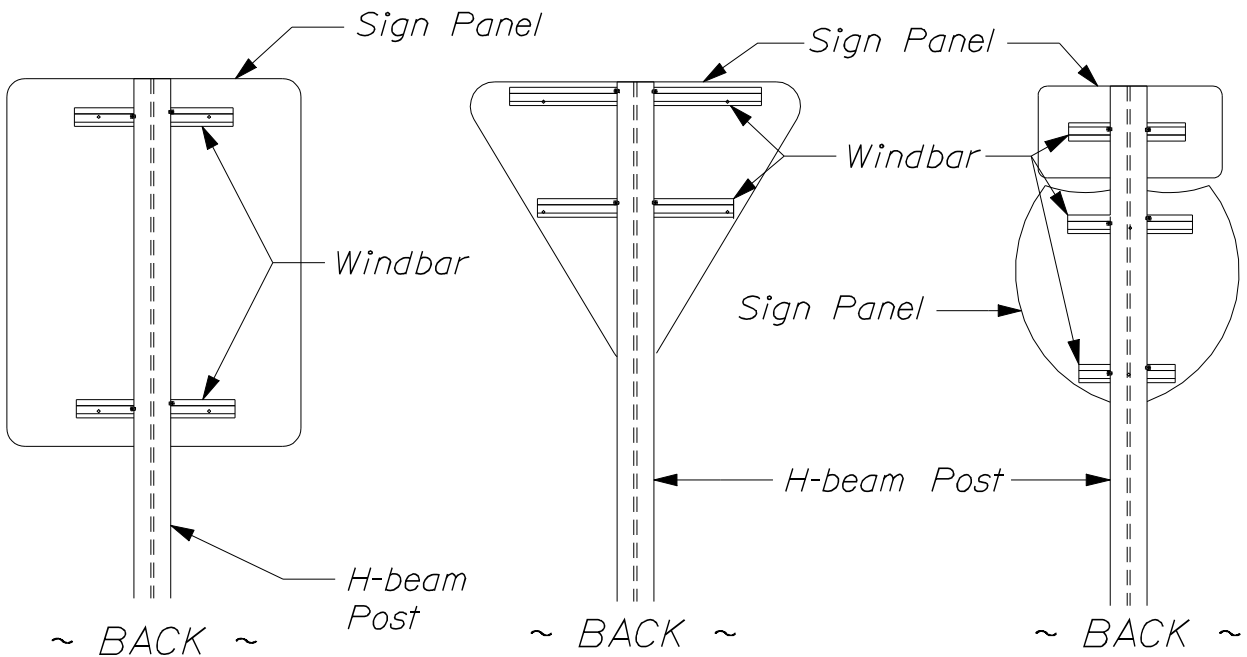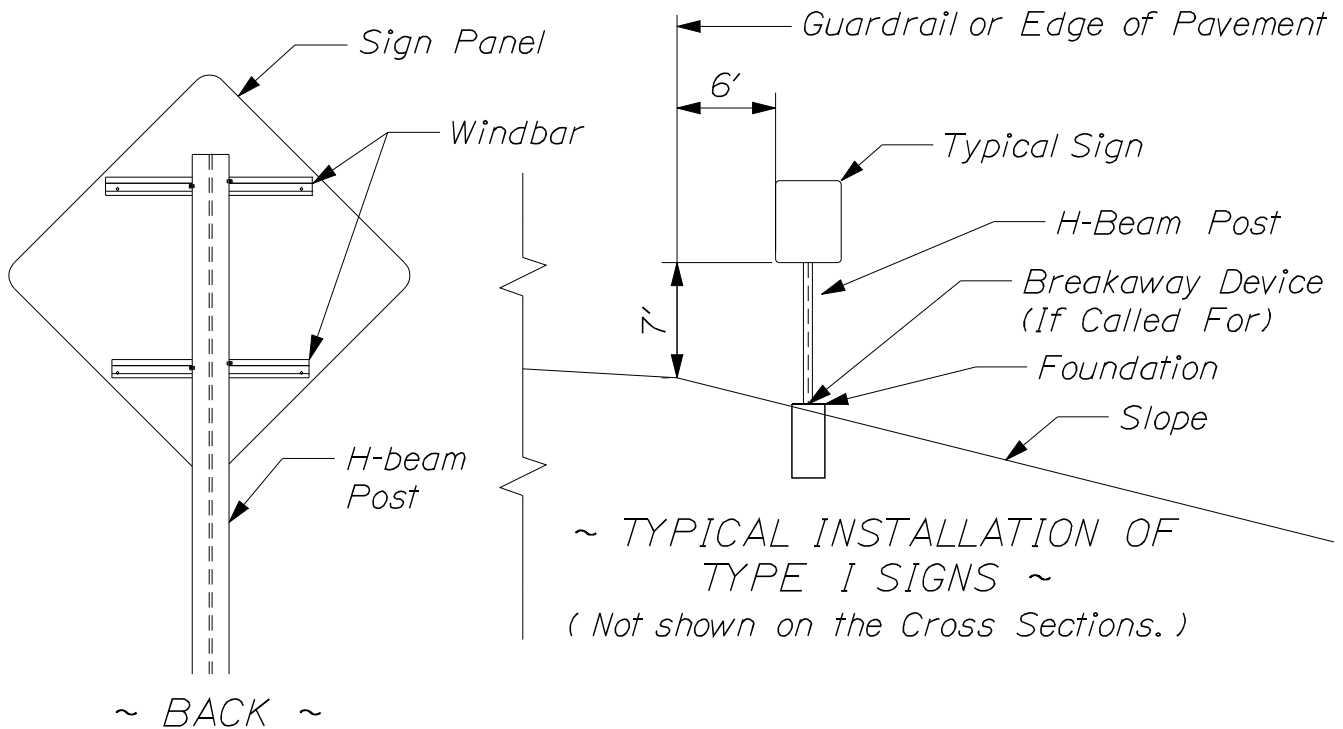

NOTE:


Bolt holes in sign panels shall be located as shown in "Standard Highway Signs".

ATTACHMENT OF SIGNS, REGULATORY, WARNING, AND ROUTE MARKER ASSEMBLY SIGNS, TYPE I TO H-BEAM POSTS

ITEM NO. 645.271

HIGHWAY SIGNING

645(04)

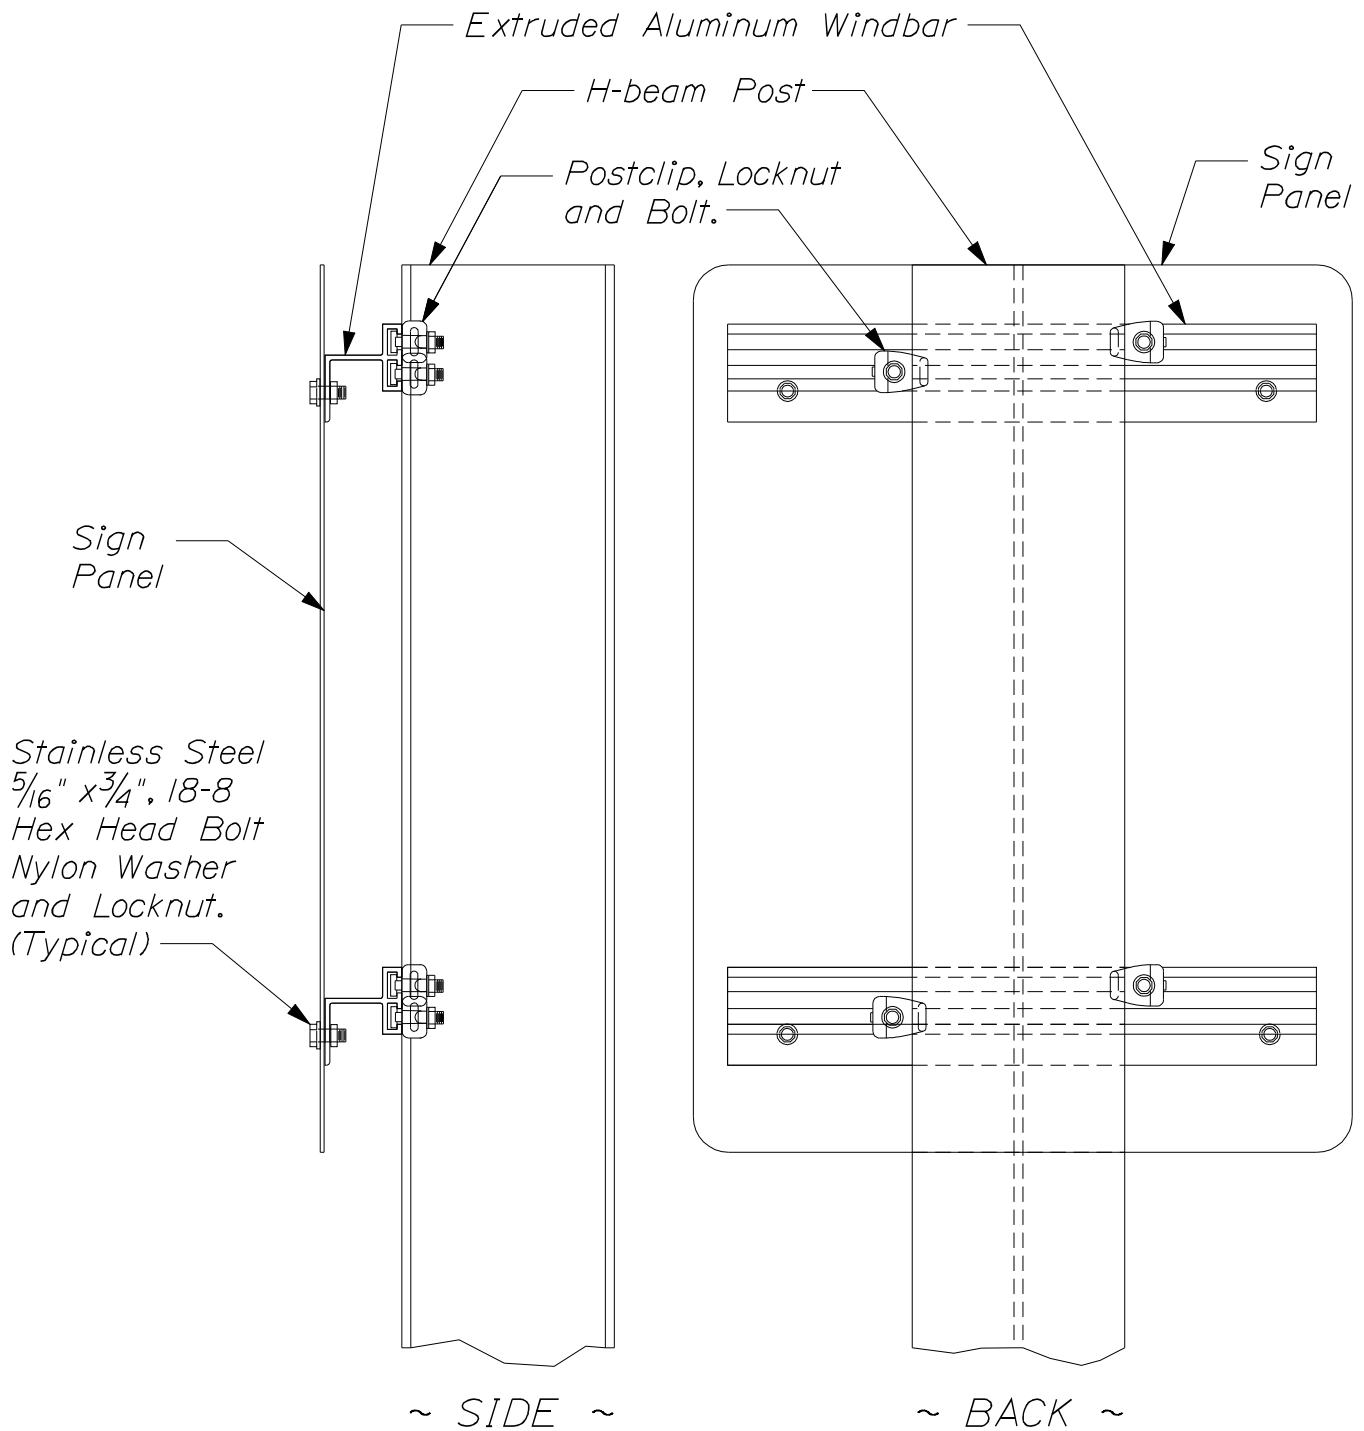

ATTACHMENT OF SIGNS, REGULATORY, WARNING, AND ROUTE
MARKER ASSEMBLY SIGNS, TYPE 1 TO H-BEAM POSTS

ITEM NO. 645.271



HIGHWAY SIGNING

645(05)

STANDARD H-BEAM POSTS for TYPE 1 SIGNS

SINGLE SUPPORT SIGNS								
Foundation Size	Sign Area (A)	Sign Width (W)	Post Size	Base Plate (1), (3)	Material	Anchor Bolts (2)	Bolt Circle	Maximum Mounting Height
N/A	0 - 10 ft ²	Use Wood Posts	See Note #8	N/A	A36	N/A	N/A	12 Ft to Center of Sign
1'-6"	10 < A ≤ 16 ft ²	W = 4'- 0" Max. But includes 5'- 0" Yield Sign	W6x9	12"x12"x1" 41 LB		1" DIA x 3'- 0"	12"	
1'-6"	16 < A ≤ 25 ft ²	W = 5'- 0" Max.	W6x15	12"x12"x1" 41 LB		1" DIA x 3'- 0"	12"	
2'-0"	25 < A ≤ 42 ft ²	W = 7'- 0" Max.	W8x24	14"x14"x1" 55 LB		1 1/4" DIA x 3'- 6"	14"	
MULTIPLE SUPPORT SIGNS								
2'-0"	To 60 ft ² /Post	Variable	W8x18	14"x14"x1" 55 LB	A36	1 1/4" DIA x 3'- 6"	14"	20 Ft to Center of Sign
2'-0"	60 - 85 ft ² /Post		W10x22	12"x17"x1 1/4" 72LB		1 1/4" DIA x 3'- 6"	15"	
2'-6"	85 - 110 ft ² /Post		W12x26	13"x20"x1 1/4" 92 LB		1 1/2" DIA x 4'- 0"	18"	
2'-6"	110 - 135 ft ² /Post		W14x30	14"x21"x1 1/4" 104 LB		1 1/2" DIA x 4'- 0"	19"	


~ ANCHOR BOLT LAYOUT ~

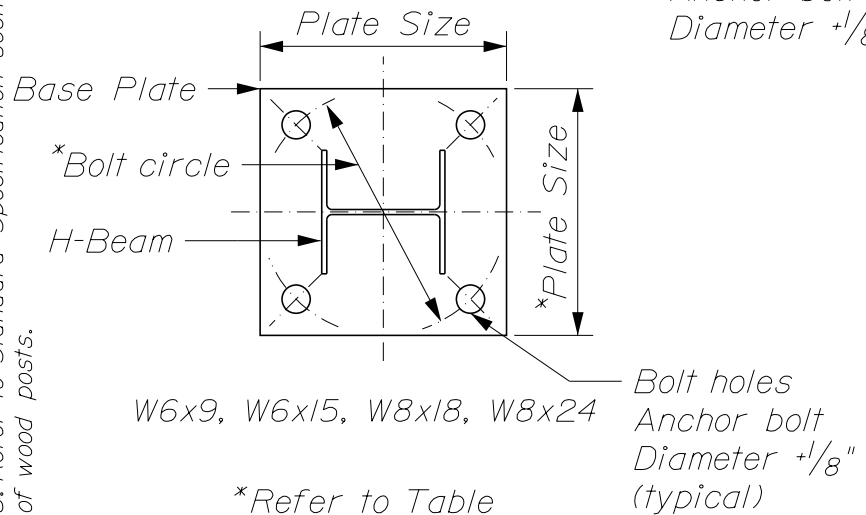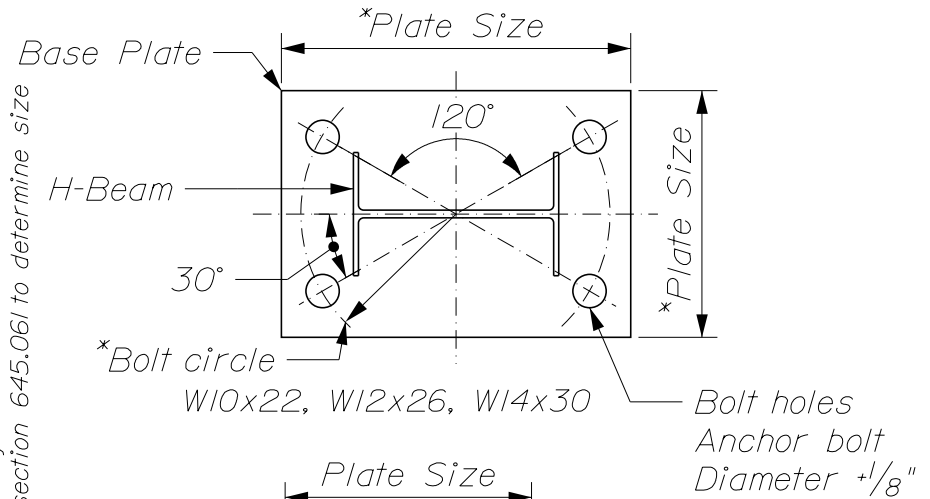

*Refer to Table





H-BEAM POSTS
HIGHWAY SIGNING
645(06)

- NOTES:
1. Bolts to be 50,000 PSI minimum yield strength.
 2. Post to base plate weld shall be 5/16" fillet weld.
 3. Base plates and H-Beams shall be hot dipped galvanized after fabrication in accordance with section 720.06.
 4. Payment for the weight of base plate shall be incidental to Item No. 645.289.
 5. Posts to be equipped with breakaway devices shall have holes drilled or punched before galvanizing. Posts equipped with breakaway devices shall have the post size die stamped, before galvanizing, near the bottom end of beam.
 6. W - Shapes utilized with Breakaway Devices shall be in strict conformance with ASTM A6, Table 16, A, Depth.
 7. Anchors for use with breakaway devices shall be set for the deepest potential W-Shape, depth +1/8". Gaps between the post (W-Shape) and the breakaway device shall be filled with galvanized shims that have the same area and hole pattern as the breakaway device. The maximum difference between the breakaway device opening and beam depth, including shims, is 1/16". Shims will be incidental to the breakaway device.
 8. Refer to Standard Specification section 645.061 to determine size of wood posts.

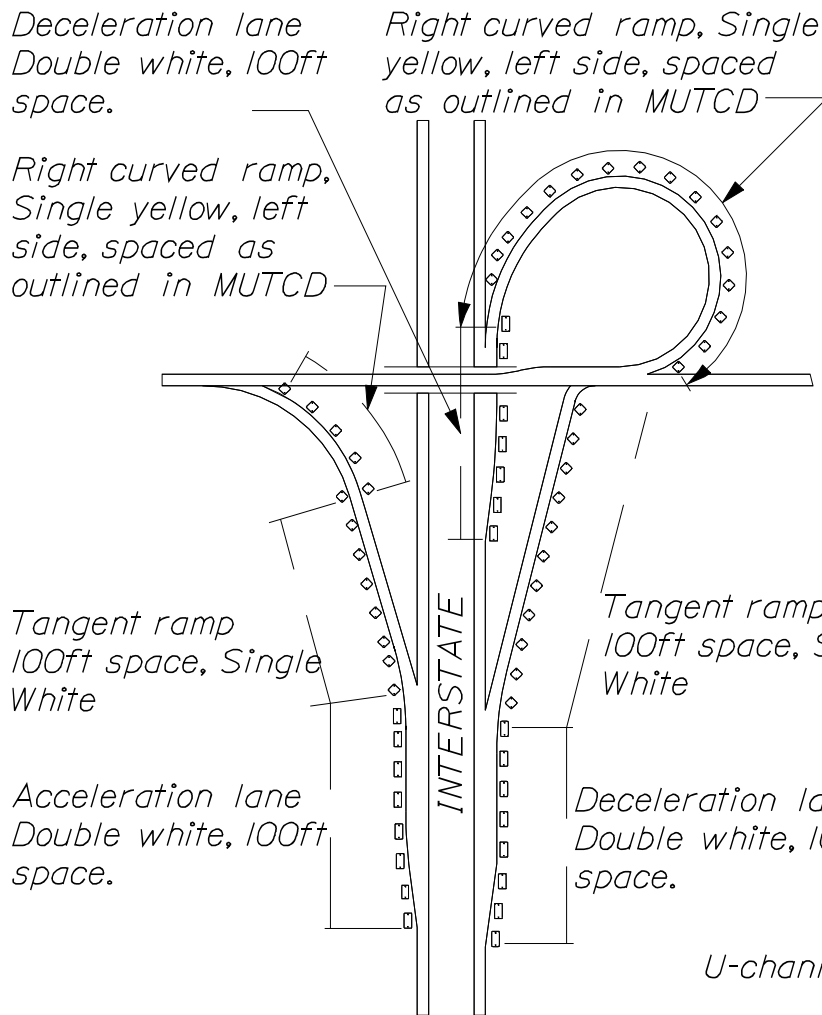


NOTE:
Locations of Delineators shall be 528 ft, 10/mile on mainline, subject to approval of the Resident. Delineators on ramps shall be placed as shown here and in the MUTCD. When placing delineators in the area of any Highway Lighting, follow normal DIGSAFE procedures.

~ TYPICAL PLACEMENT OF DELINEATORS AT INTERCHANGES ~

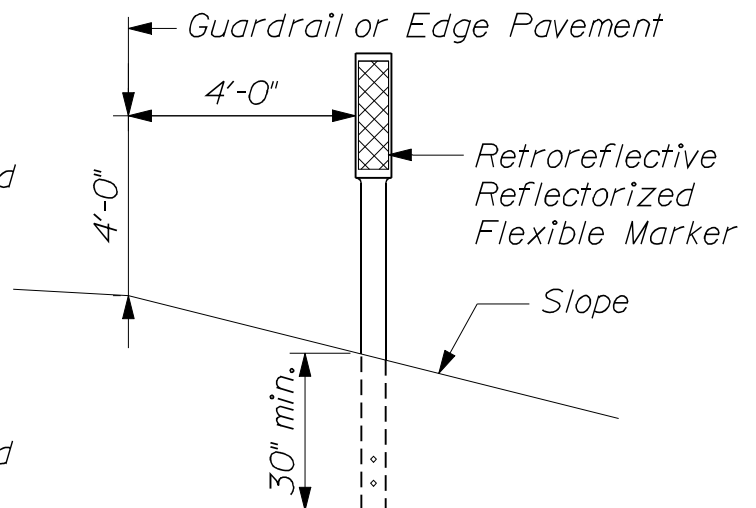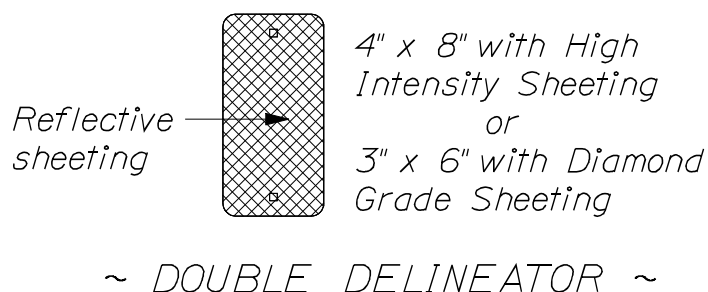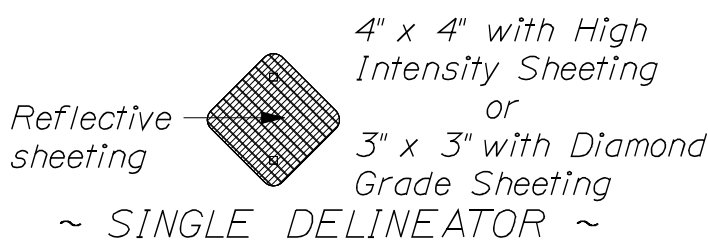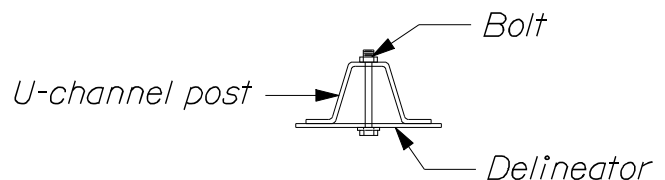


~ DELINEATORS ~

DELINEATORS HIGHWAY SIGNING 645(07)

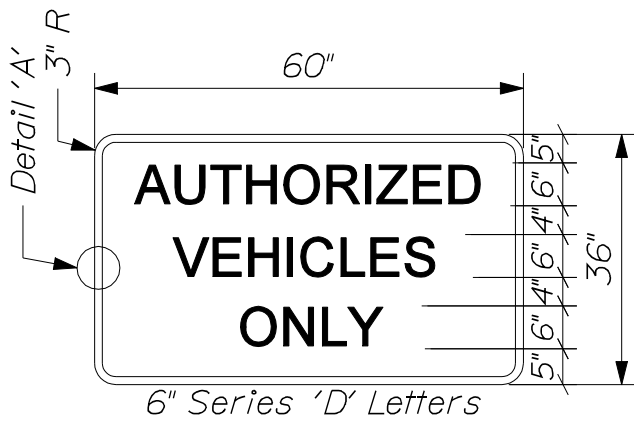

White Background AVO
Black Letters and
Legend

Borders

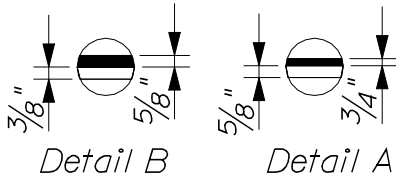

White Background
Black Letters and
Legend



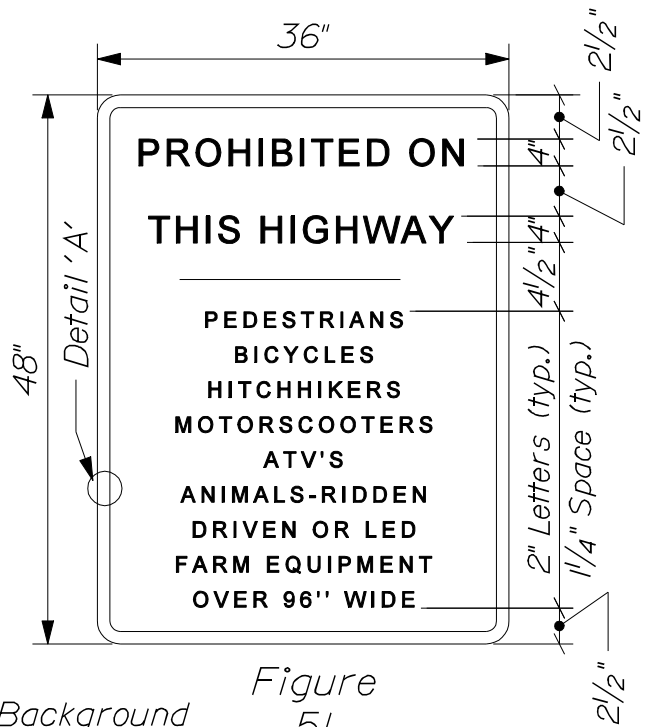


Figure
51

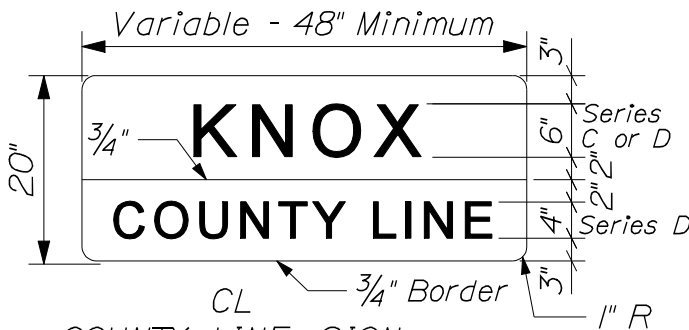


COUNTY LINE SIGN

Green Background
White Border and
Legend

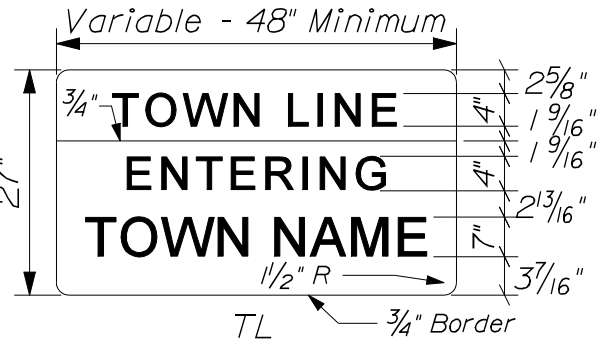


TOWNLINE SIGN

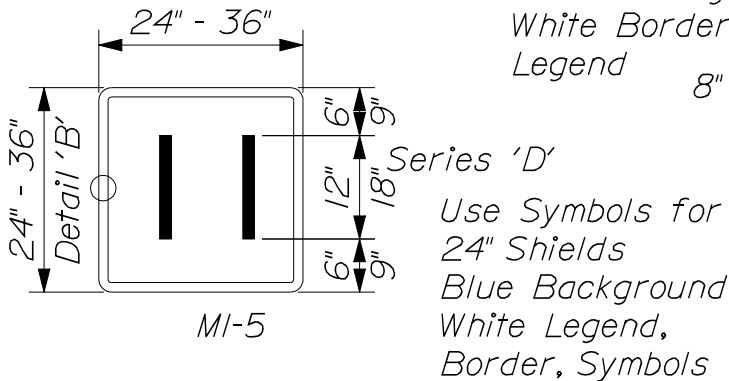

MI-5

Use Symbols for
24" Shields
Blue Background
White Legend,
Border, Symbols

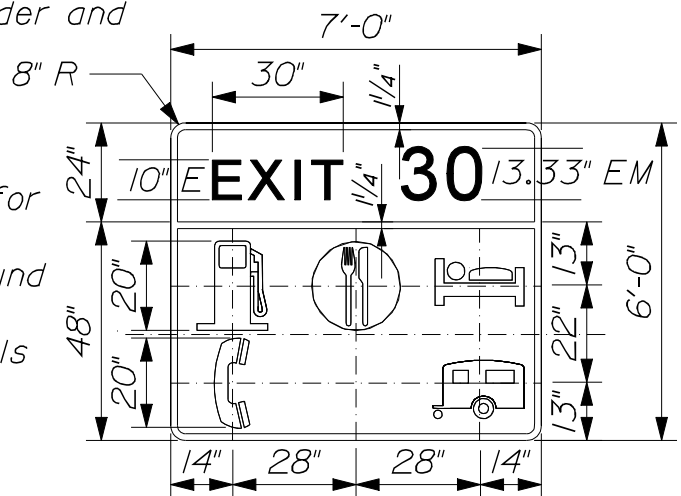


Services Sign
For Interstate

24" X 30" For 3 Digit Rte Number
36" X 45" For 3 Digit Rte Number
When Using MI-5 on Guide Signs
Omit the Border. White Background,
Black Legend and Border.


STATE OF MAINE SIGNS HIGHWAY SIGNING

645(08)

STEEL U-CHANNEL POST
INSTALLATION

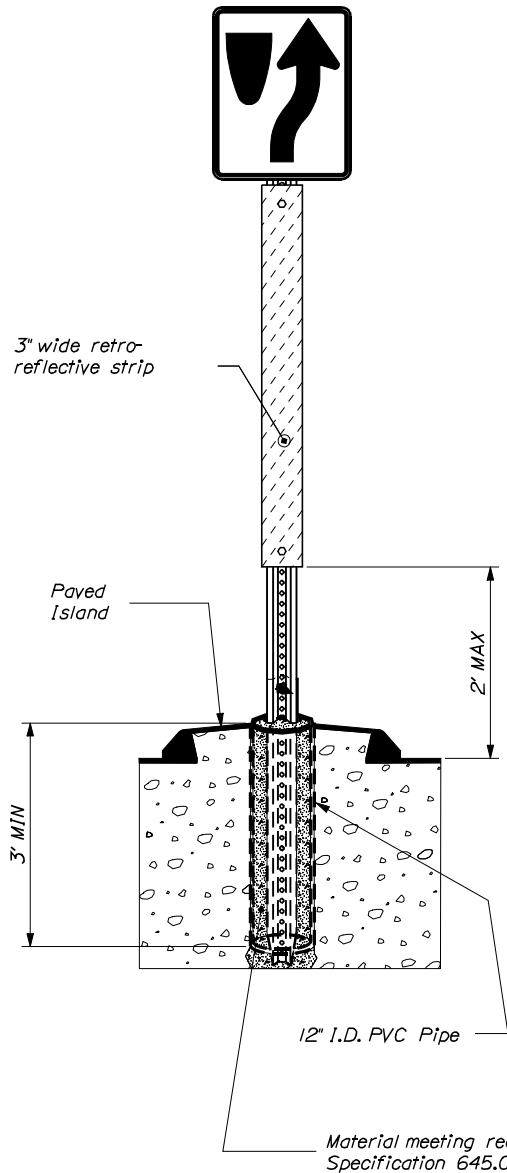


PRESSURE TREATED WOOD POST
INSTALLATION

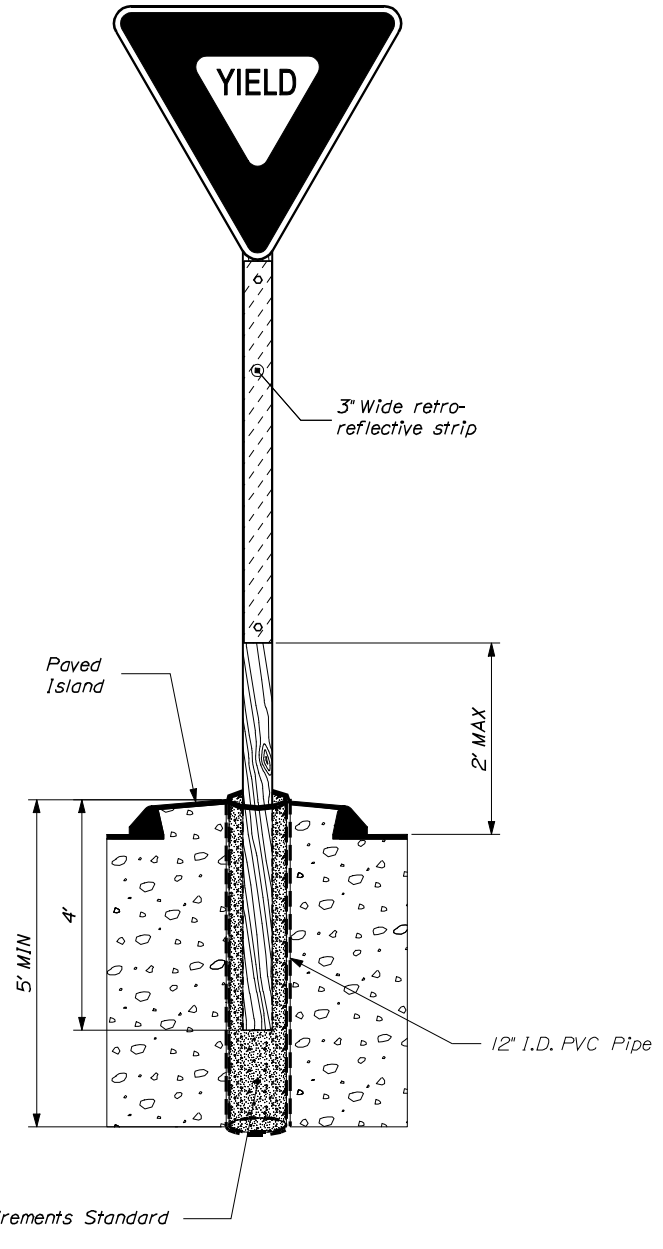

NOTES:

- 1) Posts to be plumbed & set in compacted/tamped material
- 2) Top of PVC pipe shall have no more than 1 inch reveal from finished surface pavement
- 3) Installation shall meet all requirements found in Standard Specification 645.061

~ ISLAND SIGN POST SLEEVE ~
 INSTALLATION OF TYPE II SIGNS
 HIGHWAY SIGNING & BREAK AWAY POSTS
 645(09)C

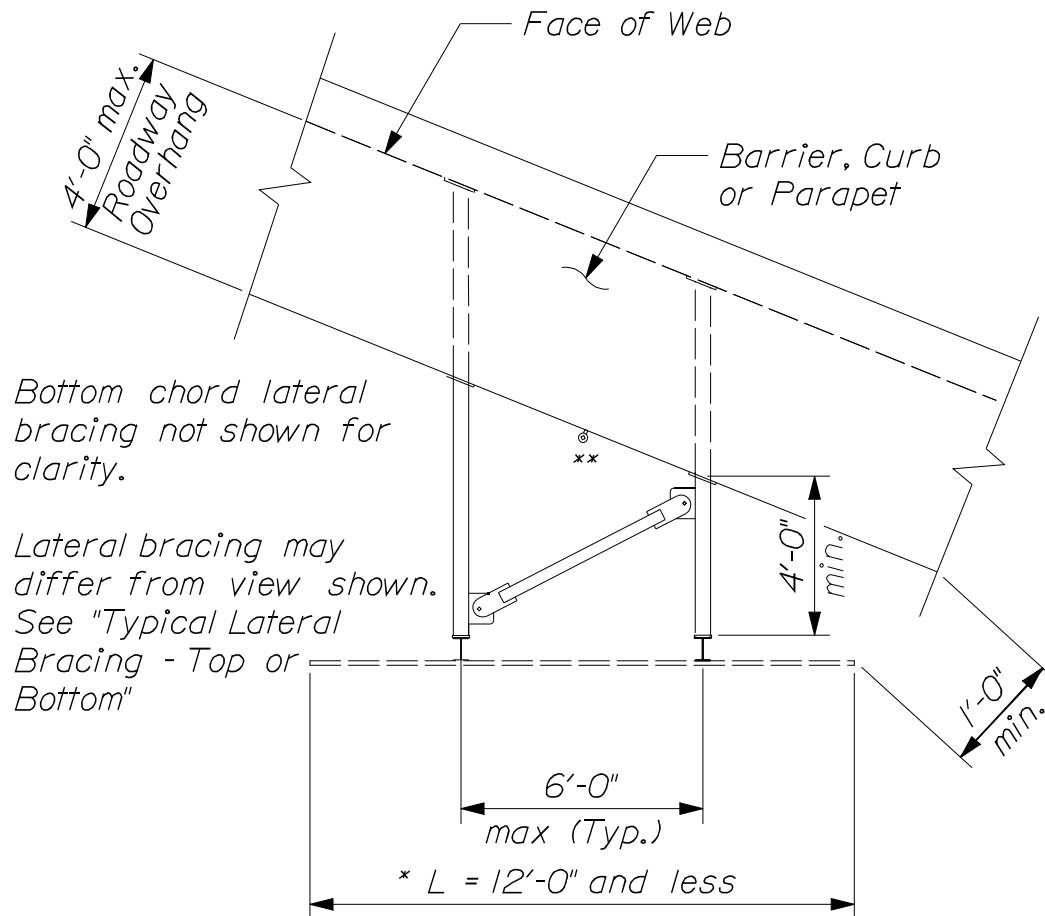


~ PLAN - SMALL SIGN PANEL SUPPORT LAYOUT ~

Max. skew permitted: 50 degrees
Max. height of sign permitted, 14'-0"

* Note: L = Width of sign

** Anchoring eyelet for barriers only
(See Anchorage Eyelet Detail)

ITEM NO. 645.13
OVERPASS MOUNTED SIGN SUPPORT
HIGHWAY SIGNING
645(10)

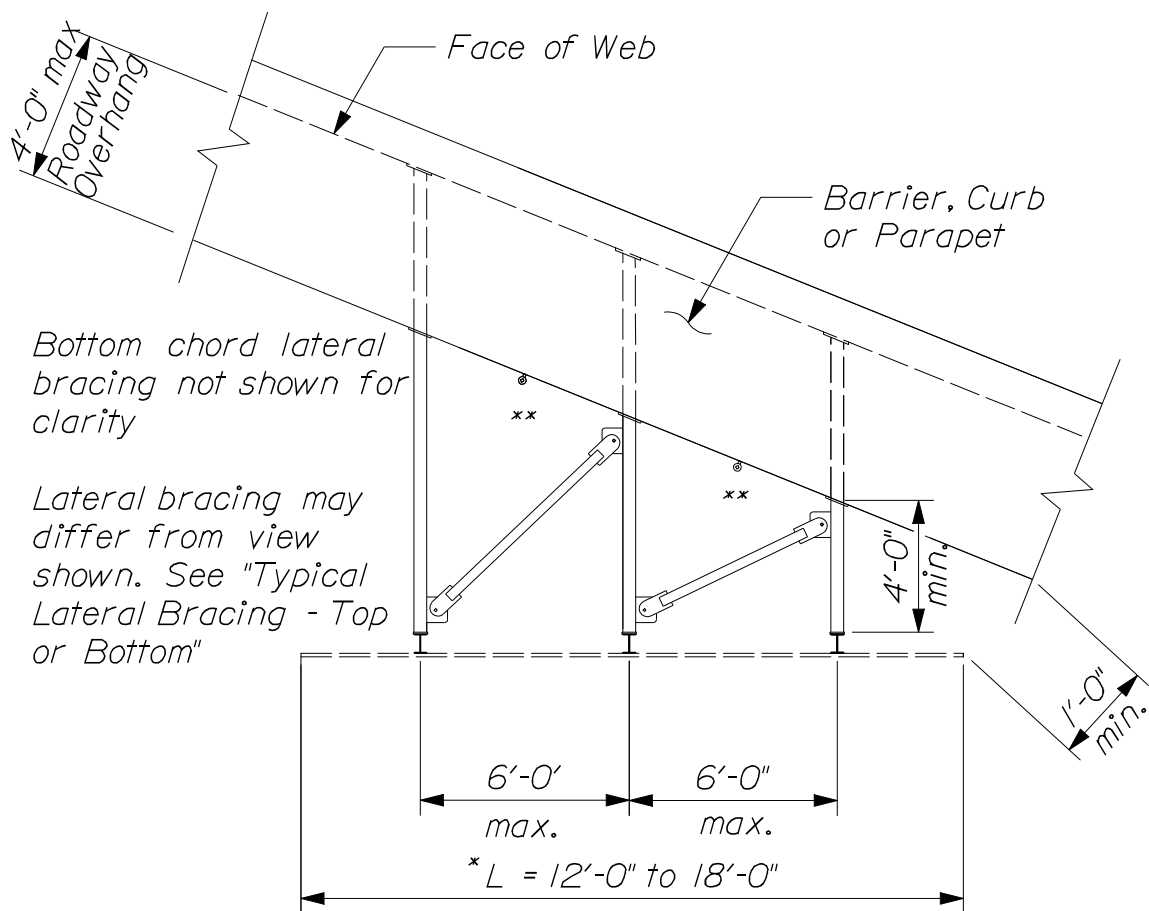


~ PLAN - MEDIUM SIGN PANEL SUPPORT LAYOUT ~

Max. skew permitted: 30 degrees
Max. height of sign permitted, 14'-0"

* Note: L = width of sign

** Anchoring eyelet for barriers only.
(See Anchorage Eyelet Detail)

ITEM NO. 645.13
OVERPASS MOUNTED SIGN SUPPORT
HIGHWAY SIGNING
645(II)

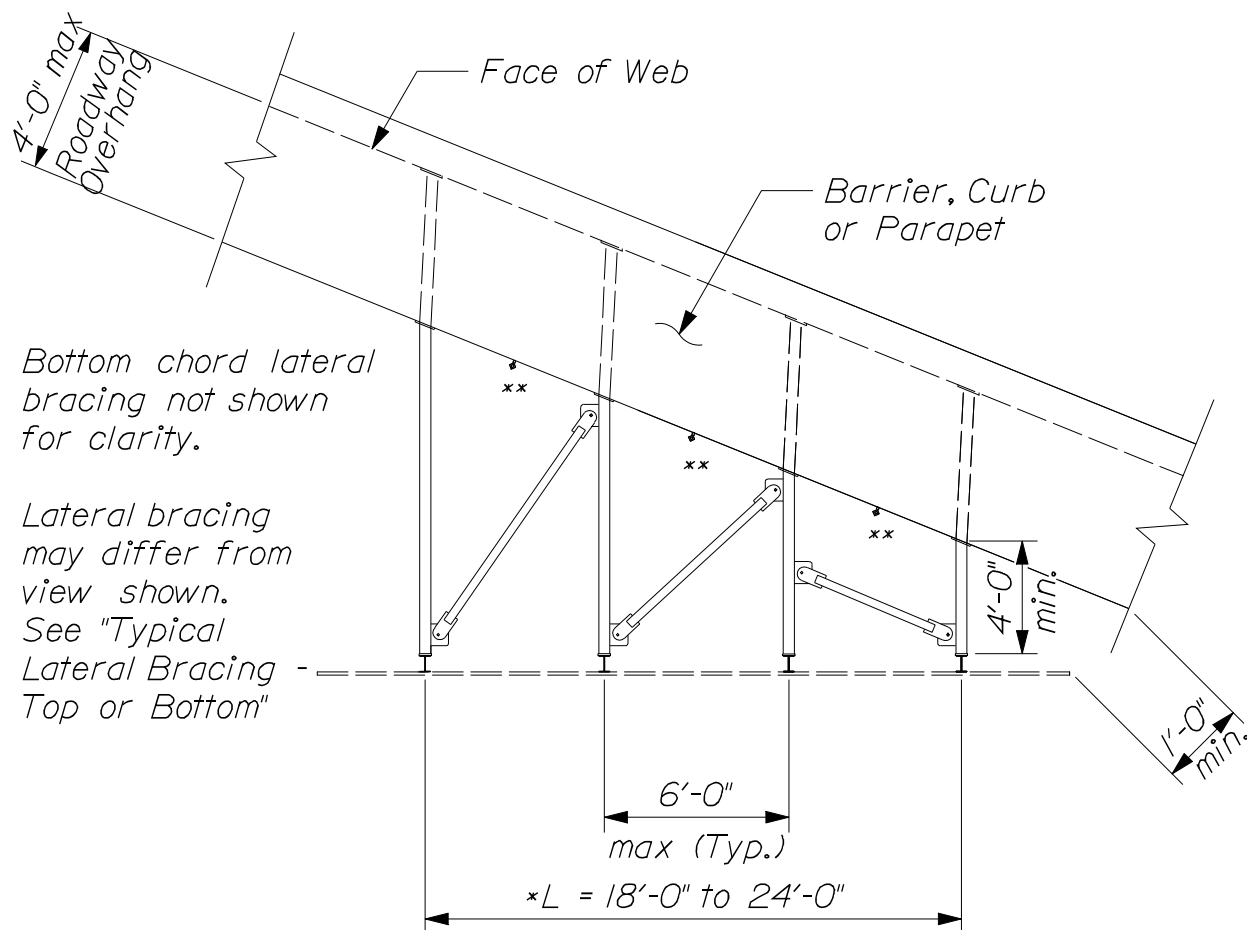


~ PLAN - LARGE SIGN PANEL SUPPORT LAYOUT ~

Max. skew permitted: 30 degrees
Max. height of sign permitted, 14'-0"


* Note: L = Width of sign

** Anchoring eyelet for barriers only.
(See Anchorage Eyelet Detail)


ITEM NO. 645.13
OVERPASS MOUNTED SIGN SUPPORT
HIGHWAY SIGNING
645(12)




*Single
Panel*

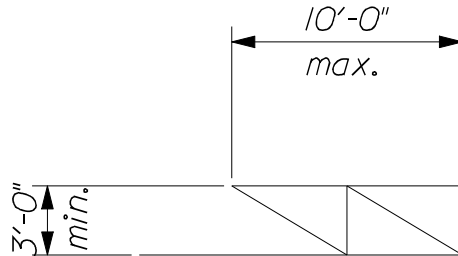

*Two equal
Panels*

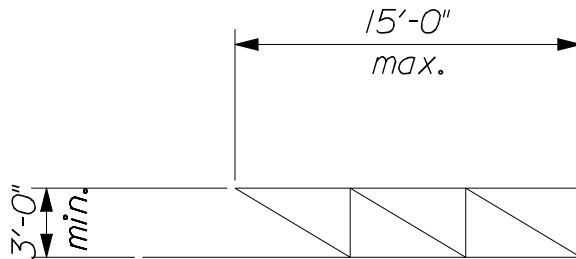


*Three equal
Panels*

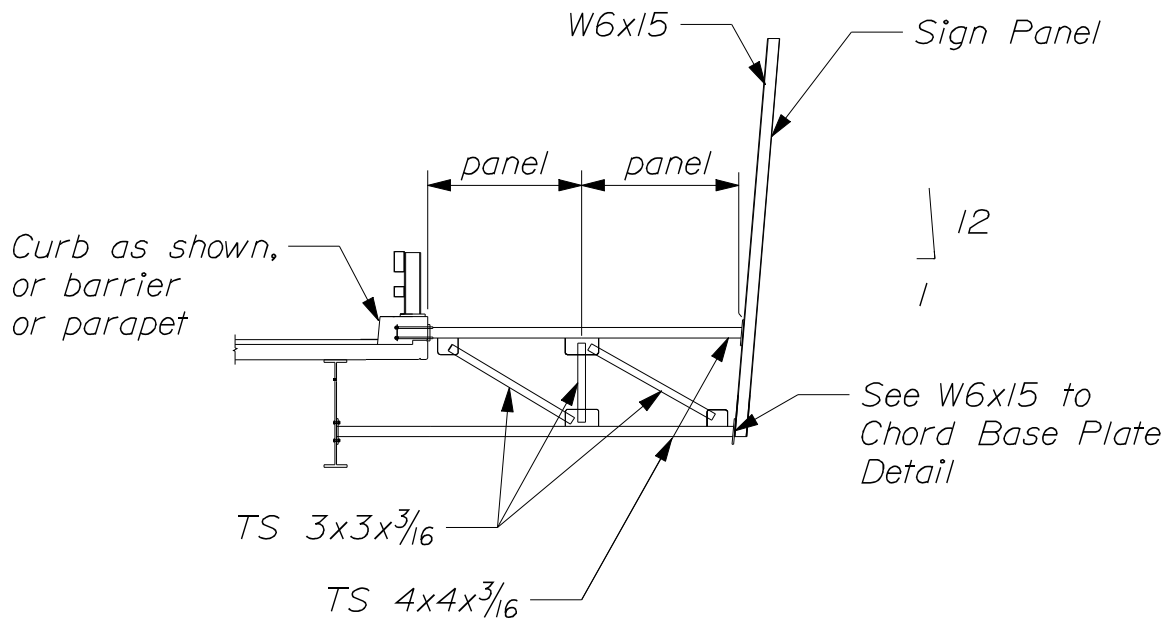


~ TYPICAL ELEVATION - VERTICAL BRACING ~


ITEM NO. 645.13
 OVERPASS MOUNTED SIGN SUPPORT
 HIGHWAY SIGNING
 645(13)




~ PLAN VIEW
2 - BRACKET ~




~ PLAN VIEW
2 - BRACKET ~

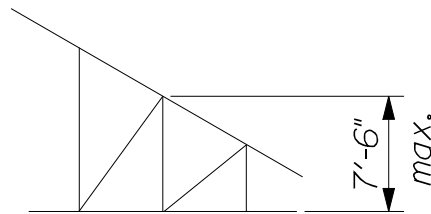


~ PLAN VIEW
3 - BRACKET ~

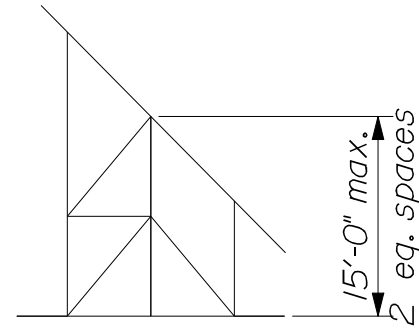

~ PLAN VIEW
3 - BRACKET ~

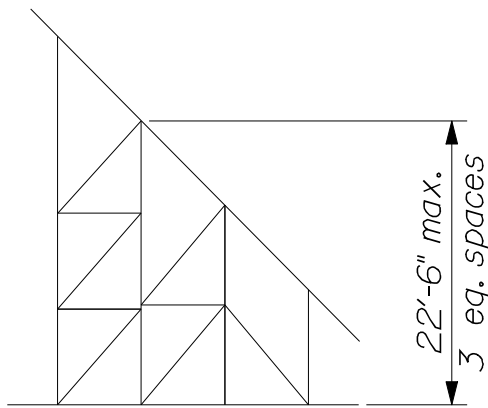

~ PLAN VIEW
4 - BRACKET ~

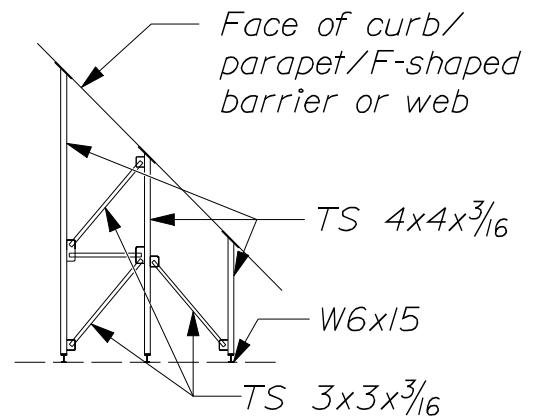


~ TYPICAL LATERAL
BRACING ~

~ TYPICAL LATERAL BRACING TOP OR BOTTOM ~

ITEM NO. 645.13
OVERPASS MOUNTED SIGN SUPPORT
HIGHWAY SIGNING
645(14)




645(15)

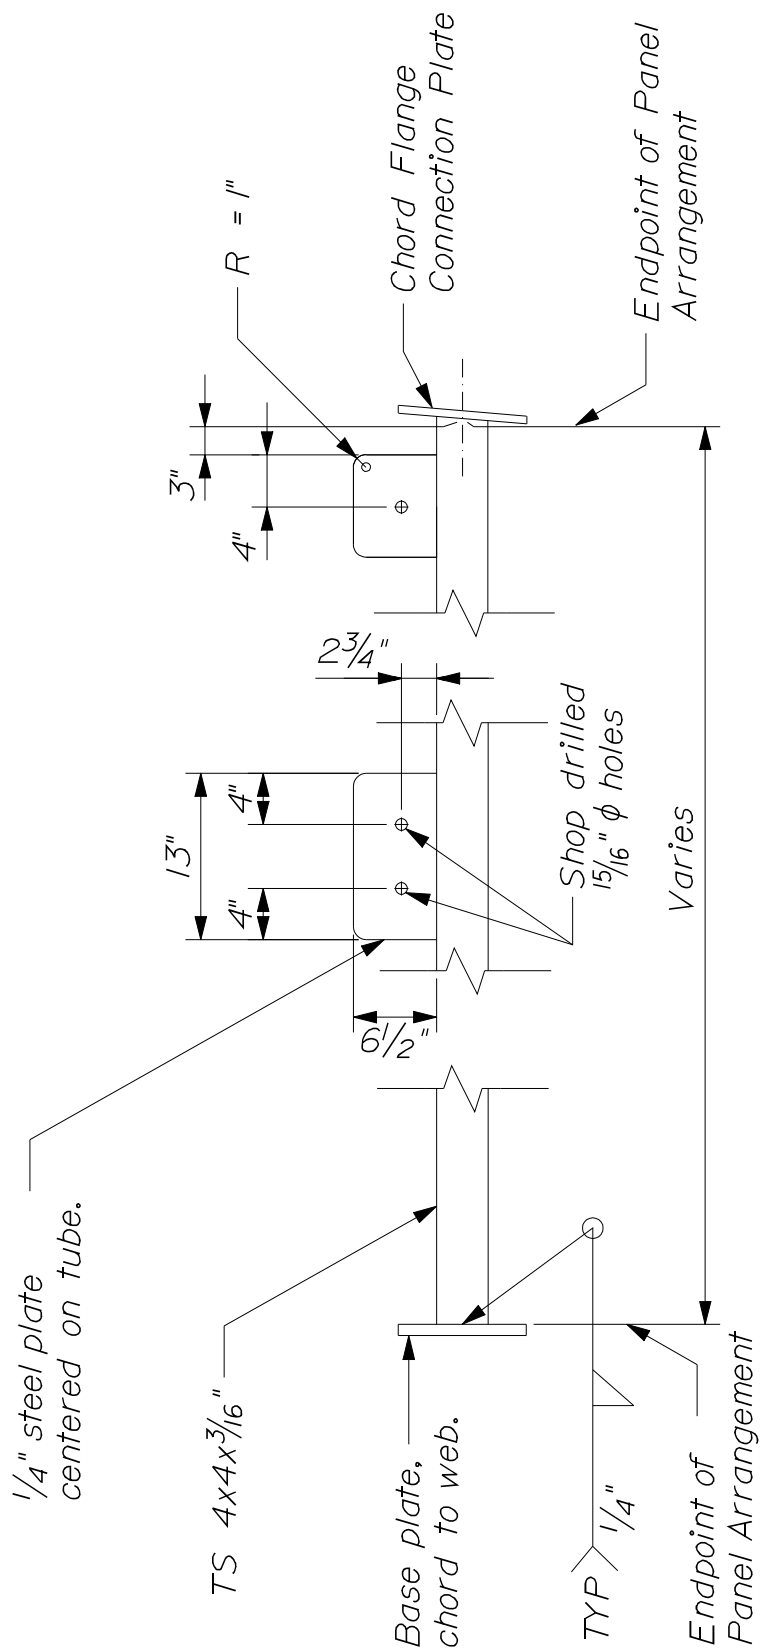


~ TYPICAL BOTTOM CHORD ~

ITEM NO. 645.13
 OVERPASS MOUNTED SIGN SUPPORT
 HIGHWAY SIGNING
 645(16)

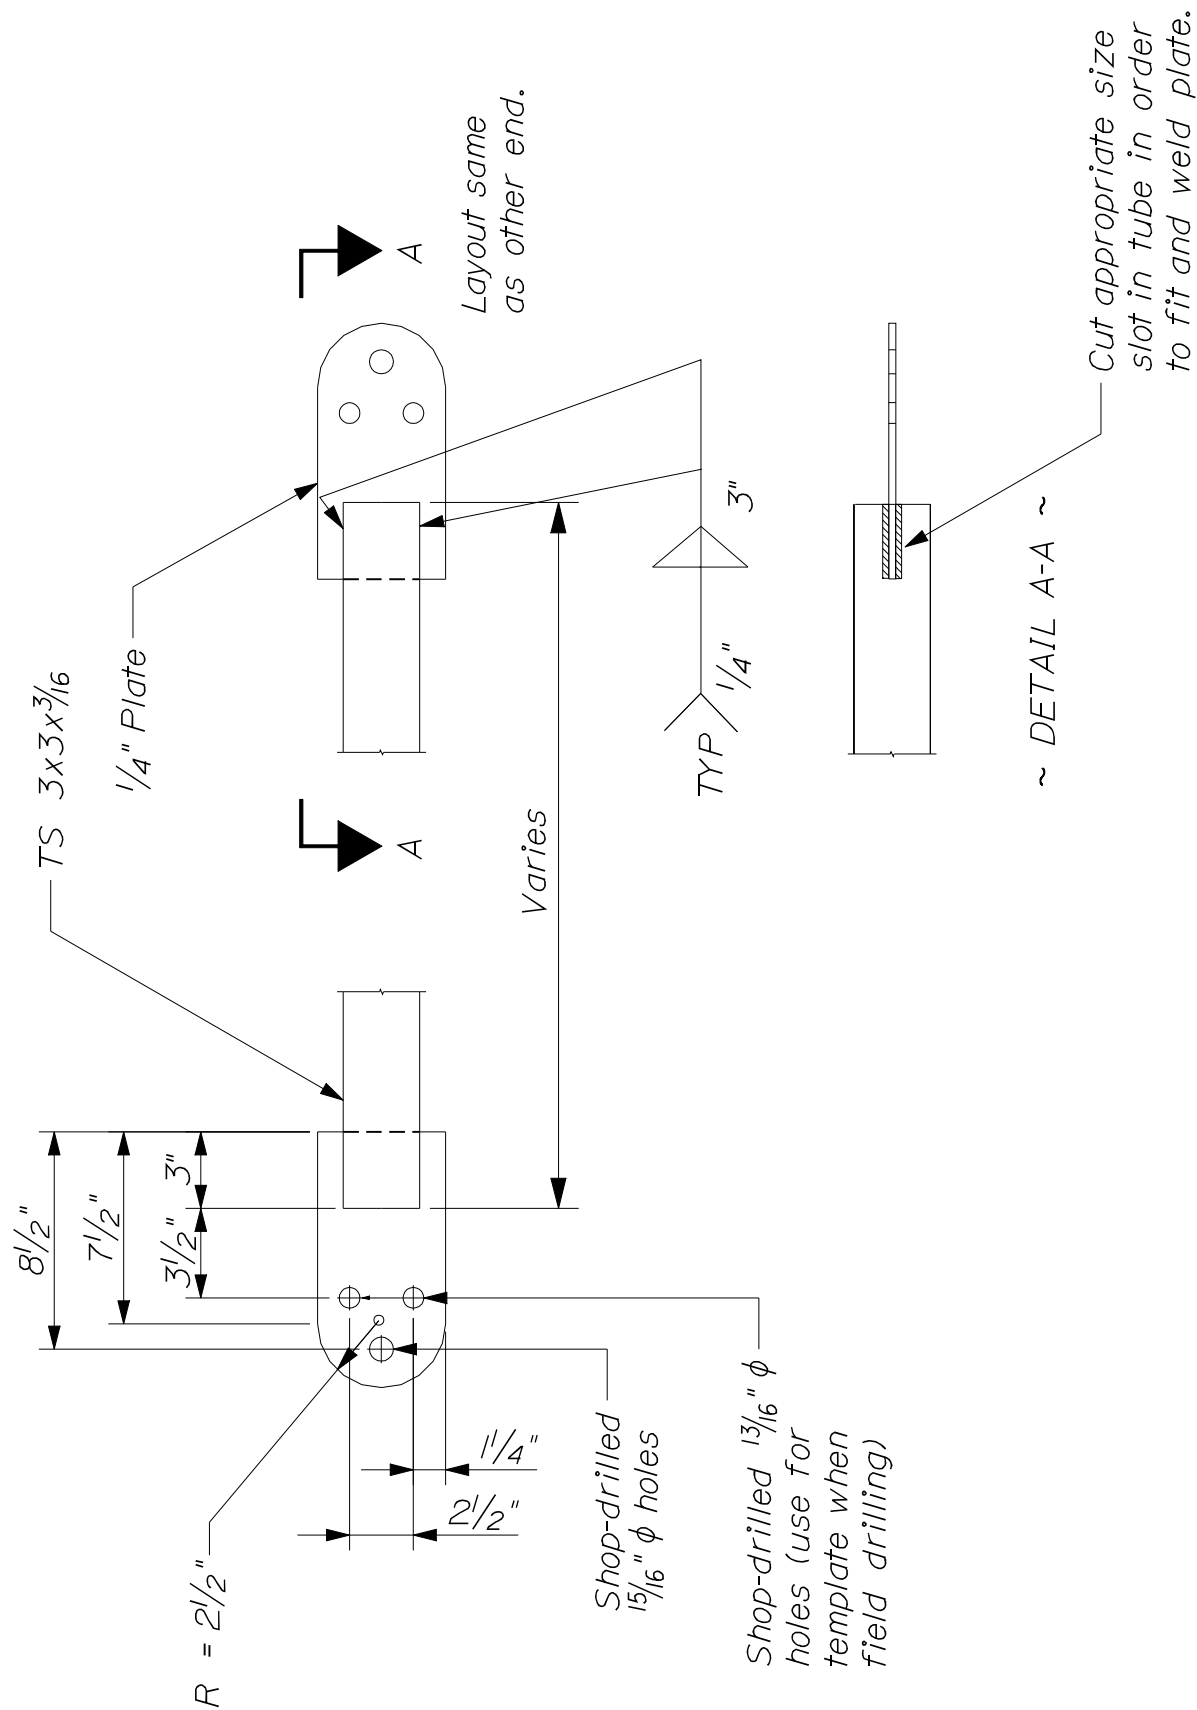


~ TYPICAL LATERAL AND VERTICAL BRACE ~

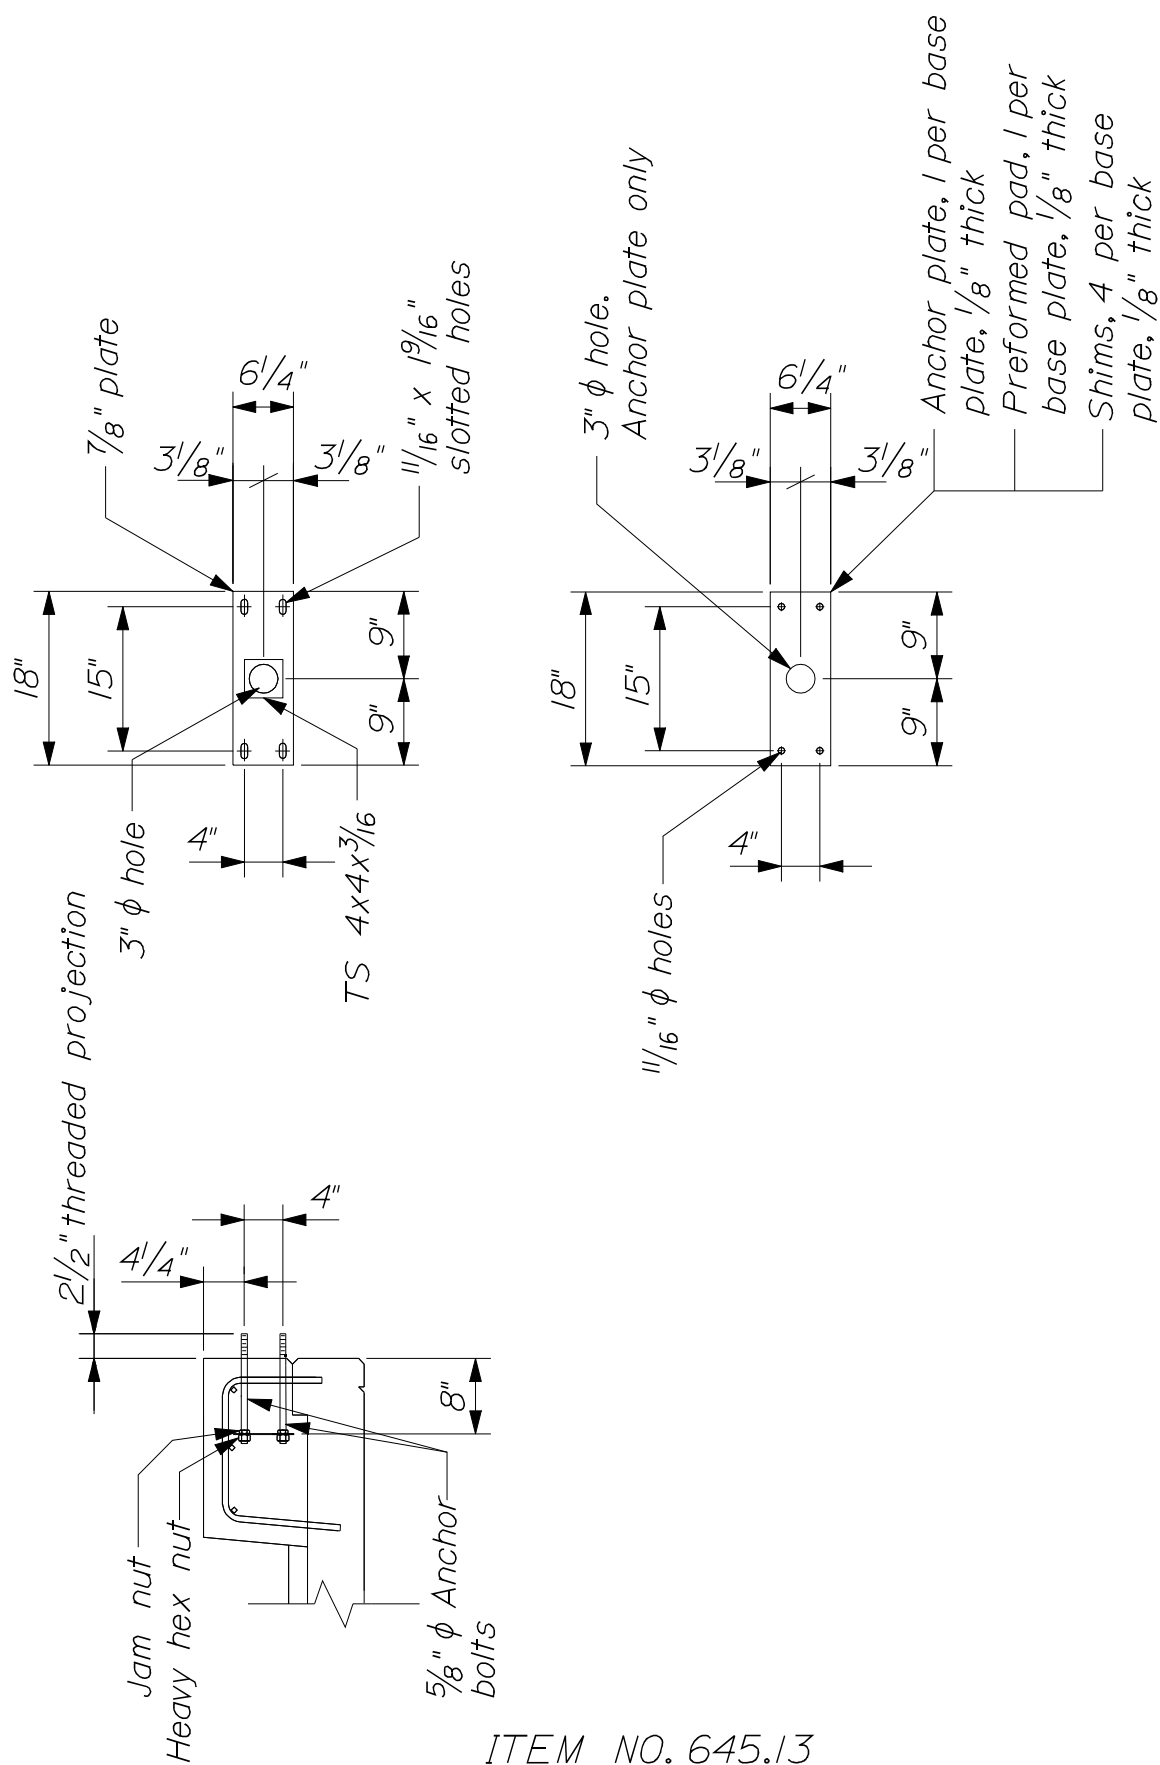



~ CURB TO CHORD BASE PLATE AND ANCHOR BOLT SYSTEM ~

ITEM NO. 645.13
 OVERPASS MOUNTED SIGN SUPPORT
 HIGHWAY SIGNING
 645(18)

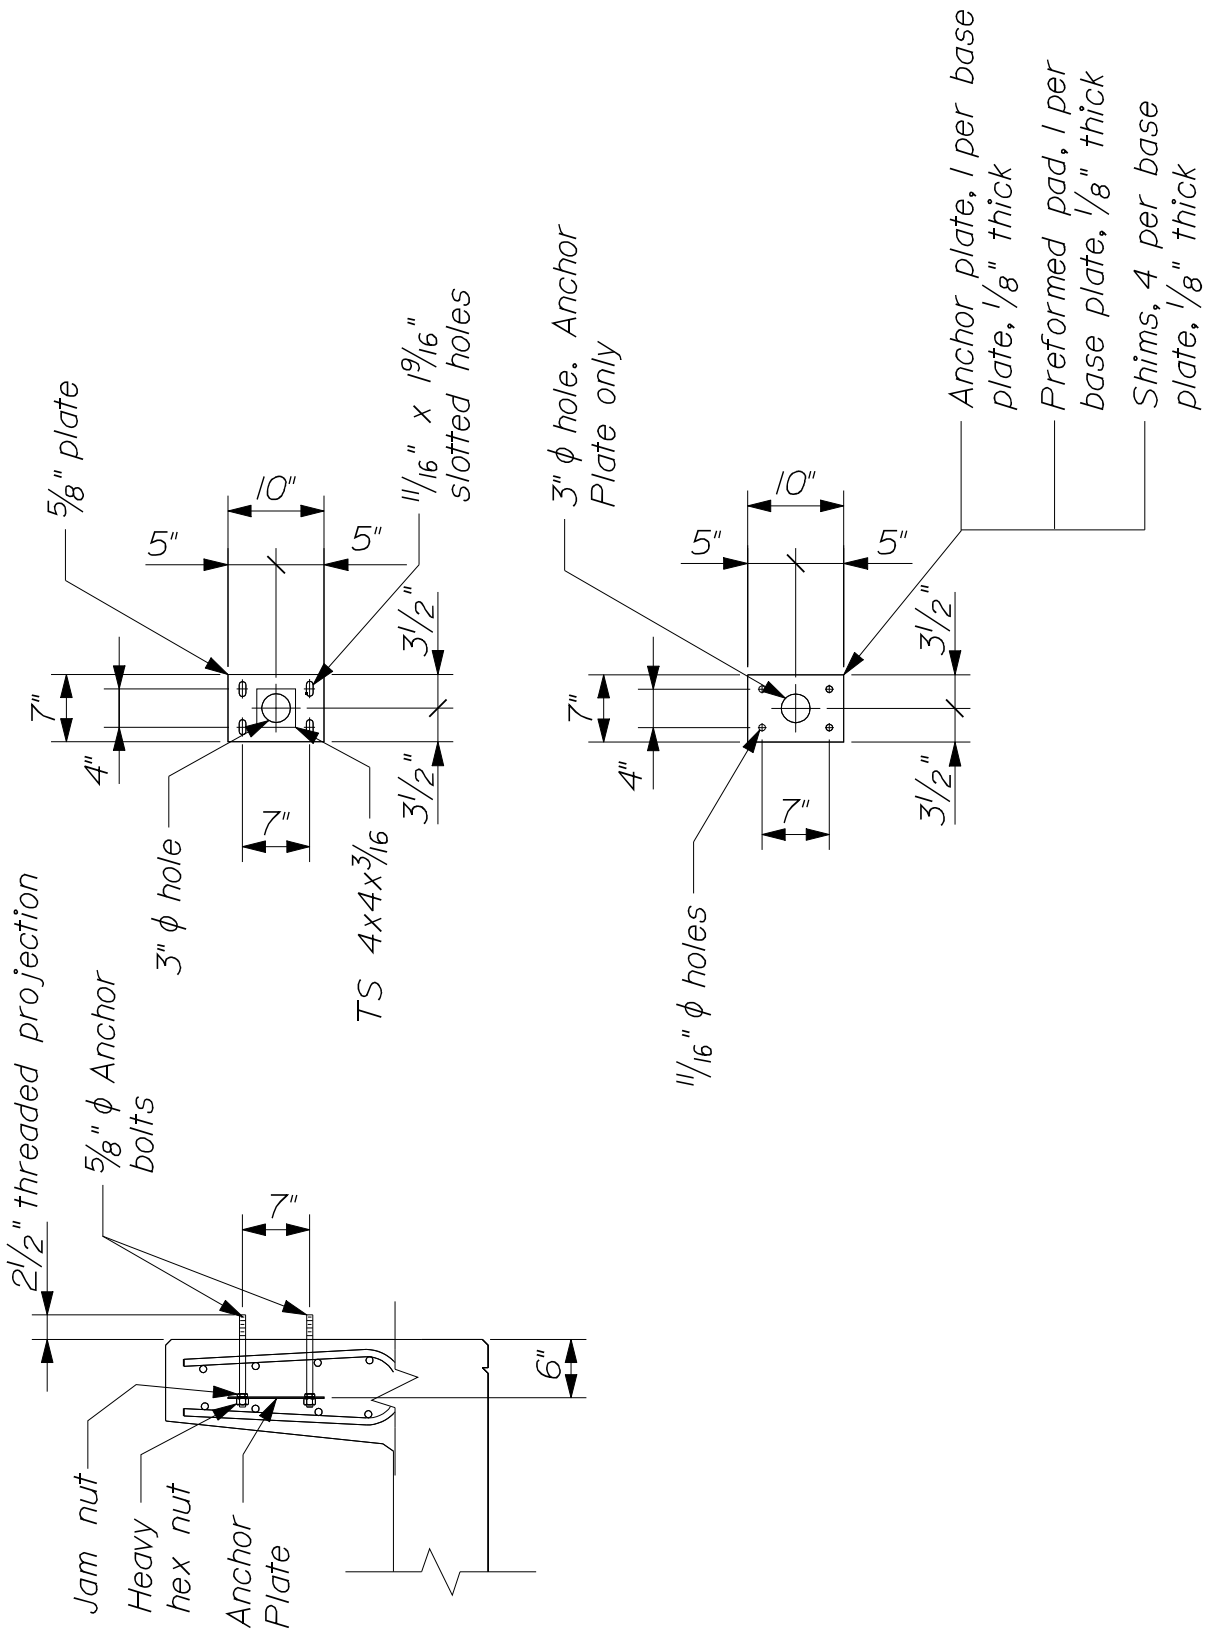

ITEM NO. 645.13
 OVERPASS MOUNTED SIGN SUPPORT
 HIGHWAY SIGNING
 645(19)

~ BARRIER/STEEL BEAM TO CHORD BASE PLATE AND ANCHOR BOLT SYSTEM ~

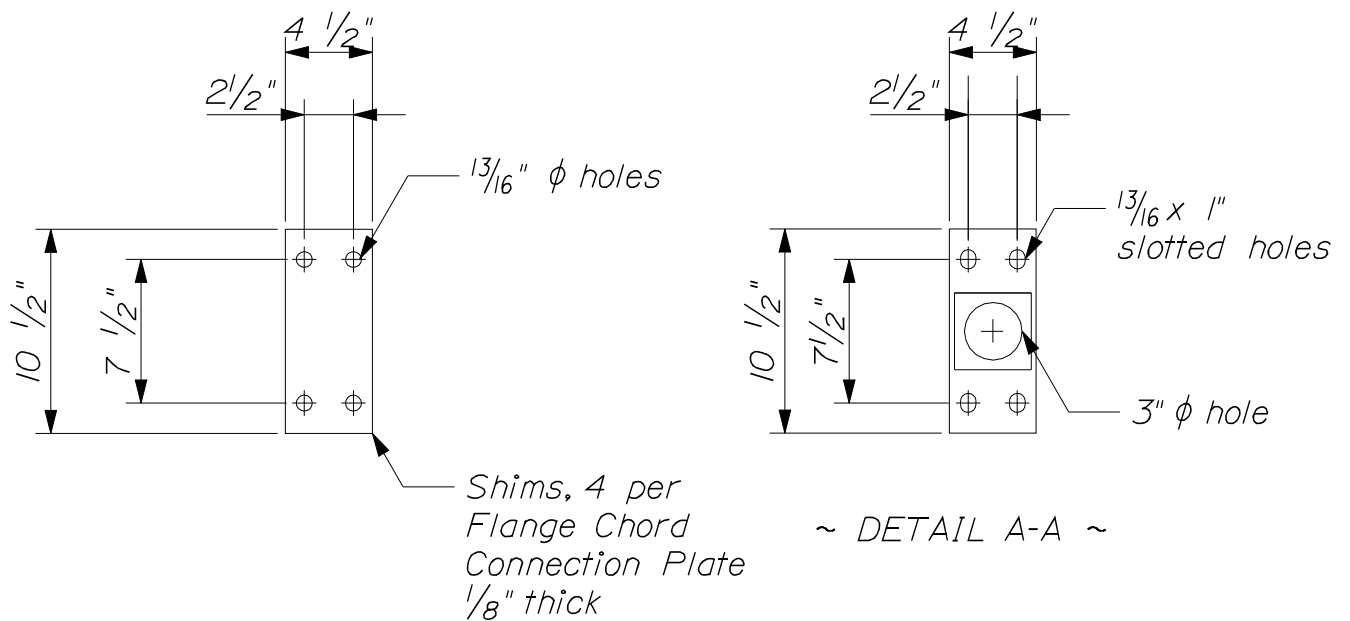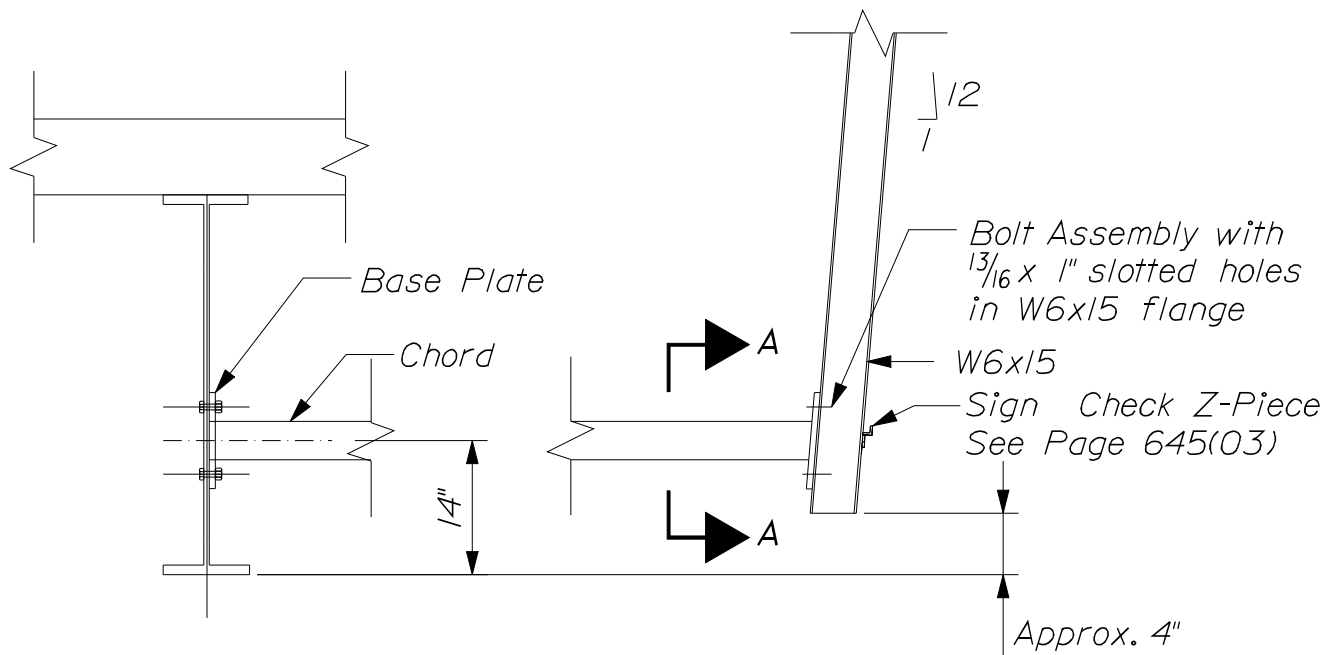

ITEM NO. 645.13
 OVERPASS MOUNTED SIGN SUPPORT
 HIGHWAY SIGNING
 645(20)

* Anchorage Eyelet shall be attached so that it is capable of supporting a dead weight load of 5400 lbs (2400 kN)

Anchorage Eyelet shall be stainless steel or shall or be galvanized to the requirement of ASTM A153, ASTM F2329, or ASTM B695 class 50 type 1.


a. Block-out opening is 6" high by 6" wide.

b. Drill hole for eyelet shank $\frac{1}{4}$ " larger than shank diameter and fill void with grout selected from MaineDOT Prequalified List of Anchoring Material

c. Following installation of eyelet hardware, patch block-out with an MaineDOT approved patching material that matches the barrier concrete.

d. Nuts shall meet the requirements of ASTM A563.

e. Washers shall meet the requirements of ASTM F436.

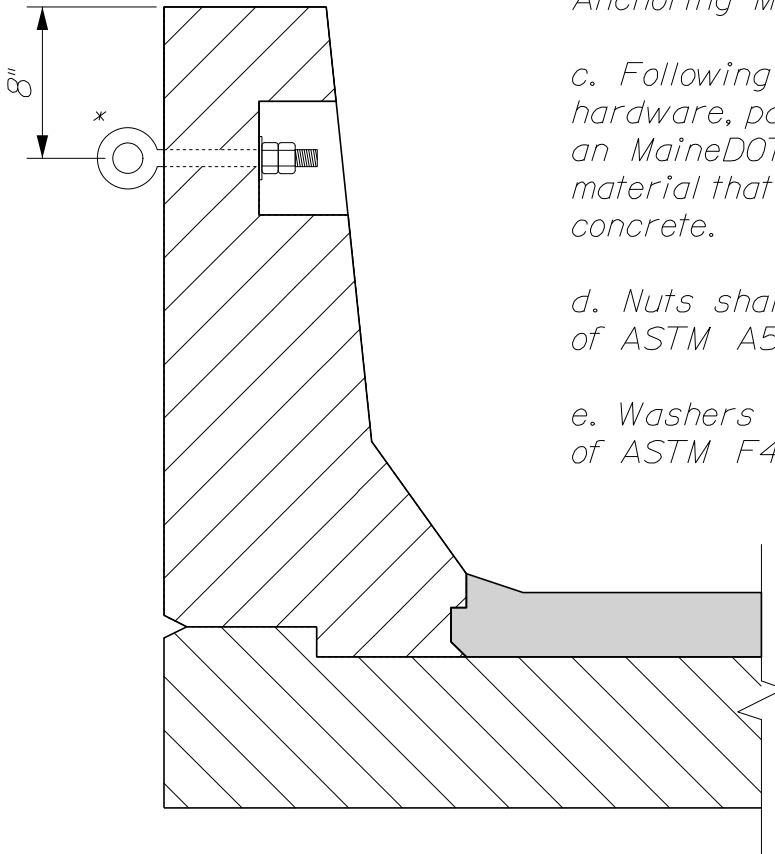

~ ANCHORAGE EYELET DETAIL ~

ITEM NO. 645.13

OVERPASS MOUNTED SIGN SUPPORT
HIGHWAY SIGNING

645(21)

NOTES:

1. *The support frame dimensions shall be determined by the Contractor. These shall be based on the sign size, bridge skew angle, and cross-sectional geometry. Field verification of these parameters is the responsibility of the Contractor. The Contractor shall consider the possibility of interferences such as splice plates, drains, stiffeners, etc. in developing the shop drawings.*
2. *The Contractor shall select an appropriate layout using the views in these Standards as a guide in order to determine the number of brackets, the configuration of the vertical bracing and the configuration of the lateral bracing.*
3. *The support frame is designed such that the Contractor may fasten chords, vertical and horizontal bracing using a single bolt per connection in an oversized hole for erection purposes. When the frame is in final desired position, adjustments may be accomplished and remaining bolt holes may be drilled in the field using the connected components as a template.*
4. *The Contractor shall select an appropriate chord base plate for attaching to a concrete barrier, curb or parapet, using the views in these Standards as a guide. An accommodating anchor bolt system shall be selected from this Standard.*
5. *All work and materials shall conform to the applicable provisions of Section 504, Structural Steel, of the Standard Specification Highways and Bridges.*
6. *All Steel components shall be galvanized after fabrication in accordance with ASTM A123, except that hardware used in the connections of the structural frame shall meet the requirements of either ASTM A153, ASTM F2329 or ASTM B695, Class 50, Type I. Parts except hardware shall be blast-cleaned prior to galvanizing in accordance with SSPC-SP6.*
7. *Materials:*

Hollow steel sections shall meet the requirements of ASTM A500, Grade B.

Steel plate shall meet the requirements of ASTM A572/A572M, Grade 50/345 (AASHTO M223M/M223, Grade 345/50). Steel shapes shall meet the requirements of ASTM A992M/A992.

Steel shim plates shall meet the requirements of ASTM A36M/A36.

ITEM NO. 645.13
OVERPASS MOUNTED SIGN SUPPORT
HIGHWAY SIGNING
645(22)


Bolting assemblies used in the connections of the structural frame shall be Heavy Hex Head 3/4" and meet the requirements of ASTM A325. The Contractor shall select appropriate bolt lengths.

Anchor bolt assemblies used to fasten the structural frame to a concrete curb, barrier or parapet shall meet the requirements of ASTM A449, Type I with a minimum yield strength of 55KSI.


Remaining materials used shall be as specified elsewhere in these Standards or in the Contract Documents.

- 8. Fastener nuts in anchor and bolt assemblies shall be tightened to a snug fit and given an extra 1/8 turn. Fastener assemblies in oversized holes shall have washers under bolt heads and nuts.*
- 9. Holes that are field drilled shall be coated with an approved zinc-rich primer prior to final erection.*
- 10. A random 25% of all base plate to chord welds and chord to Flange Connection Plate welds shall be MT inspected. Only a one-time repair is allowed on these welds without written permission of the Engineer. All other welds shall be subject to VT inspection.*
- 11. Anchor bolts shall be installed with misalignments of less than 1:40 from theoretical location.*
- 12. An anchorage eyelet shall be installed approximately midpoint between each bracket when a concrete barrier is utilized as the top chord attachment.*
- 13. Preformed pads, specified in Section 713, Structural Steel and Related Material, of the Standard Specifications Highways and Bridges, shall be placed between each chord base plate and concrete surface.*
- 14. The Contractor may use shim plates, as provided by this Standard, beneath all base plates and Flange Connection Plates as necessary, up to an adjustment of 1/2".*

ITEM NO. 645.13
OVERPASS MOUNTED SIGN SUPPORT
HIGHWAY SIGNING
645(23)

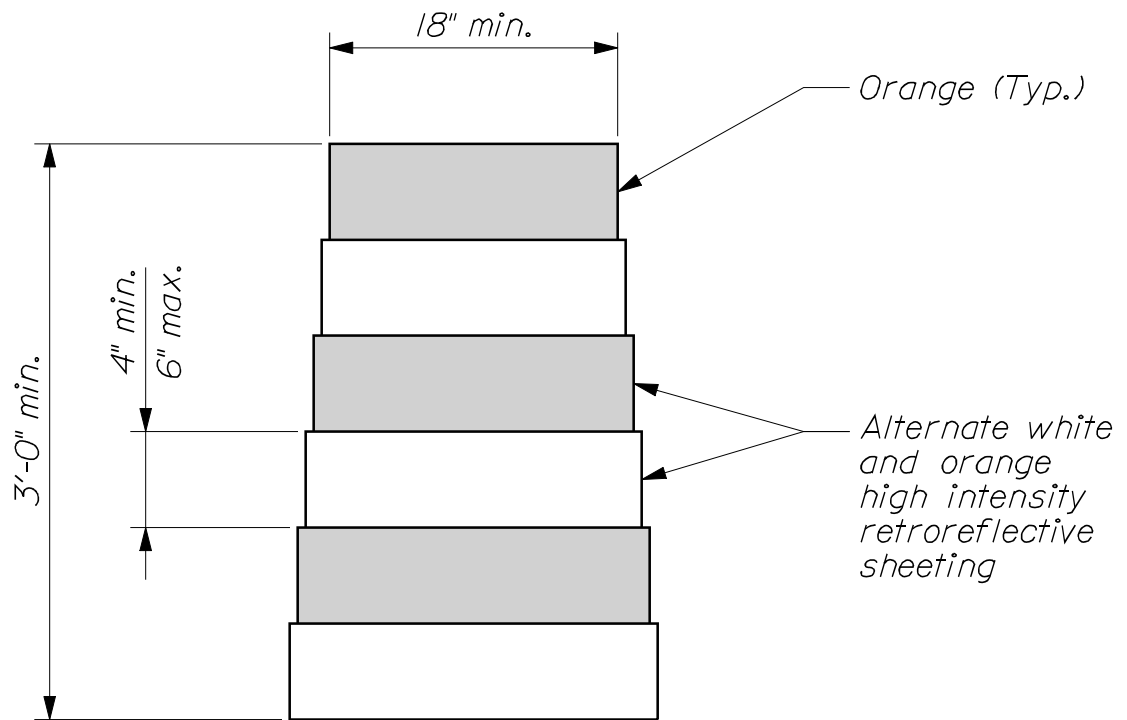


~ DRUM ~
(Non - metal)

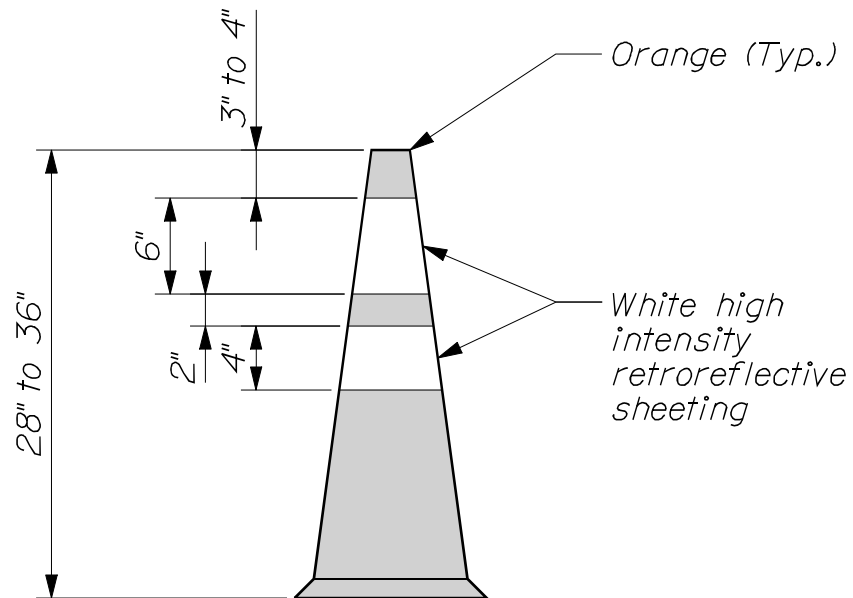


~ CONE ~
(Standard)

CHANNELIZING DEVICES


652(01)

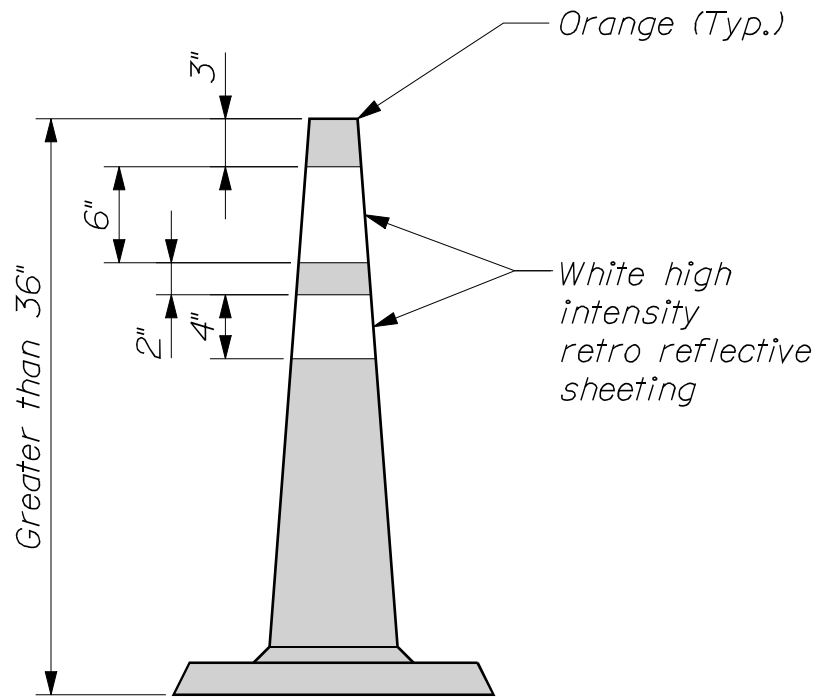

~ CONE ~
(High Ballasted)

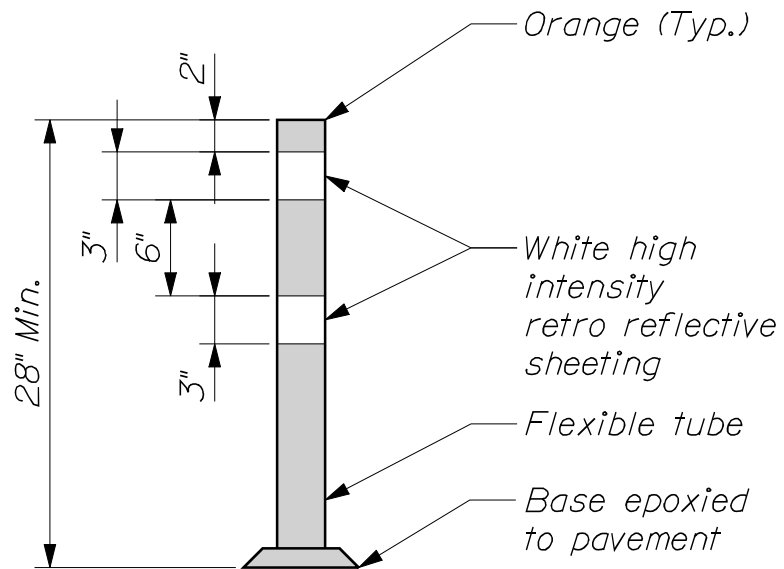

~ TUBULAR MARKERS ~
(Flexible)


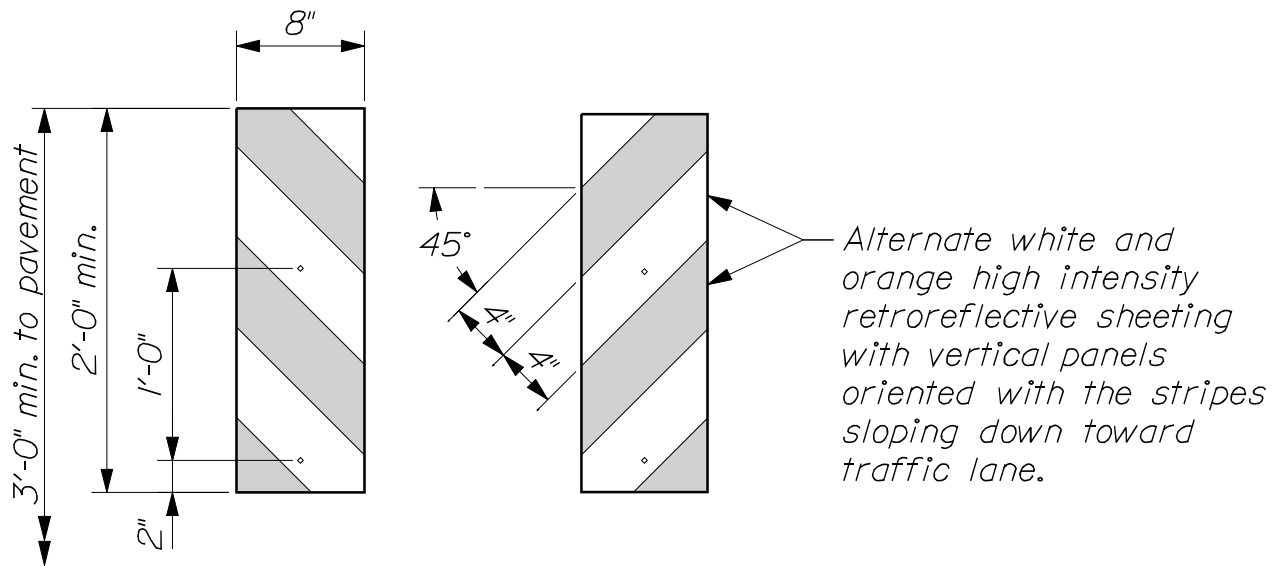


Where the height of the vertical panel itself is 36" or greater a panel stripe width of 6" shall be used.



~ VERTICAL PANELS ~

NOTES:



1. Vertical panels shall have alternate orange and white high intensity retroreflective stripes as shown.
2. Drums may be weighted with up to 22 Lbs of dry sand.
3. Ballast shall not be placed on top of a drum.
4. Temporary raised pavement marker color shall correspond with pavement striping color as follows: clear markers for white striping and amber markers for yellow striping.



Type "A"



Type "B"




Type "C"


~ RAISED PAVEMENT MARKERS ~

CHANNELIZING DEVICES

652(04)

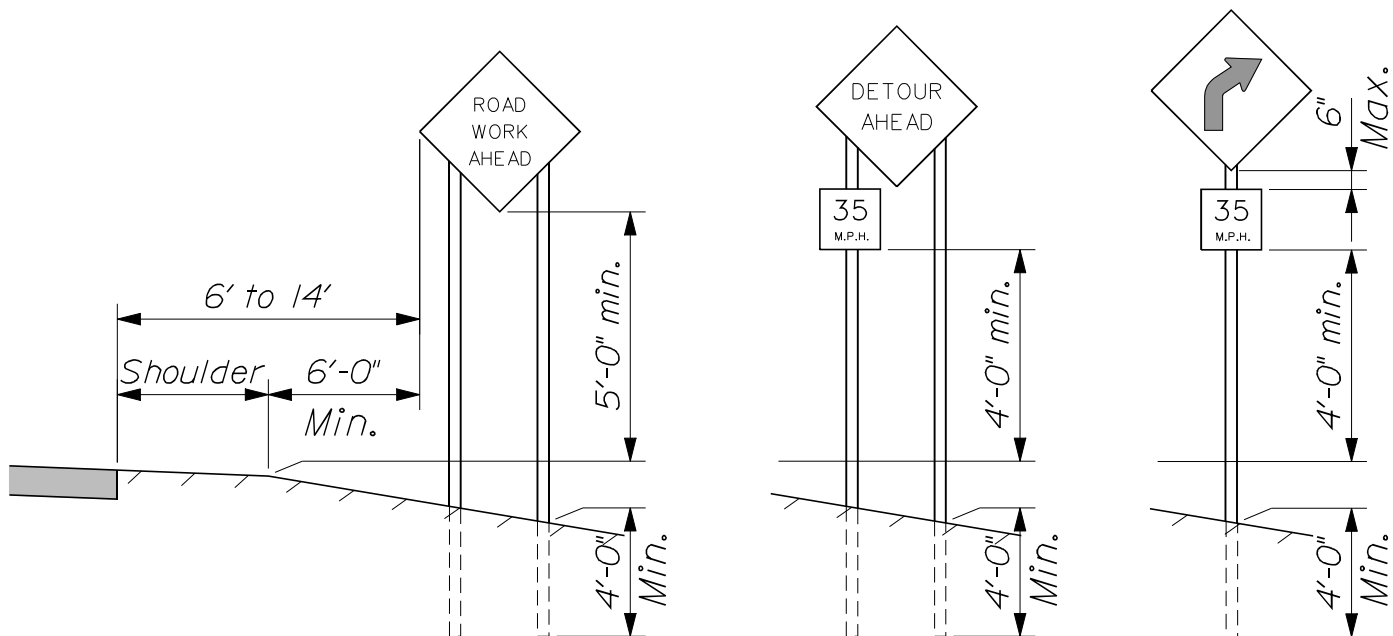

~ RURAL AREA ~
(Fixed signs)

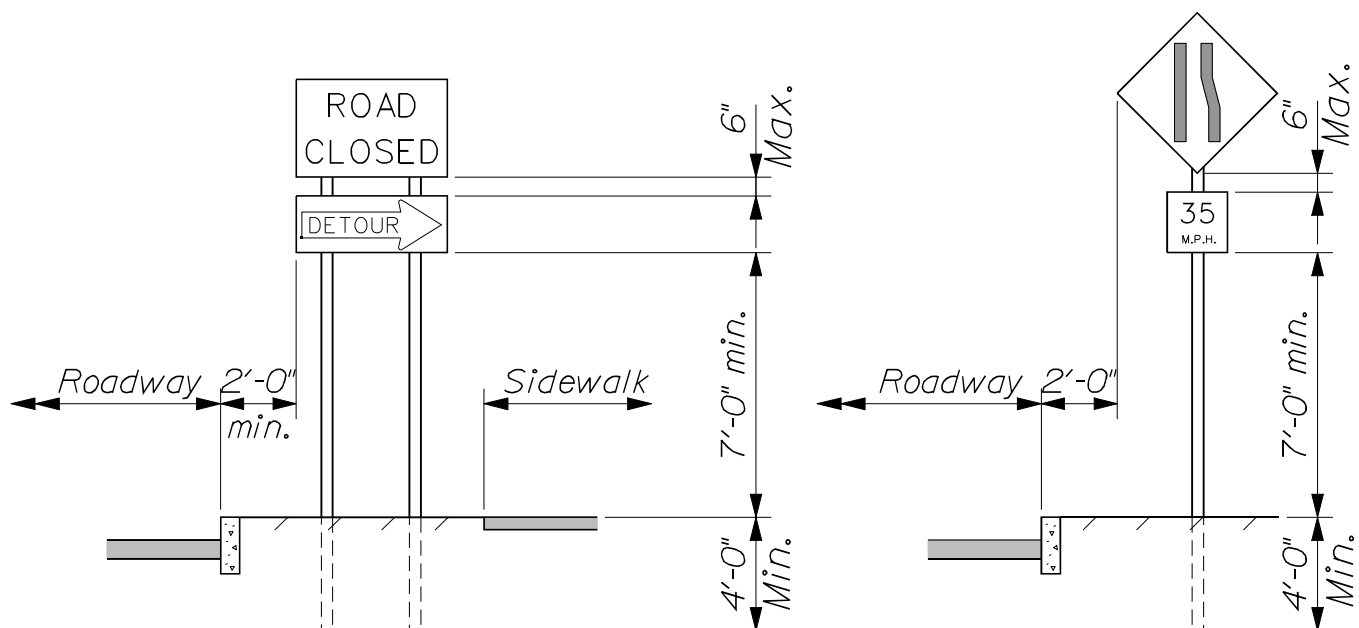


~ URBAN AREA ~
(Fixed signs)

CONSTRUCTION SIGNS
652(05)

NOTES;

- 1. All signs shall conform to the applicable provisions of the current edition of the "Manual on Uniform Traffic Control Devices for Streets and Highways", FHWA; and to "Standard Highway Signs", FHWA. Refer to current edition of MUTCD.*
- 2. Steel U-channels are required as sign posts.*
- 3. Mount signs that are wider than 3 feet or larger than one square yard in area on two or more posts.*
- 4. When parking is permitted within 200 feet of the sign, mount the sign a minimum of 7 feet above the pavement surface.*
- 5. When using lap splice see detail 645(09)A for installation requirements.*

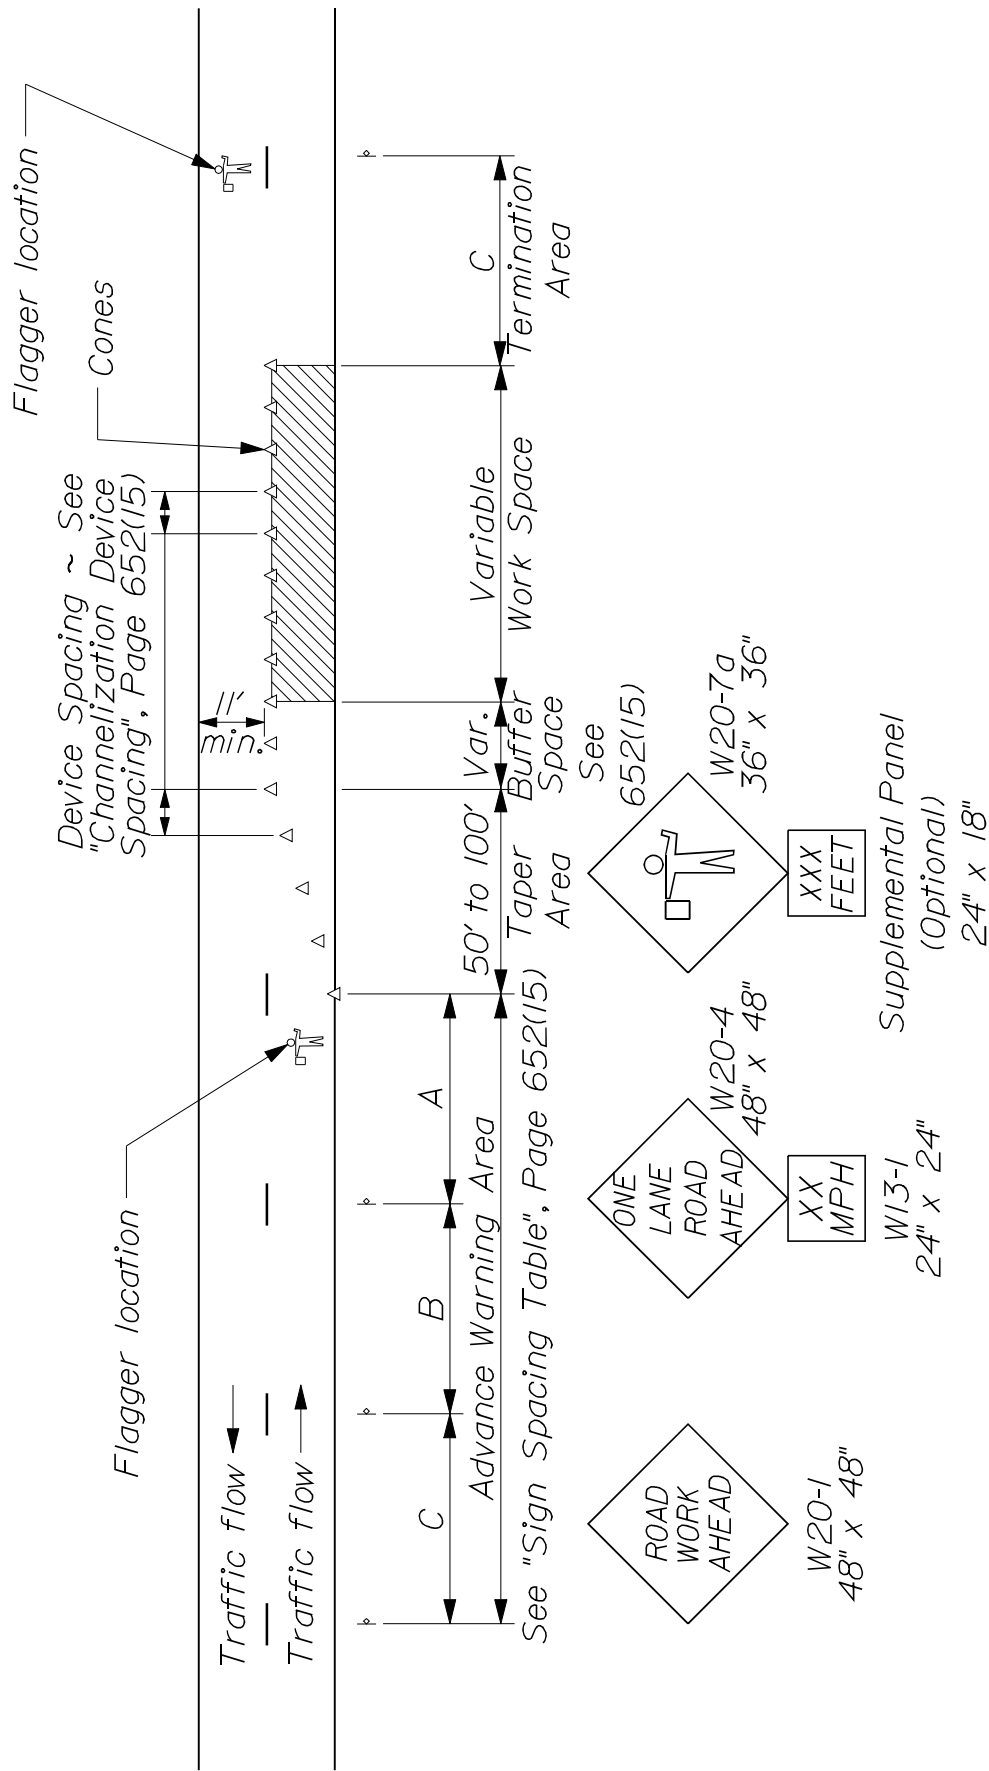

CONSTRUCTION TRAFFIC CONTROL 652(07)


~ TYPICAL APPLICATION: TWO - WAY, TWO LANE ROADWAY,
CLOSING ONE LANE USING FLAGGERS ~

CONSTRUCTION TRAFFIC CONTROL

652(08)

NOTES:


1. For operations that require a shoulder closure for a day or less, drums may be replaced with Type "A" Cones.

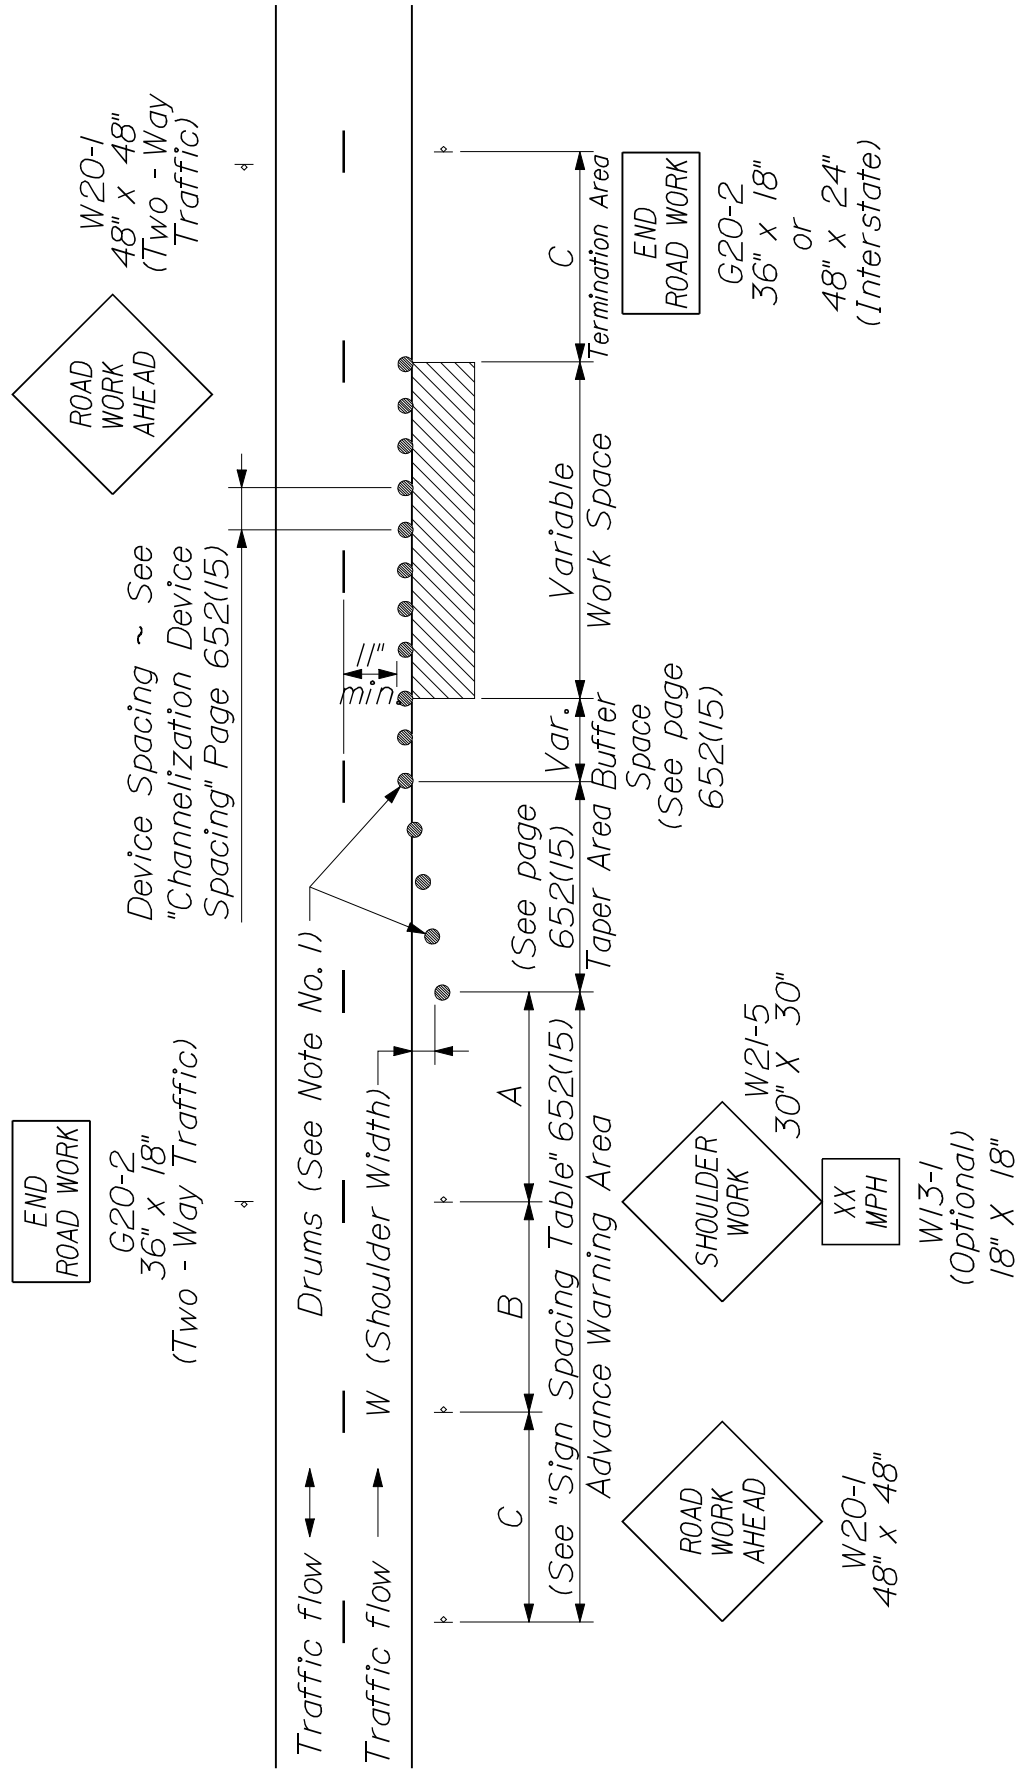

~ TYPICAL APPLICATION: ONE - WAY OR TWO - WAY, TWO LANE ROADWAY, CLOSING SHOULDER ~

NOTES:

1. Barrier placement is in accordance with the most current edition of the AASHTO Roadside Design Guide.
2. Terminate barrier ends outside the clear zone or protect the ends with an impact attenuator.
3. Right lane closure is shown. For left lane closure, substitute signing with W20-5L & W4-2L.

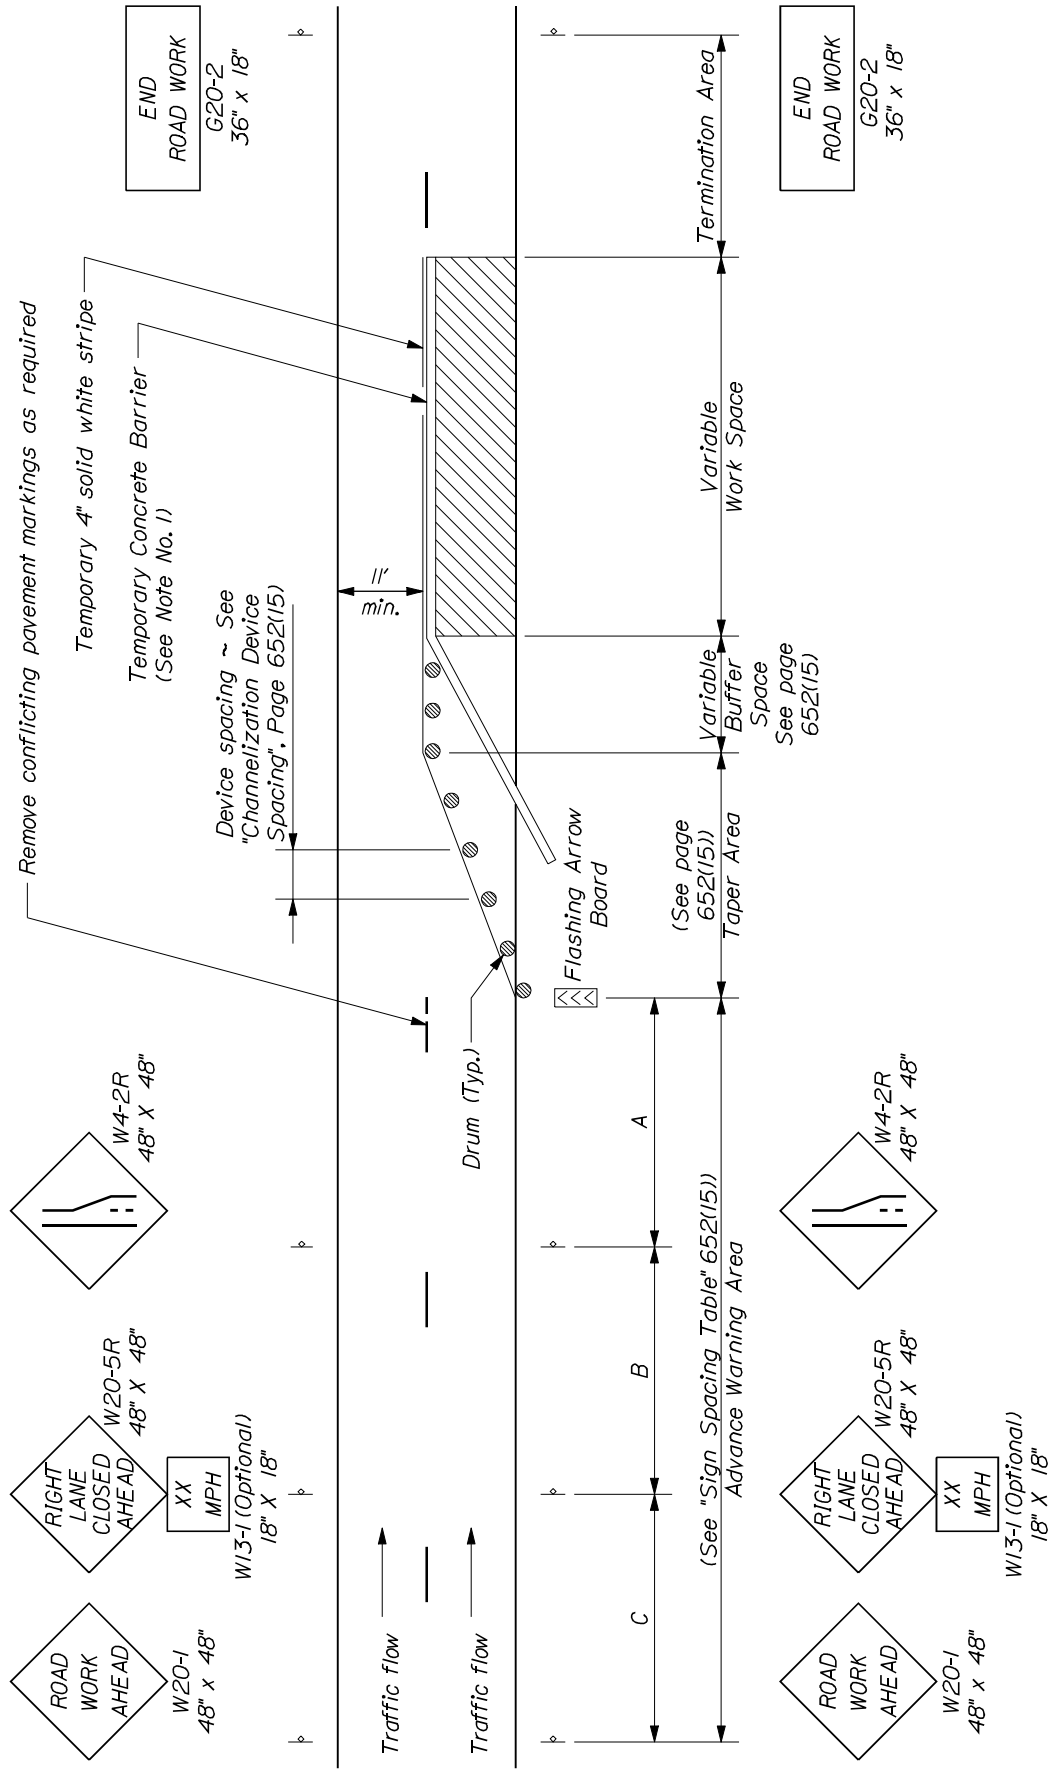


CONSTRUCTION TRAFFIC CONTROL 652(09)

~ TYPICAL APPLICATION: NON-INTERSTATE, ONE-WAY, TWO LANE ROADWAY, CLOSING ONE LANE, USING TEMPORARY CONCRETE BARRIER (55 MPH OR LESS) ~

CONSTRUCTION TRAFFIC CONTROL

652(10)

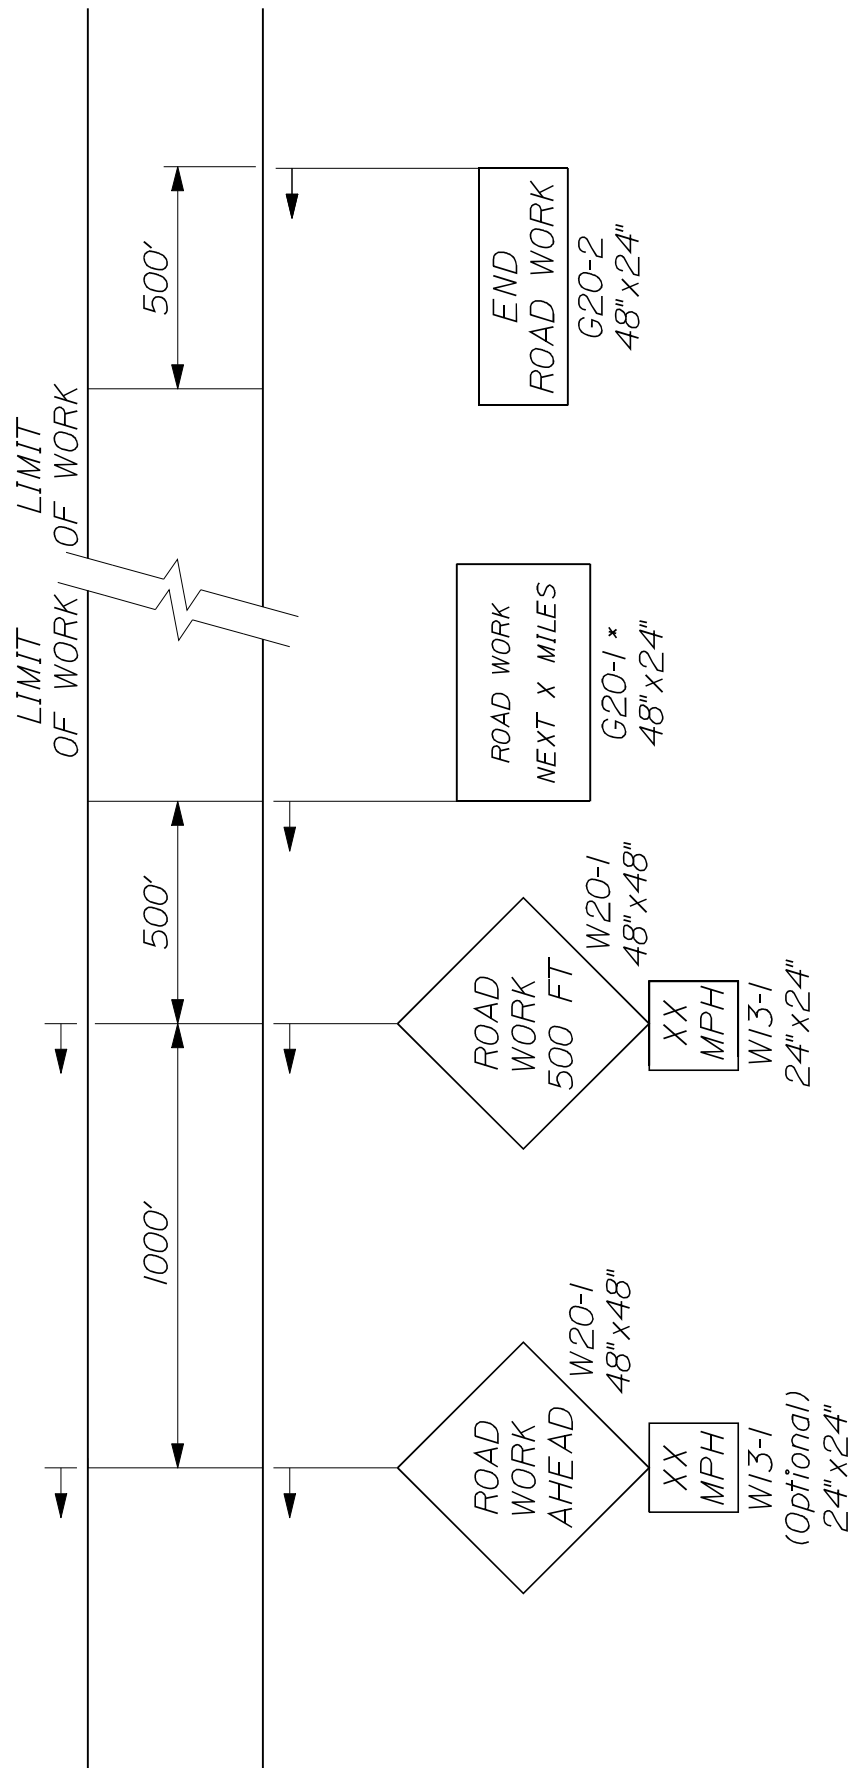

* Round to nearest mile & do NOT use if project length is less than $\frac{3}{4}$ of a mile

~ PROJECT APPROACH SIGNING ~
EXPRESSWAY


Omit W20-1 if lane closure signing array is within project limits.

Alter pavement markings as required.

Use similar signing for left lane closure.

Road Work 2 Miles and 3 Miles signs may be needed, as per resident, based on traffic volume.




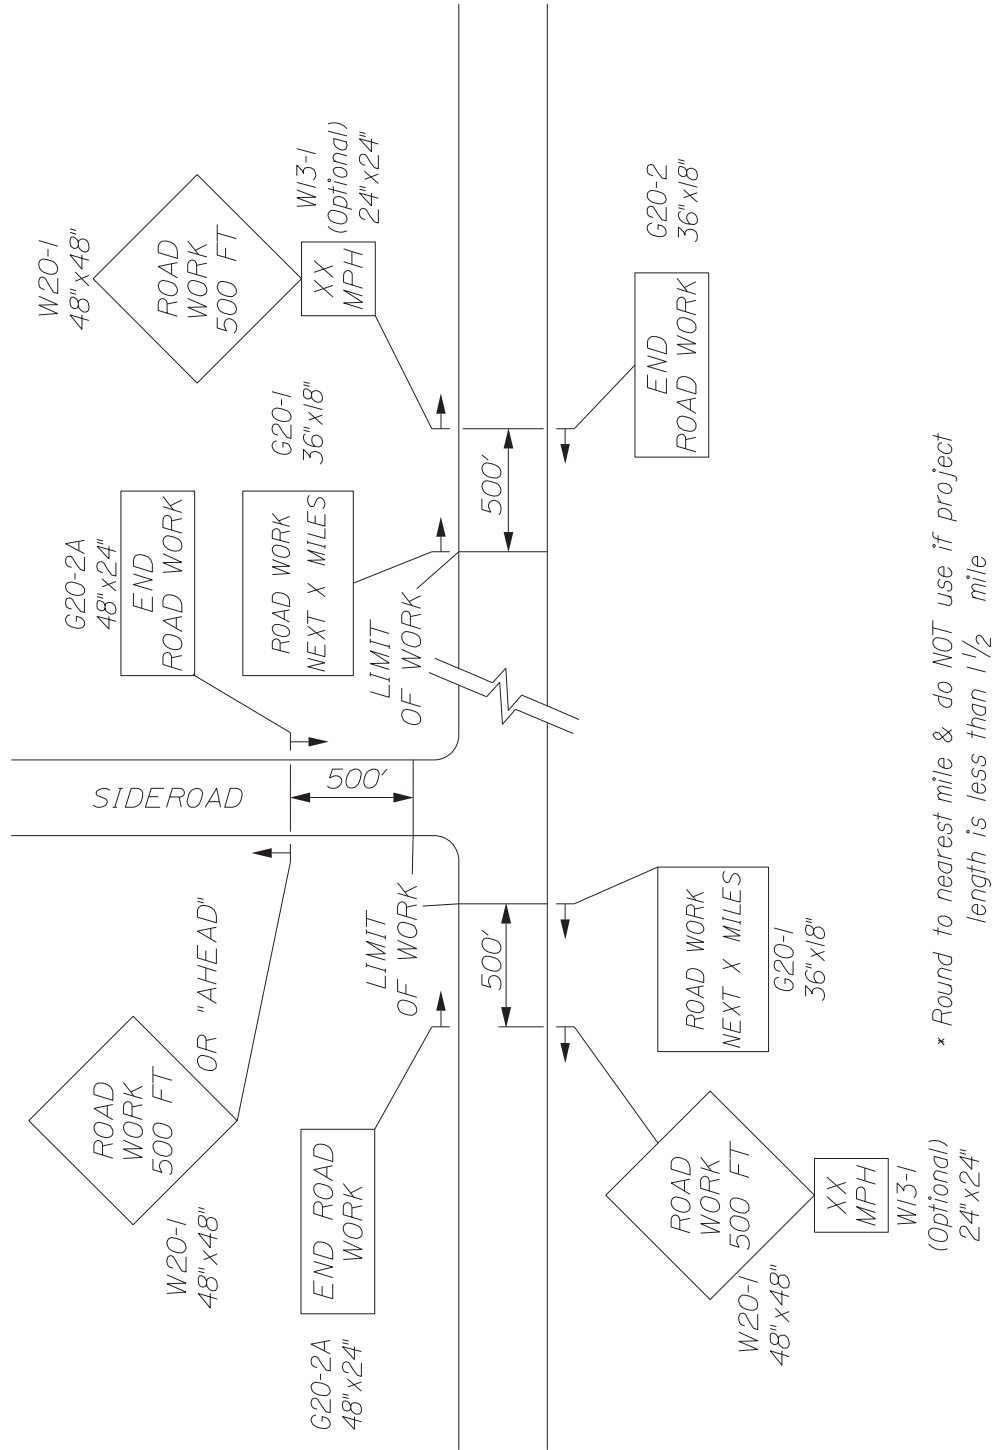

CONSTRUCTION TRAFFIC CONTROL

652(12)

~ PROJECT APPROACH SIGNING ~
TWO WAY TRAFFIC

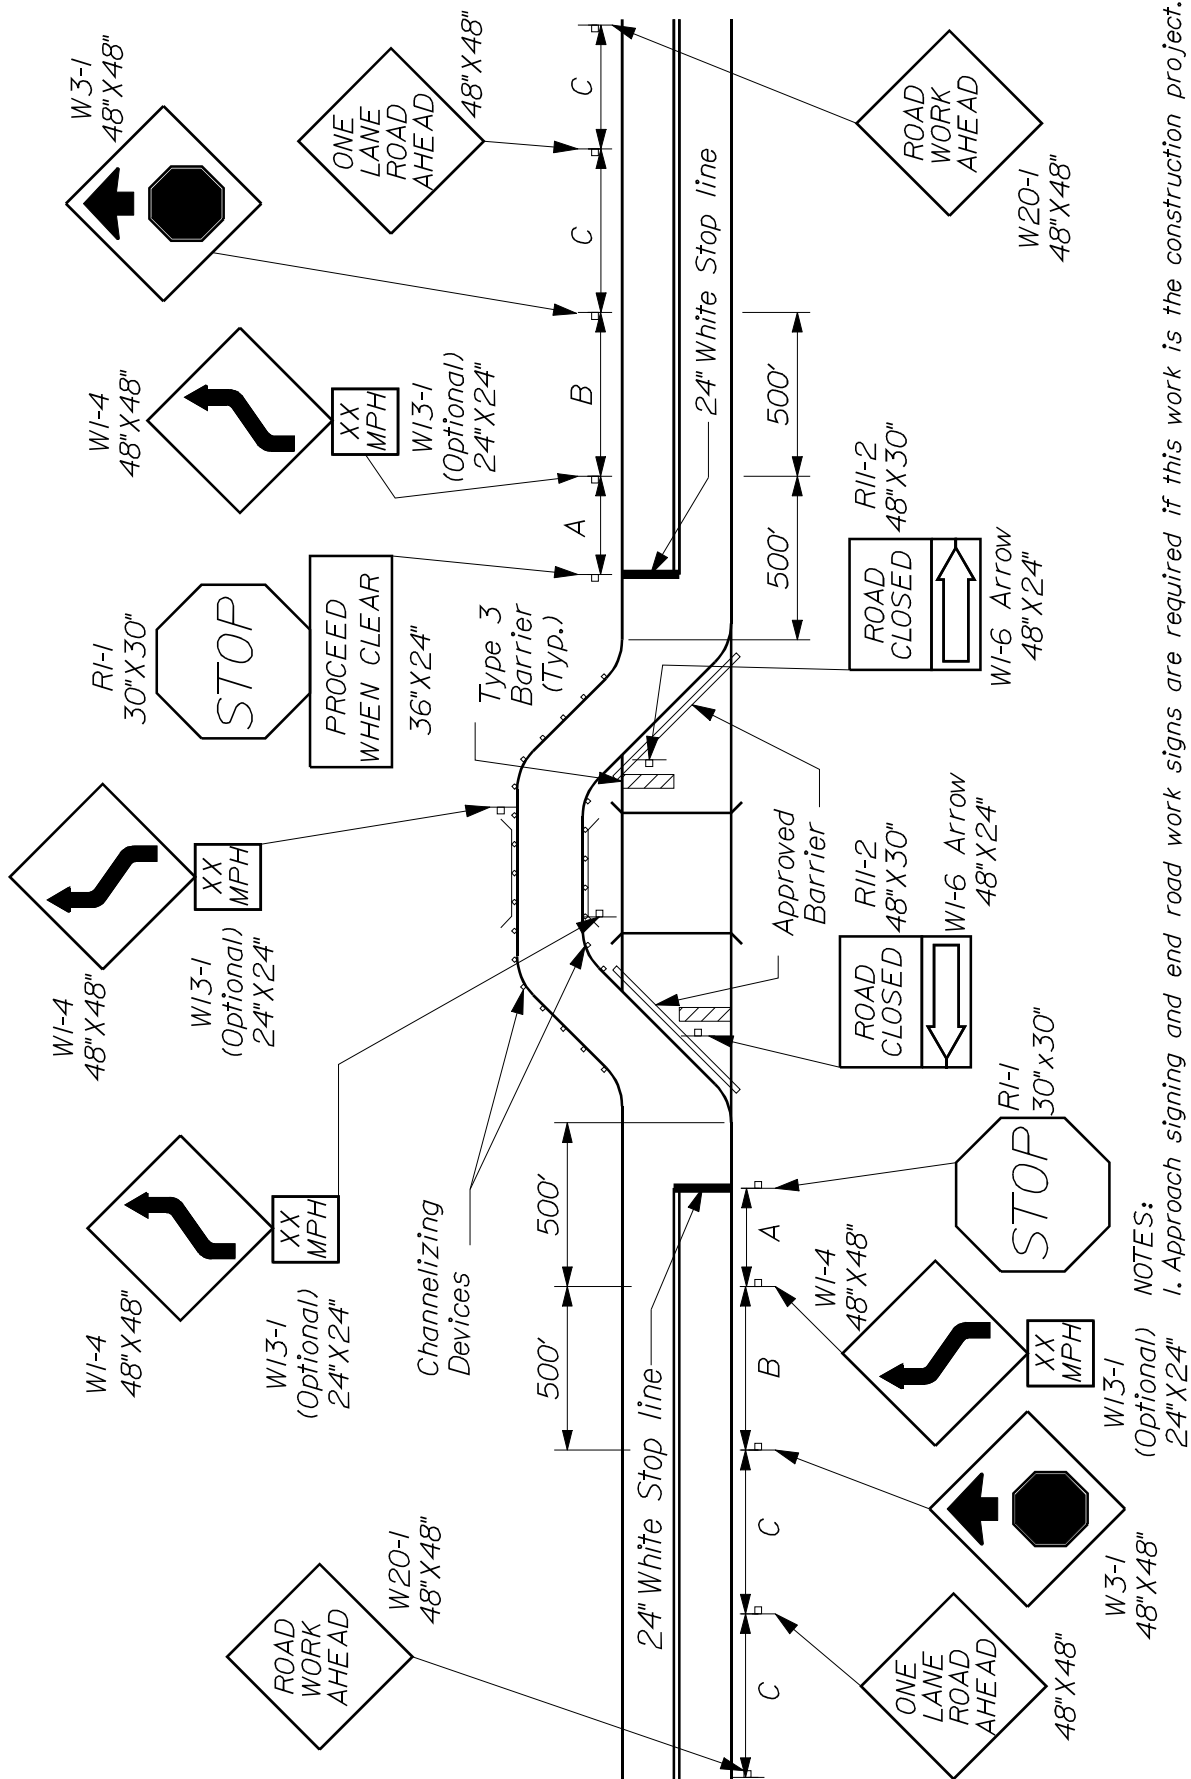

- NOTES:
1. Approach signing and end road work signs are required if this work is the construction project.
 2. If the tangent distance along the temporary diversion is less than 600 feet, a double reverse curve sign (W24-1) may be used in place of the reverse curve sign (W1-4).
 3. Barrier placement shall be in accordance with the current edition of the AASHTO Roadside Design Guide.
 4. Terminate the Barrier ends outside the clear zone or protect the ends with an impact attenuator.
 5. For A, B, C, Distances see page 652(15).
 6. Remove Centerline markings between Stop Lines.

ROAD CLOSURE WITH ONE LANE DIVERSION
LOW VOLUME ROAD WITH ADEQUATE SIGHT DISTANCE

* Formulas for L are as follows:

For speed limits of 40 mph or less:

$$L = \frac{WS^2}{60}$$

For speed limits of 45 mph or greater:

$$L = WS$$

* Formulas for L are as follows:

A minimum of 5 channelization devices shall be used in the taper.

TYPE OF TAPER	TAPER LENGTH (L)*
Merging Taper	at least L
Shifting Taper	at least 0.5 L
Shoulder Taper	at least 0.33 L
One-Lane, Two-Way Traffic Taper	100 ft maximum
Downstream Taper	100 ft per lane

CHANNELIZATION DEVICE SPACING

The spacing of channelization devices shall not exceed a distance in feet equal to 1.0 times the speed limit in mph when used for taper channelization, and a distance in feet of 2.0 times the speed limit in mph when used for tangent channelization.

GENERAL NOTES;

Road Type	Distance Between Signs**		
	A	B	C
Urban 30 mph or less	100	100	100
Urban 35 mph and greater	350	350	350
Rural	500	500	500
Expressway / Urban Parkway	1000	1500	2640

**Distances are shown in feet.

1. Final placement of signs and devices may be changed to fit field conditions as approved by the Resident.

2. Maintain same number of lanes for a shifting taper.

3. Shoulder taper allowed when a minimum of 10 feet can be open from centerline for lane.


SUGGESTED BUFFER ZONE LENGTHS

Speed (mph)	Length (feet)	Speed (mph)	Length (feet)
20	115	40	325
25	155	45	360
30	200	50	425
35	250	55	495

DIVISION 800

MISCELLANEOUS

DETAILS

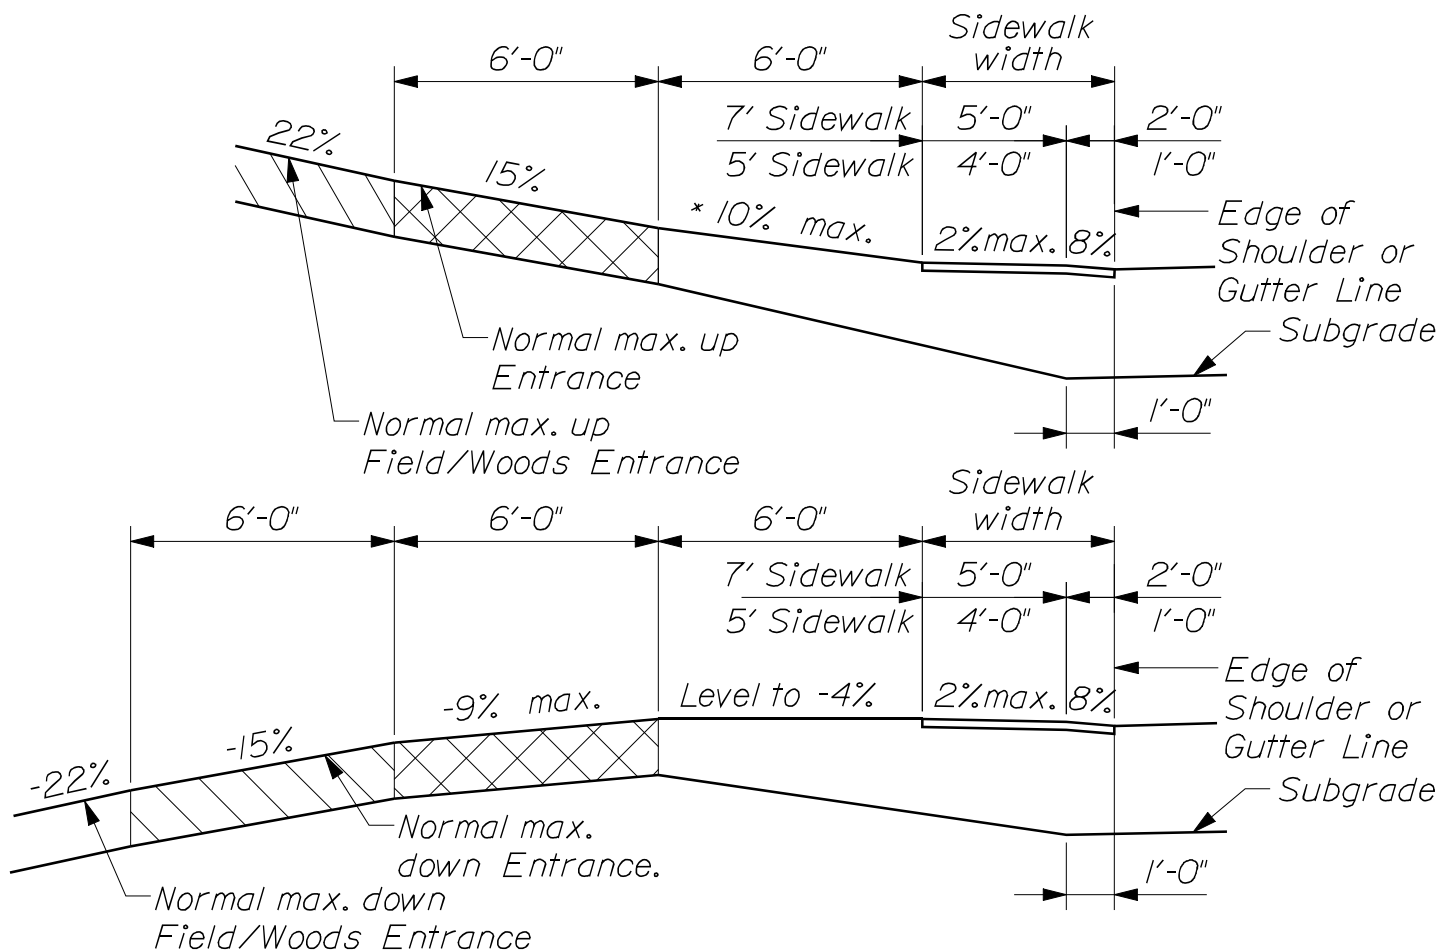

GENERAL NOTES:

1. The sidewalk width shall be paved in all cases.
2. All residential or commercial entrances 10% and over shall be paved.


NOTES ON MAXIMUM ENTRANCE PROFILES:

1. These profiles are a guide for the majority of cases, but should be field checked when the main line grade is steep (4% to 6% or greater) or the angle of approach to the entrance is unusual.
2. Generally the majority of entrances on a project will be built with flatter profiles than these maximum cases.
3. When grading entrances which are flatter than the maximum profiles the following rule of thumb should be used. Do not exceed a grade % change of more than 9% in a 6 foot increment of entrance length. This applies to both up and down profiles.
4. Entrances with grades exceeding 15% must have a design¹exception. Field entrances with grades exceeding 22% must have a¹design exception.
5. Any design change to an existing entrance that is steeper than (+ or -) 6% that adversely changes the grade (+ or -) by more than 3% will require a¹design exception.

¹Design exception to be approved by Program Manager (or designee).

ENTRANCES ON SIDEWALK SECTIONS

801(01)

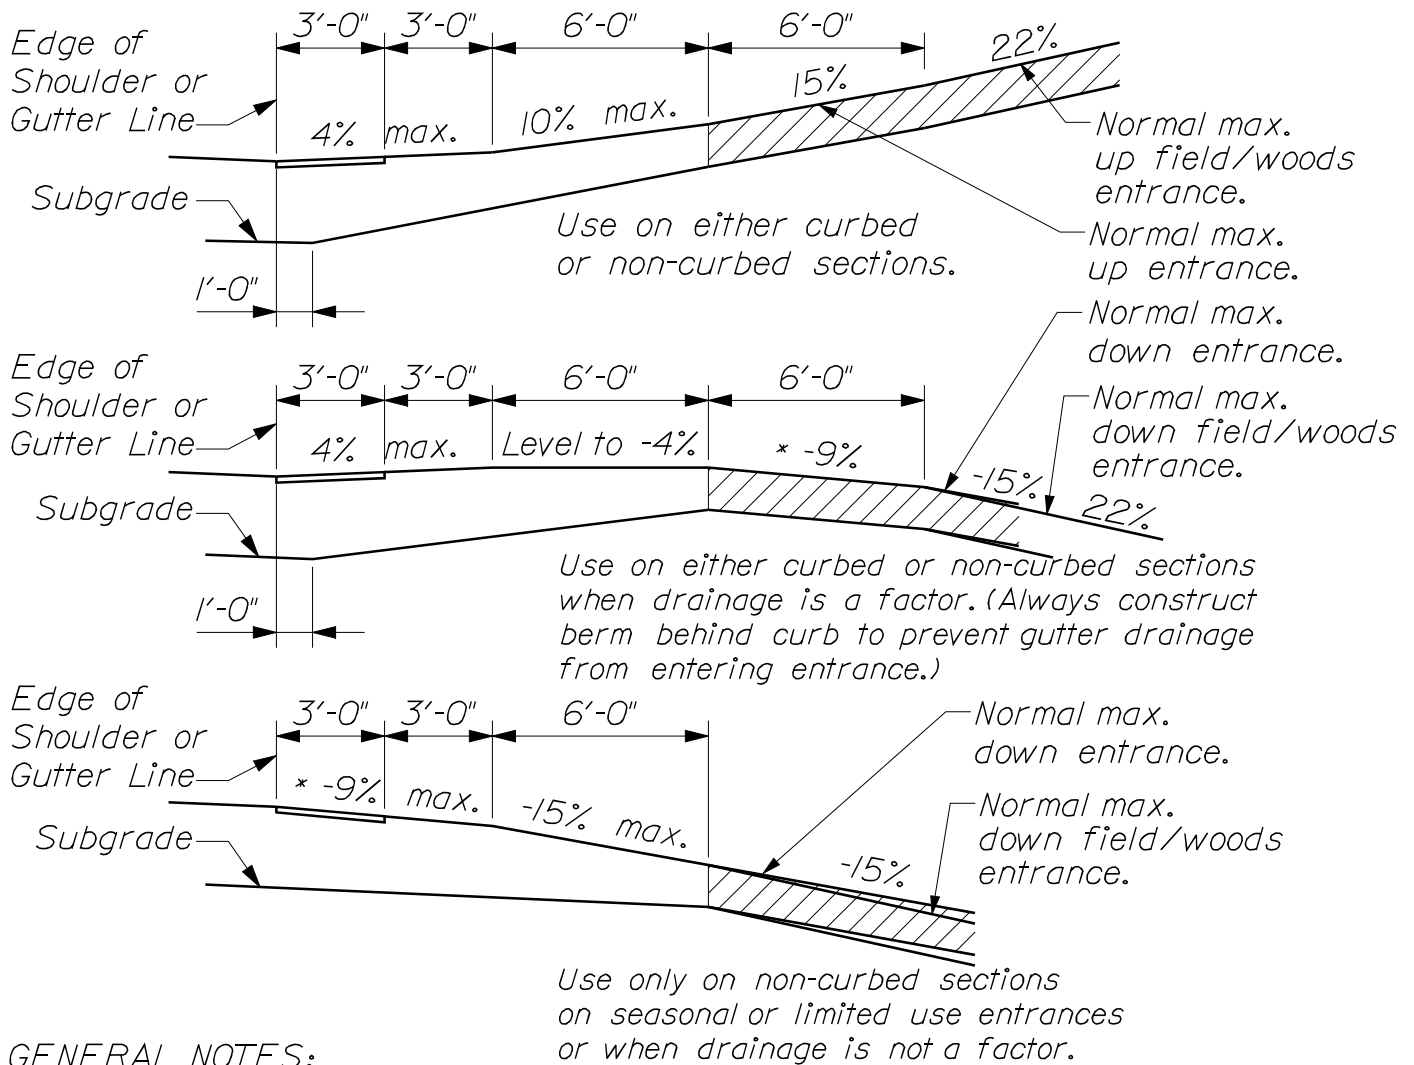

GENERAL NOTES:

1. The first 3 feet shown as pavement shall be paved only when abutting a paved area.
2. All residential or commercial entrances 10% and over shall be paved.


NOTES ON MAXIMUM ENTRANCE PROFILES:

1. These profiles are a guide for the majority of cases, but should be field checked when the main line grade is steep (4% to 6% or greater) or the angle of approach to the entrance is unusual.
2. Generally the majority of entrances on a project should be built with flatter profiles than these maximum cases.
3. When grading entrances which are flatter than the maximum profiles the following rule of thumb should be used. Do not exceed a grade % change of more than 9% in a 6 foot increment of entrance length. This applies to both up and down profiles.
4. Entrances with grades exceeding 15% must have a ¹design exception. Field entrances with grades exceeding 22% must have a ¹design exception.
5. Any design change to an existing entrance that is steeper than (+ or -) 6% that adversely changes the grade (+ or -) by more than 3% will require a ¹design exception.

¹Design exception to be approved by Program Manager (or designee).

ENTRANCES ON NON-SIDEWALK SECTIONS

801(02)

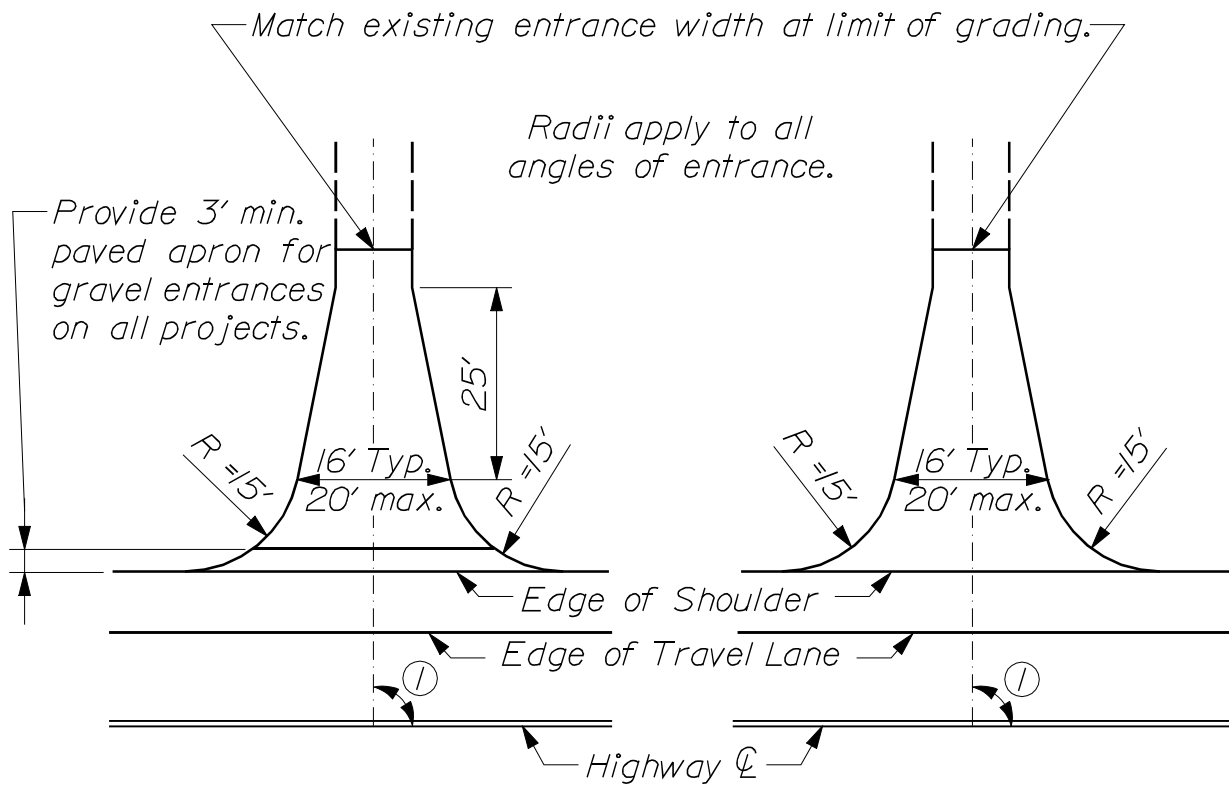


~ GRAVEL ENTRANCE ~ ~ PAVED ENTRANCE ~

① Entrance angle should not be less than 45°.

RESIDENTIAL ENTRANCE ONTO UNCURBED
HIGHWAY - PAVED SHOULDERS

801(03)

*Entrances with a high number of truck movements
may be designed on an individual basis.*

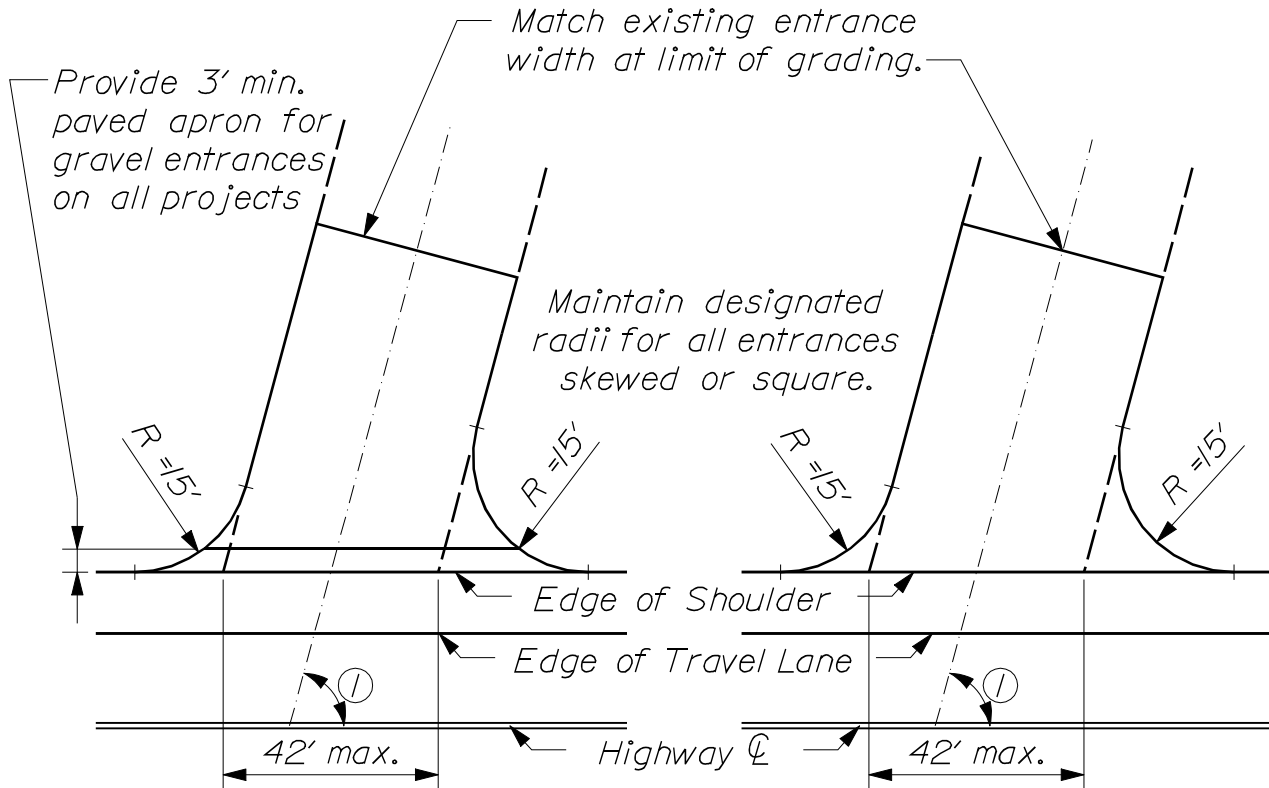


~ GRAVEL ENTRANCE ~ ~ PAVED ENTRANCE ~

① Entrance angle should not be less than 45°.

COMMERCIAL/INDUSTRIAL ENTRANCE ONTO
ONTO UNCURBED HIGHWAY - PAVED SHOULDERS

801(04)

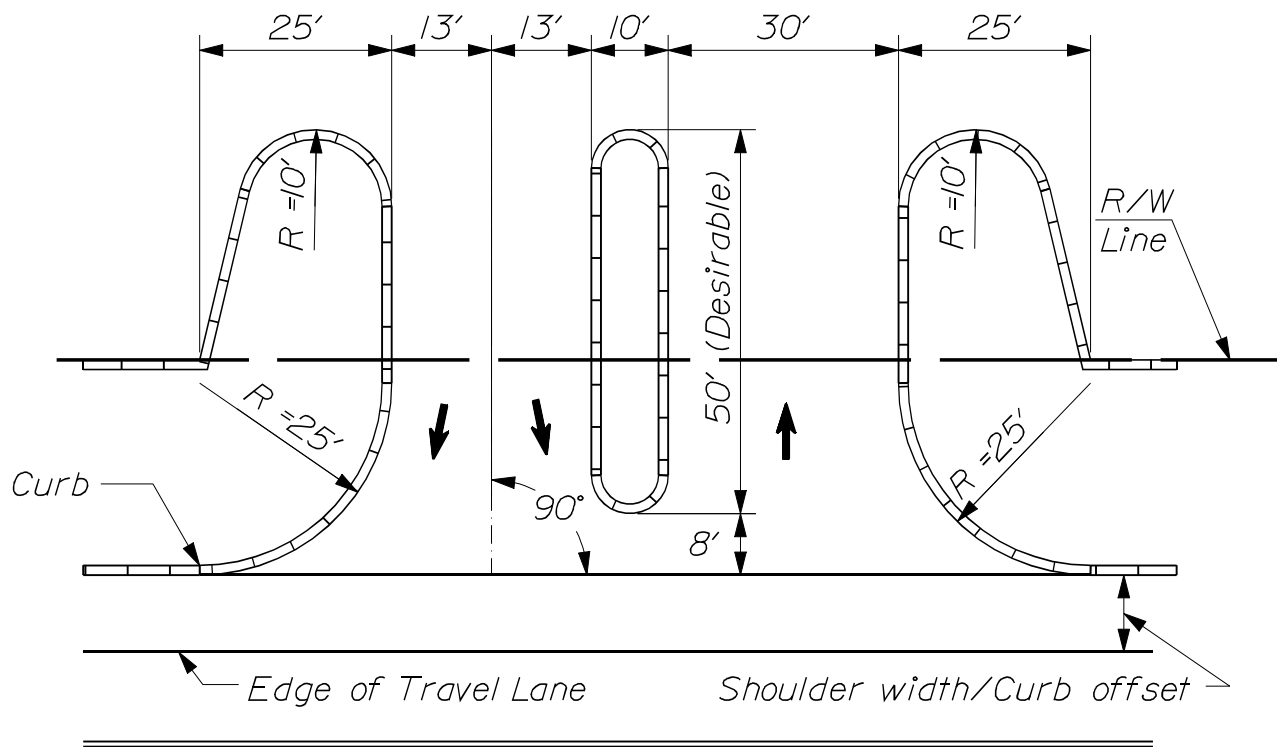


~ PAVED ENTRANCE ~

NOTES:


1. This type of entrance is suitable for other high traffic volume, public-type installations.
2. All island borders shall be curbed.

SHOPPING CENTER ENTRANCE ONTO
HIGHWAY - PAVED SHOULDERS

801(05)

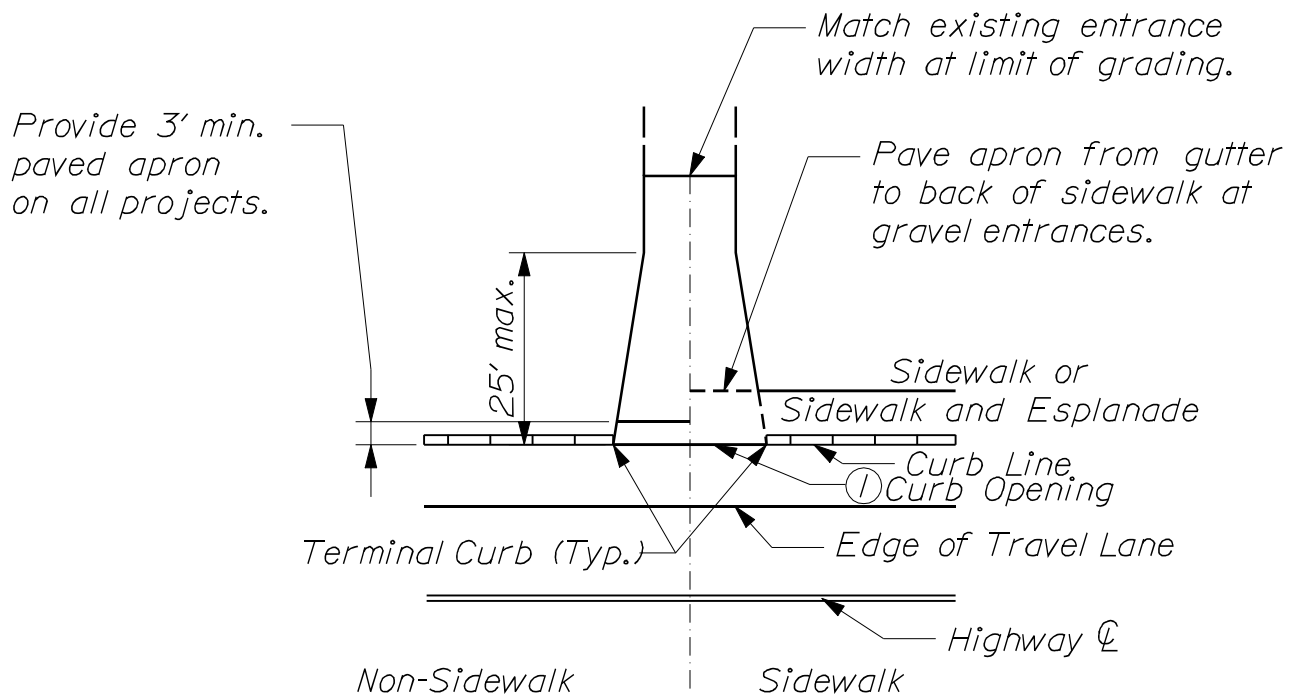

~ GRAVEL ENTRANCE ~

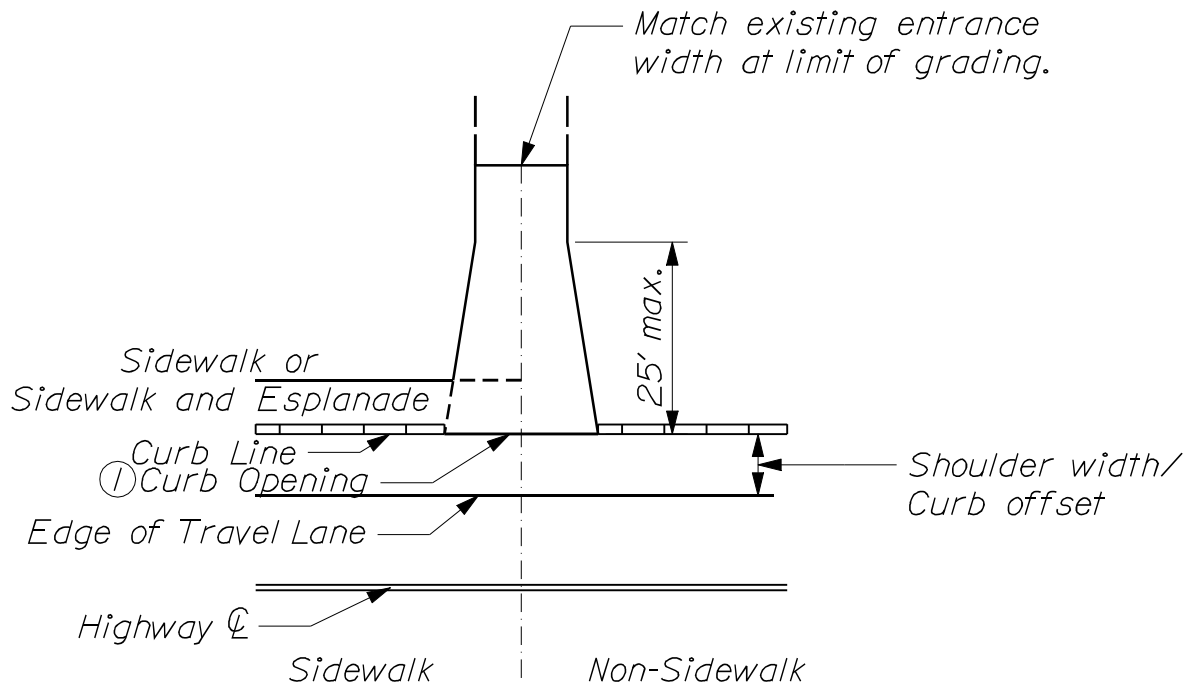


~ PAVED ENTRANCE ~

NOTES:


- ① Minimum curb opening is 20' where the shoulder width is $\geq 6'$ and 26' where the shoulder width is $< 6'$.

RESIDENTIAL ENTRANCE ONTO CURBED HIGHWAY
(WITH/WITHOUT SIDEWALKS)

801(06)

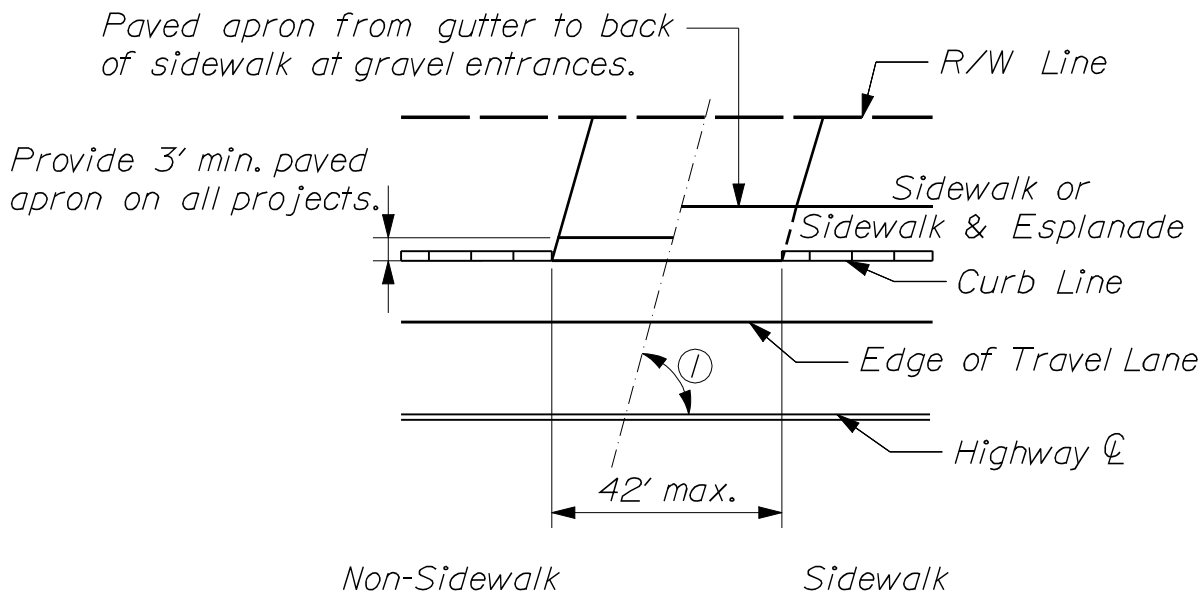


~ GRAVEL ENTRANCE ~

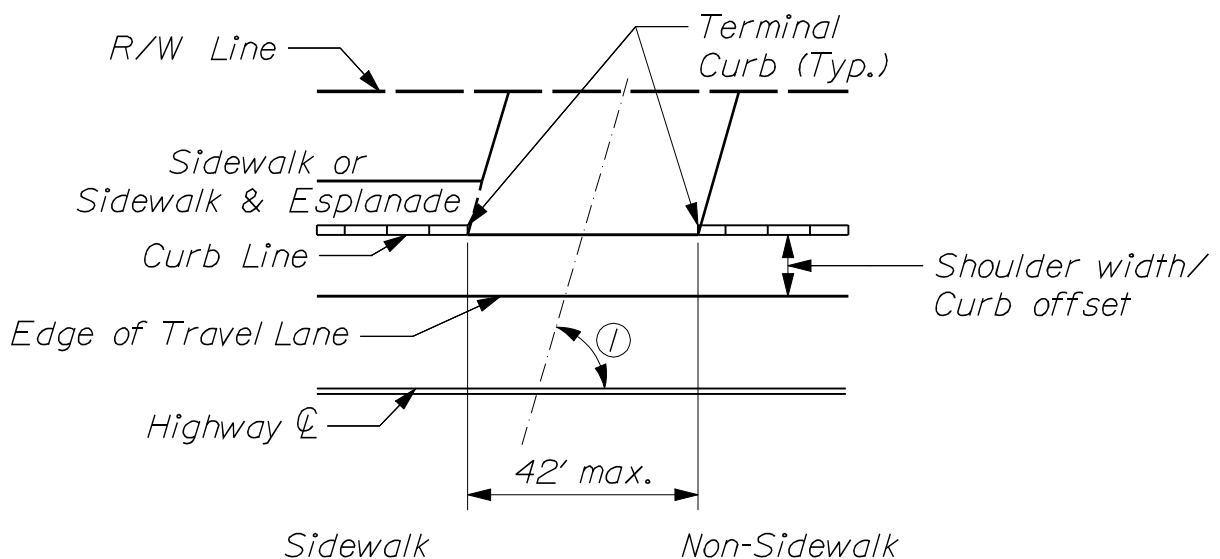

~ PAVED ENTRANCES ~

- ① Minimum entrance angle is 45° where the shoulder width $\geq 6'$ and 60° where the shoulder width $< 6'$.
- ② If there are high truck turning volumes, the designer should consider providing turning radii of $15' - 25'$ and/or a wider opening and/or limiting the angle of turn to accommodate trucks.

UNCURBED COMMERCIAL/INDUSTRIAL ENTRANCE
ONTO CURBED HIGHWAY (WITH/WITHOUT SIDEWALK)

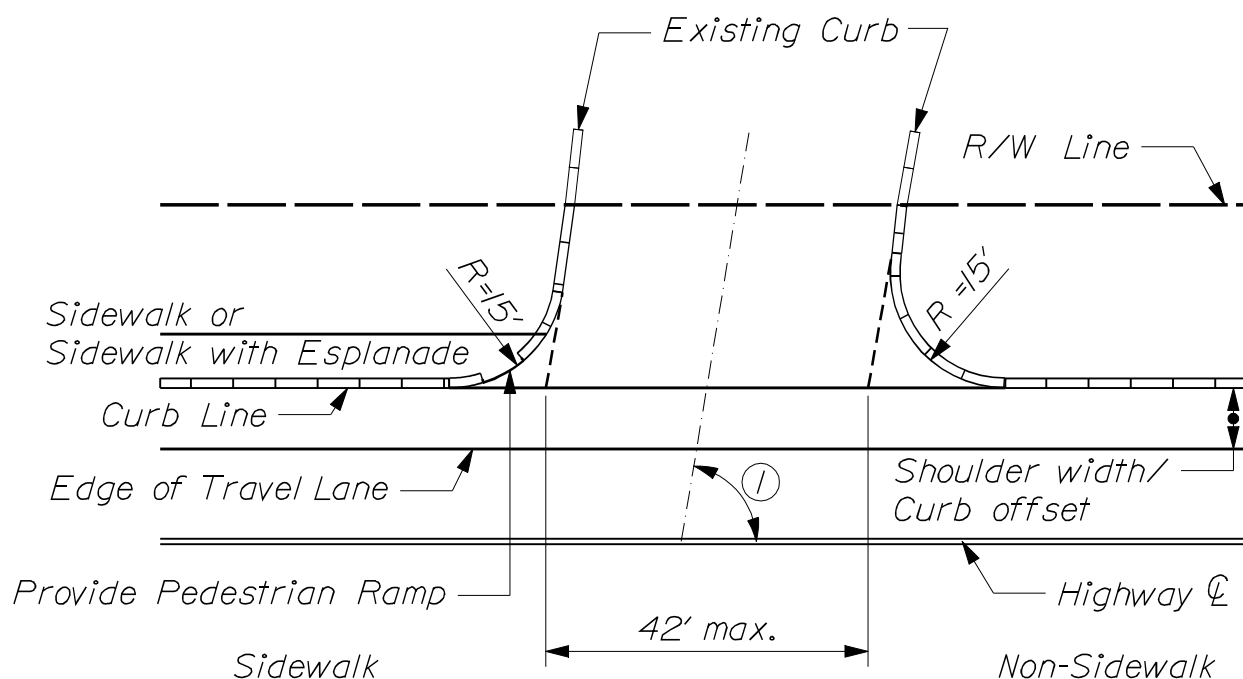


~ PAVED ENTRANCE ~

- ① Minimum entrance angle is 45° where the shoulder width $\geq 6'$ and 60° where the shoulder width $< 6'$.

CURBED COMMERCIAL/INDUSTRIAL ENTRANCE
 ONTO CURBED HIGHWAY WITH/WITHOUT SIDEWALK

801(08)

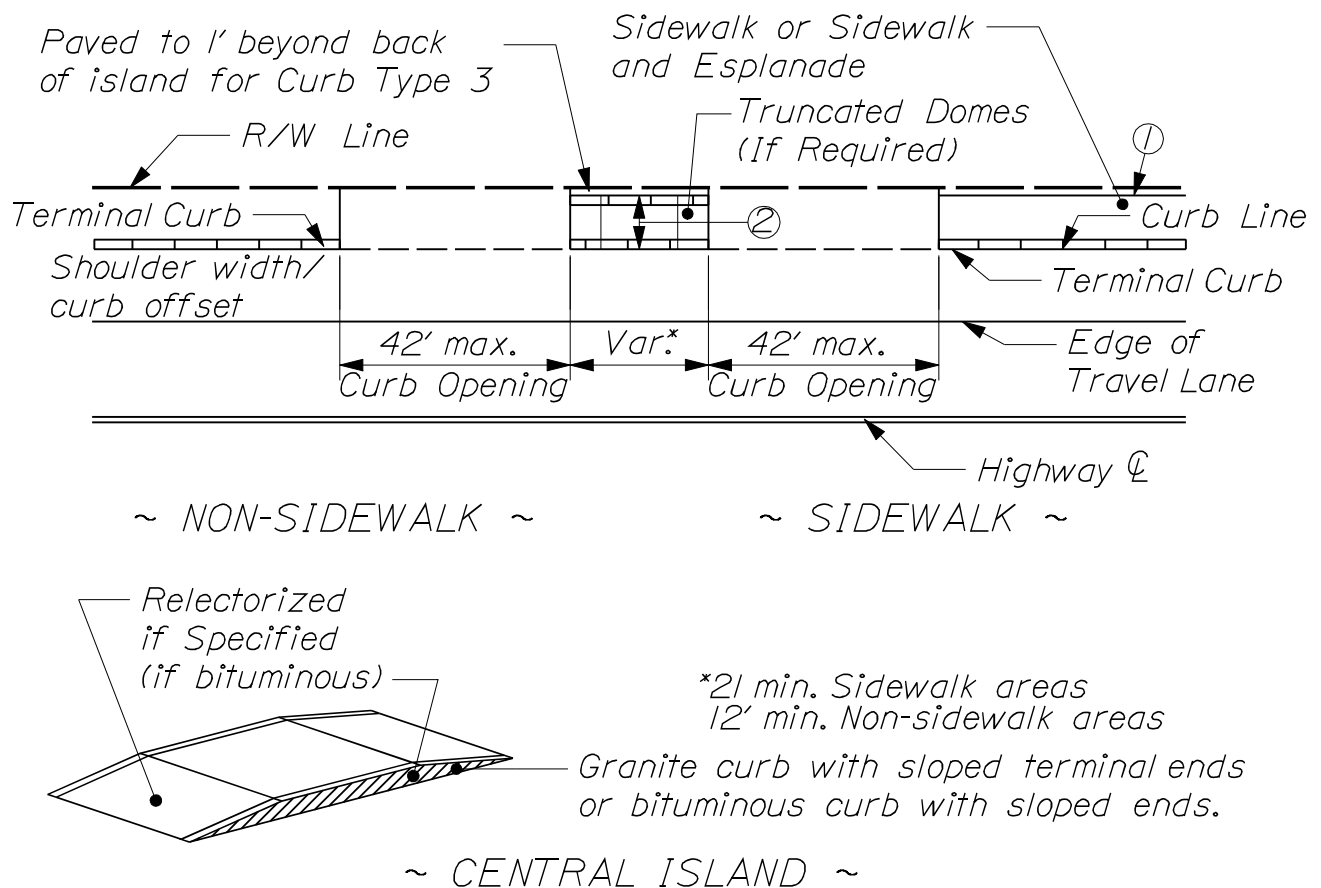

- ① Where parking of Service Area abuts sidewalk, a curb, guardrail or fence should be provided.
- ② Island width will extend within 1' of Right-of-Way line, if practical. When island width exceeds 10', use design in figure 8-41 in Highway Design Guide.
- ③ If there are high truck turning volumes, the designer should consider providing turning radii of 15' - 25' and/or wider opening and/or limiting the angle of turn to accommodate trucks.
- ④ If project requires a traffic movement permit then truncated domes will be required.

COMMERCIAL/INDUSTRIAL DOUBLE ENTRANCES ONTO CURBED HIGHWAY (NARROW RIGHT-OF-WAY)

801(09)

GENERAL NOTES

1. *Maximum and minimum standards do not have tolerances and are not to be exceeded or unmet unless existing physical or site constraints are deemed technically infeasible. Technical infeasibility must be justified.*
2. *The minimum for a level landing (turning space) is 4-foot x 4-foot sloping with a preferred design slope of 1.5% in both directions and a maximum 2% slope.*
3. *On steep grades, where existing conditions do not allow for the curb ramp slope to meet a running slope of 8.3% or less, the curb ramp length is not required to exceed 15 feet from the curb break or from the landing break if the landing is at the bottom of the ramp.*
4. *All curb ramp grade breaks shall be perpendicular to the running slope.*
5. *All curb ramp joints and grade breaks shall be flush. When retrofitting, any vertical discontinuities should not exceed a maximum of $\frac{1}{4}$ inch vertical rise or $\frac{1}{4}$ - $\frac{1}{2}$ inch beveled rise.*
6. *Counter slope grades should be adjusted according to the grade break at the bottom of the ramp. With a maximum curb ramp grade of 8.3% the maximum counter slope should not exceed 5%. When ramp slopes are less, the counter slope can be adjusted to a higher amount not to exceed 8.3%. (i.e. Ramp slope of 2% counter slope can be 6.3%.)*
7. *Beyond the bottom grade break, a clear space of 4-foot x 4-foot minimum shall be provided within the width of the pedestrian crosswalk, and outside the parallel vehicle travel lane. On ramps that have landing at street level, the clear space may exist within the ramp.*
8. *There shall be a minimum of 12-inch Aggregate Subbase Course - Gravel under the sidewalk surface on pedestrian ramps.*
9. *The running slope of a "Blended Transition" shall not exceed 5% slope and will have a minimum 4-foot level pedestrian access route at the top of the ramp. (See 801(26) for details.)*
10. *A temporary pedestrian access route shall be provided whenever the existing pedestrian access route in the public right of way is blocked by construction, alteration, maintenance, or other temporary conditions. Refer to MUTCD for guidance.*

PEDESTRIAN RAMP NOTES

801(11)



DETECTABLE WARNING FIELDS


1. *Detectable warning fields shall be installed on ramps at intersections where there is a warranted stop or yield sign at signalized intersections and midblock crossings.*
2. *Detectable warning fields shall span the width of the pedestrian ramp. See Standard Detail 608(02).*
3. *The detectable warning shall be placed in a position to stop pedestrians from entering vehicular traffic. Where possible, detectable warning fields should align with pedestrian traffic.*
4. *All detectable warning fields placed at the same intersection shall be made up of the same uniform material type. Detectable warnings shall be contrasting in color to the adjacent walkway.*
5. *Detectable warning fields shall not be placed more than 5 feet back from the gutter line.*

DRAINAGE AND OBSTRUCTIONS

1. *Drainage structures, traffic signal equipment, or other obstructions shall not be installed in the curb ramp or turning space areas.*
2. *When retrofitting ramps, all options should be used to avoid drainage grates. If that is not possible, ADA compliant drainage grates should be considered.*
3. *Before retrofitting ramps, the contractor shall verify removal limits are sufficient to provide positive drainage, maintain existing drainage patterns, and avoid ponding in the final configuration.*

CURB RAMPS REQUIREMENTS		
RUNNING SLOPE	A	MAXIMUM 8.3% (1:12) <i>Applies up to a maximum length of 15 feet</i>
CROSS SLOPE	B	1.5% (1:67) (standard) 2.1% (1:48) (maximum) <i>Ramp cross slope at street crossings without stop or signal control may match roadway profile.</i>
CLEAR WIDTH	C	5'-8" + preferred, Min. 4' -8" <u>Existing</u> ramp width may remain 4 feet.
COUNTER SLOPE	D	Counter slope grades should be adjusted according to the grade break at the bottom of the ramp. With a curb ramp grade of 8.3% the maximum counter slope should not exceed 5%. When ramp grades are lower, the counter slope can be adjusted to a higher amount not to exceed 8.3%.
FLARED SIDES	E	Where a pedestrian circulation path crosses the curb ramp, flared sides shall be installed with maximum 10% slope. (Not needed on Parallel Ramps.)
LEVEL LANDING	F	Minimum 4 feet by 4 feet <i>Maximum slope of 2.1% in any direction. May include Detectable Warnings.</i>
CLEAR SPACE	G	4 feet by 4 feet <i>Located at the bottom of perpendicular ramps with ramp slopes outside active travel lanes. (Not required on parallel ramps.)</i>
DETECTABLE WARNINGS	H	Required at traffic-controlled intersections and mid-block crossings. <i>Extend the full width of curb opening except for a 2" maximum border.</i>

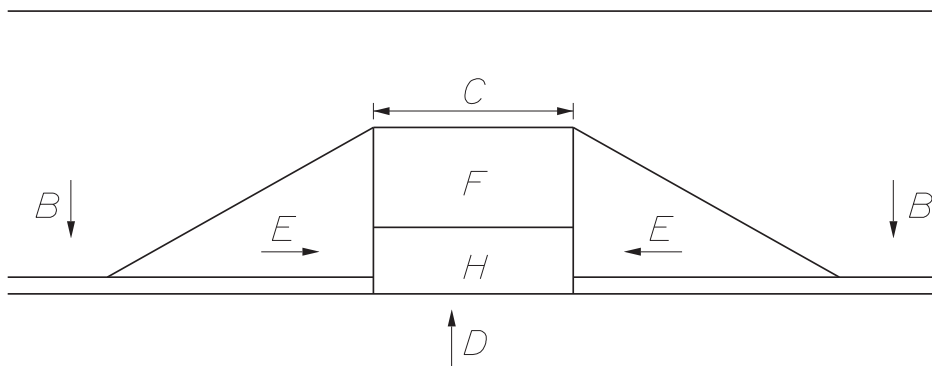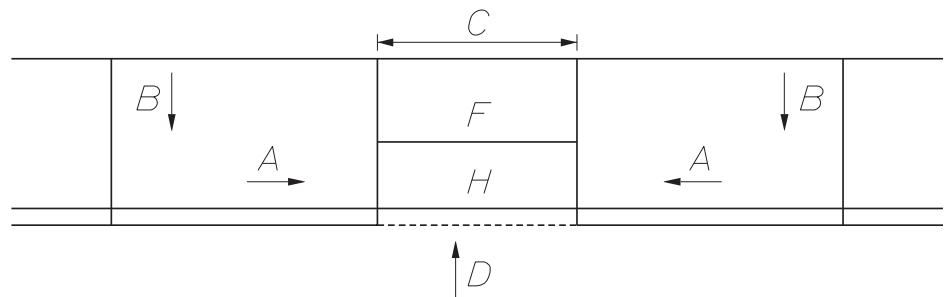


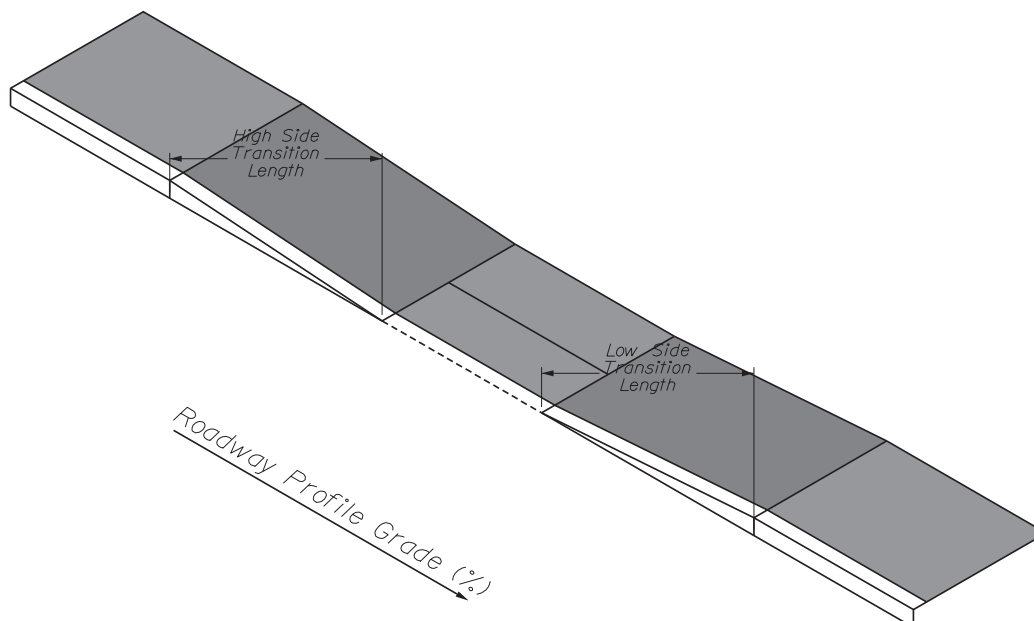


Curb Ramp Length Table						
Curb Reveal (Inches)		7	6	5	4	3
	Roadway Profile Grade	Minimum Transition Length Required (Feet)				
Low Side Transition Length	-7% and Lower	4.0	4.0	4.0	4.0	4.0
	-6%	8.0	4.0	4.0	4.0	4.0
	-5%	8.0	4.0	4.0	4.0	4.0
	-4%	8.0	8.0	4.0	4.0	4.0
	-3%	8.0	8.0	4.0	4.0	4.0
	-2%	8.0	8.0	8.0	4.0	4.0
	-1%	8.0	8.0	8.0	4.0	4.0
	-0.5% to 0.5%	8.0	8.0	8.0	8.0	4.0
High Side Transition Length	1%	10.0	8.0	8.0	8.0	4.0
	2%	10.0	10.0	8.0	8.0	8.0
	3%	12.0	10.0	10.0	8.0	8.0
	4%	15.0	12.0	12.0	10.0	8.0
	5%	15.0	15.0	15.0	12.0	10.0
	6%	15.0	15.0	15.0	15.0	12.0
	7% and Higher	15.0	15.0	15.0	15.0	15.0

Length is measured at curbline and is not required to exceed 15 feet regardless of ramp running slope.


Choose roadway profile grade by rounding up for positive grades and down for negative grades. Round to the nearest whole integer. If constraints prevent placement of the ramp length required by the table, place the maximum length possible and check the slope. If above the maximum allowable slope, consider design modifications before considering technical infeasibility.

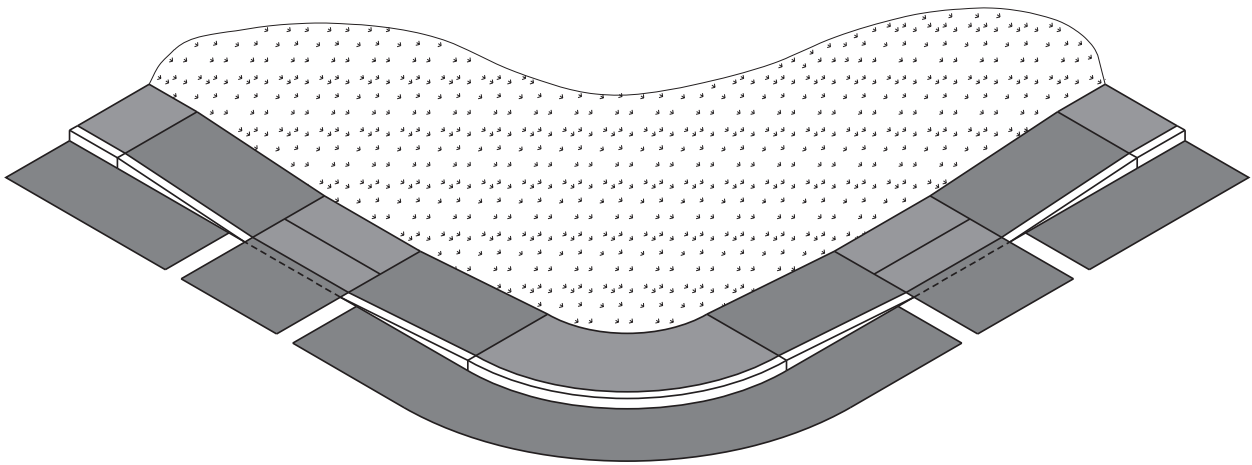


~ ISOMETRIC VIEW ~
(not to scale)

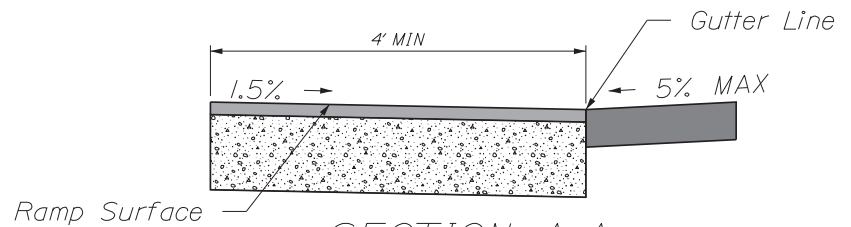

~ SECTION A-A ~
(not to scale)

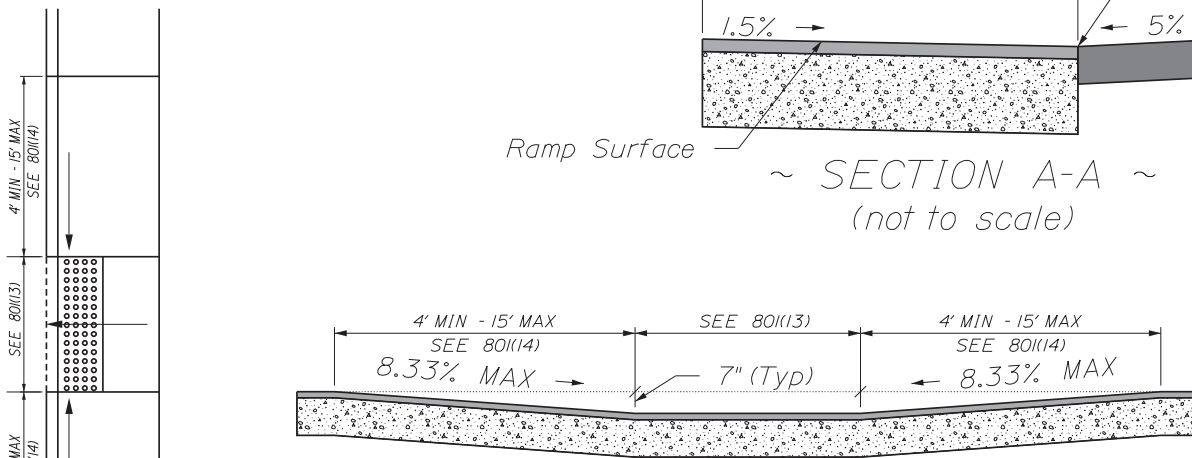

~ SECTION B-B ~
(not to scale)

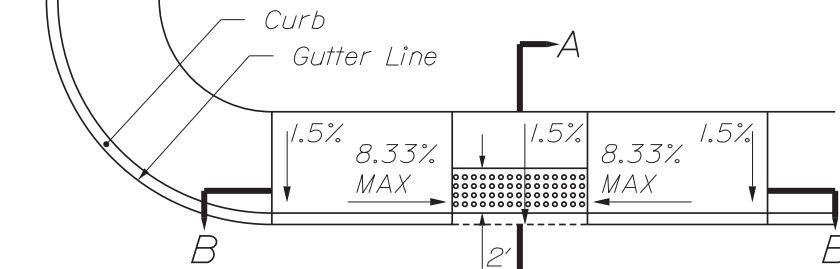


~ PLAN VIEW ~
(not to scale)


Notes:

- This desirable design is the preferred option. Use other options only when required by design constraints.
- To achieve 8.33% running slope, the pedestrian ramp may need to be extended. If the ramp length has been extended to a maximum of 15 feet and other design modifications have been considered, running slope may exceed 8.33%.


PARALLEL CURB RAMP - OPTION 1
801(15)

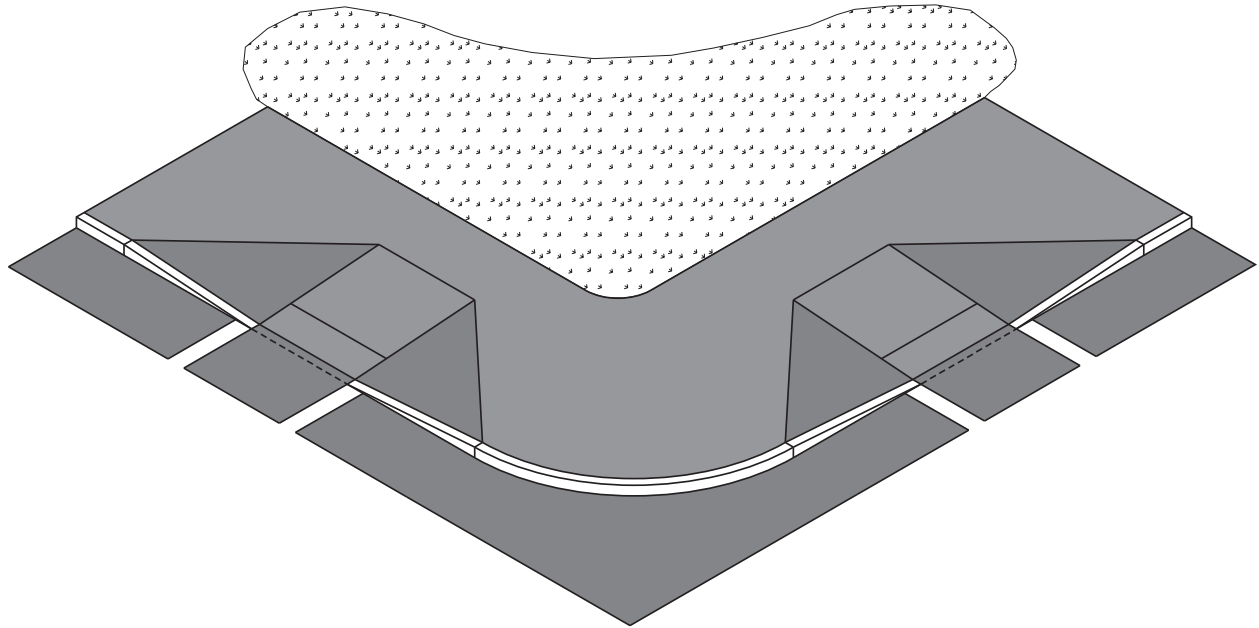


~ ISOMETRIC VIEW ~
(not to scale)

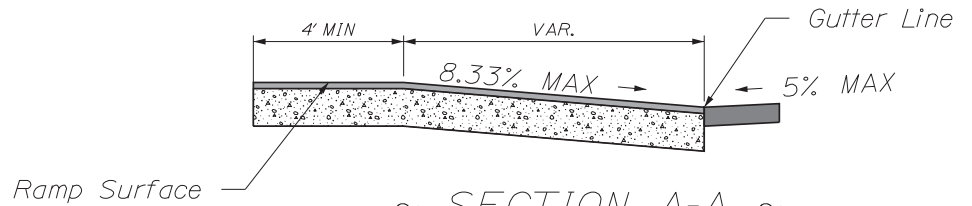

~ SECTION A-A ~
(not to scale)

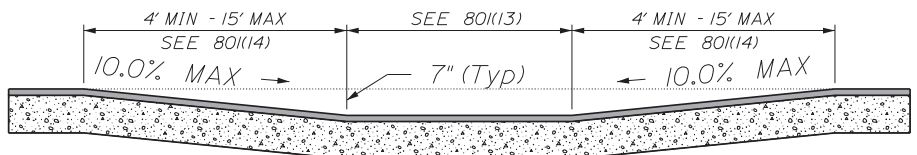

~ SECTION B-B ~
(not to scale)

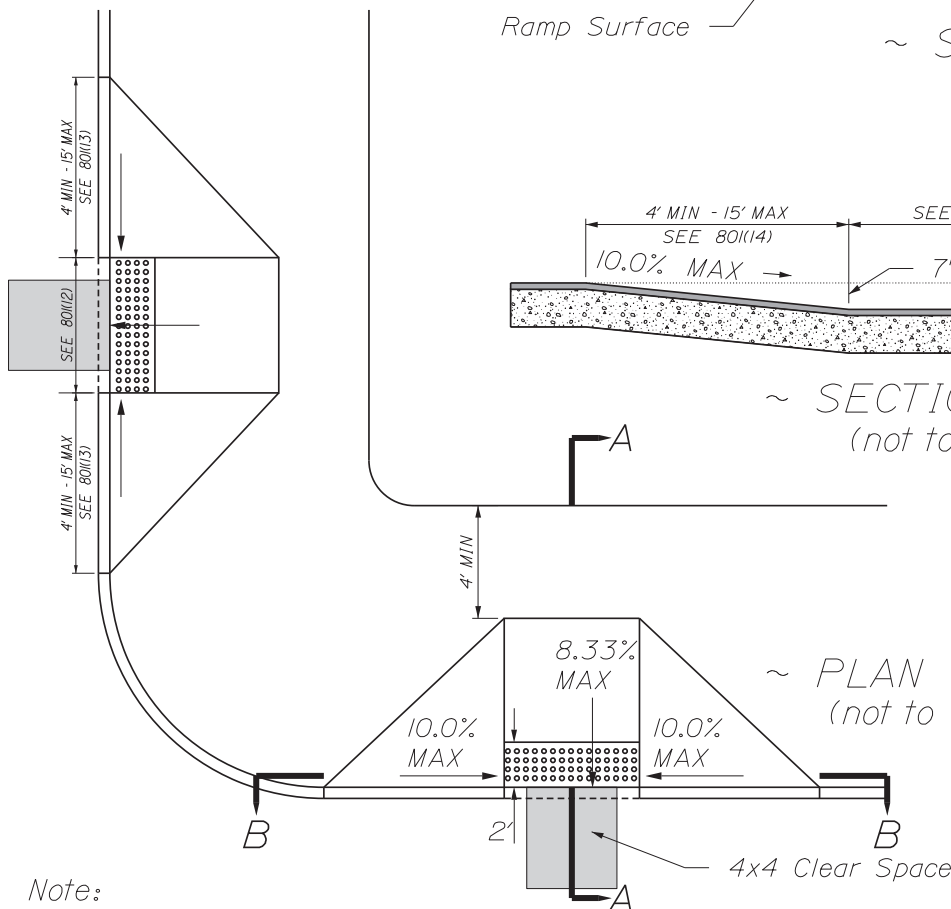

~ PLAN VIEW ~
(not to scale)

Note:


- This desirable design is the preferred option. Use other options only when required by design constraints.

PERPENDICULAR CURB RAMP - OPTION 1
801(16)





- This less desirable design should not be used unless required by design constraints. It may not provide adequate curb reveal. Use Option 1 when possible.
- No vehicular access shall be permitted through the radius curb.
- A minimum curb reveal of 3" is required at the apex of the curb radius.
- Minimum terminal curb length shall be 4ft.
- To achieve 8.33% running slope, the pedestrian ramp may need to be extended. If the ramp length has been extended to a maximum of 15 feet and other design modifications have been considered, running slope may exceed 8.33%.

801(17)

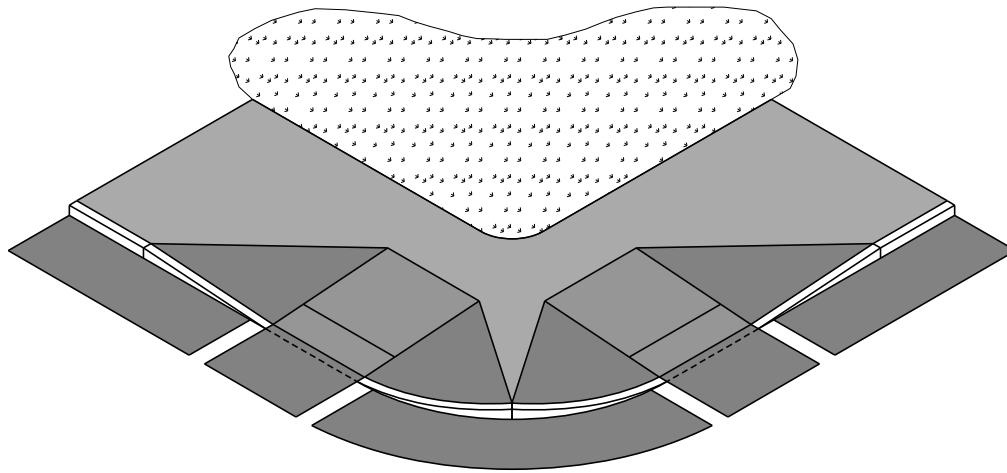


~ ISOMETRIC VIEW ~
(not to scale)

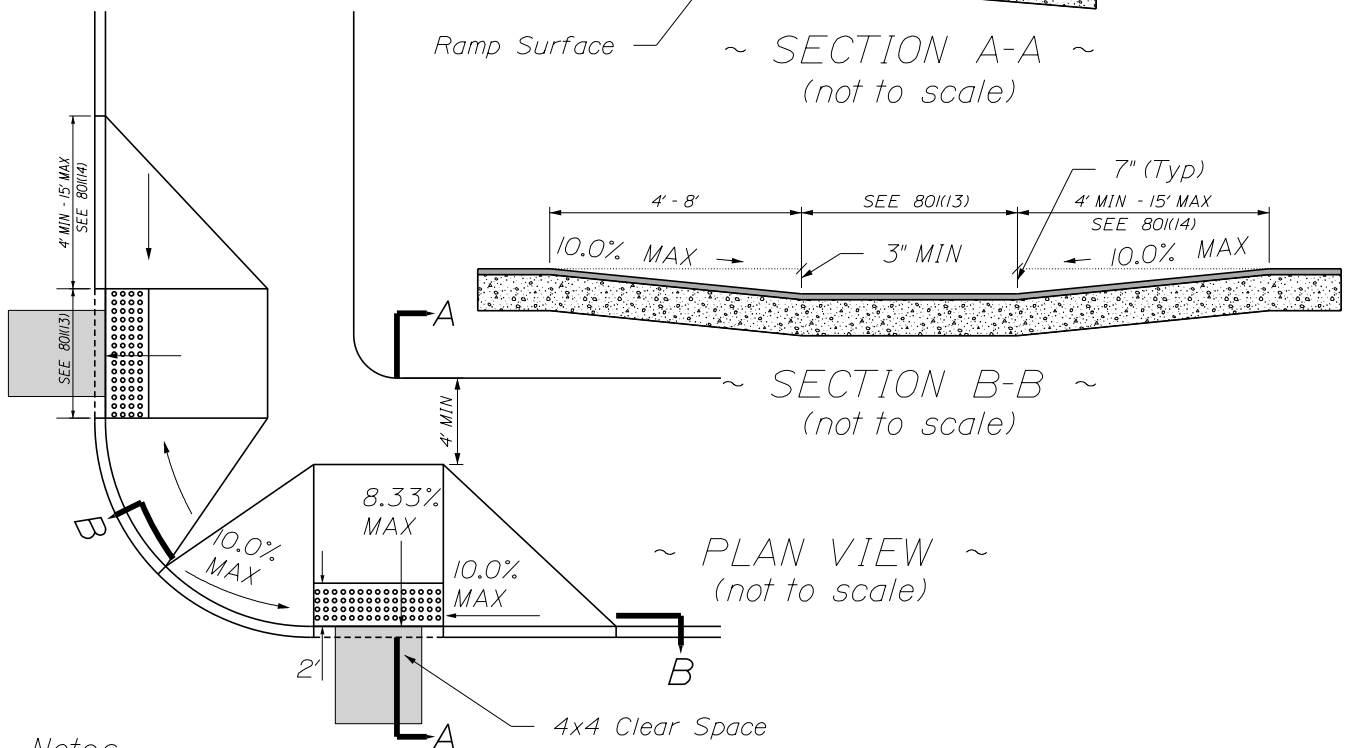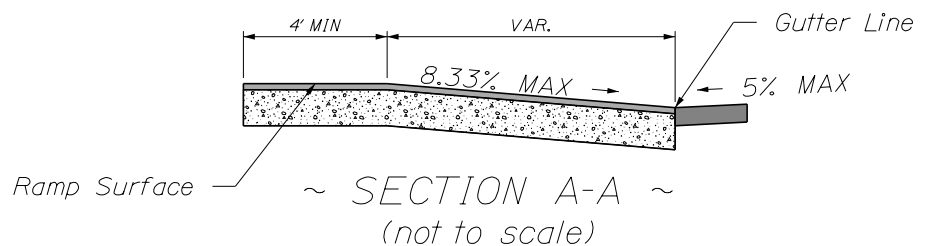


Notes:

- This less desirable design should not be used unless required by design constraints. It may not provide adequate curb reveal. Use Option 1 when possible.
- No vehicular access shall be permitted through the radius curb.
- A minimum curb reveal of 3" is required at the apex of the curb radius.
- Minimum terminal curb length shall be 4ft.


PERPENDICULAR CURB RAMP - OPTION 2A
801(18)

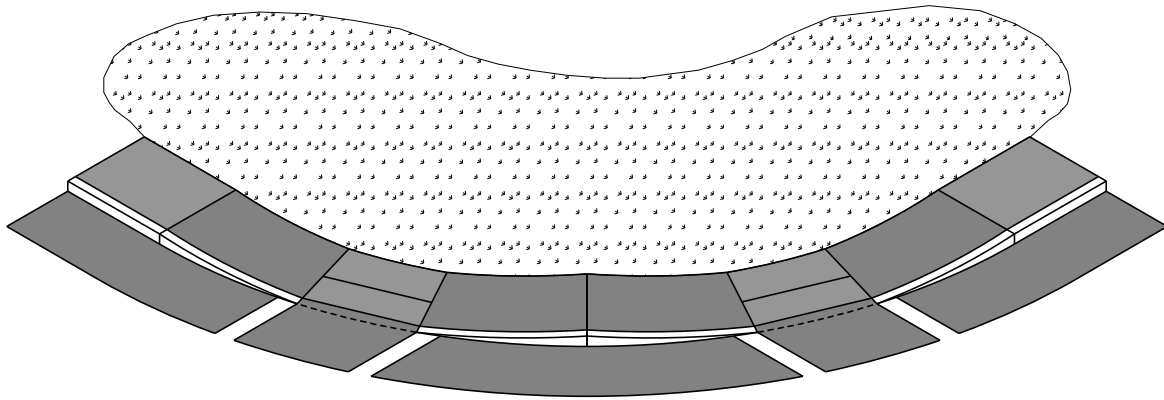

~ ISOMETRIC VIEW ~
(not to scale)

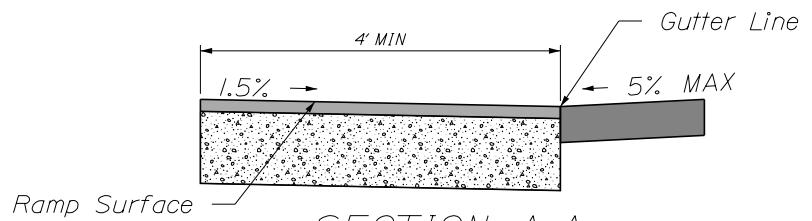

~ SECTION A-A ~
(not to scale)

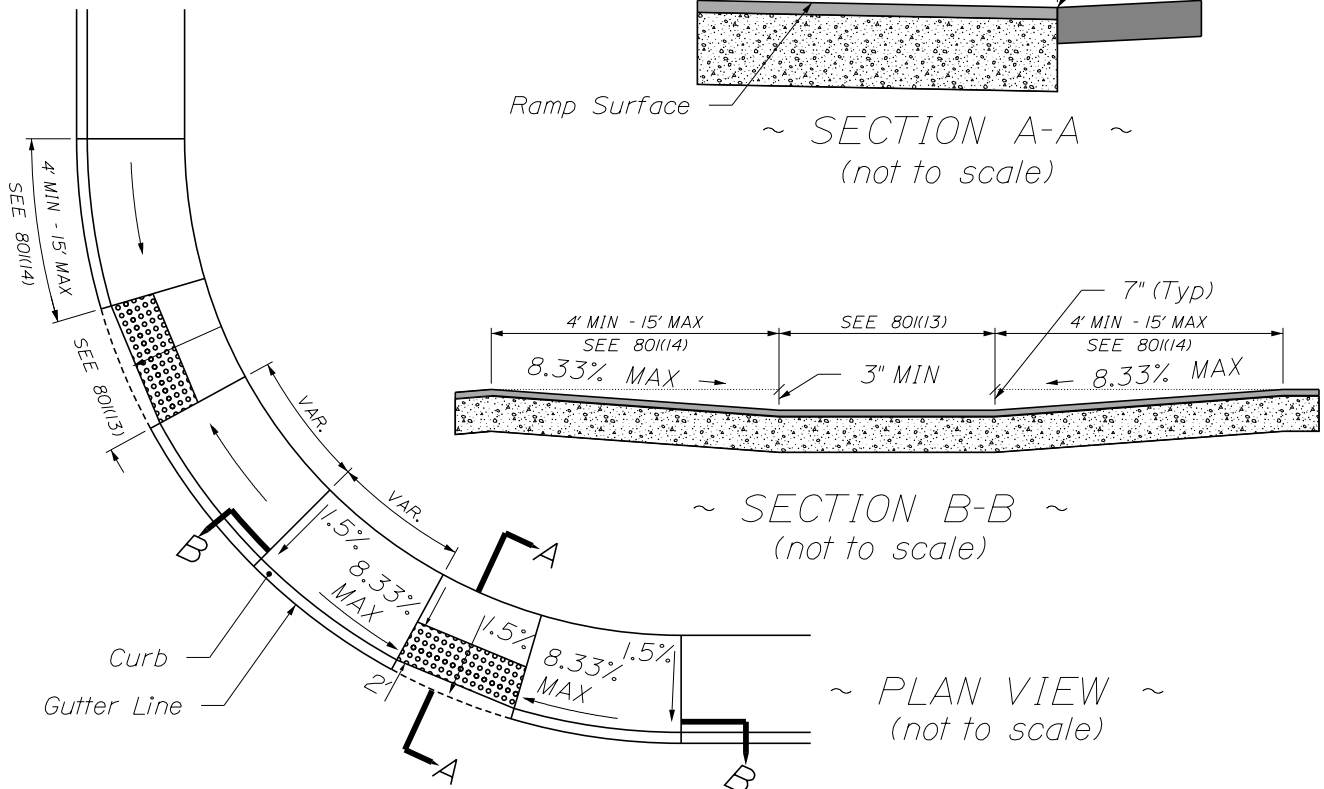


~ SECTION B-B ~
(not to scale)




~ PLAN VIEW ~
(not to scale)

Notes:

- This less desirable design should not be used unless required by design constraints. It may not provide adequate curb reveal. Use Option 1 when possible.
- No vehicular access shall be permitted through the radius curb.
- A minimum curb reveal of 3" is required at the apex of the curb radius.
- Minimum terminal curb length shall be 4ft.
- To achieve 8.33% running slope, the pedestrian ramp may need to be extended. If the ramp length has been extended to a maximum of 15 feet and other design modifications have been considered, running slope may exceed 8.33%.

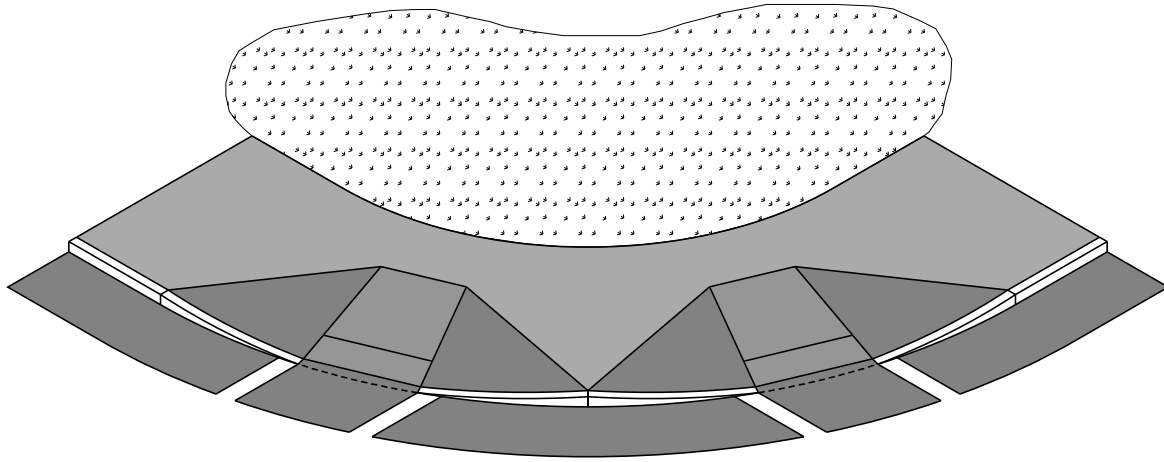


~ ISOMETRIC VIEW ~
(not to scale)

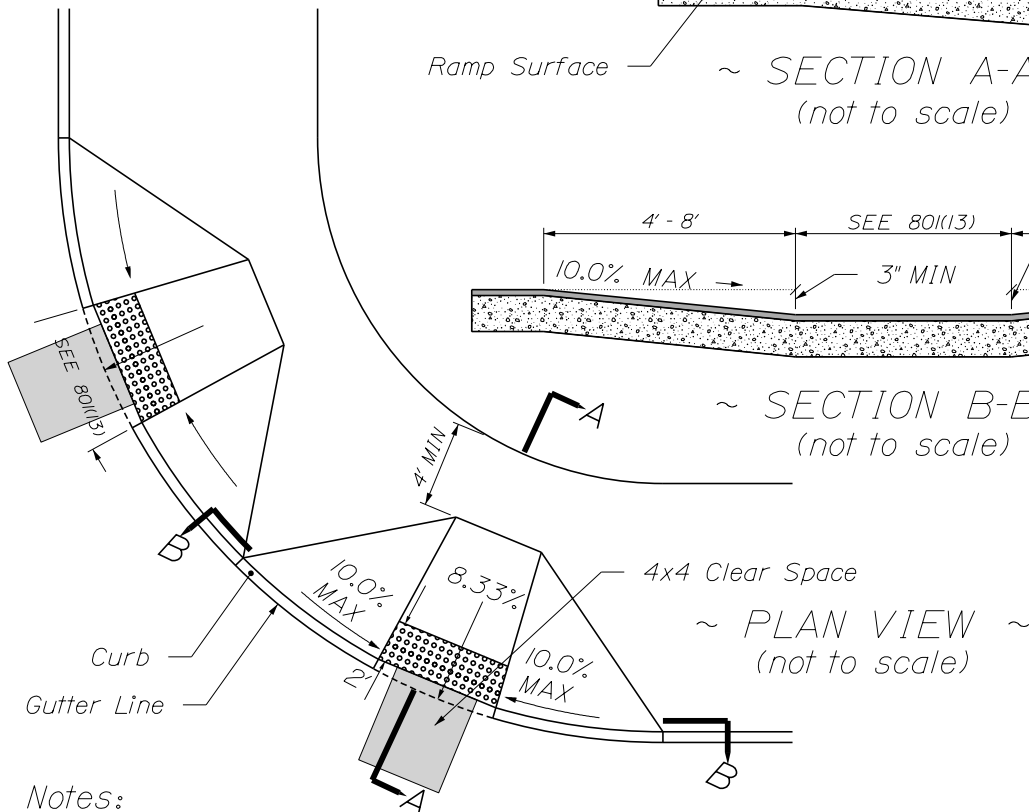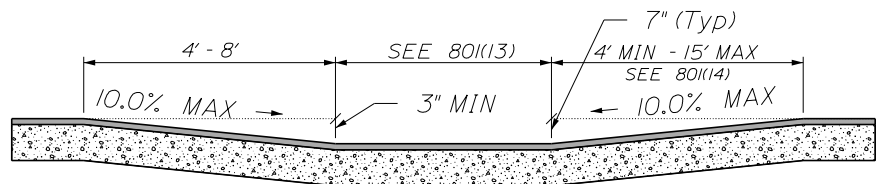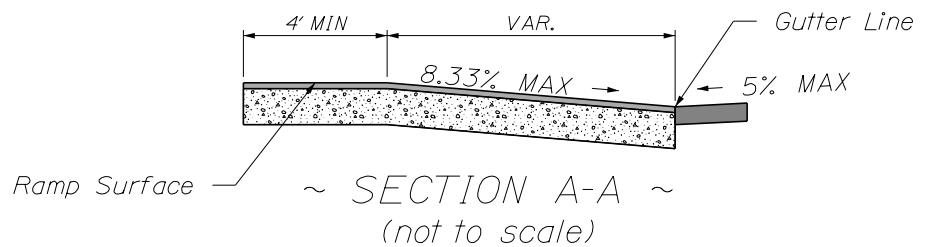


Notes:

- This less desirable design should not be used unless required by design constraints. It may not provide adequate curb reveal. Use Option 1 when possible.
- No vehicular access shall be permitted through the radius curb.
- A minimum curb reveal of 3" is required at the apex of the curb radius.
- Minimum terminal curb length shall be 4ft.



PERPENDICULAR CURB RAMP - OPTION 2B
801(20)

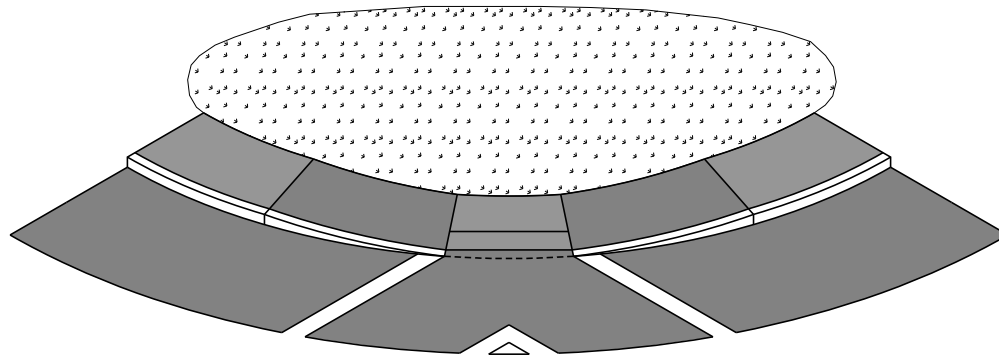

~ ISOMETRIC VIEW ~
(not to scale)

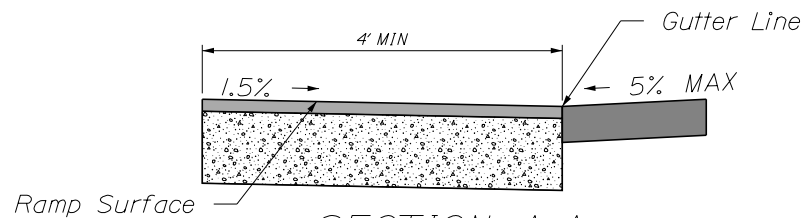

~ SECTION A-A ~
(not to scale)

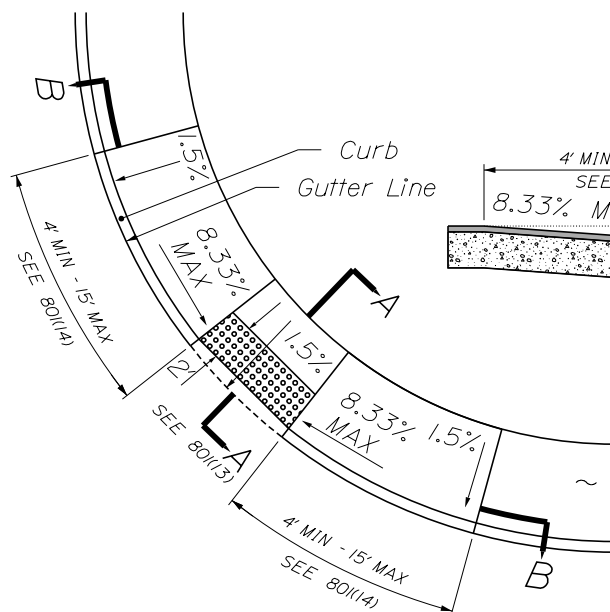


~ SECTION B-B ~
(not to scale)

~ PLAN VIEW ~
(not to scale)



Notes:

- This less desirable design should not be used unless required by design constraints. It does not provide directional cues. Use Option 1 or Option 2 when possible.
- No vehicular access shall be permitted through the curb radius.
- To achieve 8.33% running slope, the pedestrian ramp may need to be extended. If the ramp length has been extended to a maximum of 15 feet and other design modifications have been considered, running slope may exceed 8.33%.


PARALLEL CURB RAMP - OPTION 3
80(21)

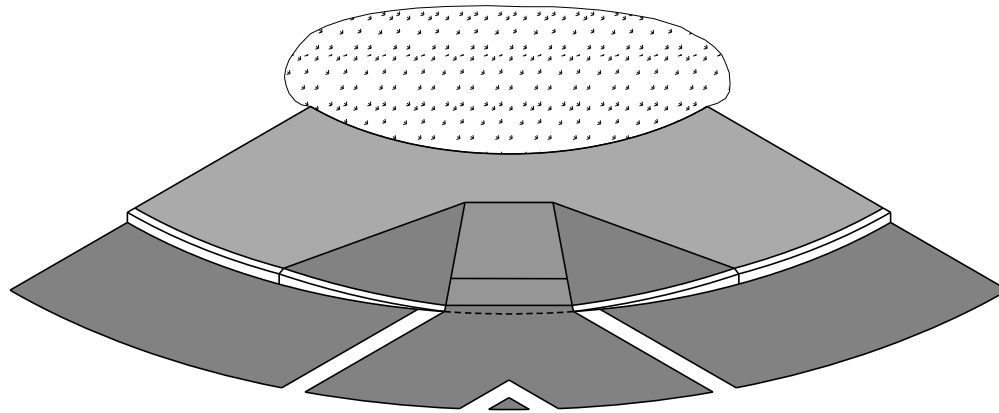

~ ISOMETRIC VIEW ~
(not to scale)

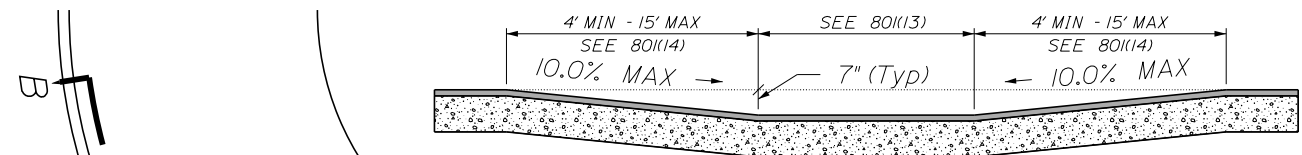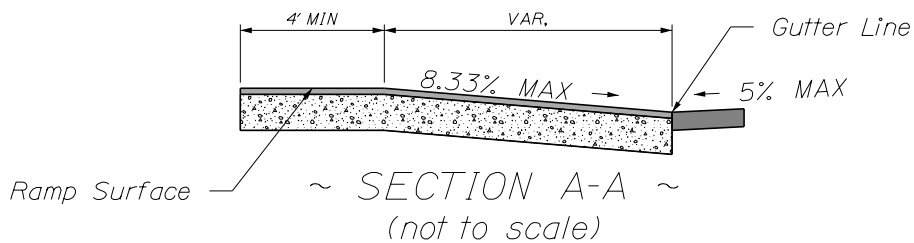

~ SECTION B-B ~
(not to scale)

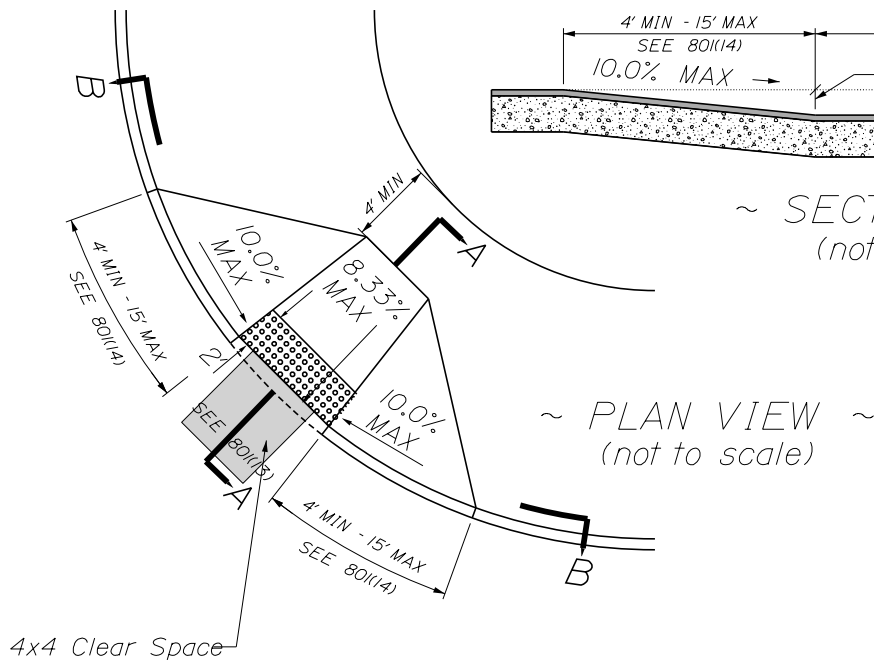

Notes:


- This less desirable design should not be used unless required by design constraints. It does not provide directional cues. Use Option 1 or Option 2 when possible.
- No vehicular access shall be permitted through the curb radius.

PERPENDICULAR CURB RAMP - OPTION 3
801(22)




- To achieve 8.33% running slope, the pedestrian ramp may need to be extended. If the ramp length has been extended to a maximum of 15 feet and other design modifications have been considered, running slope may exceed 8.33%.


PARALLEL CURB RAMP - ESPLANADE
801(23)

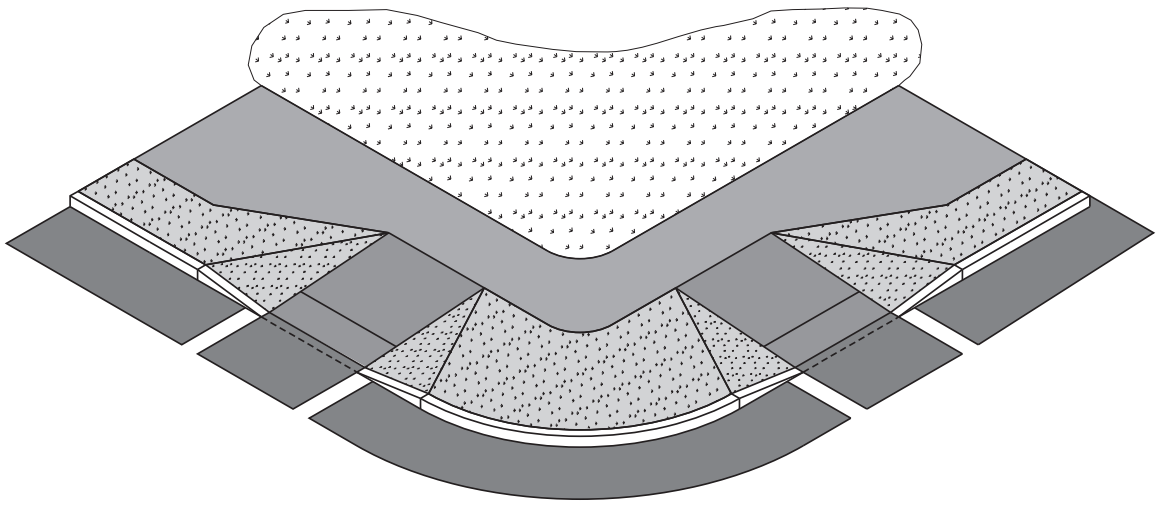


~ ISOMETRIC VIEW ~
(not to scale)

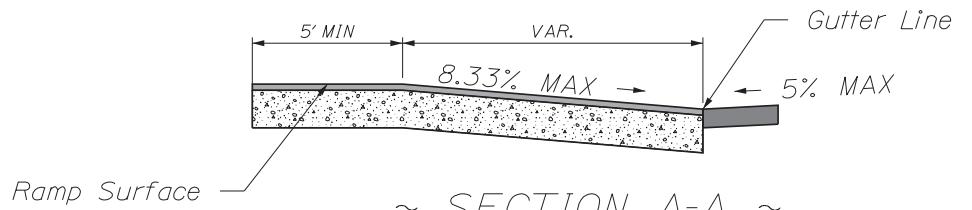

~ SECTION A-A ~
(not to scale)


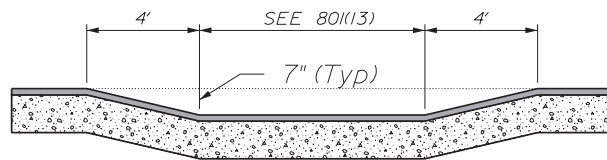


~ SECTION B-B ~
(not to scale)

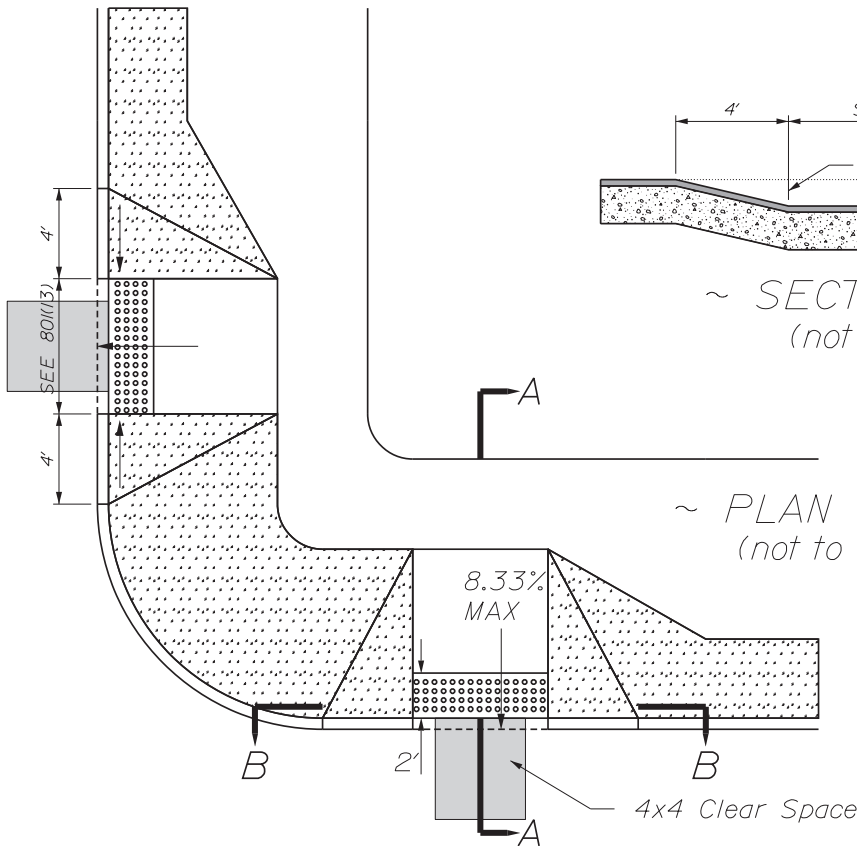

~ PLAN VIEW ~
(not to scale)


PERPENDICULAR CURB RAMP - ESPLANADE
80(24)

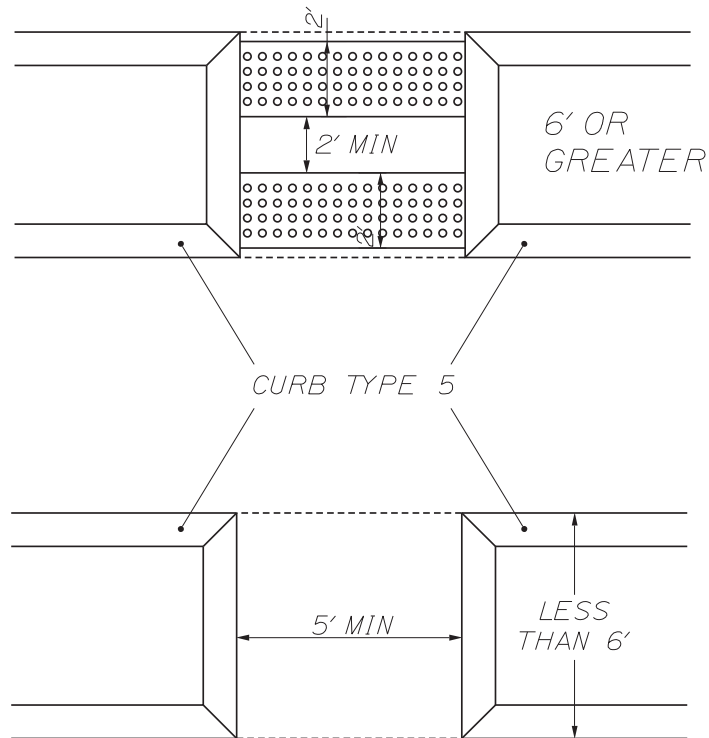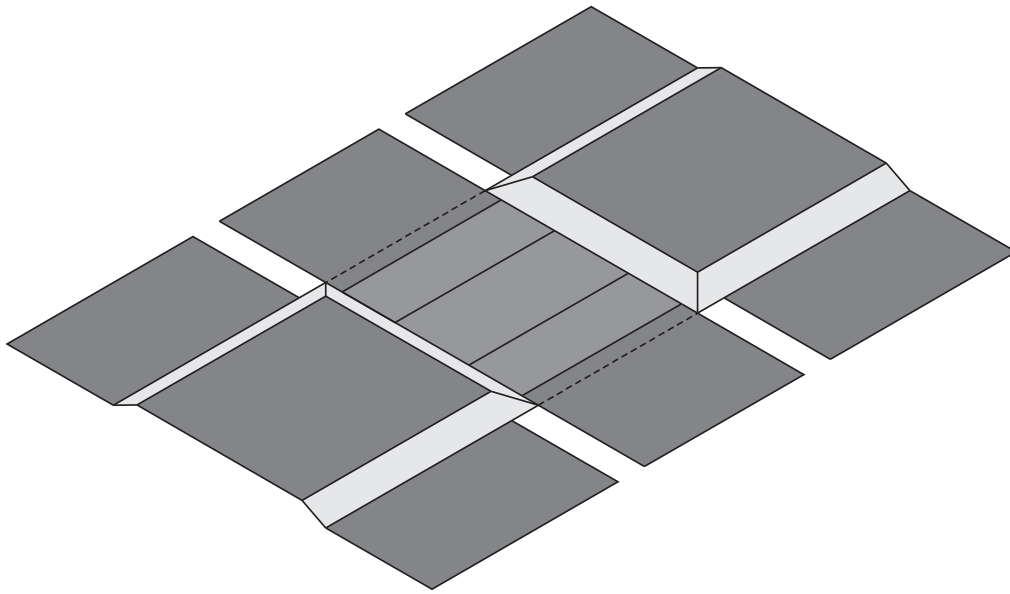


Note:
 - Omit Detectable Warnings if minimum of 2'-0" between Detectable Warnings cannot be met.

ISLAND CROSSINGS

801(25)

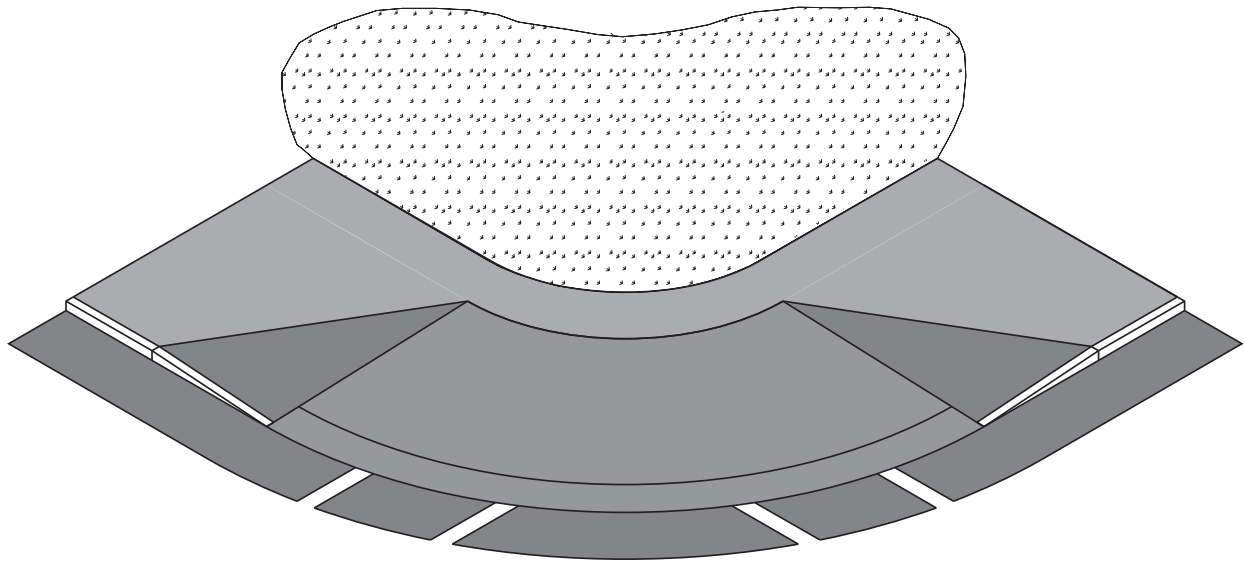

~ ISOMETRIC VIEW ~
(not to scale)

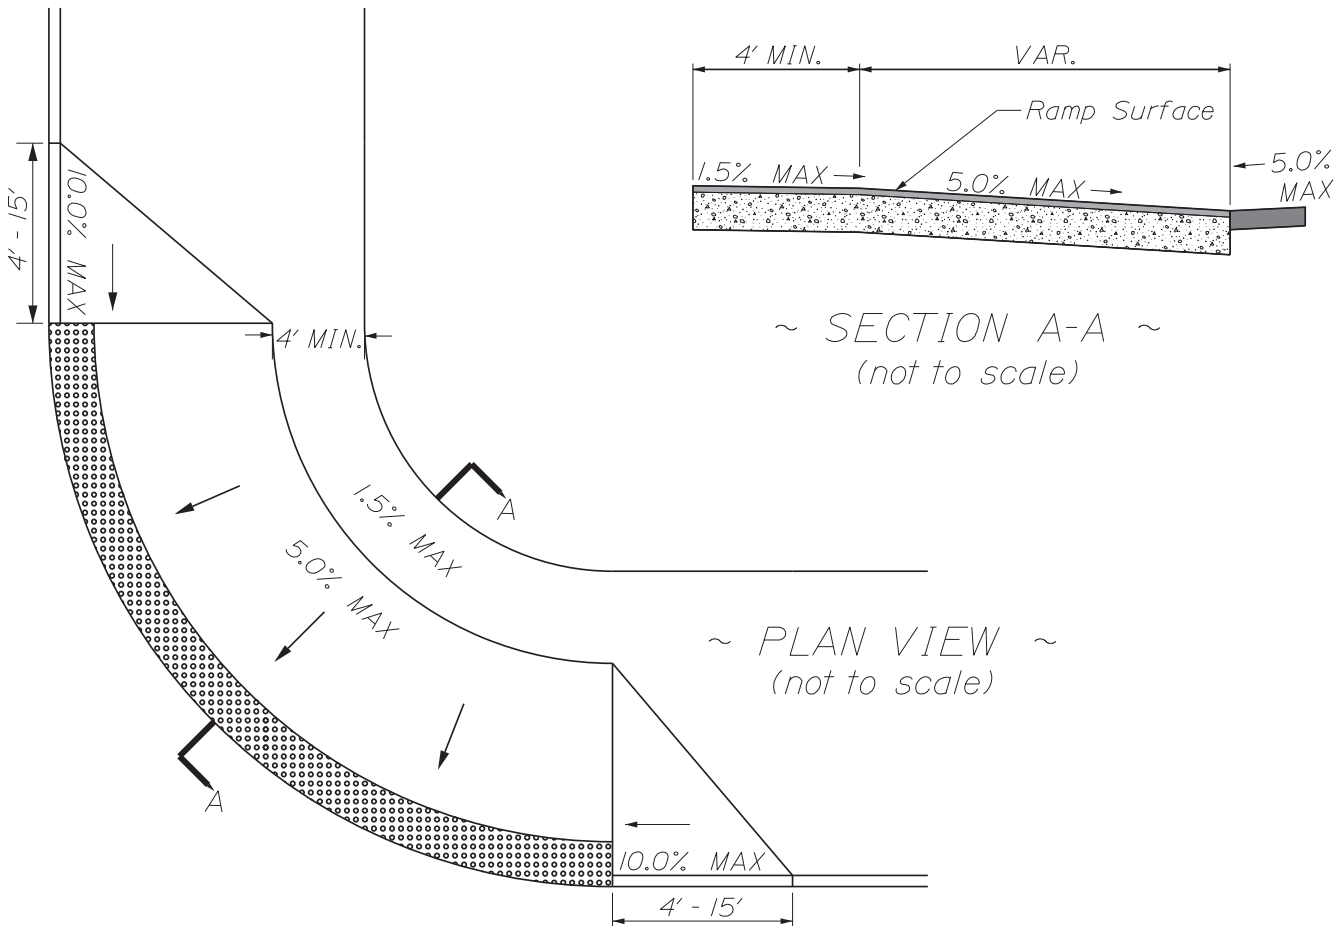


~ SECTION A-A ~
(not to scale)

~ PLAN VIEW ~
(not to scale)


Note:

This option should only be used after all other options have been considered and deemed infeasible.


BLENDING TRANSITION
80(26)

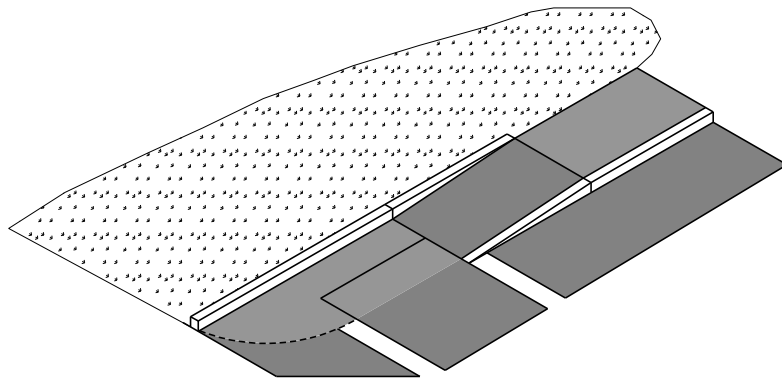

~ PERSPECTIVE VIEW ~
(not to scale)

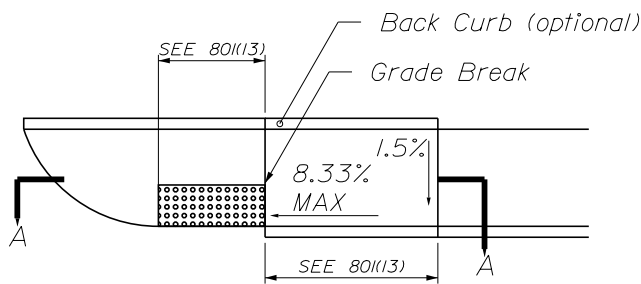

~ PLAN VIEW* ~
(not to scale)

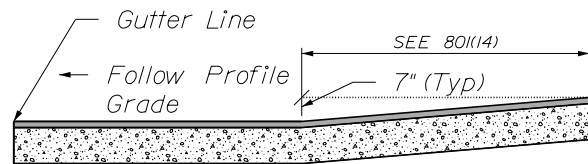


~ SECTION A-A ~
(not to scale)

Notes:


- This less desirable design should be used only when all other options have been considered and exhausted.
- For use only when no sidewalk is present at driveway/non-signalized intersection.
- To achieve 8.33% running slope, the pedestrian ramp may need to be extended. If the ramp length has been extended to a maximum of 15 feet and other design modifications have been considered, running slope may extend 8.33%.

CURB RAMP ADJACENT TO DRIVEWAY OR ENTRANCE


801(27)

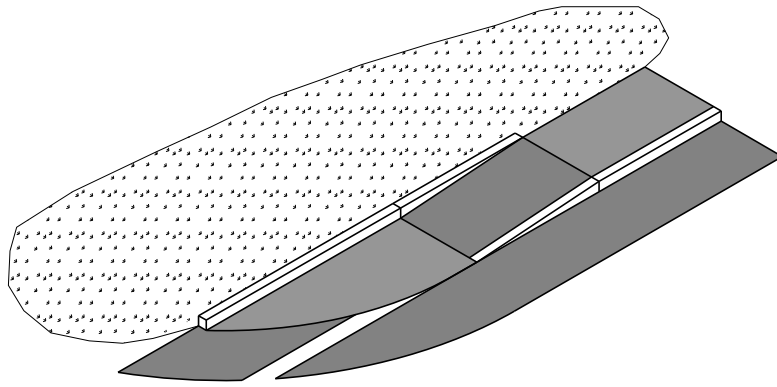


~ PERSPECTIVE VIEW ~
(not to scale)

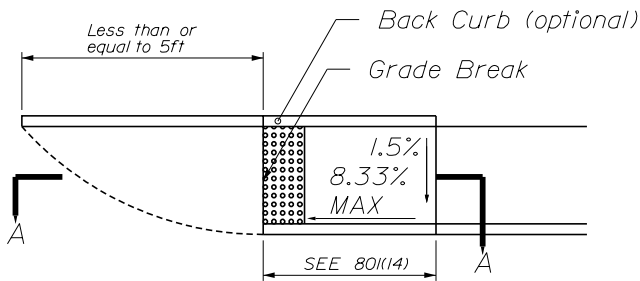


~ *PLAN VIEW* ~
(not to scale)

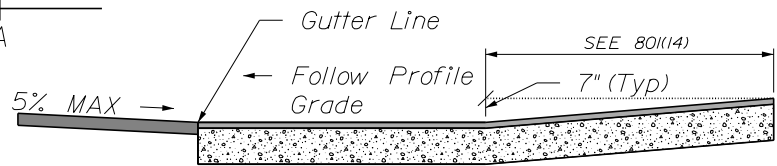

~ SECTION A-A ~
(not to scale)

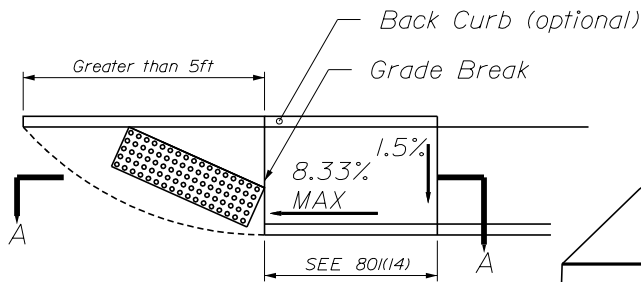

~ **PLAN VIEW** ~
(not to scale)

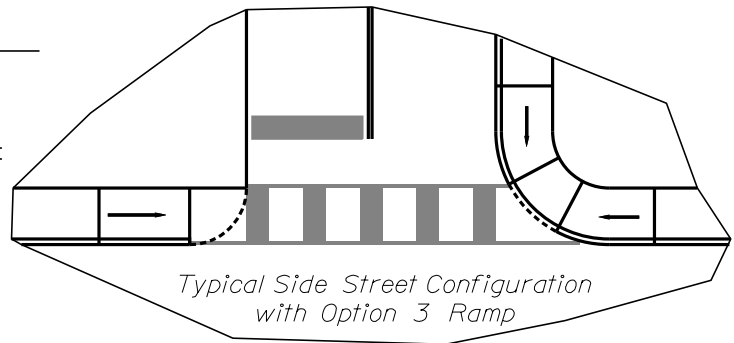


Typical Side Street Configuration
with Option 3 Ramp

Notes:


- No vehicular access shall be permitted through the curb radius.
- For use only when no sidewalk is present on the side road.
- * Use this detectable placement if the distance from the grade break to the gutterline is less than or equal to 5ft.
- ** Use this detectable placement if the distance from the grade break to the gutterline is greater than 5ft.
- To achieve 8.33% running slope, the pedestrian ramp may need to be extended. If the ramp length has been extended to a maximum of 15 feet and other design modifications have been considered, running slope may exceed 8.33%.

SIDE STREET CURB RAMP

801(28)

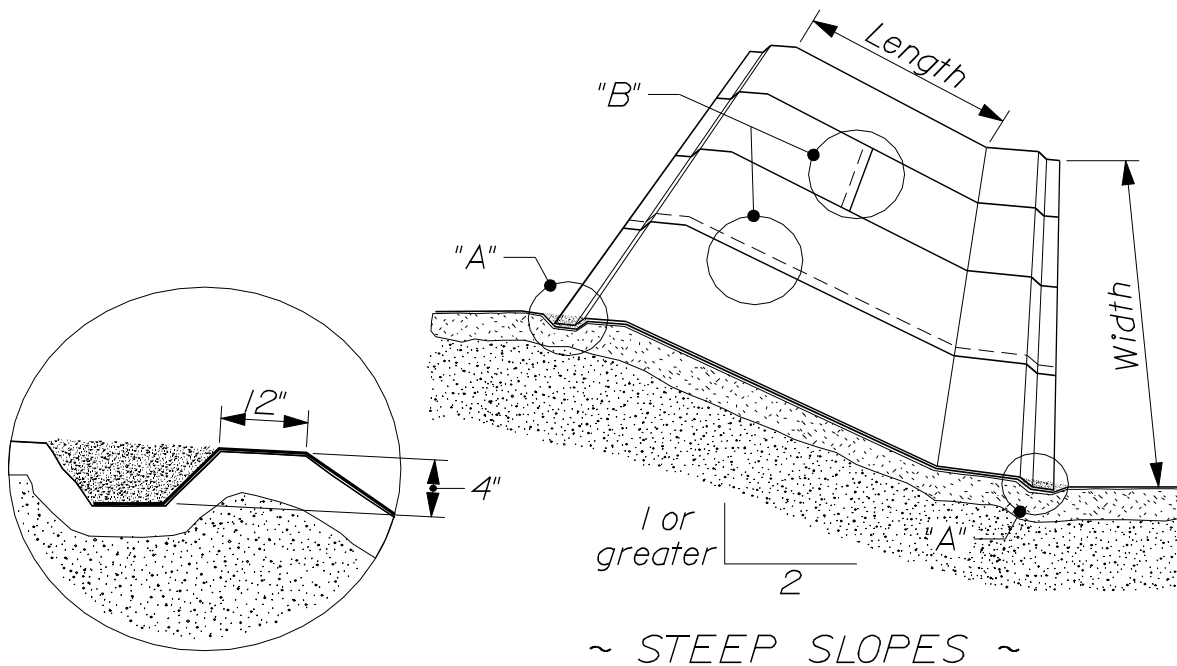

~ DETAIL "A" ~
Anchor Trench

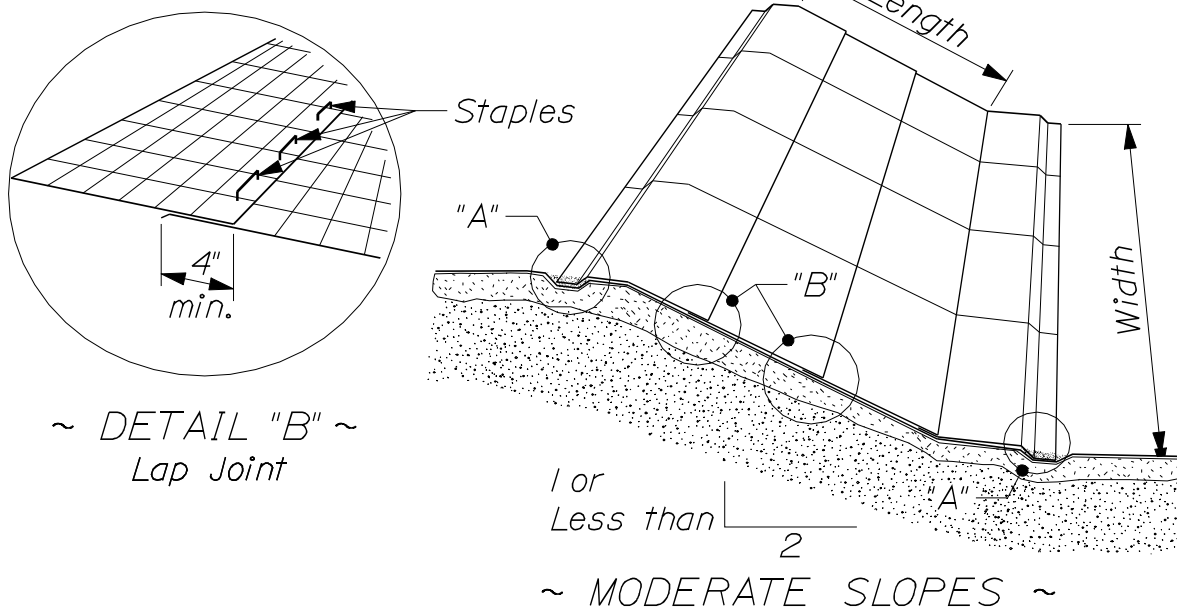


~ DETAIL "B" ~
Lap Joint

NOTES:


1. Width may vary depending on type of material chosen.
2. Follow Manufacturer's recommendations for anchoring blanket ends, overlaps, and staple spacing. Dimensions for these activities are to be used as a minimum.
3. Staples may be as provided or biodegradable staples according to the Qualified Products List*.
4. See section 717.061 of the MaineDOT Standard Specification or MaineDOT Qualified Products List*.
- *<http://www.maine.gov/mdot/transportation-research/qpl.php>
5. Reference the most recent version of the MaineDOT Best Management Practices for Erosion and Sedimentation Control Manual.

EROSION CONTROL BLANKET SLOPE APPLICATION


802(01)




~ ANCHOR DETAIL ~

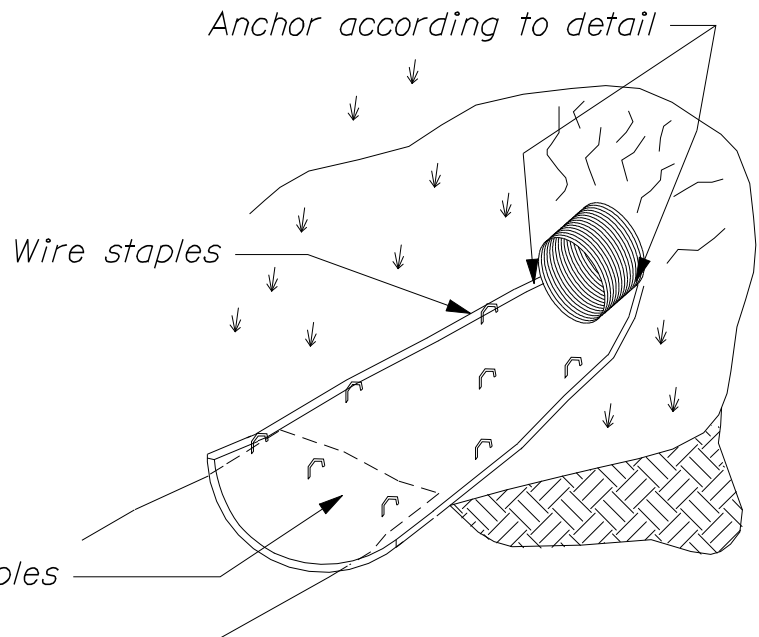

~ UNCOVERED CHANNEL SIDE SLOPES ~

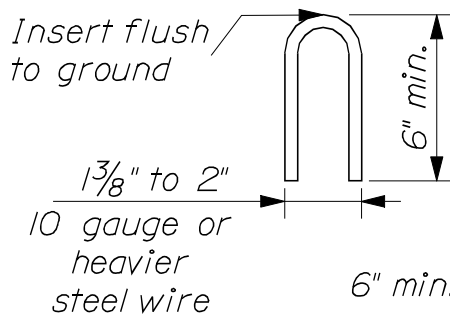

~ WIRE STAPLE ~

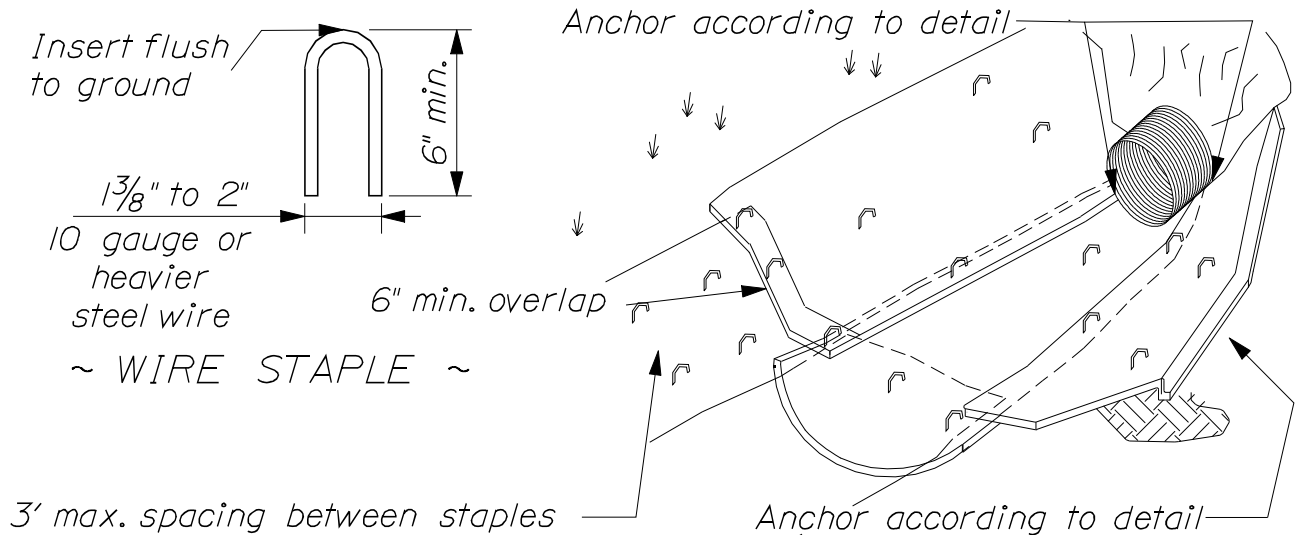


~ COVERED CHANNEL SIDE SLOPES ~

NOTES:


1. Width may vary depending on design flows, channel side slopes, and type of material chosen.
2. Follow Manufacturer's recommendations for anchoring blanket ends, overlaps, and staple spacing. Dimensions shown for these activities are to be used as a minimum.
3. Staples may be as provided or biodegradable staples according to the Qualified Products List*.
4. See Section 717.061 of the MaineDOT Standard Specifications or MaineDOT Qualified Products List*.
- *<http://www.maine.gov/mdot/transportation-research/qpl.php>
5. Reference the most recent version of the MaineDOT Best Management Practices for Erosion and Sedimentation Control Manual.

EROSION CONTROL BLANKET DITCH APPLICATIONS


802(02)

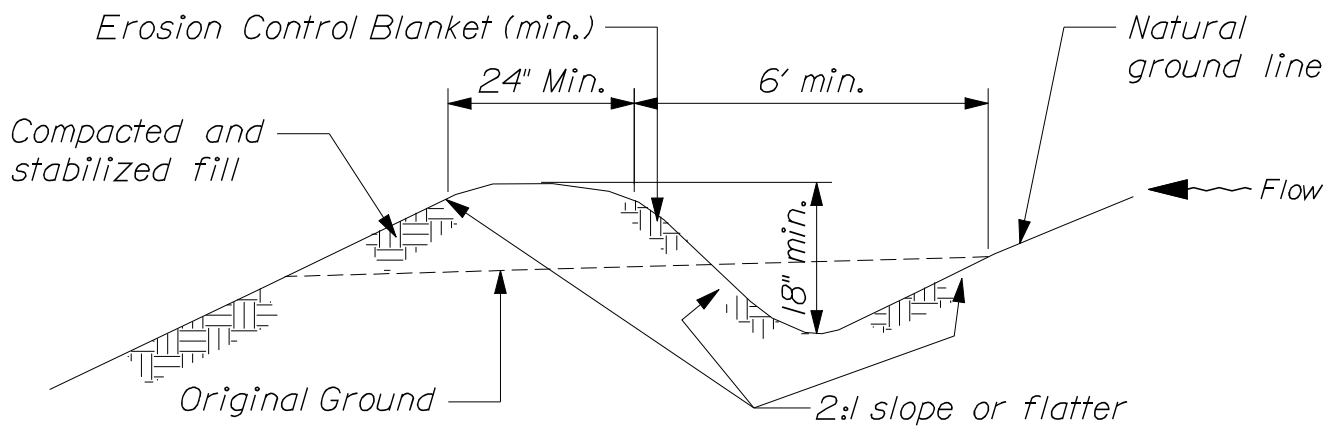

~ EXCAVATED DIVERSION ~

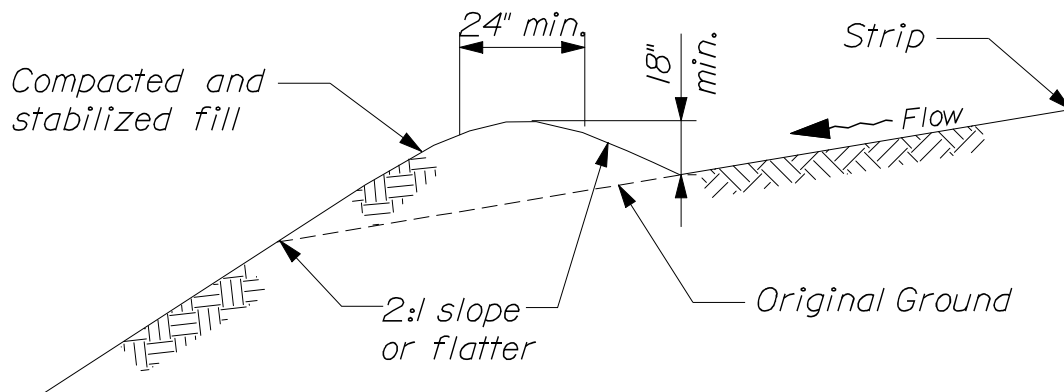

~ FILL PLACED DIVERSION ~

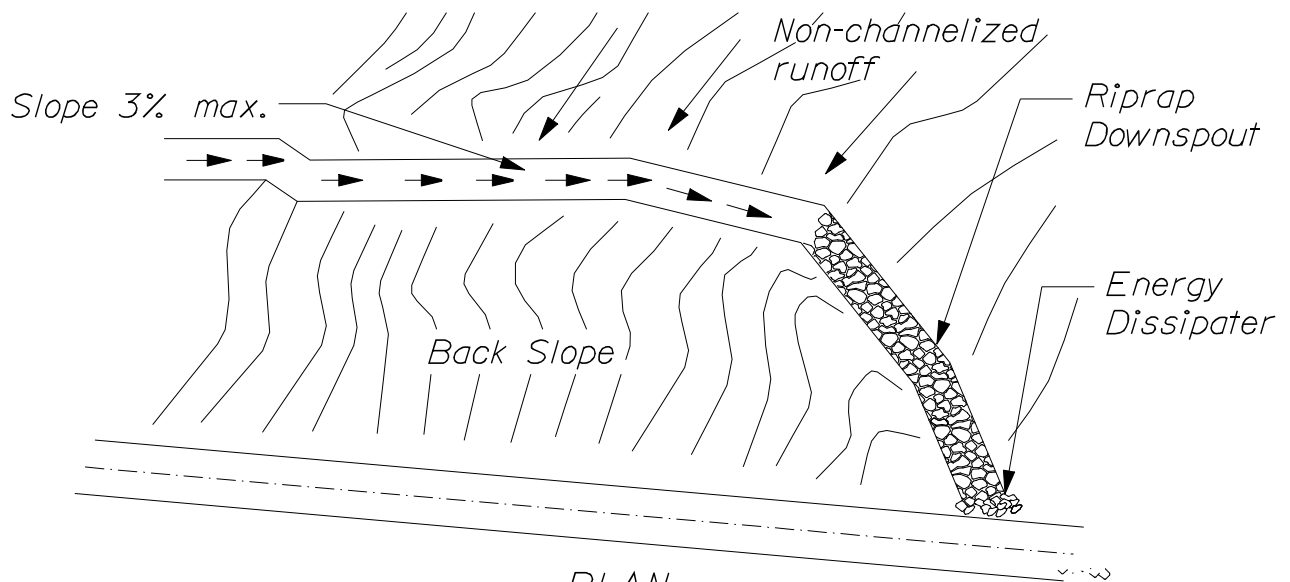

~ PLAN ~


NOTES:

1. Dimensions shown are for a temporary hillside diversion; if used as a permanent practice, it must be designed by a professional engineer.


2. Reference the most recent version of the MaineDOT Best Management Practices for Erosion and Sedimentation Control Manual.

HILLSIDE DIVERSIONS


802(03)

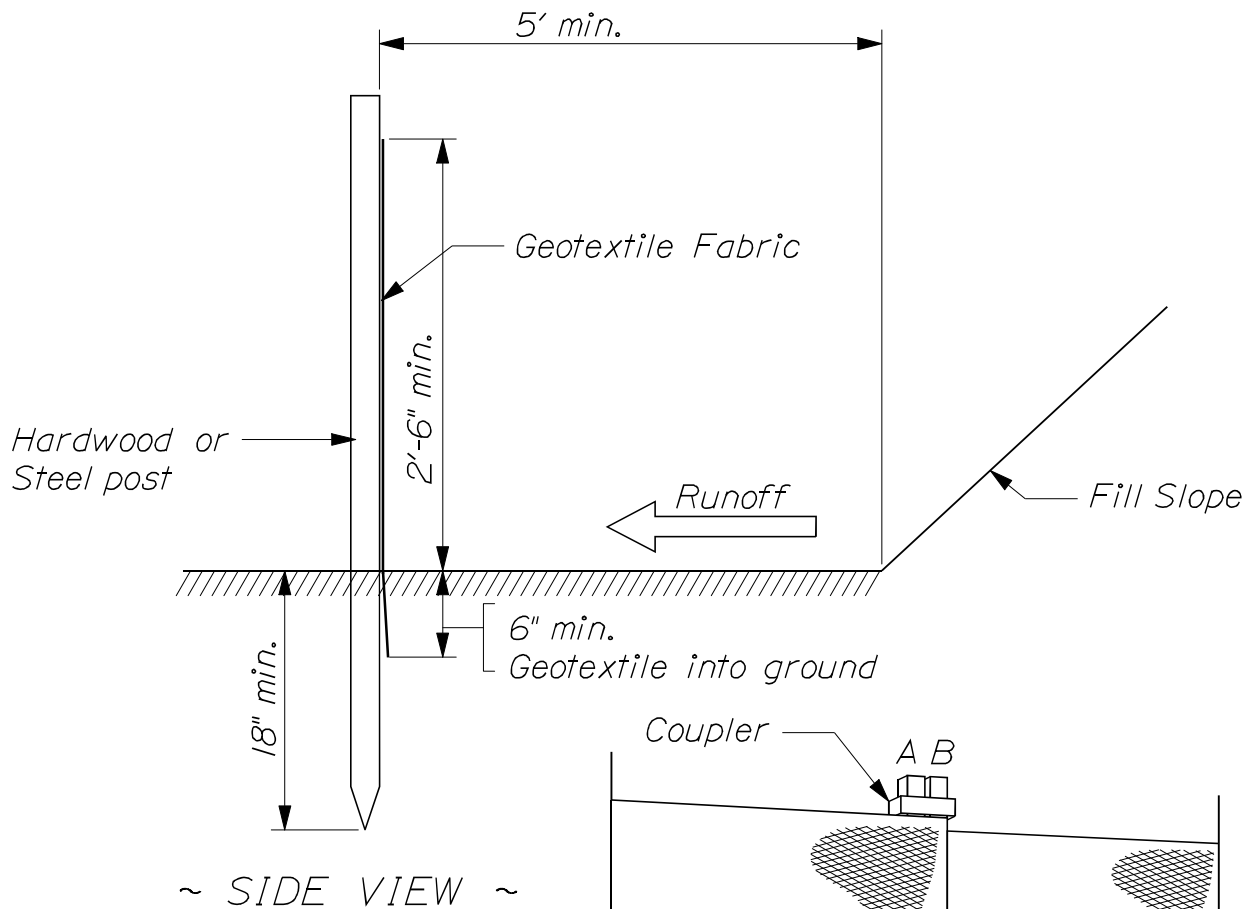

Posts may be wired together when joining sections

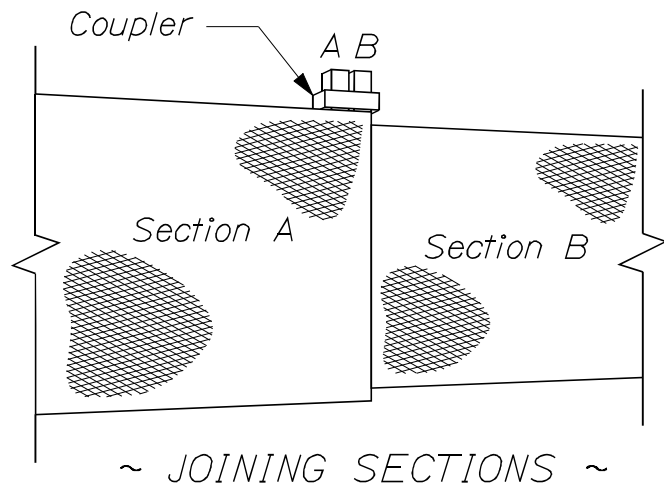


The coupler can be any acceptable device used to tie the poles together

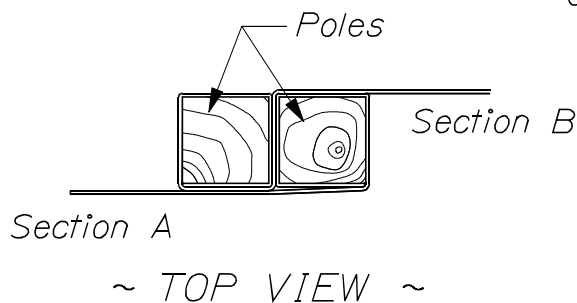

REF:
Best Management Practices for Erosion and Sedimentation Control -
Level Spreader


SILT FENCE *SEDIMENT BARRIER* 802(04)

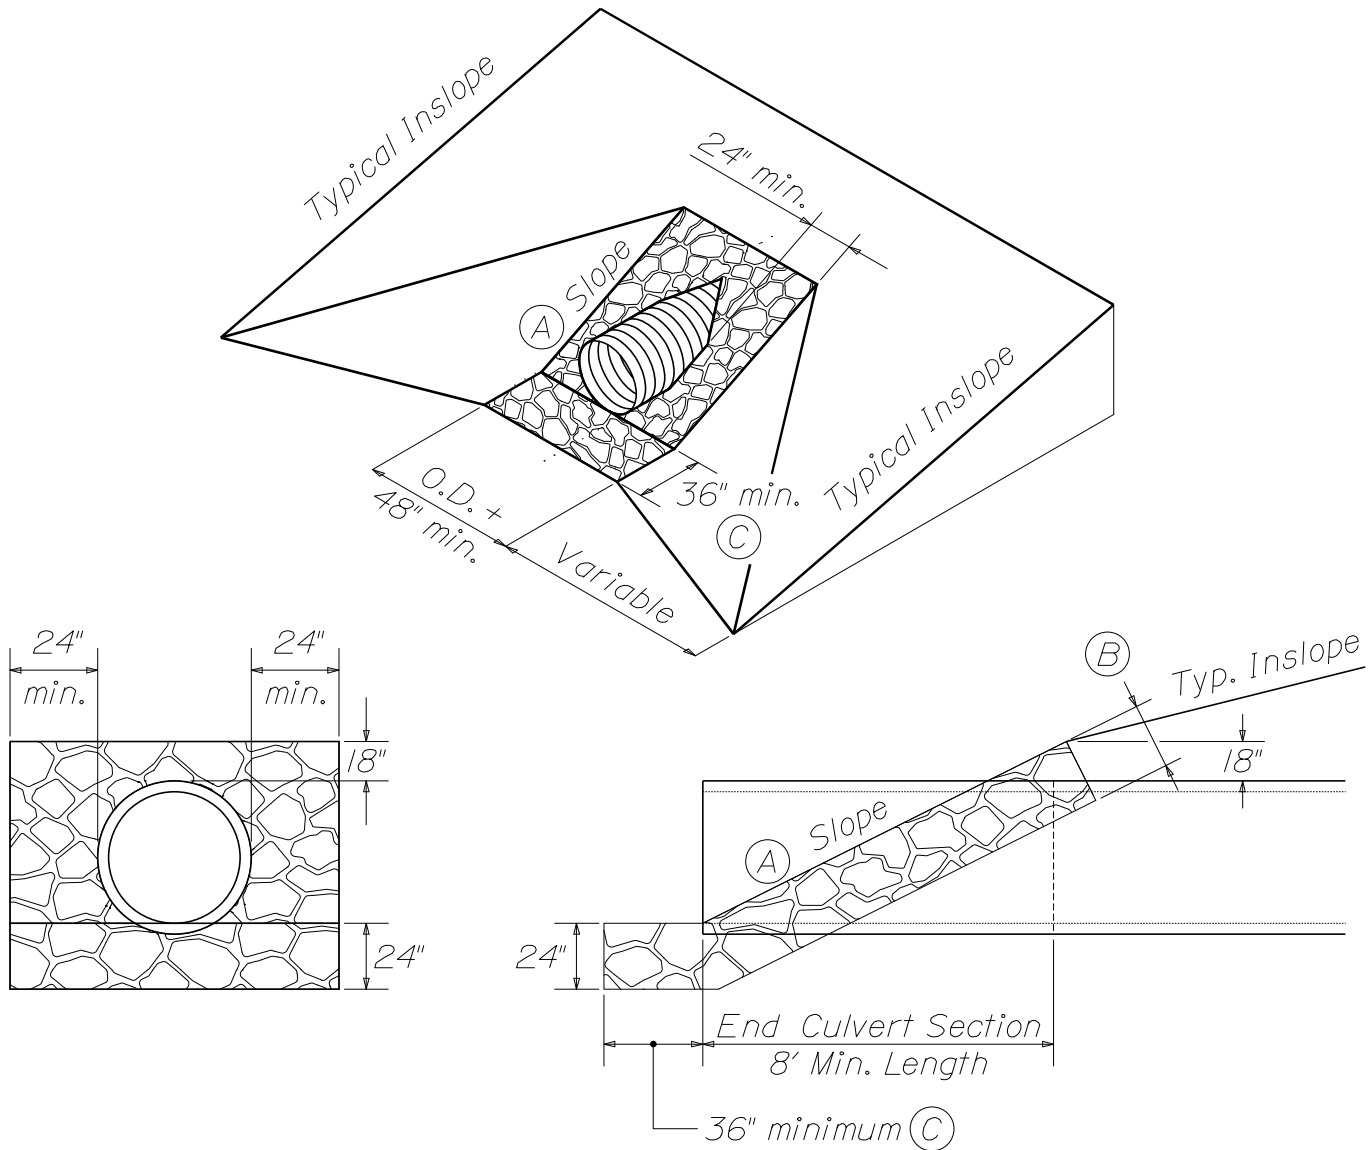

- (A) 2H:IV for culverts less than 60" diameter. 1.75H:IV for culverts 60" diameter or greater.
- (B) 24" for culverts less than 60" diameter. 36" for culverts 60" diameter or greater.
- (C) Dimensions will vary by location. Refer to Best Management Practices for Erosion and Sediment Control - Energy Dissipators for additional requirements.
- (D) Slopes within the dimensions of the culvert end treatment and any additional slopes steeper than 2H:IV shall be riprapped. Slopes steeper than 2H:IV shall be discussed with the Geotechnical Engineer.

ROADWAY CULVERT END SLOPE TREATMENT


802(05)

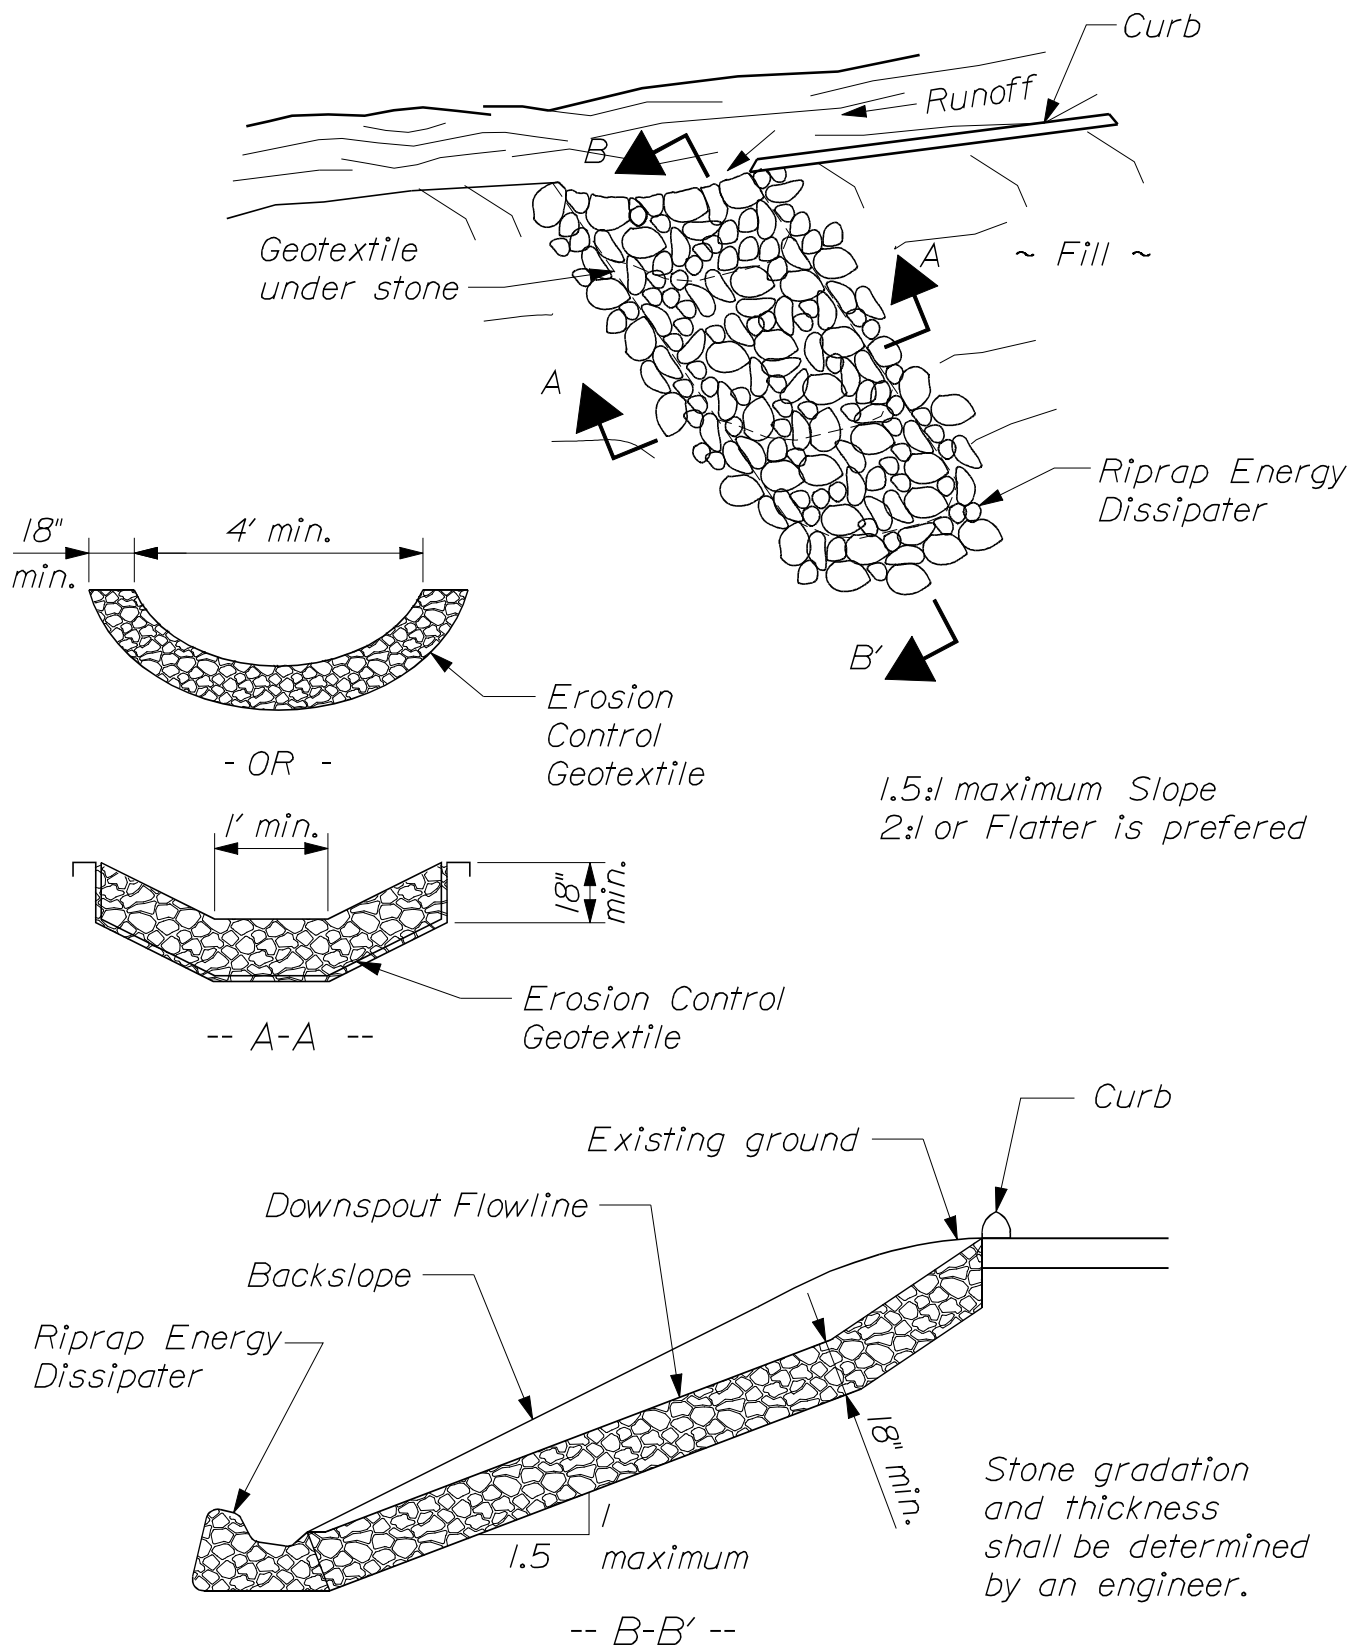


REF: Best Management Practices for Erosion and Sediment Control - Temporary Slope Drains

RIPRAP DOWNSPOUT

802(06)

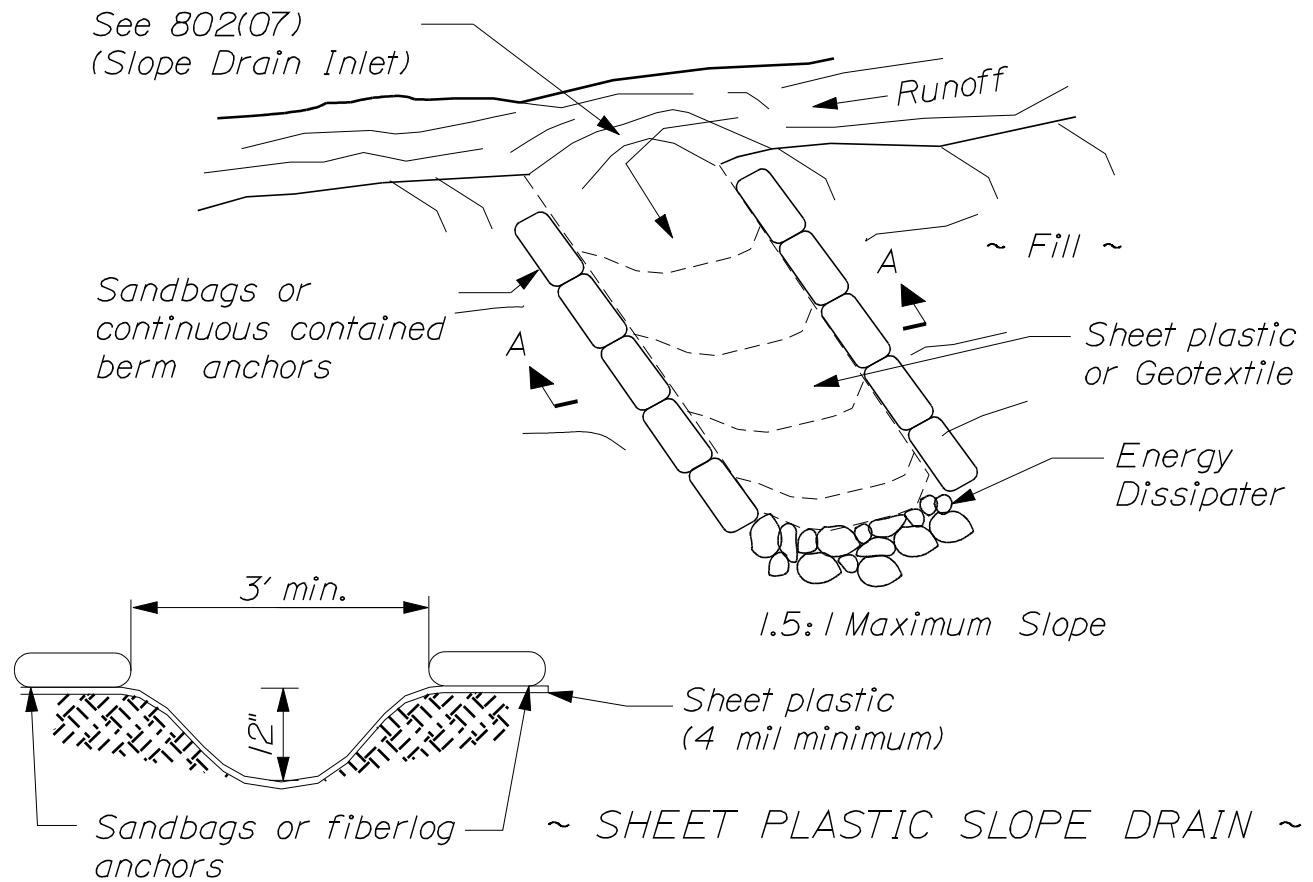



~ SECTION A-A ~

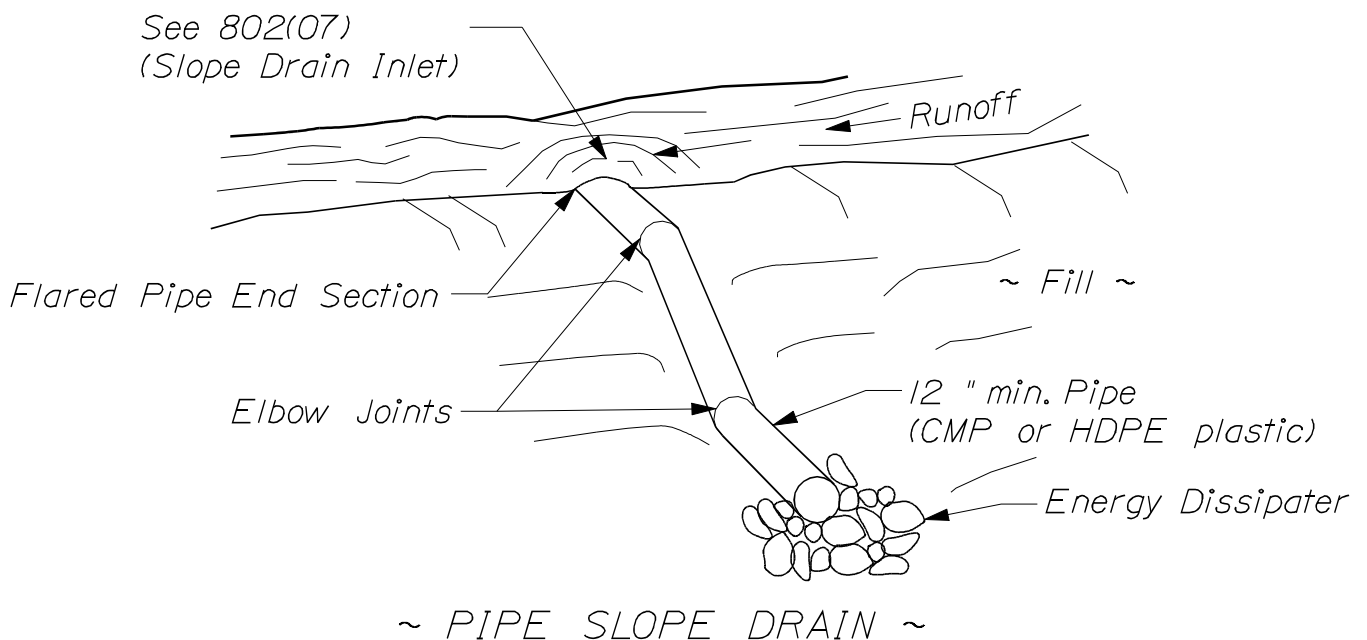


REF: Best Mngmt. Practices for Erosion and Sedimentation Control -
Temporary Slope Drains

TEMPORARY SLOPE DRAINS

802(07)

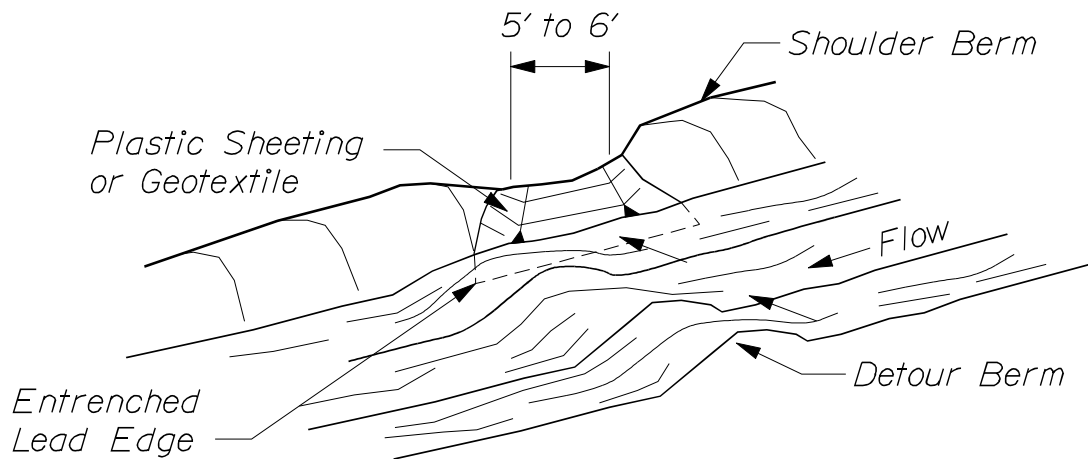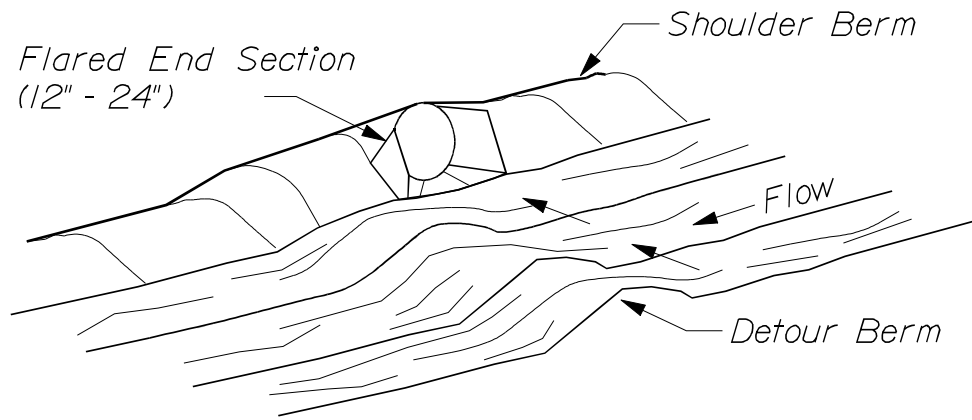


~ SLOPE DRAIN INLETS ~

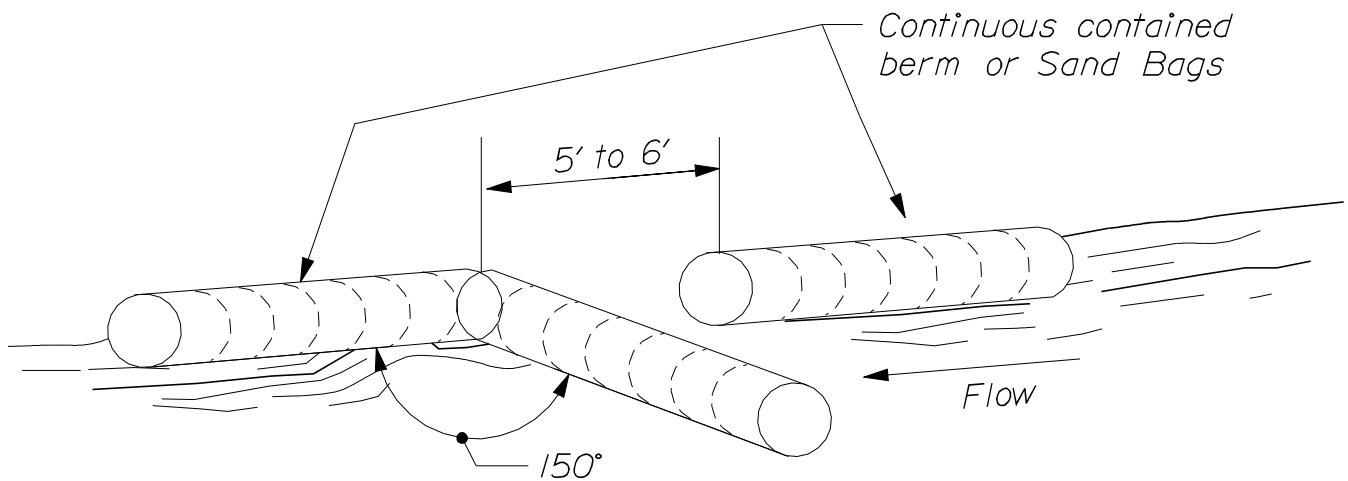


REF: Best Mngmt. Practices for Erosion and Sedimentation Control -
Temporary Slope Drains

TEMPORARY SLOPE DRAIN INLETS
802(08)

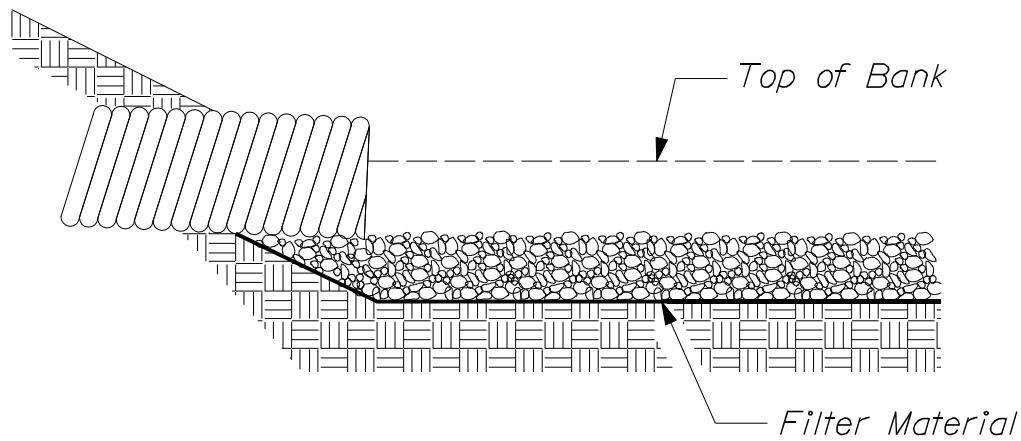

~ SECTION ~

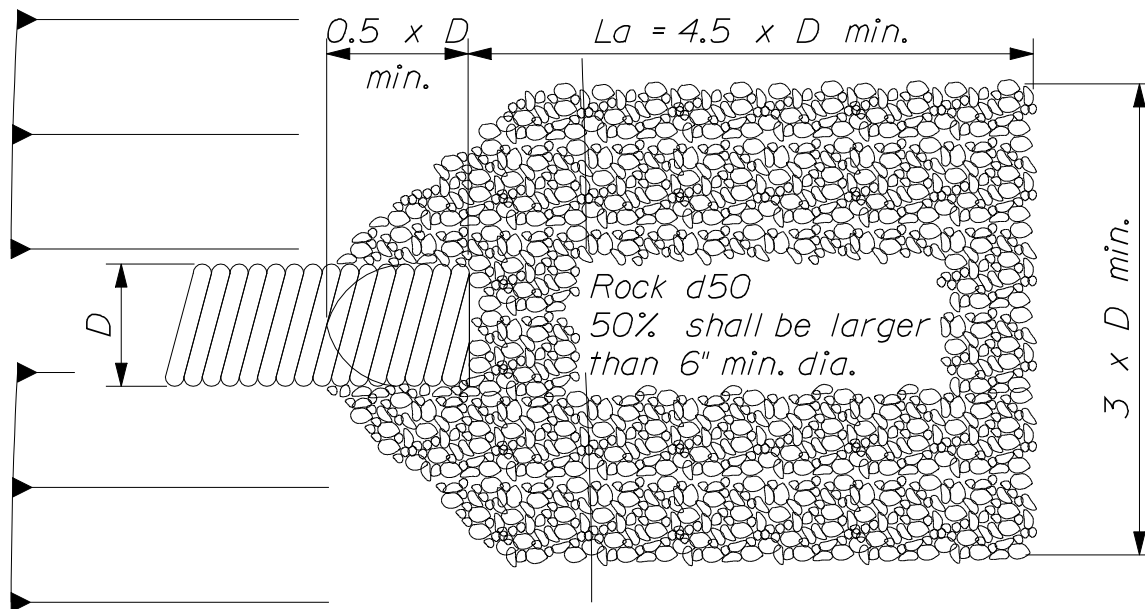



~ PLAN ~

NOTES:

1. 'La' = Length of Apron. Distance 'La' shall be of sufficient length to dissipate energy
2. Apron shall be set to a zero grade and aligned parallel to water flow.
3. Filter material shall be filter fabric or 6" thick minimum graded gravel layer.
4. Reference: Best Management Practices for Erosion and Sediment Control - Energy Dissipater Riprap Apron
5. This detail shall apply to pipe diameters of 36" or less.
6. Larger diameter pipes shall be designed by a professional engineer.
7. Reference: Riprap spec. 703.29

ENERGY DISSIPATER - RIPRAP APRON


802(09)

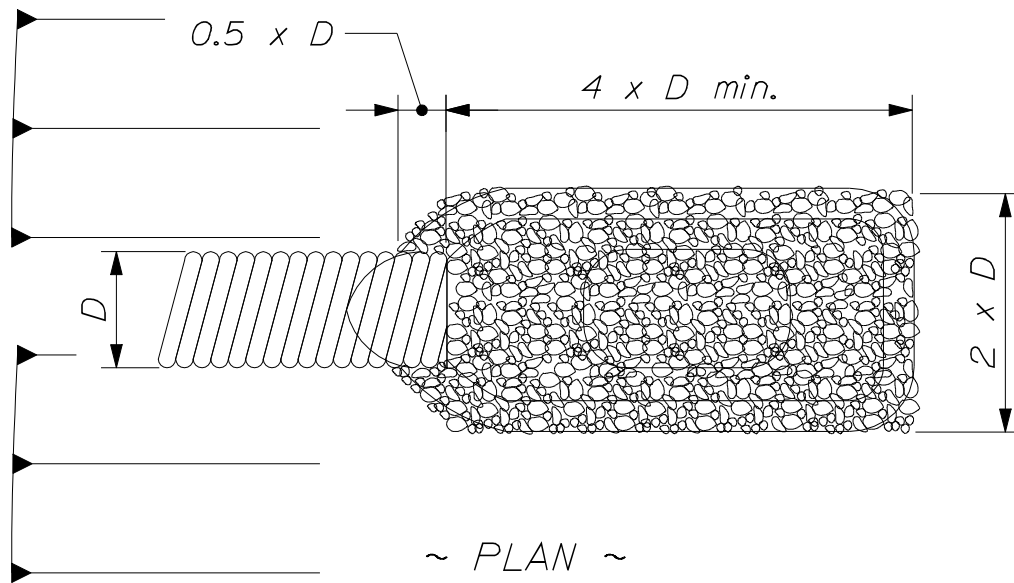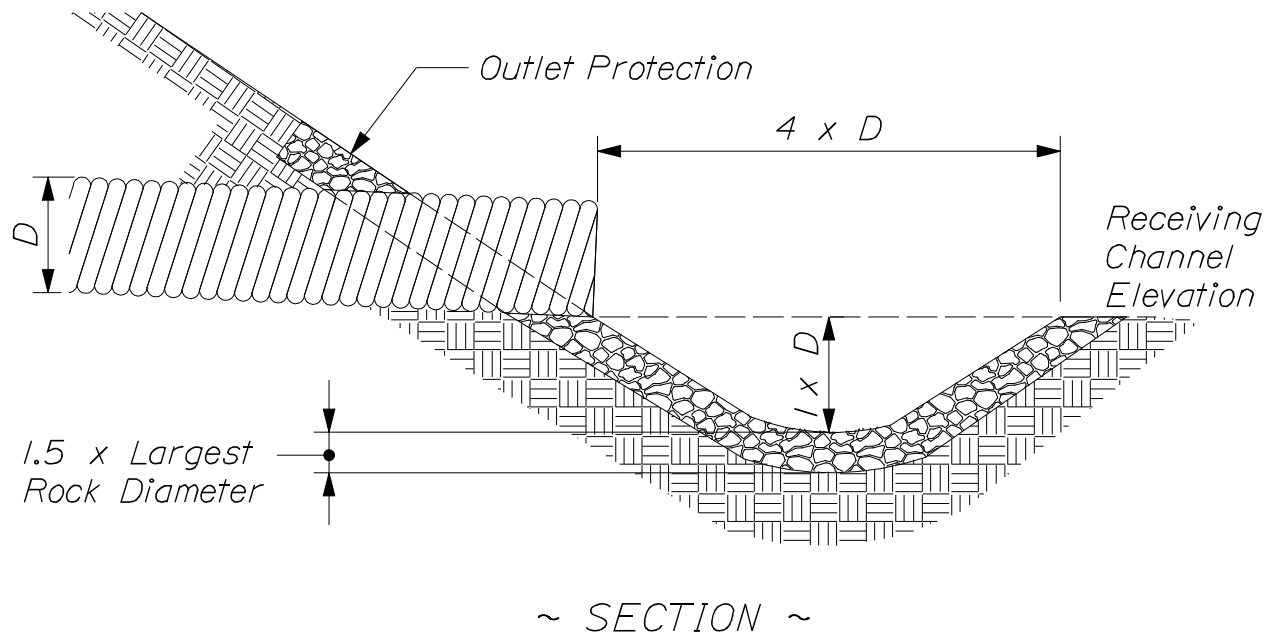

NOTES:

1. Riprap shall be underlain by gravel bedding or non-woven geotextile.
2. REF: Best Management Practices for Erosion and Sediment Control - Energy Dissipater.
3. This detail shall apply to pipe diameters of 36" or less. Plunge pools for large diameter pipes shall be designed by a professional engineer.


ENERGY DISSIPATER - PLUNGE POOL
802(10)

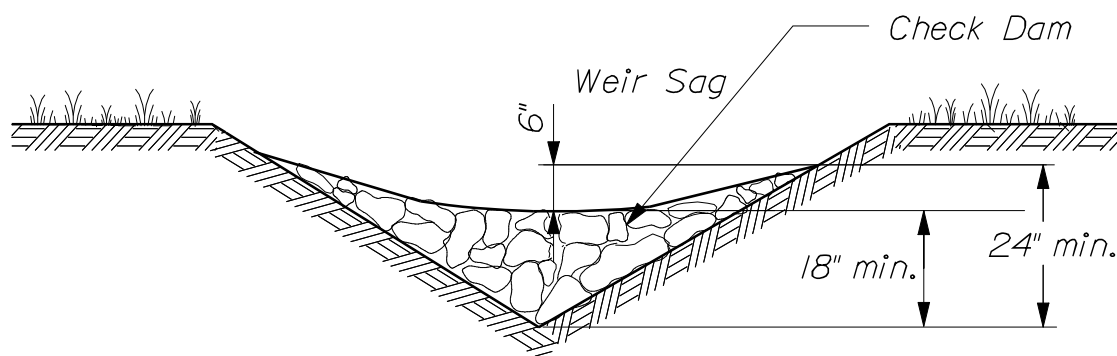

~ CROSS SECTION ~

NOTE:



Unless specified, stone shall meet requirements of material specification 703.29 stone ditch protection.

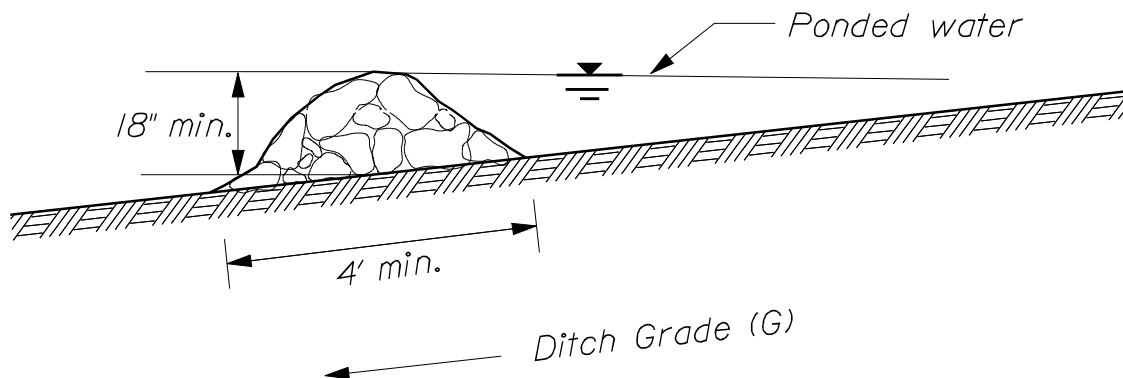

~ PROFILE @ DITCH ~

REF: Best Management Practices for Erosion and Sedimentation Control -
Check Dam


STONE CHECK DAM
802(11)

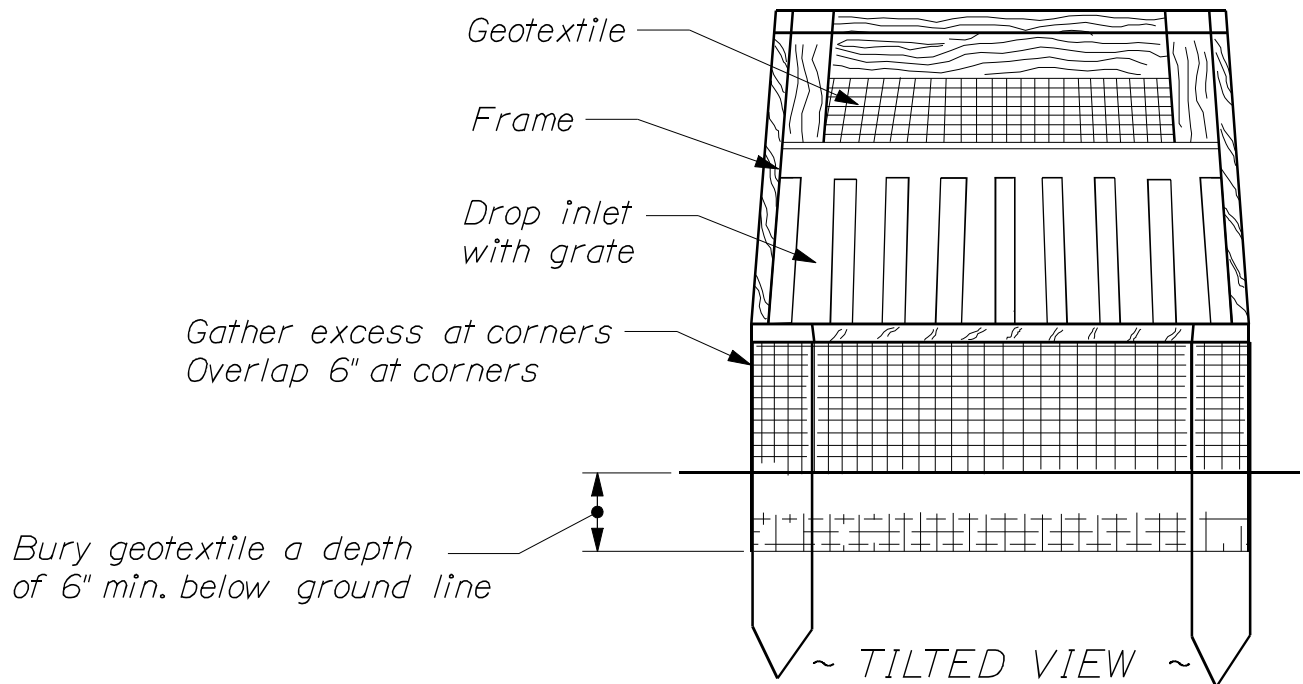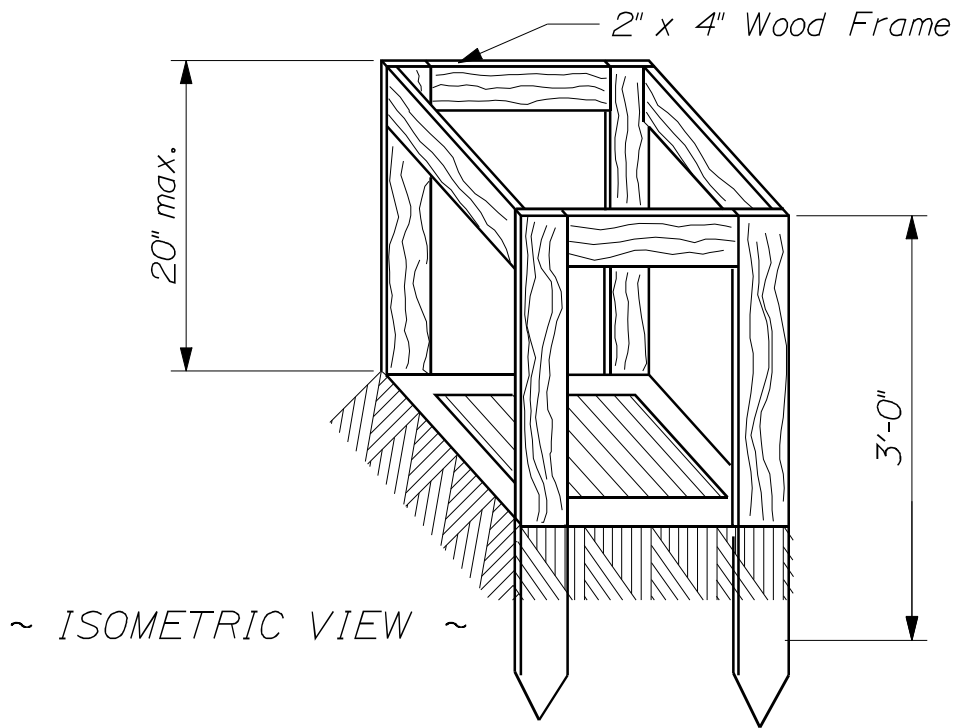

NOTE: Use Silt Fence inlet protection in sump locations only. Sheet flow less than 1 acre Drainage Area not in paved areas or with concentrated flows.

REF: Best Management Practices for Erosion and Sedimentation Control - Storm Drain Inlet Protection

SILT FENCE CB/ INLET GRATE UNIT PROTECTION
802(12)

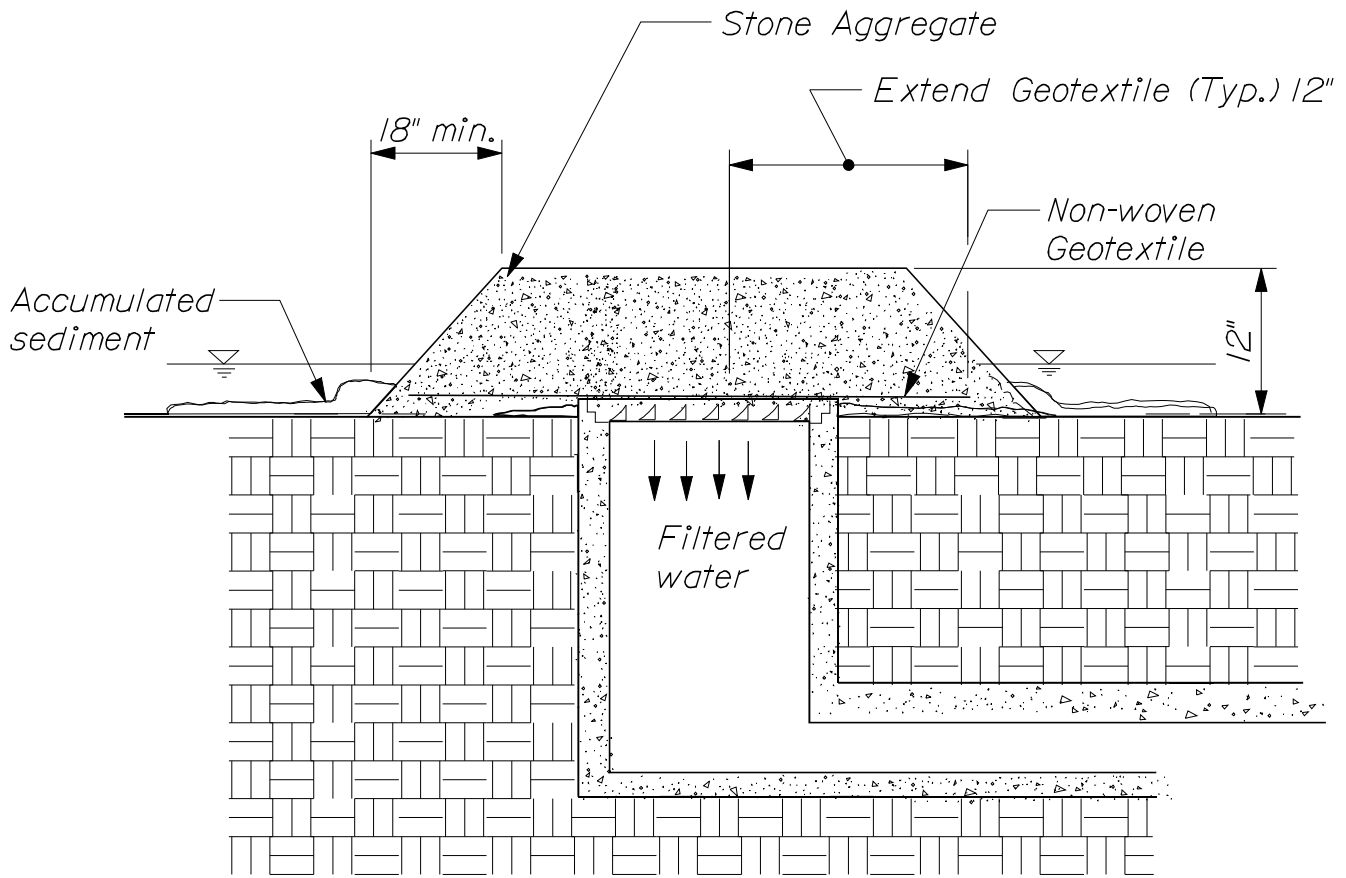




~ SECTION ~

NOTES:

1. Use Stone aggregate and non-woven geotextile inlet protection only in sump locations where heavy concentrated flows are expected.
2. Do not use where ponding around the structure might cause inconvenience or damage.
3. Stone aggregate shall be Stone For French Drain 703.24 or approved by the Resident.
4. Ref: Best management Practices for erosion and sedimentation control - Storm Drain Inlet Protection.

STONE AGGREGATE & GEOTEXTILE CB/ INLET GRATE UNIT PROTECTION



802(13)

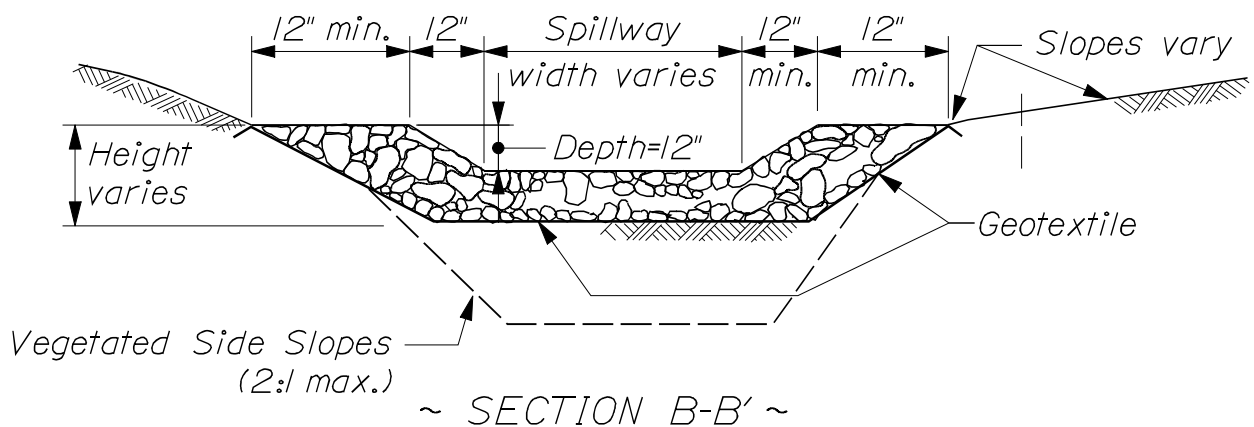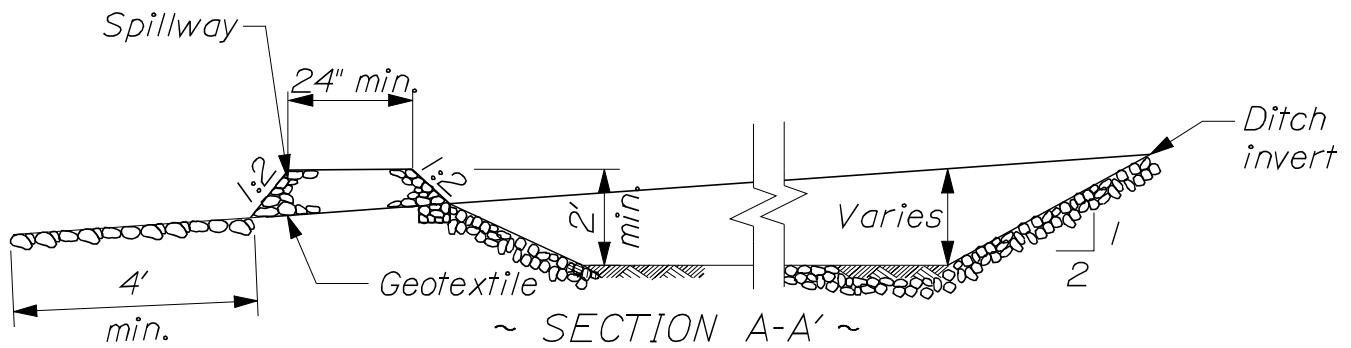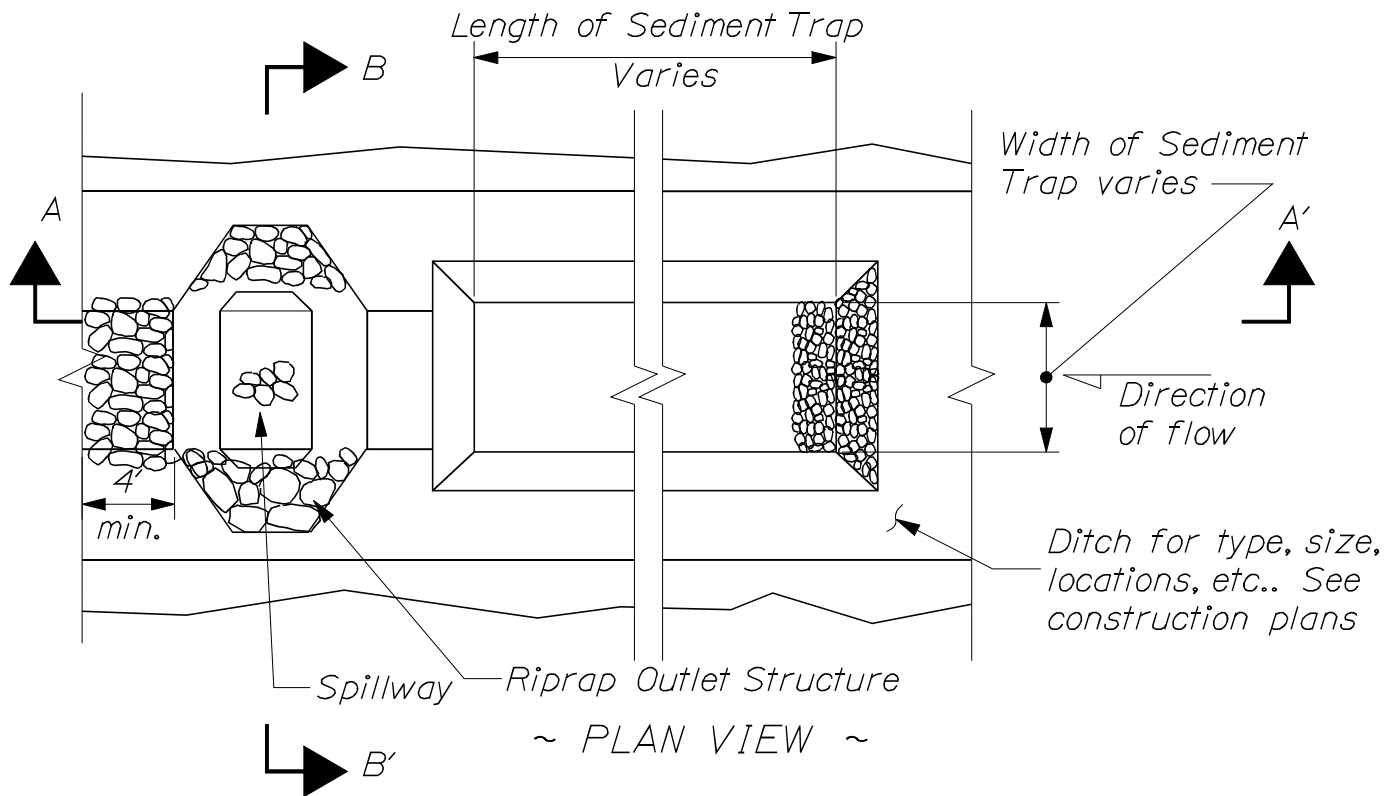

REF:
Best Management Practices for Erosion and Sedimentation Control -
Sediment Traps

SEDIMENT TRAP




802(14)

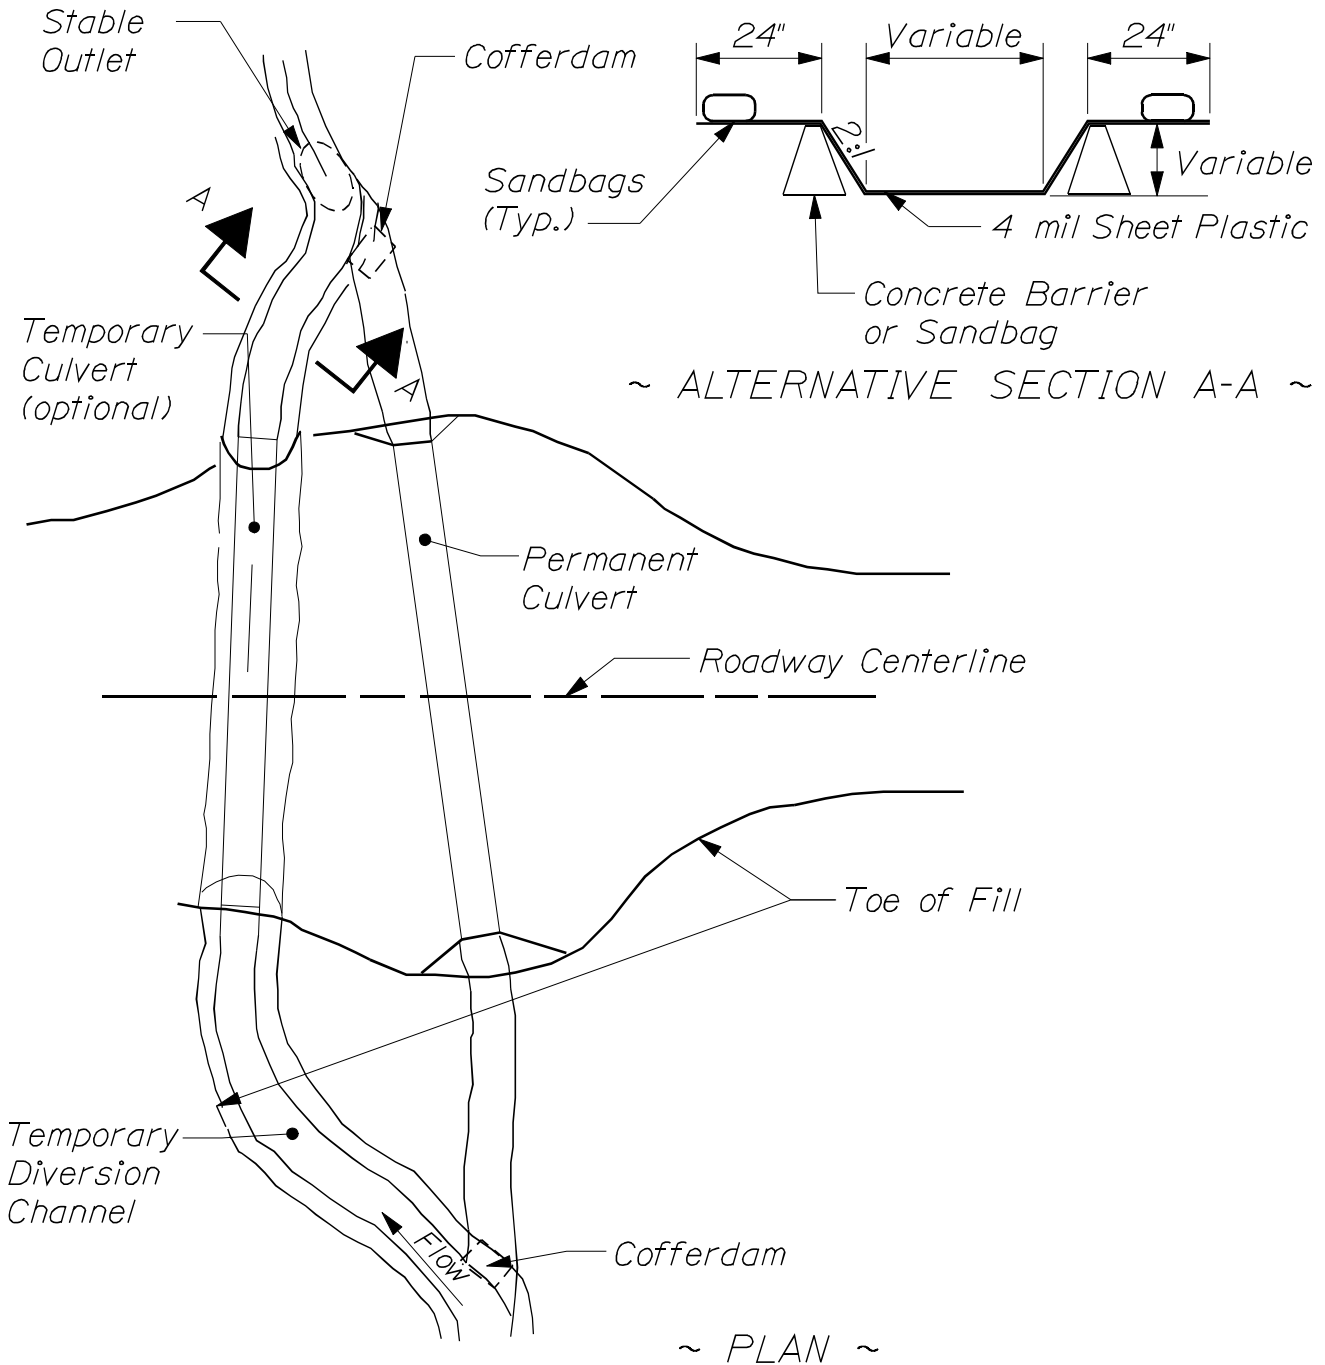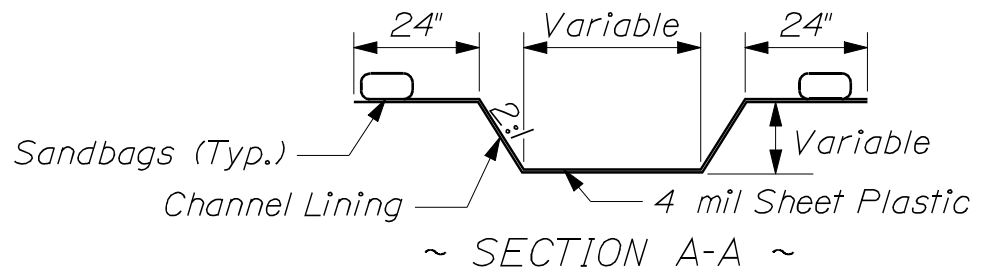

REF: Best Management Practices for Erosion and Sedimentation Control -
Temporary Stream Diversion

TEMPORARY STREAM DIVERSION

802(15)

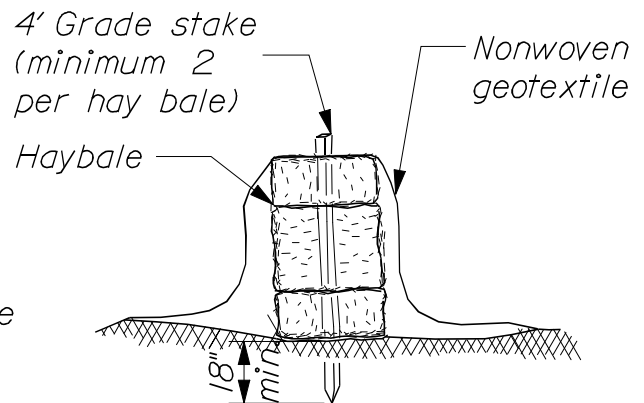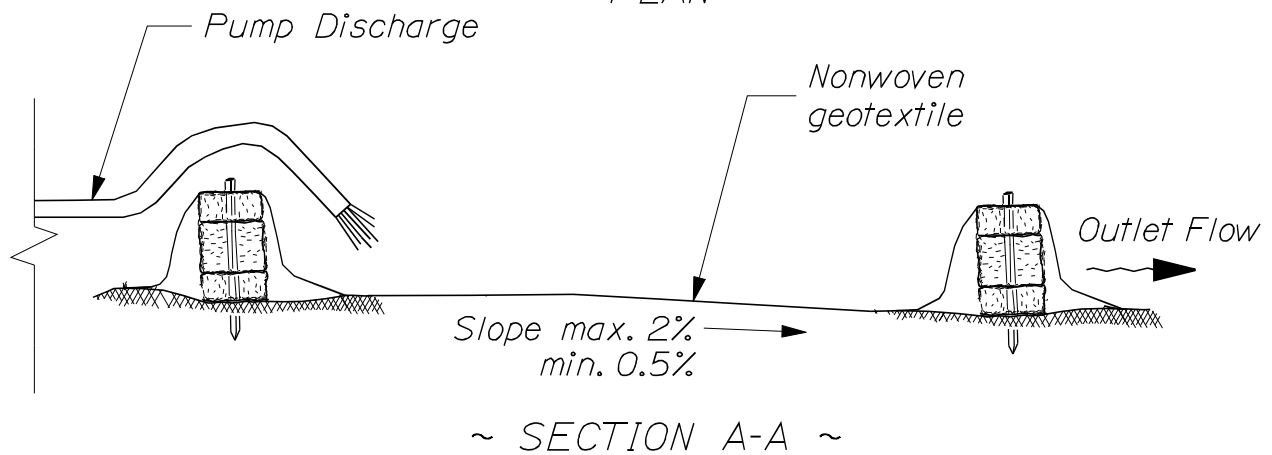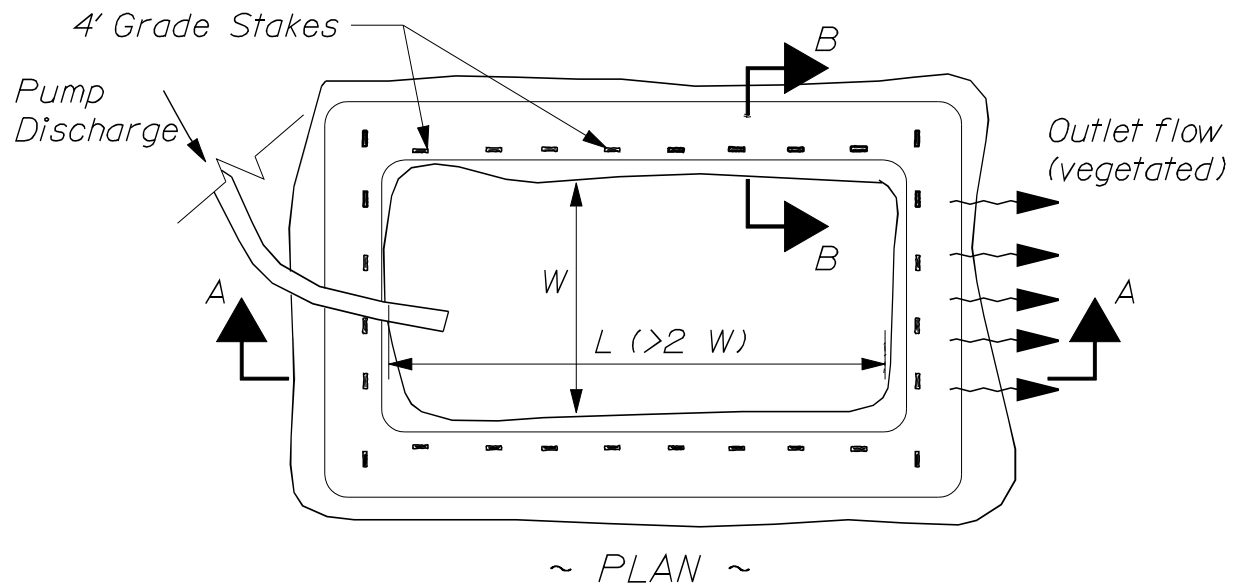


NOTES:


1. Most non-woven geotextile is available in 12.5' & 15' widths.
2. Overlap all temporary sediment basin geo-textile joints by 1' minimum.
3. Design basin according to Best Management Practices for Erosion and Sedimentation Control - Temporary Sediment Basin.

TEMPORARY SEDIMENT BASIN

802(16)

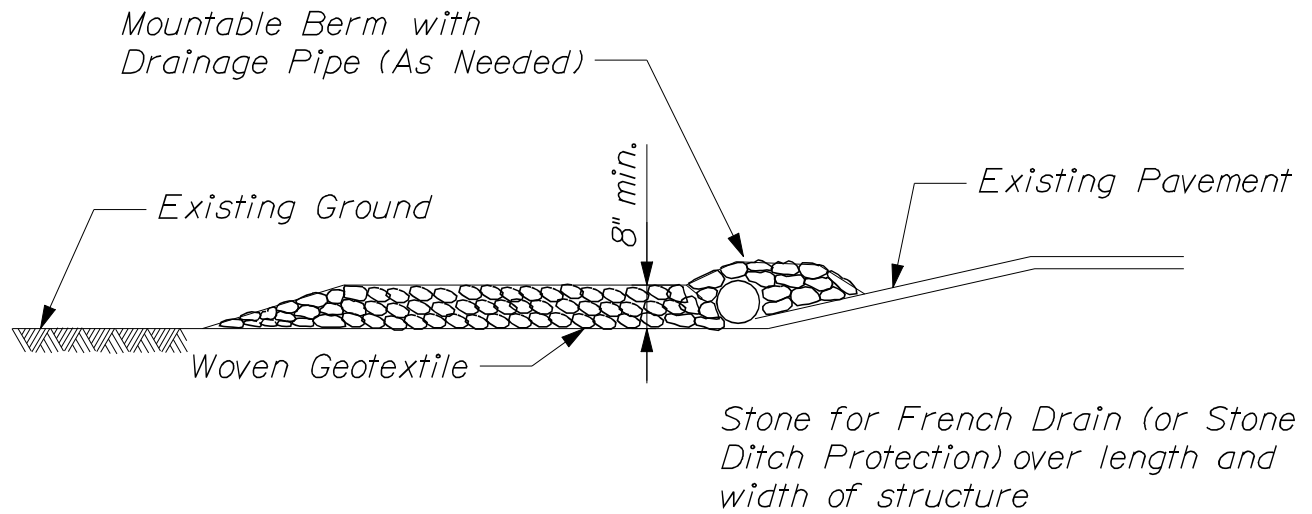

~ PROFILE ~


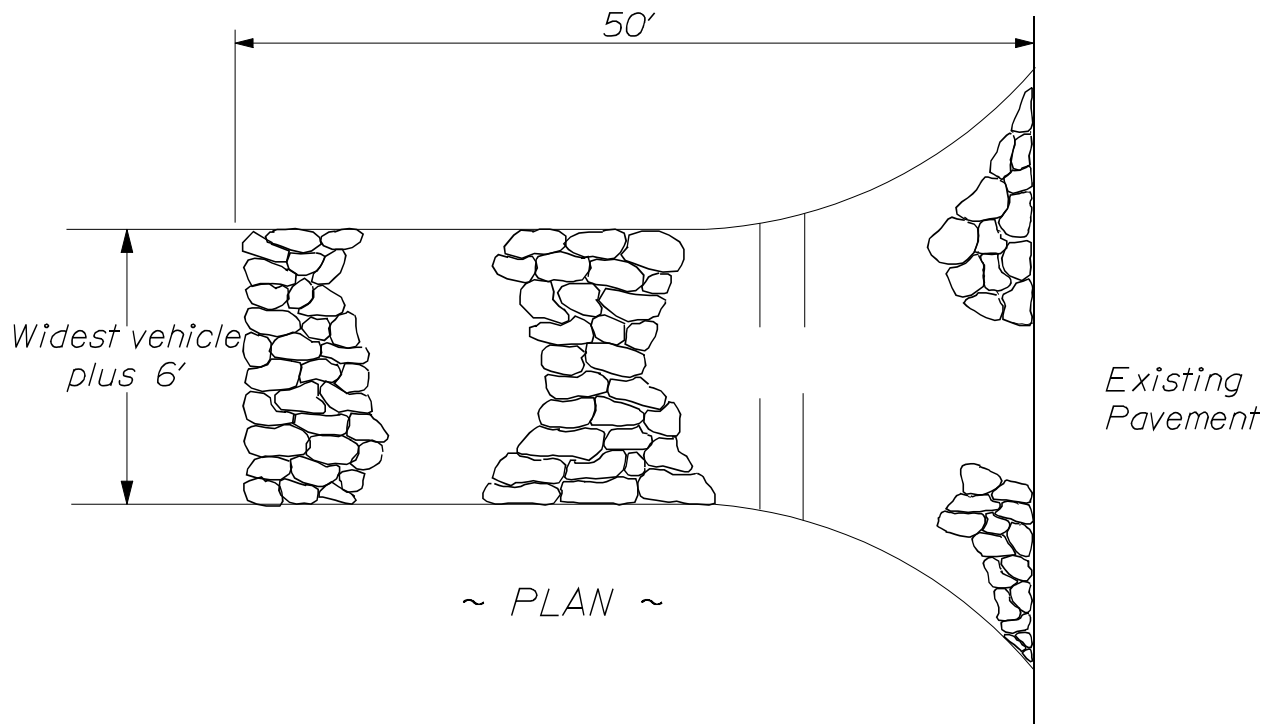


~ PLAN ~

REF: Best Management Practices for Erosion and Sedimentation Control - Stabilized Construction Entrance/Exit

CONSTRUCTION ENTRANCE/EXIT


802(17)

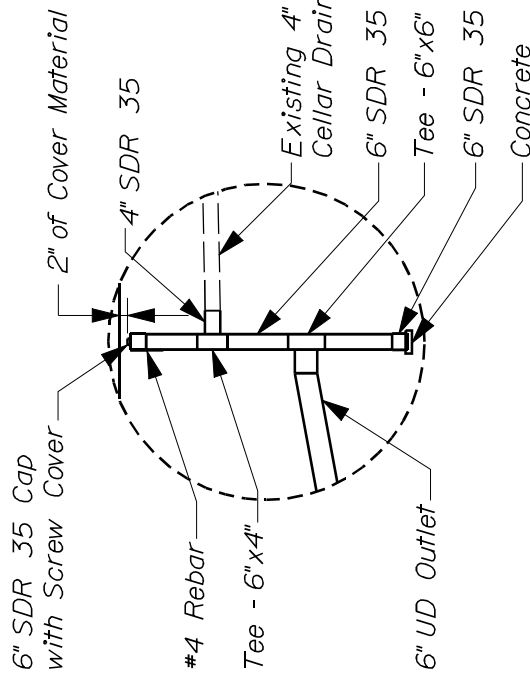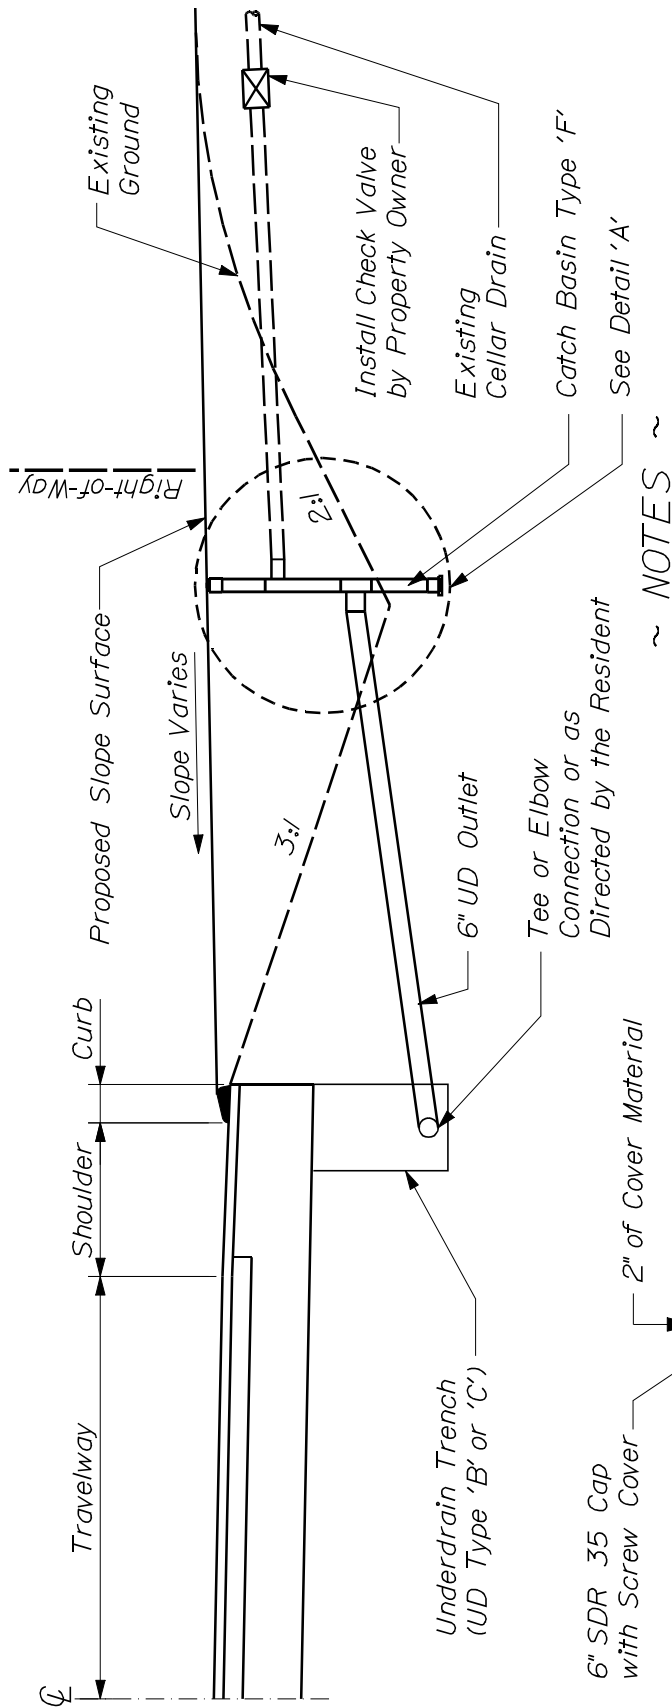

~ DETAIL "A"
INSPECTION STANDPIPE ~


~ NOTES ~

1. Payment for connection from the inspection standpipe to the proposed underdrain system shall be a 6 inch underdrain outlet, item no. 605.10, or as directed by the resident.
2. Inspection standpipe shall have a solid cover and be installed within the state's right of way.
3. A check valve to prevent back flow to property may be installed. Check valve should be installed at the upstream side of the inspection standpipe and outside of the state's right of way. Installation of check valve shall be the responsibility of the property owner.
4. Payment for connection of the existing cellular drain to the inspection standpipe shall be incidental to the item no. 801.141 or 801.16.
5. The station locations may be changed to fit field conditions, as directed by the resident.
6. A 3 foot length of #4 rebar shall be placed adjacent to the standpipe and flush with cap. Installation of the rebar and the concrete footing shall be incidental to item no. 801.141 or 801.16.

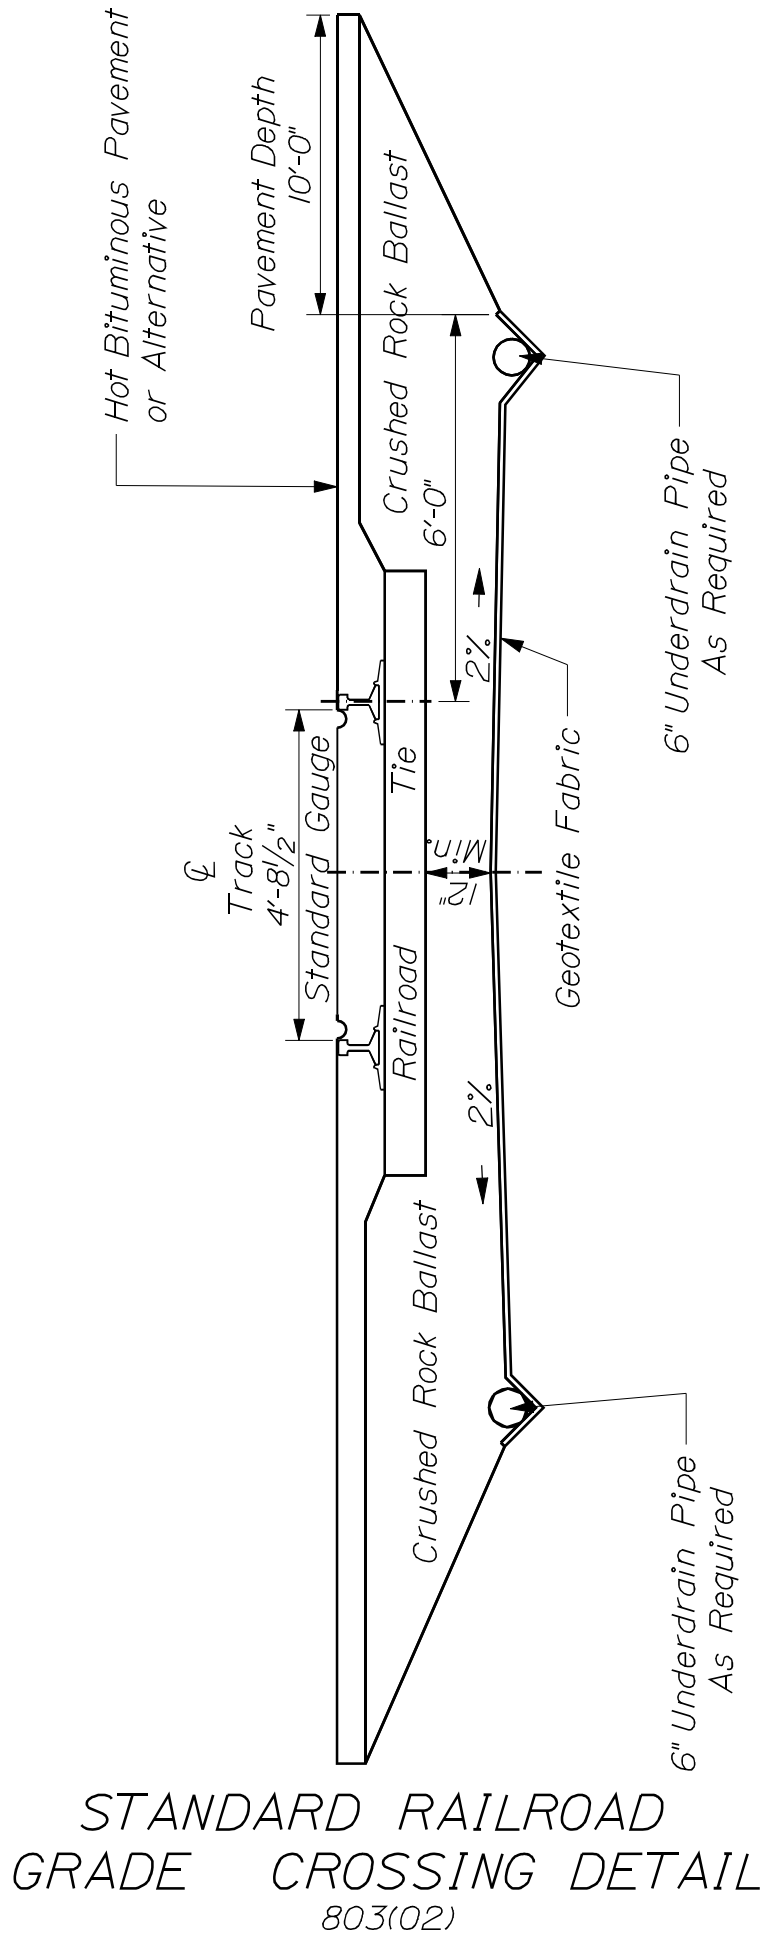


~ RAILROAD SECTION ~

Not to Scale

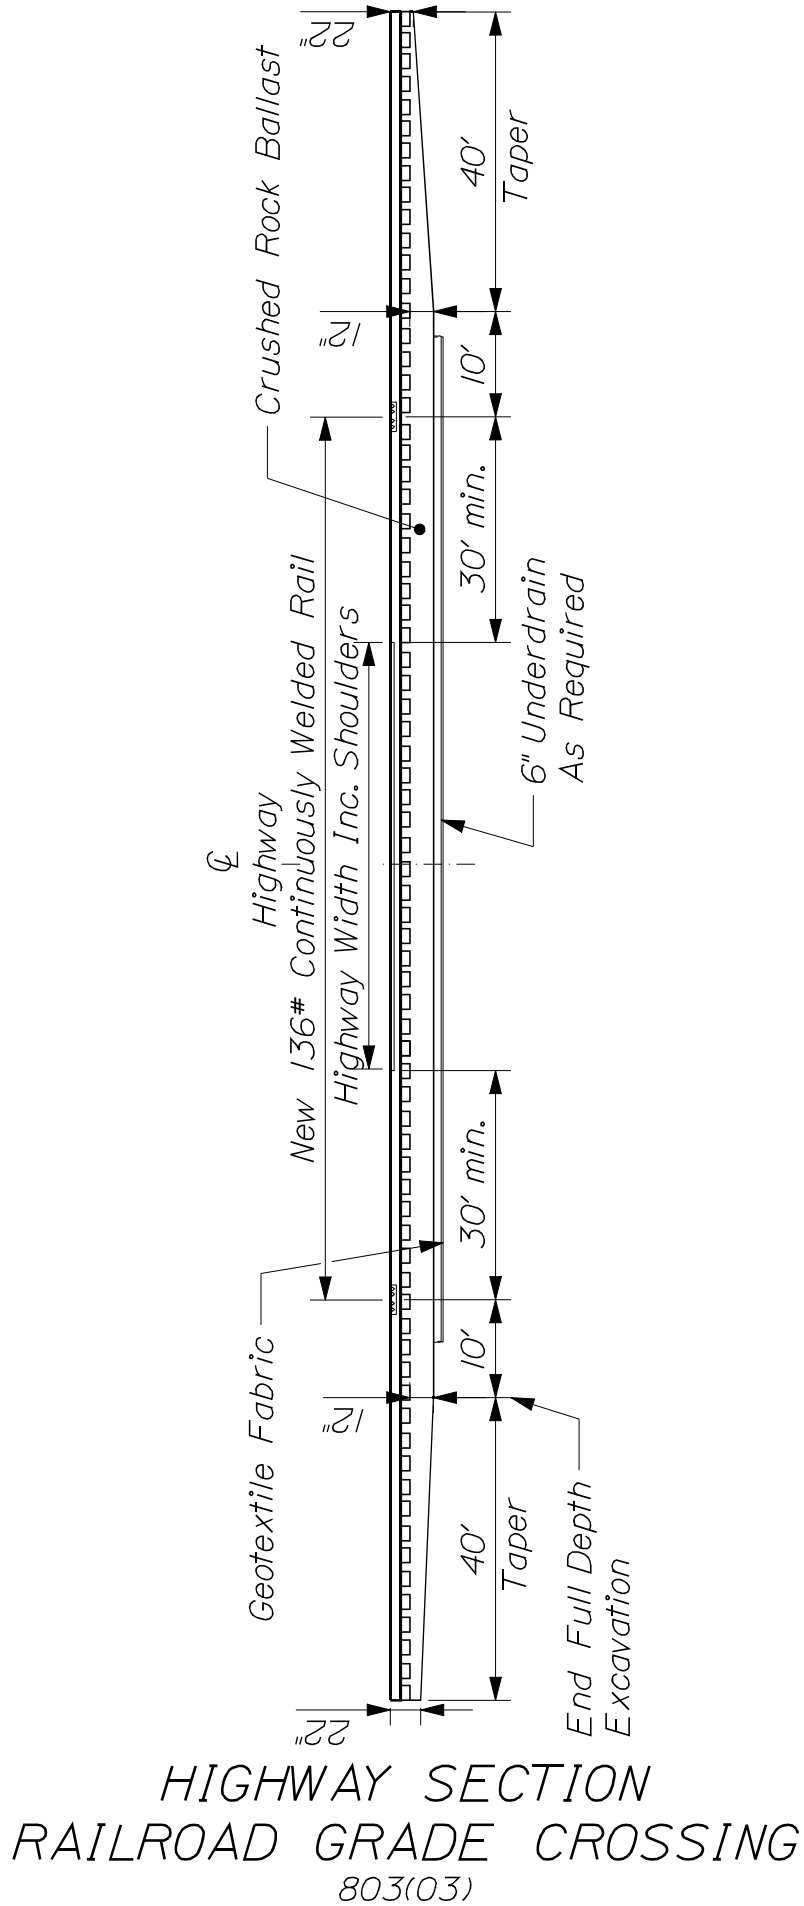

PAVING DETAIL

Ⓢ
Track

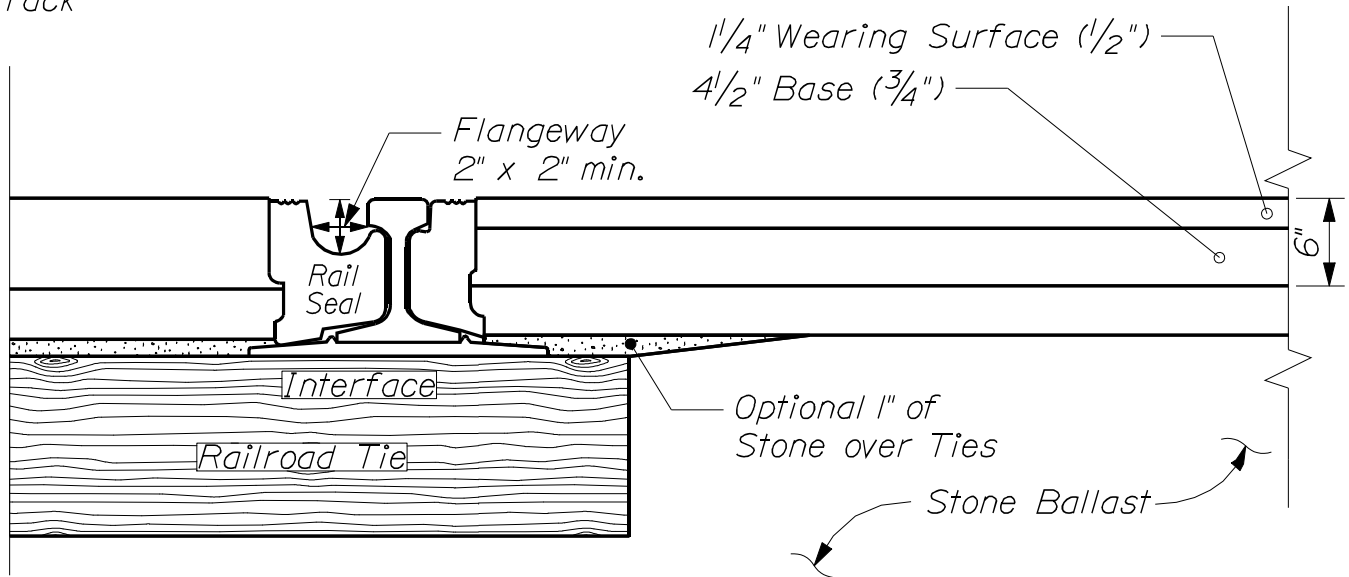

ADDITIONAL PAVING NOTES

The Department will pay for the work specified in Subsection 401.11 for the HMA used, except that cleaning objectionable material from the pavement and furnishing and applying Item 409.15 bituminous material to joints and contract surfaces is incidental.

A tack coat of emulsified asphalt, RS-1 or HFMS-1, Item 409.15 shall be applied to any existing pavement at a rate of approximately 0.025 gal/sq.yd, and on milled pavement approximately 0.05 gal/sq.yd, prior to placing a new course. All joints between existing and new pavement will be tacked.

Crossings shall be paved within 20 days following the completion of the crossing reconstruction.

Paved shoulders within the gage of the rail to point 24" outside of the field side of each rail shall be a standard 6" depth of pavement. Paved shoulders outside of this area shall be paved with 2" surface mix only.

- The bituminous binder material for the mixture shall be viscosity grade AC-10 or 20 asphalt cement.
- The density requirements are waived.

PAVING DETAIL PAVING NOTES

803(04)

RAILROAD CROSSING GENERAL NOTES

1. *The highway section over railroad crossings shall be designed with a minimum of 2-11 ft travelways and 6' shoulders. 4' shoulders may be designed if field conditions warrant.*
2. *Signals shall be located as per standard detail and shall comply with the latest edition of the Manual of Uniform Traffic Control Devices.*
3. *The standard crossing surface shall consist of a rubber railseal interface as manufactured by Polycorp or Performance Polymers, Inc, or approved equivalent. Alternative crossing surfaces may be installed with approval of MaineDOT.*
4. *New 136 # prime welded rail shall be provided for crossing reconstruction. The minimum length of welded rail shall be 117' or extend 30' beyond each edge of pavement whichever is longer. The full depth excavation area shall extend 10' beyond the welded rail and excavated to a minimum depth of 12" below bottom of tie elevation.*
5. *7" x 9" ties (8'6" or 9' long) shall be installed under the welded rail and shall be fully box anchored. Anchors may be omitted beneath the crossing surface in order to accommodate the installation of rubber railseal.*
6. *Geotextiles provided for rail crossings shall be the following minimum weights: 8 oz./s. y. for non-woven fabrics and 6 oz. /s.y. for woven fabrics. The minimum width through the crossing area shall be 17'. Geotextile fabrics shall be placed throughout the entire full depth construction area.*
7. *Construction signs and traffic control devices shall be erected and maintained during the construction of the project.*
8. *Field work performed between December 15 and March 15 shall be approved in advance by the MaineDOT Resident.*
9. *Erosion Control shall be installed and maintained as per approved Erosion Control Plan until all permanent measures are in place.*

RAILROAD CROSSING GENERAL NOTES

803(04)A

~ SPECIAL PROVISION ~

Section 403 - Bituminous Pavement

Descrip. of Course	Grad. Design	Item No.	Bit. Cont. % of Mix	Total Thick.	No. of Layers	Complementary Notes
-----------------------	-----------------	-------------	------------------------	-----------------	------------------	------------------------

*Railroad Planning
(6" Pavement Depth)*

Wearing	1/2"	403.208	N/A	1 1/2"	1	4,9,17
Binder	3/4"	403.207	N/A	4 1/2"	2	4,9,17

~ NOTES ~

1. The design traffic level for the mix placed shall be 0.3 to <3million ESALS

2. Section 106.6 Acceptance, (2) Method C-For hot mix asphalt designated as Method C in Special Provision Section 403 - Hot Mix Asphalt, one sample will be taken from the paver hopper or the truck body per 250 ton per pay item. The mix will be tested for gradation and PGAB content. Disputes will not be allowed. If the mix is within tolerances listed in Table 9, Method C the Department will pay the contract unit price.

~ TABLE 9 ~

Property	USL and LSL - Method C
Percent passing 3/16" [No. 4] and larger sieves	Target +/- 7
Percent passing 3/32" [No. 8] to 1.18mm [No.16] sieves	Target +/- 5
Percent passing 1/32" [no. 30] sieve	Target +/- 4
Percent passing 1/64" [No. 50] to 0.003" [No.200] sieve	Target +/- 3
PGAB Content	Target +/- 0.5

If the test results for each 250 ton increment are outside these limits the following deductions (Table 9b) shall apply to the HMA quantity represented by the test. A second consecutive failing test shall result in cessation of production.


~ TABLE 9B ~

PGAB Content	- 5%
No. 8 - 3/32" sieve	- 2%
No. 50 - 1/64" sieve	- 1%
No. 200 - 0.003" sieve	- 2%

3. Compaction of the new Hot Mix Asphalt Pavement will be obtained using a minimal roller train consisting of a 3-5 ton vibratory roller. An approved release agent is required to ensure the mixture does not adhere to hand tools, rollers, pavers, and truck bodies. The use of petroleum based fuel oils will not be permitted.

RAILROAD CROSSING PAVING NOTES

803(04)B

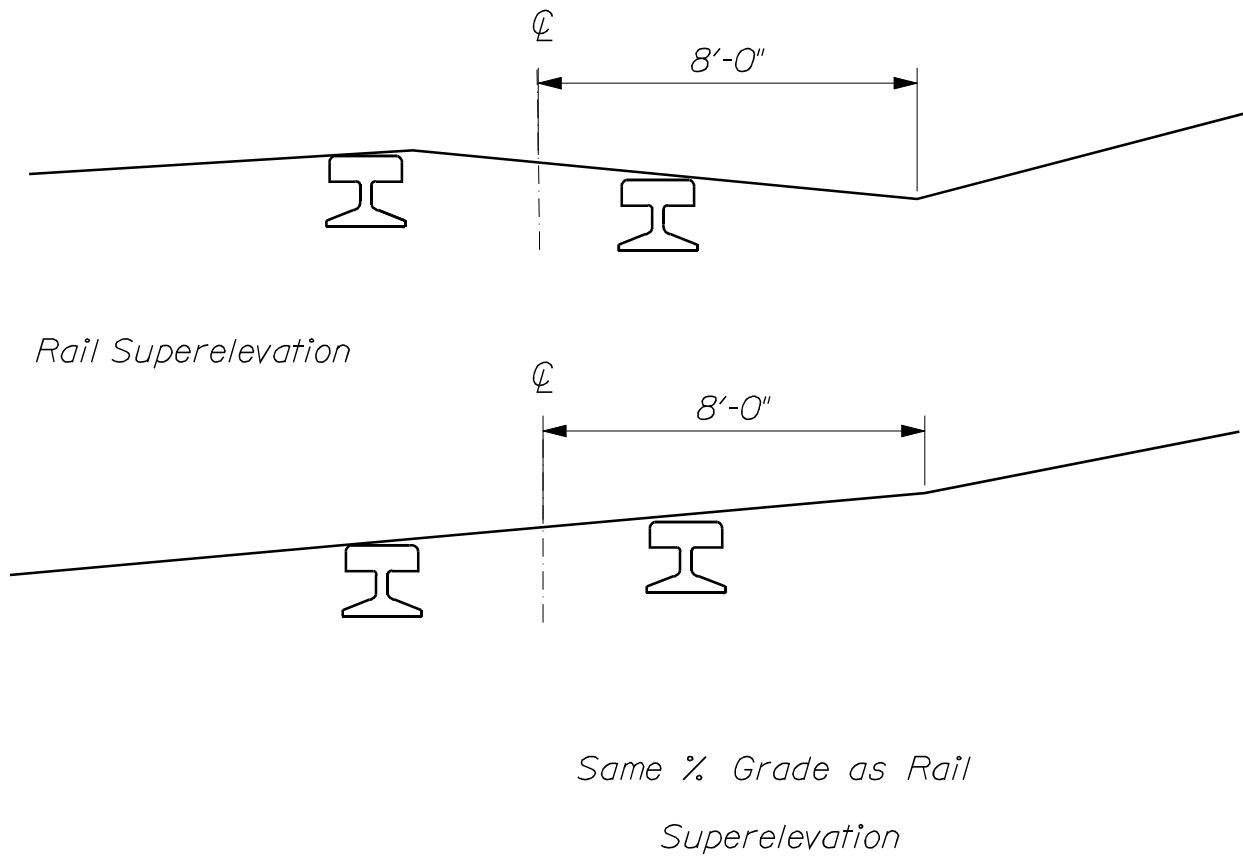

~ RAIL ROAD CROSSING GRADING ~

NOTE:

The slope of the 8' shown, in no case, shall be above the plane of the rails either side of C/L per P.U.C. General Order # 2.

RAIL ROAD CROSSING GRADING
803(05)

Key:



Flagger



Channelizing devices

Warning sign sequence in opposite direction same as below.


Channelizing devices separate work area from traveled way.

END
ROAD WORK
2' x 4'

END
ROAD WORK
2' x 4'

NOTE:

1. Flood lights should be provided to mark flagger stations at night as needed.
2. If entire work area is visible from one station, a single flagger may be used.
3. Warning lights should be used to mark channelizing devices at night as needed.
4. Channelizing devices are to be extended to a point where they are visible to approaching traffic.

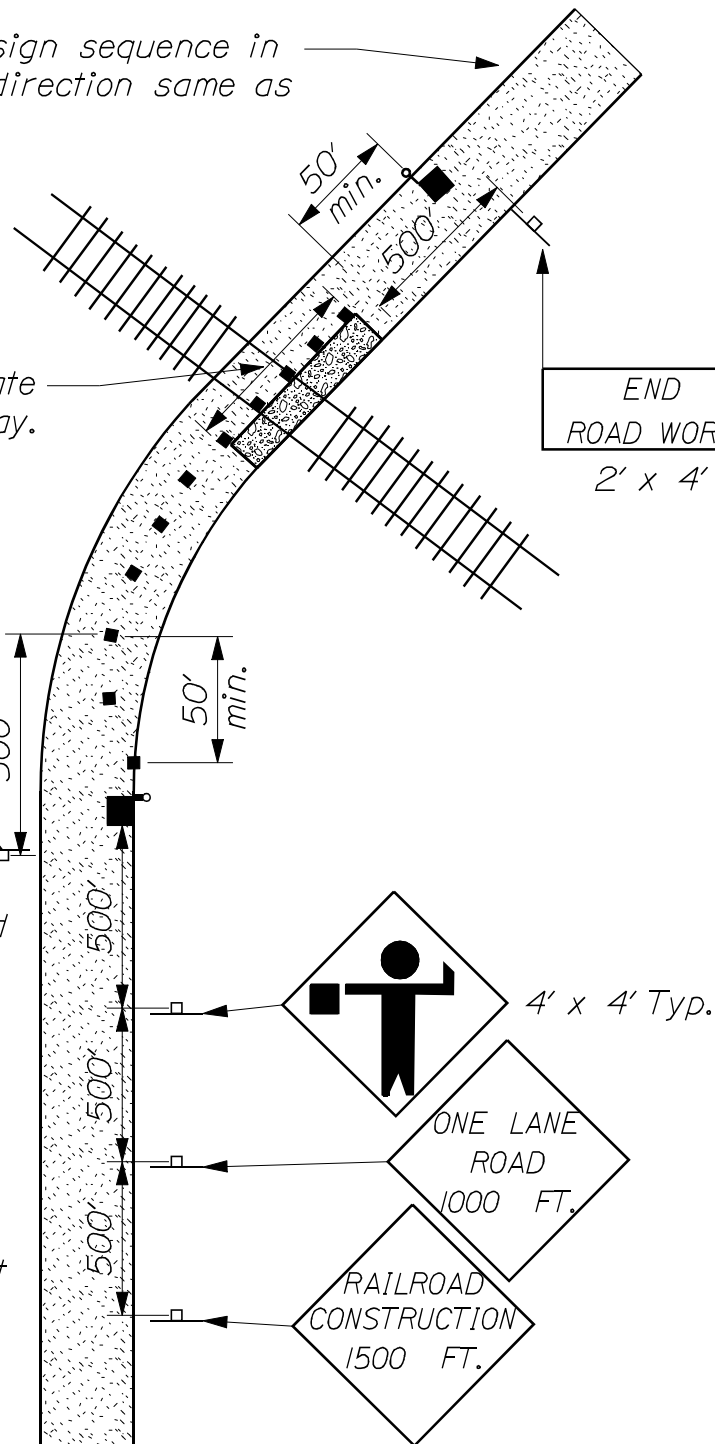

TYPICAL APPLICATIONS OF TRAFFIC CONTROL DEVICES ON 2-LANE HIGHWAY. ONE LANE IS CLOSED AND FLAGGING IS PROVIDED.

*Use Highest
Posted Speed*

*Minimum Distance
(Feet)*

<i>20 mph</i>	<i>225'</i>
<i>25 mph</i>	<i>325'</i>
<i>30 mph</i>	<i>450'</i>
<i>35 mph</i>	<i>550'</i>
<i>40 mph</i>	<i>650'</i>
<i>45 mph</i>	<i>750'</i>
<i>50 mph</i>	<i>850'</i>
<i>55 mph</i>	<i>950'</i>
<i>60 mph</i>	<i>1100'</i>


~ SUGGESTED MIN. PAVEMENT MARKING PLACEMENT DISTANCE ~

NOTES:


- 1. When used, a portion of the pavement marking symbol shall be directly opposite the Advance Warning Sign (W 10-1). If needed, supplemental pavement marking symbol(s) may be placed between the Advance Warning Sign and the crossing, but should be at least 50' from the Stop Line.*
- 2. A three lane roadway should be marked with a centerline for two-lane approach operation on the approach to a crossing. On multi-lane roads the transverse bands should extend across all approach lanes, and individual RXR symbols should be used in each approach lane.*
- 3. Refer to Standard Alphabet for Highway and Markings for RXR symbols details.*

PAVEMENT MARKING NOTES

803(07)

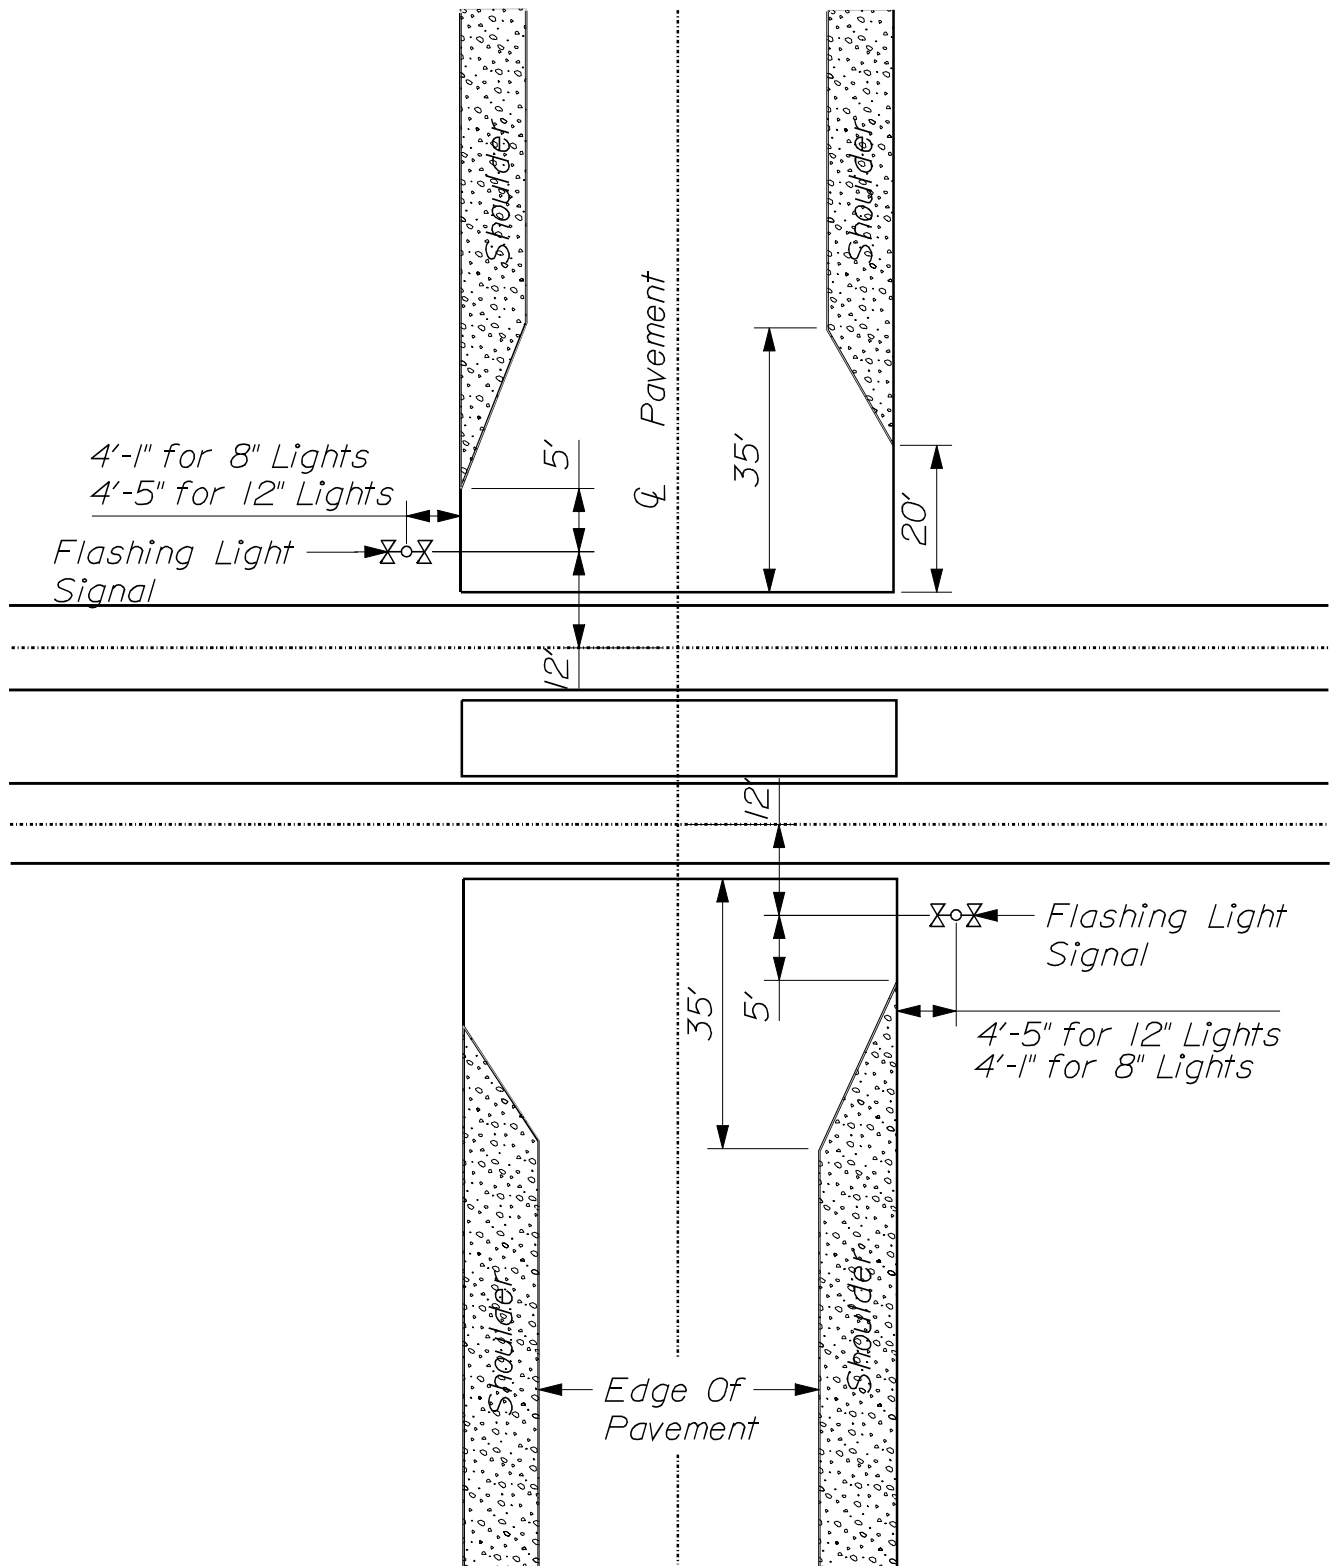


TYPICAL SIGNAL LOCATION AND
PAVING PLAN FOR SQUARE CROSSING
803(08)

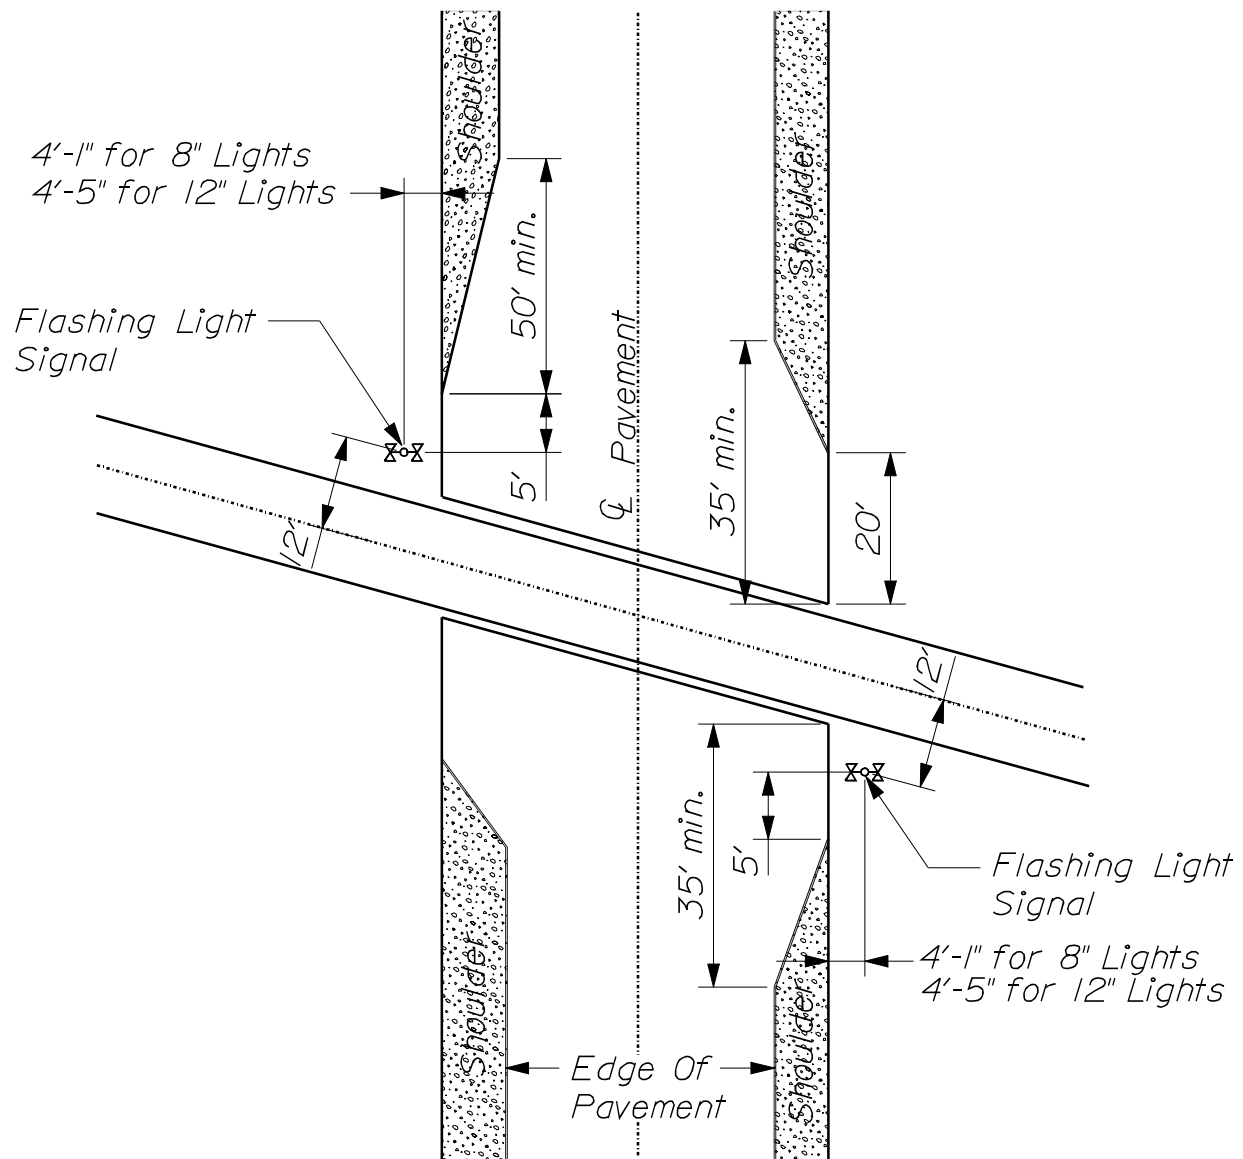


TYPICAL SIGNAL AND GUARD RAIL LOCATIONS
FOR ACUTE ANGLE CROSSING

803(09)

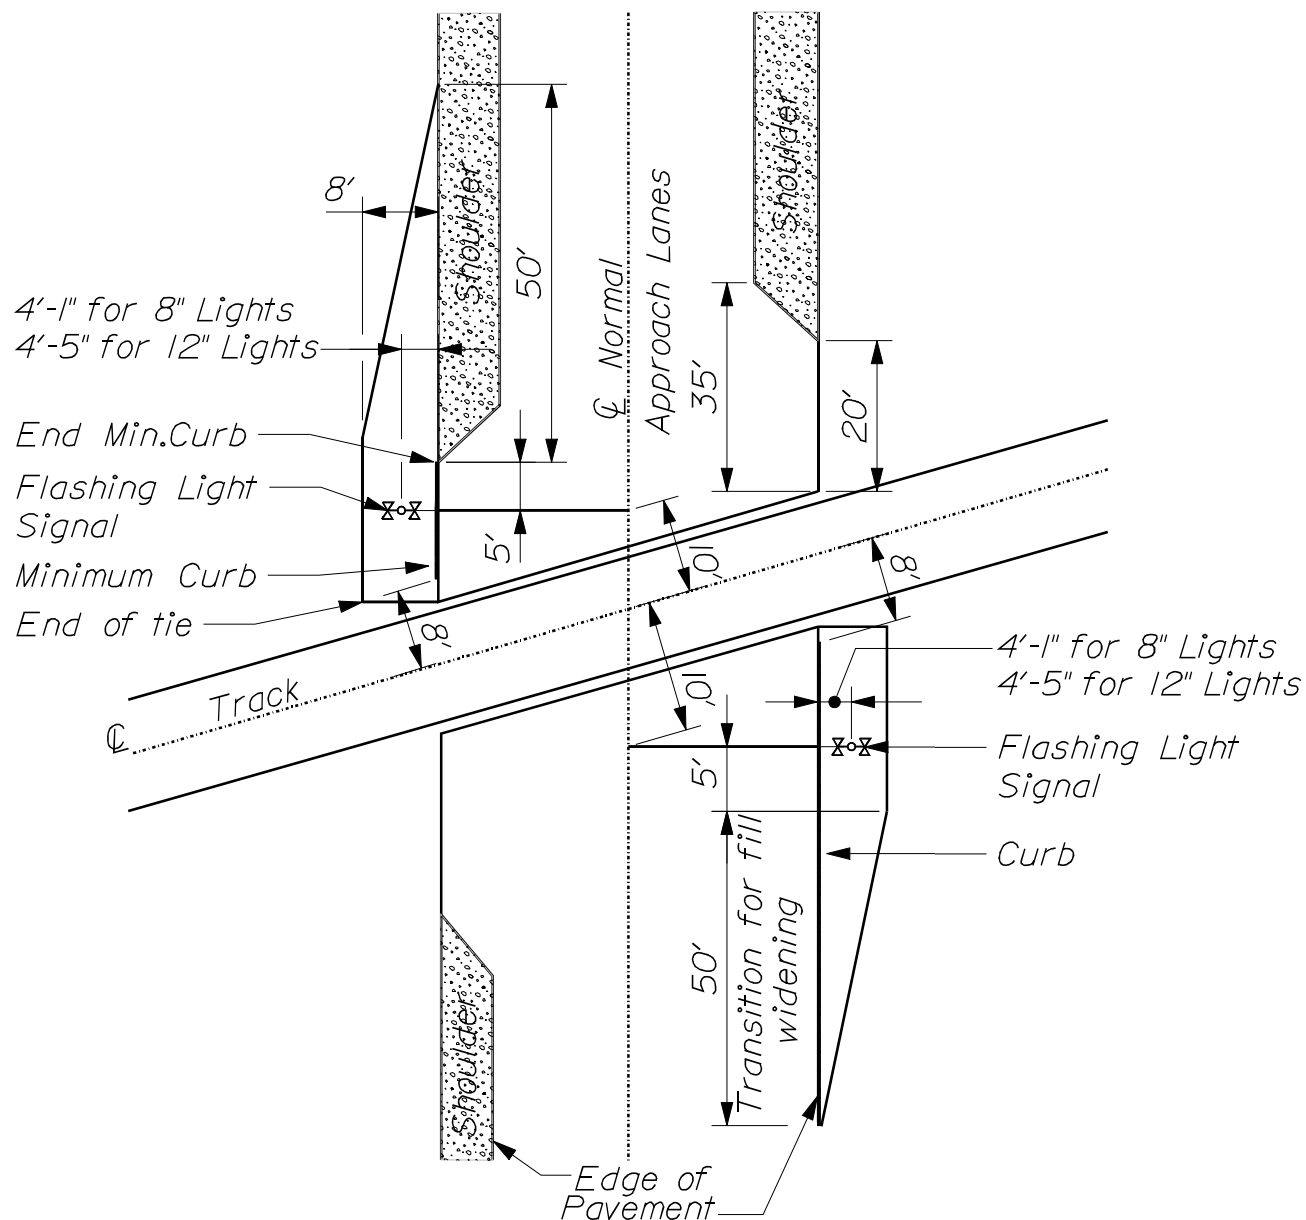


TYPICAL SIGNAL AND CURB LOCATIONS FOR
OBTUSE ANGLE CROSSING

803(10)

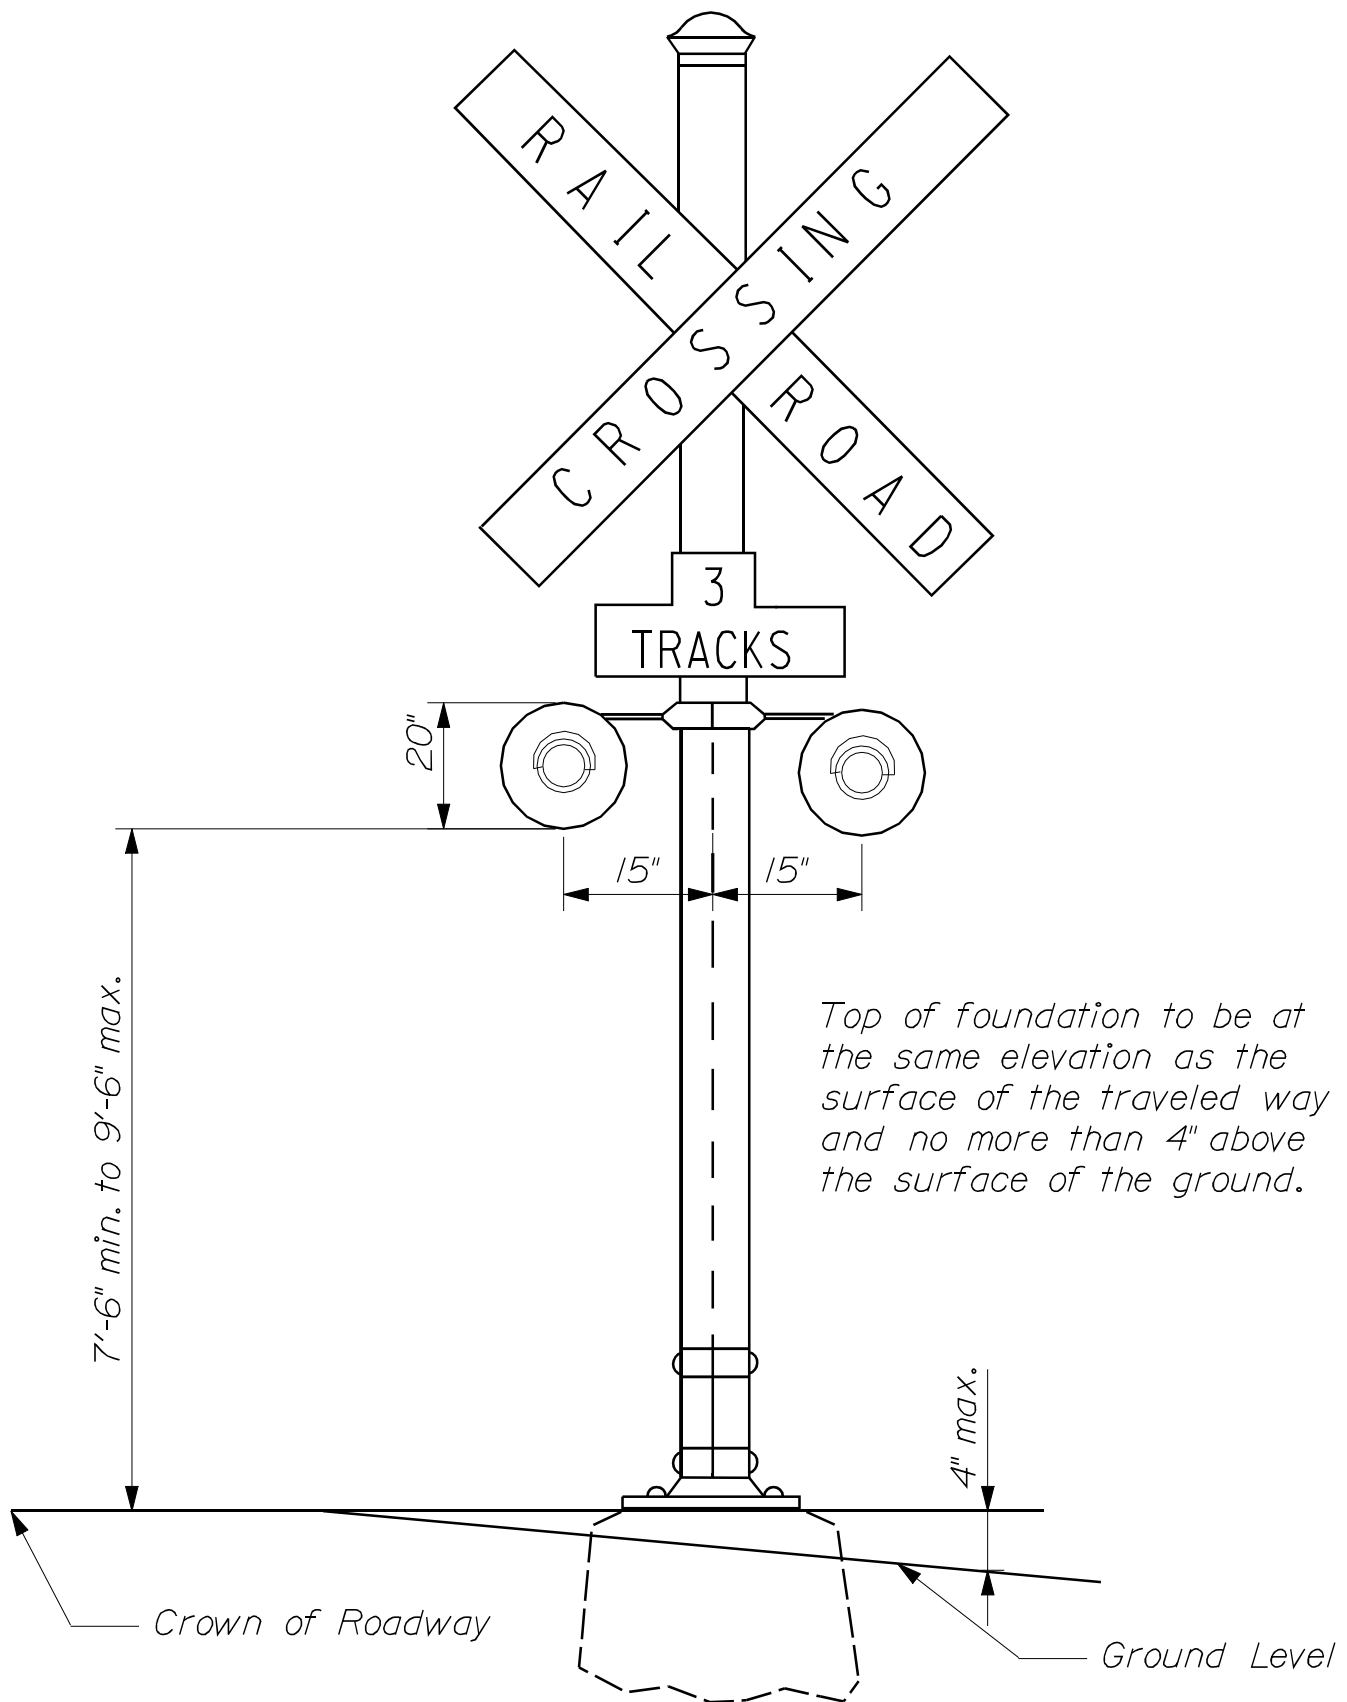

*TYPICAL FLASHING LIGHT SIGNAL - POST MOUNTED.
TYPICAL SHOULDER WITHOUT CURB*

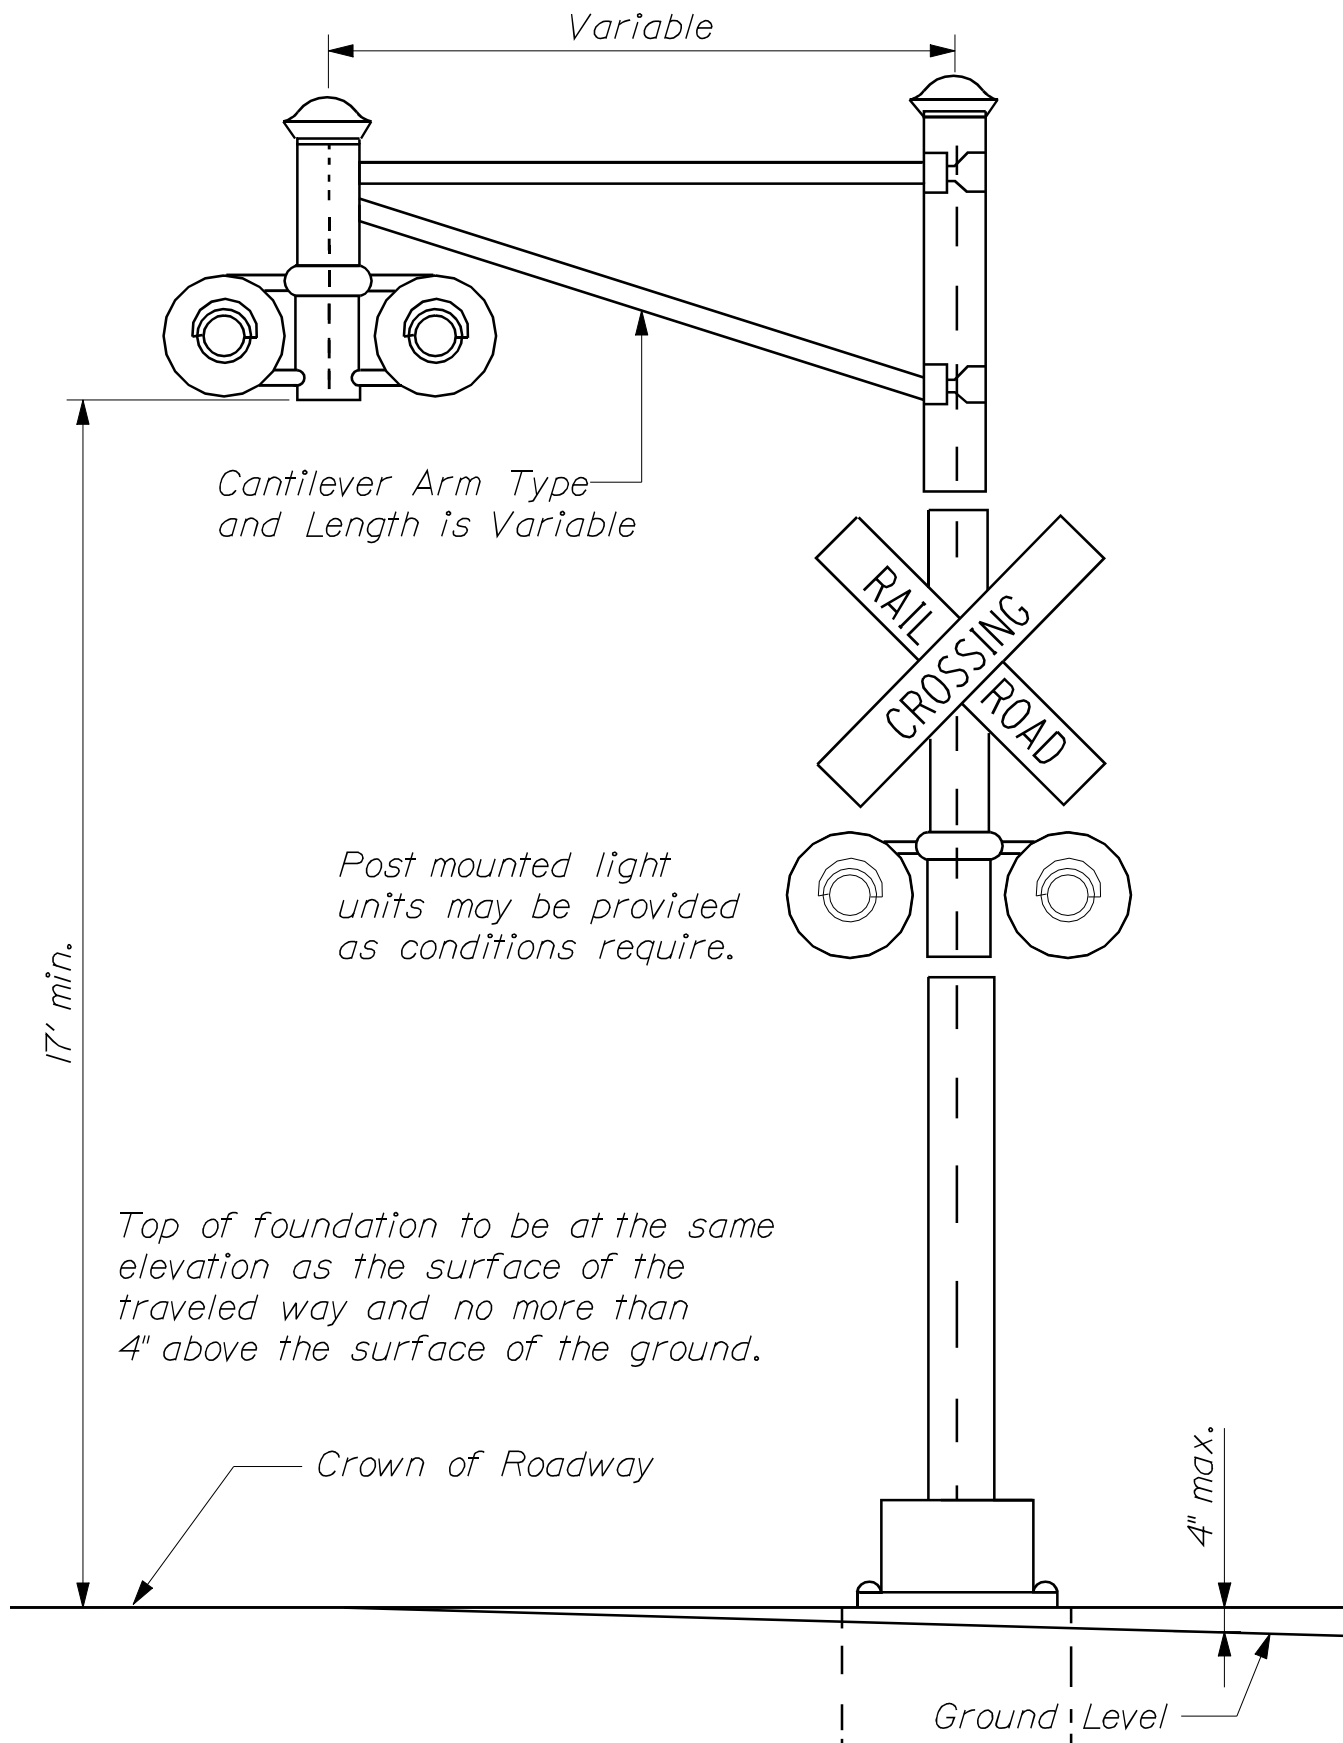

**TYPICAL FLASHING LIGHT SIGNAL -
CANTILEVER SUPPORTED**

803(12)


Typical minimum clearance is 2' from face of vertical curb to closest part of signal or gate arm in its upright position for a distance of 17' above the crown of the roadway.

Where there is no curb, a minimum horizontal clearances of 2' from edge of a paved or surfaced shoulder shall be provided with a minimum clearance of 6' from the edge of the traveled roadway where there is no curb or shoulder, the minimum horizontal clearance shall be 6' from the edge of the roadway.

Where gates are located in the median, additional widths may be required to provide the minimum clearance for the counterweight supports.

4'-1" for 8" Lights
4'-5" for 12" Lights

Vertical Curb

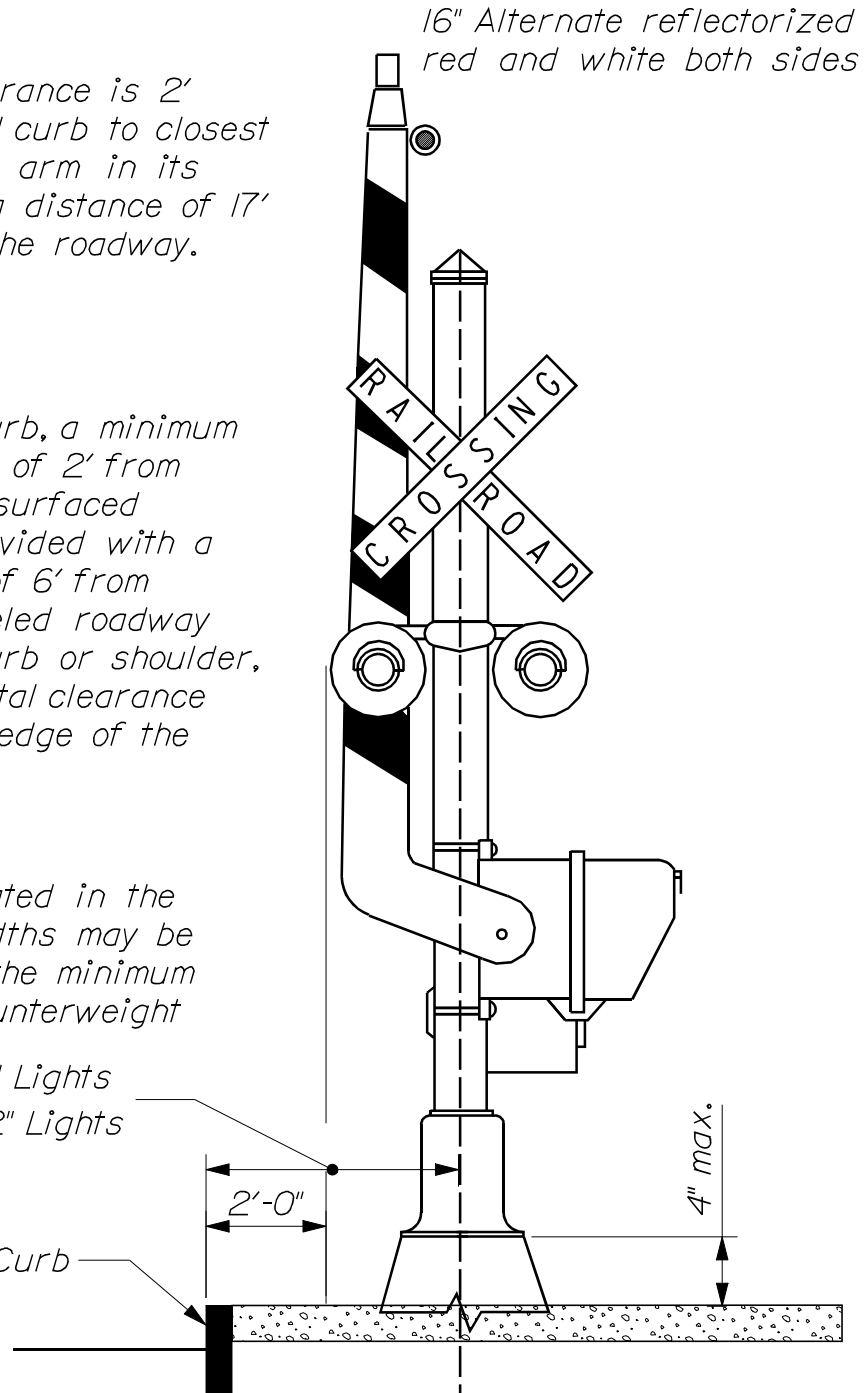

TYPICAL CLEARANCES FOR FLASHING LIGHT SIGNALS AND AUTOMATIC GATES TYPICAL CURB LOCATION