


NOTES

1. WHEN ATTACHING A 31" GUARDRAIL TERMINAL TO GUARDRAIL TYPE 3 THIS SPICE WILL BE THE FIRST SPICE AT OR BEYOND THE LIMITS OF THE TERMINAL. THE ENTIRE TRANSITION WILL TAKE PLACE BEYOND THE LIMITS OF THE GUARDRAIL TERMINAL.
2. WHEN ATTACHING A 31" GUARDRAIL TERMINAL TO GUARDRAIL TYPE 3 THIS POST WILL BE POST 8 OR BEYOND, UNLESS OTHERWISE SPECIFIED BY THE MANUFACTURER.
3. A 9'-4 1/2" GUARDRAIL BEAM MAY BE USED IN PLACE OF THE ADDITIONAL POST AS DIRECTED BY THE RESIDENT. POST SPACING WILL NEED TO BE ADJUSTED ACCORDINGLY.
4. THE 25' TRANSITION APPLIES TO HEIGHT TRANSITIONS FROM 31" TO 27-3/4". IF TRANSITIONING TO A LOWER EXISTING GUARDRAIL HEIGHT, TRANSITION AT A RATE OF NO MORE THAN 3" PER 25'.
5. THE FIRST 25' OF TRANSITION WILL BE INCIDENTAL TO THE GUARDRAIL TERMINAL PAY ITEM. ADDITIONAL TRANSITION LENGTH WILL BE PAID FOR UNDER THE ADJUST GUARDRAIL PAY ITEM.

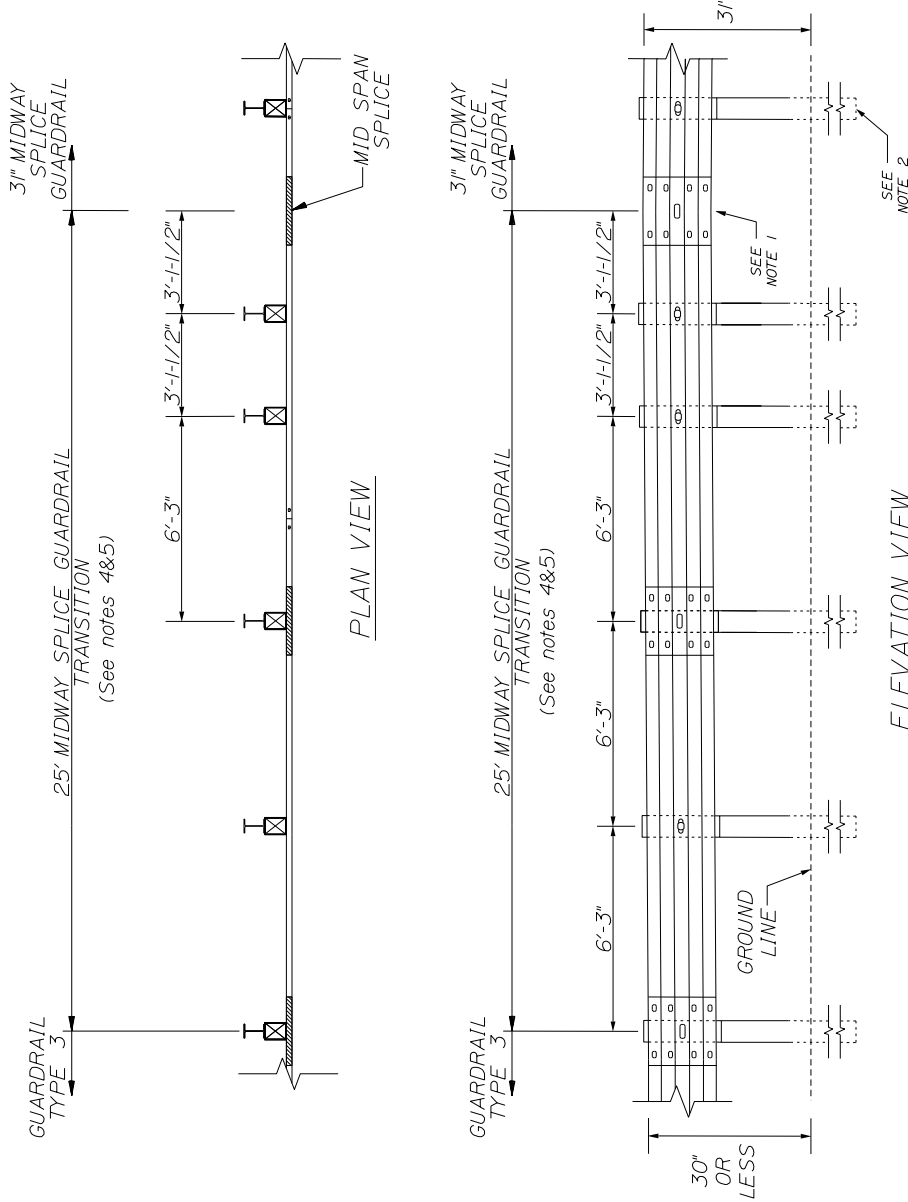

MIDWAY SPLICE GUARDRAIL TRANSITION

Supplemental
Standard Detail

Supersedes 606(17)

4-19-22