




~ ISOMETRIC VIEW ~
(not to scale)

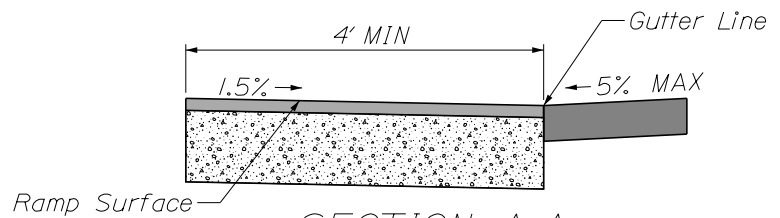

~ SECTION A-A ~
(not to scale)

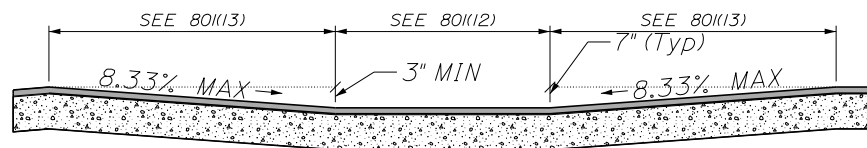

~ SECTION B-B ~
(not to scale)

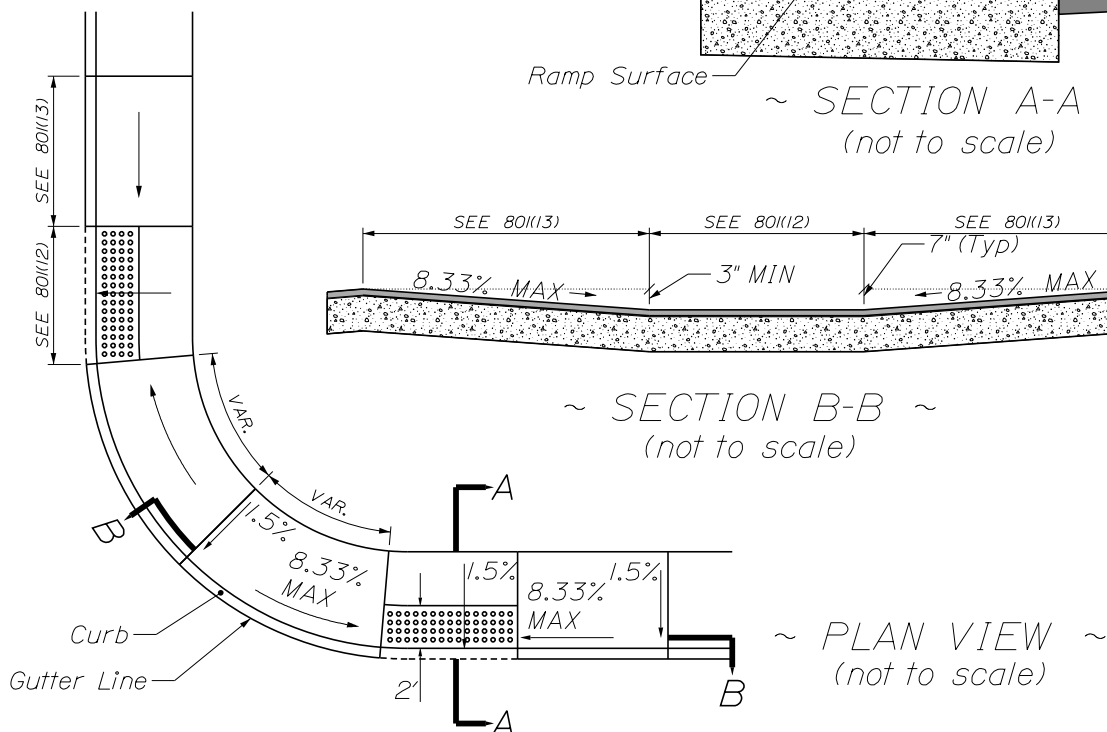

~ PLAN VIEW ~
(not to scale)

Notes:

- This less desirable design should not be used unless required by design constraints. It may not provide adequate curb reveal. Use Option 1 when possible.
- No vehicular access shall be permitted through the radius curb.
- A minimum curb reveal of 3" is required at the apex of the curb radius.
- Minimum terminal curb length shall be 4ft.
- To achieve 8.33% running slope, the pedestrian ramp may need to be extended. If the ramp length has been extended to a maximum of 15 feet and other design modifications have been considered, running slope may exceed 8.33%.

PARALLEL CURB RAMP - OPTION 2A