MAINE LAND USE PLANNING COMMISSION
Department of Agriculture, Conservation and Forestry

For office use:
47742 (Tracking No.) GP/SA/WL/WQC 122-C (Permit No.)
$180.00 (Fee Received)

Expedited Shoreland Alteration Permit Application

Permit for Alteration of a P-WL1 Subdistrict and Water Quality Certification

1. APPLICANT INFORMATION
Print the legal names and mailing addresses of all persons or organizations with title, right or interest in the property associated with this application. Persons with "title, right or interest" are those listed on any deed, lease or sales contract for the property.

Applicant Name(s)	Daytime Phone	FAX or Email *(if applicable)*
Francis M. & Kathleen O. Bachand	207-745-1400	Hews24@aol.com

Mailing Address	Town	State	Zip Code
24 Blanchard Street	Bangor	Me.	04401

RECEIVED
AUG 22 2014
LUPC - ASHLAND

2. PROJECT LOCATION AND PROPERTY DETAILS *(See Instructions)*

Township, Town or Plantation	County
Cross Lake Twp	Aroostook

Tax Information *(check your tax bill)*
Map: AR301 Plan: P01 Lot: 2108

Deed or Lease Information *(check your deed or lease)*
Book: — Page: — Lease #: 1543

Lot size *(in acres, or in square feet if less than 1 acre)*: .23 acres 9991 s.f

Zoning at Development Site: P-FP (FEMA) RD-RS

Water Frontage. List the name and frontage (in feet) for any lakes, ponds, rivers, streams, or other waters on or adjacent to your lot. Measure water frontage in a straight line between the points of intersection of side property lines and the normal high water mark of the shoreline.
Waterbody: Cross Lake Frontage 106 for -

LUPC Approved Permit. List any permit numbers you are aware of for projects on your property previously approved by the Commission. If your lot is part of an approved subdivision, provide both the subdivision permit number and your lot number. This information is usually included in your deed description. GP 122

Land Division History. Using your deed as a starting point, trace the ownership history and configuration changes of your property back 20 years from today. List any division of those lots from which your property originated (use an additional sheet of paper or page 3 of the application, if needed).

Grantor and grantee *(example -Amy Adams to Rob Roberts*	Date of sale or lease *1/12/97*	Lot size *10 acres)*
Allagash Timber lands	6/1/99.	.23

If your property is part of subdivision approved by the Commission, continue to Question 3. If your property is not part of an approved subdivision, please complete the Land Division History. *(Check deed or contact the LUPC office that serves your area.)*

3. PROPOSED ACTIVITY *(check all that apply)*

☐ Dock Reconstruction ☑ Shoreline Stabilization ☐ Rock Relocation

☐ Water Intake Pipe (private residential) or Dry Hydrant (public) ***(NOTE: An application for a dry hydrant may only be made by a public entity or representative, for example a town or fire department.)***

If this application is for a Dock Reconstruction, Shoreline Stabilization, Rock Relocation and/o Water Intake Pipe or Dry Hydrant you must complete and attach the appropriate Activity Attachment form.

☐ Time extension of previously issued Expedited Shoreland Alteration permit (write permit number) _____

☐ Other amendment of previously issued Expedited Shoreland Alteration permit (write permit number) _____

If this is a permit amendment or a time extension of a previously issued Expedited Shoreland Alteration permit, contact the LUPC office that serves your area to determine which parts of this application form you must complete.

4. DEVELOPMENT IN FLOOD PRONE AREAS

(Note: There are questions in the Conditions of Approval activity attachment relevant to work in a FEMA zone, P-FP zone, or an area prone to flooding.)

Is your proposed activity located within a mapped P-FP (Flood Prone Area Protection) Subdistrict, a mapped FEMA (Federal Emergency Management Agency) flood zone, or an unmapped area prone to flooding?

RECEIVED
AUG 27 2014
LUPC - ASHLAND

P-FP Subdistrict	☐ YES	☑ NO
FEMA Flood Zone	☑ YES	☐ NO
Unmapped Area Prone to Flooding	☐ YES	☑ NO

5. APPLICANT SIGNATURE (REQUIRED) AND AGENT AUTHORIZATION (OPTIONAL)

Agent Name: White Farms Grading + Excavation — Mike White — Daytime Phone: 207-831-8891 — FAX or Email *(if applicable)*: mswhite@reagan.com

Mailing Address: P.O. Box 24 — Town: Sinclair — State: Me — Zip Code: 04779

I have personally examined and am familiar with the information submitted in this application, including the accompanying exhibits and supplements, and to the best of my knowledge and belief, this application is complete and includes all necessary exhibits. I understand that if the application is incomplete or missing any of the required exhibits, this will result in delays in processing my permit. The information in this application is a true and adequate narrative and depiction of what currently exists on, and what is proposed at, the property. I certify that I will give a copy of this permit and the associated CONDITIONS OF APPROVAL to any contractors working on my project. I understand that I am ultimately responsible for complying with all applicable regulations and with all conditions and limitations of any permits issued to me by the Commission. If there is an Agent listed above, I hereby authorize that individual or business to act as my legal agent in all matters relating to this permit application.

I certify that the project will be completed in accordance with the CONDITIONS OF APPROVAL, and the attached Standard Conditions for Shoreland Alterations, and any other applicable Commission requirements and laws. If this is a permit amendment, then all conditions in prior permits issued for this activity will continue to apply unless specifically amended herein.

Please check one of the boxes below. *(see "Accessing the Project Site for Site Evaluation and Inspection" on Page ii)*

☑ I authorize staff of the Land Use Planning Commission to access the project site as necessary at any reasonable hour for the purpose of evaluating the site to verify the application materials I have submitted, and for the purpose of inspecting for compliance with statutory and regulatory requirements, and the terms and conditions of my permit.

☐ I request that staff of the Land Use Planning Commission make reasonable efforts to contact me in advance to obtain my permission to fully access the project site for purposes of any necessary site evaluation and compliance inspection.

All appropriate persons listed on the deed, lease or sales contract must sign below.

Signature(s): Frances Bouchard — Date: 8/12/2014

Kathleen Bouchard — Date: 8/12/2014

IMPORTANT

- This application, once signed by Commission staff and then returned to you, is your permit and authorization to proceed with your project as you have described it and have shown on the Site Plan.
- Your project must be done in compliance with all of the CONDITIONS OF APPROVAL, as you have described in this application and the Activity Attachment.
- The Permit Certificate that will be included with the signed permit must be displayed at the construction site.
- In order to comply with the Conditions of this LUPC Permit and be eligible for authorization under the Corps of Engineers Maine General Permit for work being done in a water of the United States under Federal Jurisdiction, LUPC permittees must submit to the Corps the **U.S. Army Corps of Engineers, Category 1 Notification Form** that will be attached to the signed LUPC permit. (See COMPLIANCE, on the last page of the Instructions)

LUPC AUTHORIZATION *(for office use)*

Based on the information you have submitted in the attached application and supporting documents, the staff of the Land Use Planning Commission concludes that, if carried out in compliance with the CONDITIONS OF APPROVAL and Standard Conditions (attached), the project you propose will not affect the water quality classification of the affected waterbody and meets the provisions of the General Land Use Standards for Wetland Alterations, Section 10.25,P of the Commission's *Land Use Districts and Standards*. Further, the project you propose meets the Criteria for Approval, 12 M.R.S.A. §685-B(4) of the Commission's statutes. Any variation from the project as described in this application and the CONDITIONS OF APPROVAL is subject to the LUPC staff review and approval prior to construction. Any variation undertaken without approval by Commission staff constitutes a violation of Land Use Planning Commission law. In addition, any person aggrieved by this decision of the staff may, within 30 days, request that the Commission review the decision.

Billie J. MacLean
LUPC Authorized Signature

8/29/14
Effective Date

Use this page to provide any explanations that will help describe your project. If you wrote "n/a" next to any of the questions or CONDITIONS OF APPROVAL in the Attachment or in the application form, if needed please explain why below, and include the number of the question or condition.

RECEIVED
AUG 2 2 2014
LUPC - ASHLAND

lot #34 Francis Bouchard

This existing bulkhead/retaining wall is in rough shape, wood has rotted out and wall is failing, it has been repaired and maintained over the years, but its life span is over.

We propose to replace with rip-rap. The lot frontage is
* approx. 100'. We propose to rip-rap approx. 80' of frontage on lake. There is an existing boat ramp on the northeast corner of lot which will be untouched by this work. This ramp area is stable and rip-rap will be sloped to match into this relatively flat slope.

Planting: the existing wall has lawn that runs right up to the back of the wall. There are some very large trees that we will work around. These will cause the slope of new rip-rap to vary in front of trees. Once rip-rap installed lawn will be re-planted to match top rear of rip-rap.

For office use:

47742 (GP/SA/WL/WQC) 122-C

Tracking No. Permit No.

Activity Attachment: Shoreline Stabilization

Questions and Conditions of Approval

RECEIVED
AUG 22 2014
LUPC ASHLAND

This Activity Attachment must accompany the Expedited Shoreland Alteration Permit Application, and is for projects involving stabilization of eroding shorelines on inland waters:

- On ponds, lakes, and on streams or rivers bordered by a P-SL1 zone
- Where the size of the alteration area below the normal high water mark would be less than 500 square feet.

For projects approved using the Expedited Shoreland Alteration Permit form, the preferred method of shoreline stabilization is by planting trees or shrubs, or riprap that includes plantings. Riprap without plantings may be used where site conditions preclude the use of vegetation. Retaining walls may only be reconstructed where riprap or plantings are not feasible. **This Activity Attachment cannot be used for new retaining walls.**

This Activity Attachment may only to be used for shoreline stabilization projects where the affected waterbody is bordered by the following zones:

- P-GP and P-GP2, including where there is a FEMA or P-FP zone, or a P-AR zone;
- P-SL2 zone associated with a pond smaller than 10 acres, including where there is a FEMA or P-FP zone, or a P-AR zone;
- P-SL1 zone associated with a river or stream (but **not** where there is a FEMA or P-FP zone);
- P-AL zone; and
- All development zones (except D-PD and D-MT).

> This Activity Attachment **may not be used** for shoreline stabilization projects on minor flowing waters (P-SL2 zone). Projects on waterbodies bordered by zones not listed here, or that cannot be reviewed using the expedited form for other reasons may be allowed using the standard application form. Contact the LUPC office serving your area for additional information.

A. PROJECT TYPE *(check one)*

- ☐ Stabilization using plantings only (native shrubs or trees)
- ☐ Riprap that will include plantings for stabilization
- ☑ Riprap that will not include plantings - ***Explain on page 3 of the application form why plantings cannot be used at your site.***
- ☐ Reconstruction of a legally existing retaining wall - ***Explain on page 3 of the application form why plantings or riprap cannot be used at your site.***

B. LOCATION *(check one)*

- ☑ Lake or pond larger than 10 acres
- ☐ Pond smaller than 10 acres
- ☐ River or stream bordered by a P-SL1 zone

C. PROJECT DETAILS

Answering YES to a question indicates that the statement is correct about your project.

1. The total area in square feet of lake, pond, river or stream below the normal high water mark to be impacted by the shoreline stabilization project will be less than 500 square feet. ..... ☑ YES ☐ NO

   If NO, then the expedited shoreland alteration permit form cannot be used; STOP HERE. Contact the LUPC office that serves your area to obtain the standard application form.

   If YES, provide the size of the area within the waterbody to be impacted, and continue to Question 2: ..... 200 **sq. ft.**

This form continues onto the next page...

D. CONDITIONS OF APPROVAL FOR SHORELINE STABILIZATION

By law, any proposed development must meet certain conditions of approval. Please read each of the following statements carefully. Check **'YES'** if your project will be done as described in each statement. You must complete all questions, including those marked as "[P-FP]". ***Checking 'NO' to any of the statements indicates that your project will not comply with that CONDITION OF APPROVAL, and this form cannot be used for your project.*** However, projects not qualifying for the expedited permit may still be allowed using a standard permit. If a statement does not apply to your project, check **'N/A'** and if needed, explain why on page 3 of the application form.

RECEIVED
AUG 22 2014
LUPC-ASHLAND

PROJECT DESCRIPTION

		N/A	YES	NO
1.	If the shoreline stabilization project includes riprap or a retaining wall, the project will extend no further than 100 ft. along the shoreline	☐	☑	☐
2.	The shoreline stabilization project will not involve alteration of any (P-WL) Wetland Protection Subdistrict other than the waterbody that the activity is located on.		☑	☐
3.	The shoreline stabilization project will involve only the area of the shoreline showing evidence of active erosion, or in the case of a retaining wall, deterioration		☑	☐
4.	The project will be conducted during a period of low water level		☑	☐
5.	Heavy machinery would not be driven in the water or below the normal high water mark to conduct the project (except as provided for on flowed lakes, see Question 6, below).	☐	☑	☐
6.	***For projects on flowed lakes only***: Heavy machinery will be driven below the normal high water mark only where necessary, when the work area is above the level of the water, and only on rocky or gravely substrate. Mats or platforms will be used as needed to protect the shoreline and lake bottom from damage.	☑	☐	☐
7.	***For projects on flowing waters only***: The shoreline stabilization project will occur between July 15th and October 1st.	☑	☑	☐
8.	The shoreline stabilization project will not involve construction of access roads.		☑	☐
9.	The shoreline stabilization project will not occur within 250 feet of mapped Endangered, Threatened, and Special Concern species habitat as designated by the ME Department of Inland Fisheries and Wildlife (MDIFW). For further information, contact the LUPC office that serves your area; or MDIFW, 284 State Street, Augusta, ME 04333; (207) 287-8000.		☑	☐
10.	[P-FP] The shoreline stabilization project will not interfere with navigation or recreation.		☑	☐
11.	[P-FP] The shoreline stabilization project will not interfere with natural flow, will not create an impoundment, and will not block fish passage		☑	☐

PROJECT DESIGN AND CONSTRUCTION

Riprap and retaining walls

		N/A	YES	NO
12.	***For riprap only:*** If riprap is proposed, the eroded slope is steeper than 3 horizontal to 1 vertical (33%), but no more than 1 horizontal to 1 vertical (45%).	☐	☑	☐
	Vegetation must be used to stabilize slopes shallower than 3:1.			
13.	[P-FP] ***For riprap only:*** Riprap installed along a river or stream shoreline will not extend more than 2 feet above the normal high water mark, or to the elevation of 100 year flood where mapped by the Federal Emergency Management Agency where depicted as a FEMA or P-FP zone on the Commission's zoning maps (if mapped on both, then whichever is higher).	☑	☐	☐
14.	Geotextile filter fabric and/or a layer of clean coarse sand will be used behind the riprap or retaining wall to prevent fines from washing into the waterbody.	☐	☑	☐
15.	***For riprap only:*** Riprap will only extend below the normal high water mark as needed to be keyed in, and excavation of the waterbody will be limited to only the amount needed to key in the riprap.	☐	☑	☐
16.	***For riprap only:*** Rocks used for riprap will not be taken from the waterbody or other areas of the shoreline	☐	☑	☐
17.	***For riprap only:*** Design of riprap along a stream or brook must be approved by a Maine Registered Professional Engineer, the United States Natural Resources Conservation Service, or the local Soil and Water Conservation District. Evidence of this approval or plans stamped by a professional engineer must be submitted along with the Application Form.	N/A		

Section D Conditions of Approval, continues onto the next page...

18. [P-FP] The construction practices and methods used will minimize flood damage, and the materials used will be resistant to flood damage. The riprap or retaining wall will not reduce the flood carrying capacity of the watercourse. ☐N/A ☑YES ☐NO

19. [P-FP] ***For retaining wall reconstruction only:*** The reconstructed retaining wall will be adequately anchored to prevent flotation, collapse or lateral movement resulting from hydrodynamic and hydrostatic loads, including the effects of buoyancy. ☑N/A ☐YES ☐NO

20. ***For retaining wall reconstruction only:*** The reconstructed retaining wall will not extend farther into the waterbody than the existing retaining wall. ☑N/A ☐YES ☐NO

21. ***For retaining wall reconstruction only:*** The reconstructed retaining wall will not include a walkway unless it is a part of the existing retaining wall. ☑N/A ☐YES ☐NO

22. Fill material will only be used as needed to backfill behind the riprap or retaining wall. ☐N/A ☑YES ☐NO

23. ***For retaining wall reconstruction only:*** Only untreated wood or pressure-treated wood approved by the U.S. Environmental Protection Agency for use on inland waters will be used to reconstruct the retaining wall. CCA pressure-treated wood will only be used if it is dried on land for at least 21 days in such a manner as to expose all surfaces to the air. PCP pressure-treated wood or wood treated with creosote will not be used. ☑N/A ☐YES ☐NO

24. ***For retaining wall reconstruction only:*** The retaining wall reconstruction will not involve the use of concrete. ☑N/A ☐YES ☐NO

RECEIVED
AUG 22 2014
LUPC ASHLAND

Vegetation

25. The shrubs or trees to be planted are not listed as invasive species in Maine by the Maine Natural Areas Program. See www.maine.gov/dacf/mnap/index.html. ☑N/A ☐YES ☐NO

26. The shoreline stabilization project will not involve the removal of non-invasive aquatic vegetation from the waterbody. ☑YES ☐NO

SOIL AND VEGETATION DISTURBANCE; AND EROSION / SEDIMENTATION CONTROL

27. The shoreline stabilization project will not require more than incidental grading, filling or clearing of vegetation within 100 feet of the normal high water mark. The project will comply with the LUPC's standards for Vegetation Clearing (10.27,B) and Filling and Grading (10.27,F). See www.maine.gov/dacf/lupc/laws_rules/ch10.html, Rules and Regulations, Chapter 10. ☑YES ☐NO

28. The shoreline stabilization project will not occur when the soil above the normal high water mark is frozen or saturated. ☑YES ☐NO

29. All areas of disturbed mineral soils above the normal high water mark will be stabilized with hay or bark mulch and replanted within one week of inactivity or completion of the project in accordance with the Commission's Guidelines for Vegetative Stabilization. See www.maine.gov/dacf/lupc/laws_rules/ch10.html, Rules and Regulations, Chapter 10, Appendix B. ☑YES ☐NO

30. Prior to construction, erosion/sedimentation control measures such as staked hay bales or silt fencing will be placed between the work area and the normal high water mark to prevent sediment from entering the waterbody. Silt fencing will be removed within 30 days of completing the project, if soil stabilization is complete. ☑YES ☐NO

31. For work to be done in the water, then prior to construction sedimentation control measures such as a floating silt boom will be installed around the work area below the normal high water mark to contain and isolate turbidity. The silt boom will be removed upon completion of construction. ☑YES ☐NO

Maine Land Use Planning Commission
Department of Agriculture, Conservation and Forestry

For office use:
47742 *Tracking No.* GP122-C *Permit No.*

Supplement S-4

Requirements for development in flood prone areas

RECEIVED
AUG 22 2014
LUPC - ASHLAND

Applicant Name(s): Francis III + Kathleen O. Bachland

Project Location (Township): Cross Lake Twp

Project Location (County): Aroostook

SECTION A: GENERAL INFORMATION *All applicants must complete Sections A and B.*

1. What type of flood prone area is your property located in? (Refer to maps and check all that apply)
   - ☐ P-FP Flood Prone Area Protection Subdistrict
   - ☑ FEMA Zone A, A1-30 or AE
   - ☐ FEMA Zone VE (Coastal Floodplains) ***(also complete Section E)***
   - ☐ Unmapped Flood Prone Area

2. Will you be making a Substantial Improvement to an existing structure? ☐ Yes ☑ No

   If you are proposing maintenance and repair or renovations to an existing structure costing $1,000 or more; or if you plan to expand or rebuild a portion of an existing structure, within the next 2-3 years, it is possible that your project could be considered a substantial improvement. This worksheet will assist you in determining which structures would be substantially improved.

SUBSTANTIAL IMPROVEMENT WORKSHEET *(check your tax evaluation or recent appraisal)*

Structures to be altered (dwelling, garage, etc.*)	**A. Current Market Value ($)** of *ONLY* the structure being altered (Do not include land)	**B. Estimated Improvement Costs ($)** of the proposed improvements (Include labor costs)	**C. Market Value Increase (%)** (Estimated Improvement Costs (B) ÷ Current Market Value (A) x 100)
	$	$	%
	$	$	%
	$	$	%

*The value of a new or improved deck that is attached to any structure must be included in your calculations for that structure. If the Market Value Increase is 50% or greater, your improvement to that structure will be considered a substantial improvement. Please check the appropriate box(es) in Question 3 below and complete the required sections. If the Market Value Increase is less than 50%, your improvement to that structure will NOT be considered a substantial improvement.

3. What type of development are you proposing within the Flood Prone Area? (Check **ALL** that apply)
   - ☐ Normal Maintenance and Repair or Renovations costing $1,000 or more to any type of existing structure that do not constitute a Substantial Improvement
   - ☐ An Addition or Expansion that does not constitute a Substantial Improvement to any type of existing structure
   - ☐ Relocation, Reconstruction, or Replacement of an existing structure that does not constitute a Substantial Improvement ***(also complete Section C)***
   - ☐ New Permanent Foundation; Reconstruction or Replacement of an Existing Permanent Foundation ***(also complete Section C)***
   - ☐ Driveway, Land Management Road, Road Project, or Trail
   - ☐ Docking Structure, Noncommercial, in VE Zone ***(also complete Section E)***
   - ☑ Shoreland Alteration (Riprap, etc.)
   - ☐ Other Development or Activity (Describe): _____

   New Construction or Placement or Substantial Improvement of the following:
   - ☐ Residential Structure, including Accessory Structures in P-FP, A1-A30, AE or A Zones ***(also complete Sections C and D)***
   - ☐ Residential Structure, including Accessory Structures in VE Zone ***(also complete Sections C and E)***
   - ☐ Manufactured Home ***(also complete Sections C and F)***
   - ☐ Recreational Vehicle ***(also complete Sections C and F)***
   - ☐ Nonresidential Structure, including Accessory Structures ***(also complete Sections C and G)***, or Fish and Lobster Sheds in VE Zone ***(also complete Section E)***
   - ☐ Bridge ***(also complete Section H)***
   - ☐ Docking Structure, Commercial ***(also complete Sections C and I)***, in VE Zone ***(also complete Section E)***
   - ☐ Containment Wall ***(also complete Section J)***

4. Will any of the proposed development, structure(s) or any fill (including for a driveway) be located within the floodway of a river, stream or other flowing water? ☐ Yes ☑ No

   If YES, *you must attach* ***Exhibit S4-A: Floodway Development Certification****. See Instructions.*

All applicants must complete Section B (continue to next page...)

SECTION B: CONSTRUCTION SPECIFICATIONS

All applicants must complete Sections A and B.

N/A means not applicable.

5. Will your development be designed or modified and adequately anchored to prevent flotation, collapse or lateral movement resulting from hydrodynamic and hydrostatic loads, including the effects of buoyancy? ☑ Yes ☐ No ☐ N/A

Explain: We will be placing Rip-Rap to replace wooden Bulkhead/ Retaining wall. Rip-Rap will be properly anchored, won't Floater collapse. Properly install + sized Rip-Rap will resist hydrodynamic/hydrostatic loads

6. Will your construction materials be resistant to flood damage? ☑ Yes ☐ No ☐ N/A

Explain: It's Rip-Rap, yes

RECEIVED
AUG 22 2014
LUPC - ASHLAND

7. Will your construction methods and practices minimize flood damage? ☑ Yes ☐ No

Explain: It's Rip-Rap, yes

8. Will the proposed electrical, heating, ventilation, plumbing, and air conditioning equipment and other service facilities be designed and/or located to prevent water from entering or accumulating within the components during flooding conditions? ☐ Yes ☐ No ☑ N/A

Explain:

9. Will any new or replacement water supply system be designed to minimize or eliminate infiltration of flood waters into the system? ☐ Yes ☐ No ☑ N/A

Explain:

10. Will any new or replacement sanitary sewage system be designed to minimize or eliminate infiltration of flood waters into the system and discharges from the system into flood waters? ☐ Yes ☐ No ☑ N/A

Explain:

11. Will any on-site waste disposal system be located and constructed to avoid impairment to it or contamination from it during floods? ☐ Yes ☐ No ☑ N/A

Explain:

12. Will your development alter or relocate any portion of a watercourse? ☐ Yes ☑ No

If YES, describe the nature and extent of the watercourse alteration or relocation and show it on the site plan for your application:

*If YES, you must attach **Exhibit S4-B: Notification of Watercourse Alteration or Relocation**, and if you are in the floodway of the river or stream, you must attach **Exhibit S4-A: Floodway Development Certification**. See Instructions.*

If your answers to Section A do not require that you complete additional Sections C—J of this supplement, you may STOP HERE and attach this supplement and any required exhibits (see Instructions, p. vi) to your application.

GP122-C

FRANCES BOUCHARD
EXHIBIT E
OVERHEAD PLAN

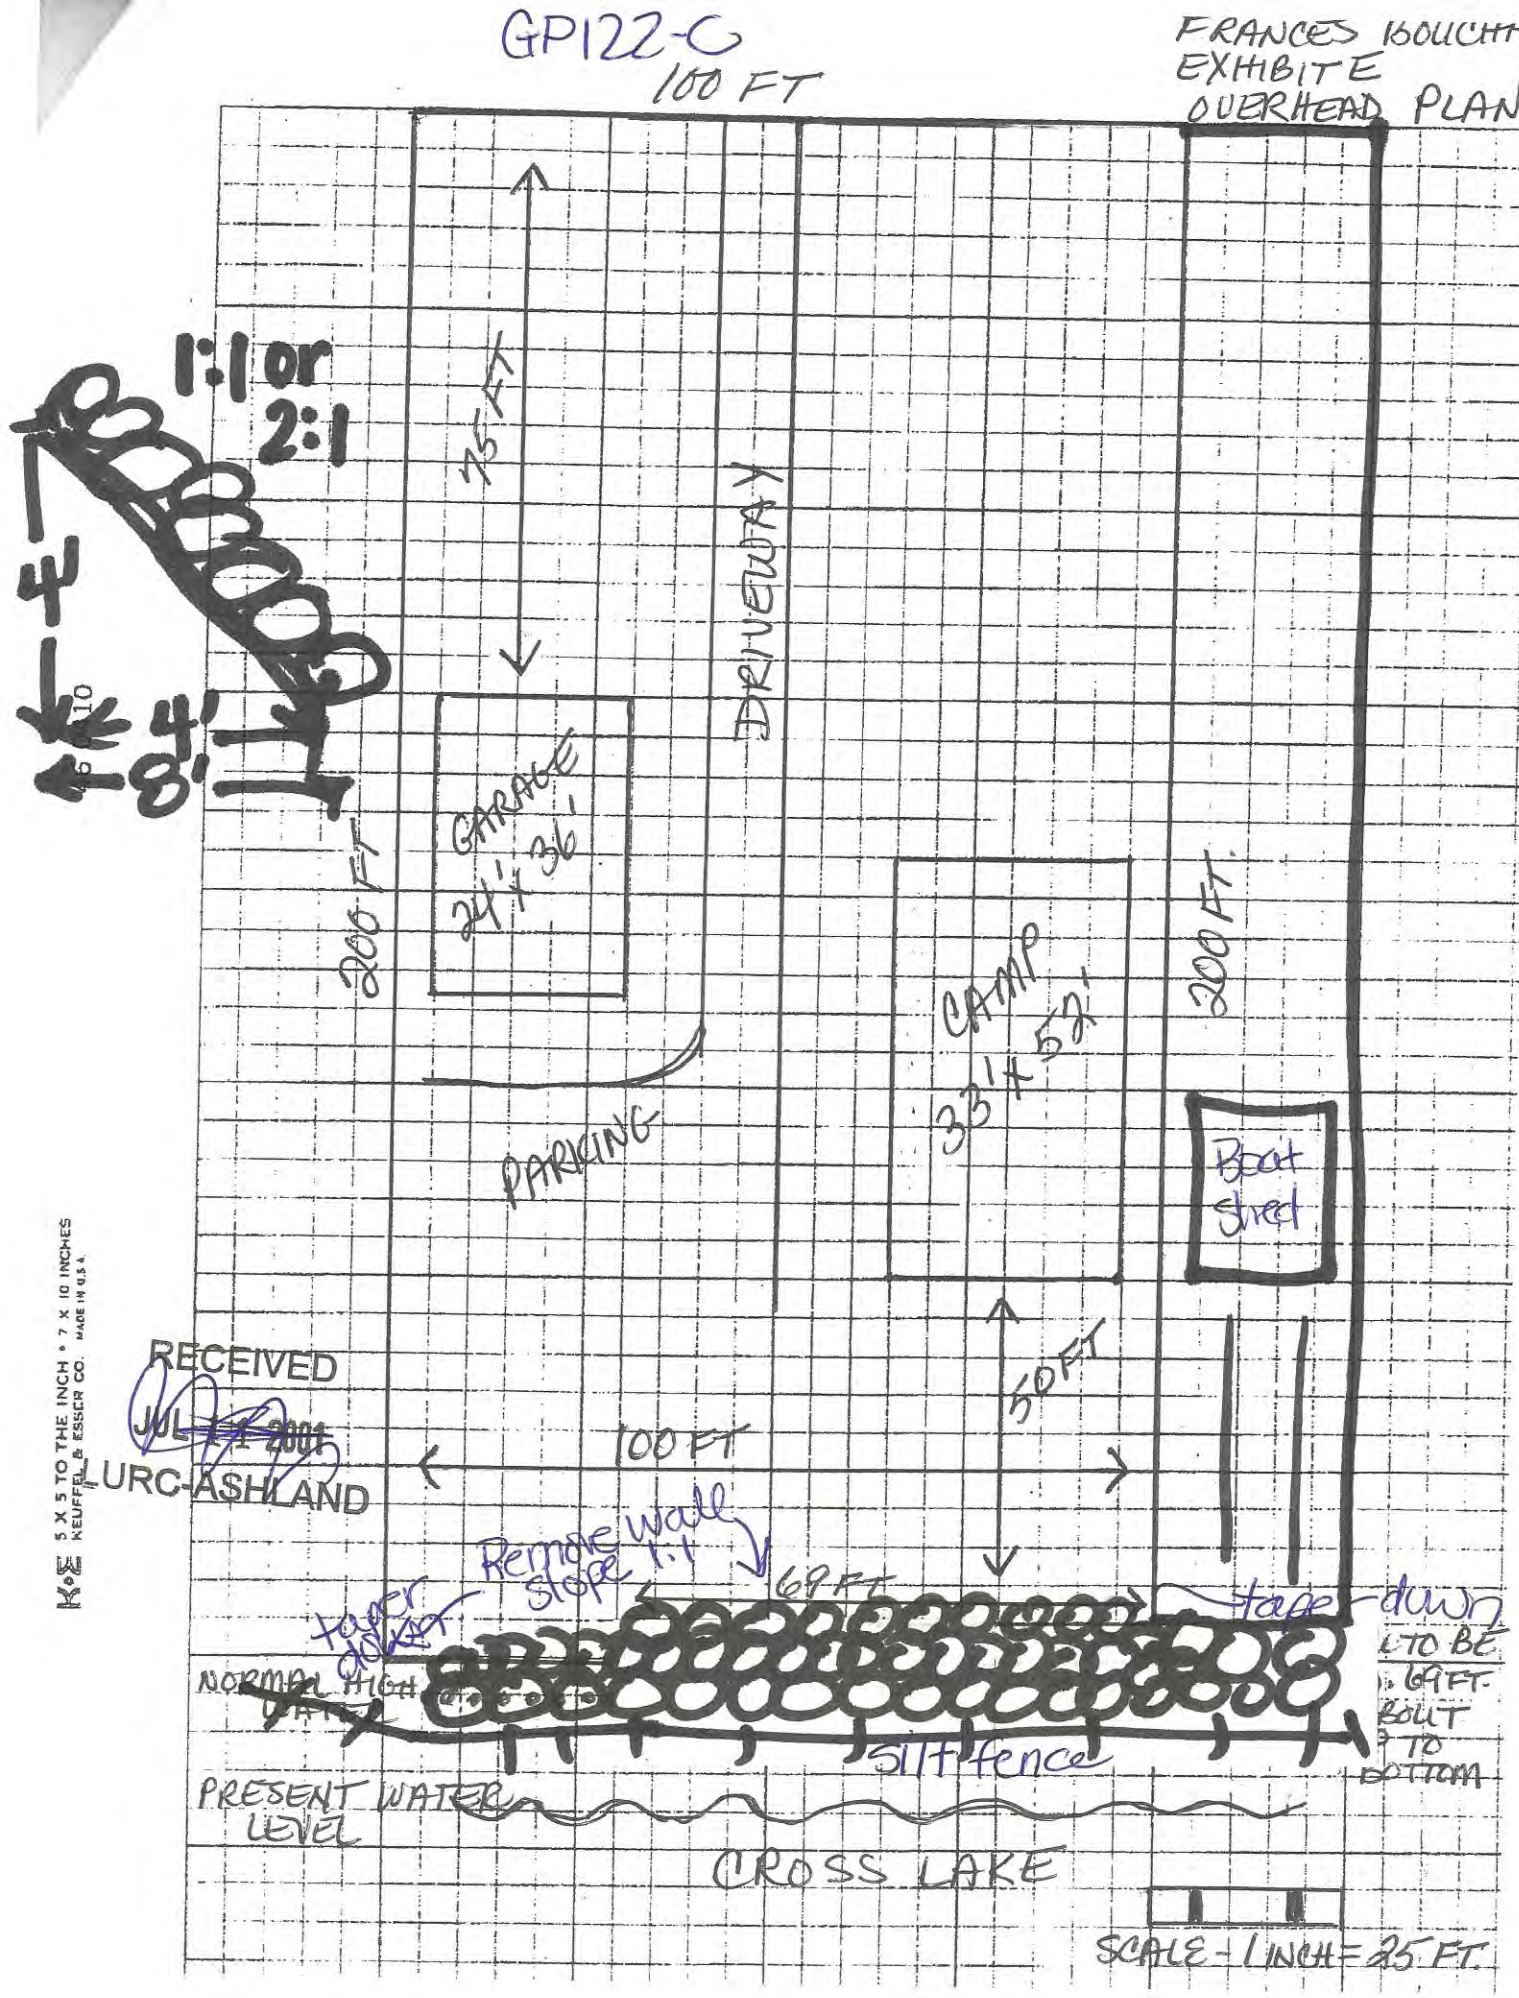

RECEIVED
JUL 11 2001
LURC-ASHLAND

K&E 5 X 5 TO THE INCH • 7 X 10 INCHES
KEUFFEL & ESSER CO. MADE IN U.S.A.